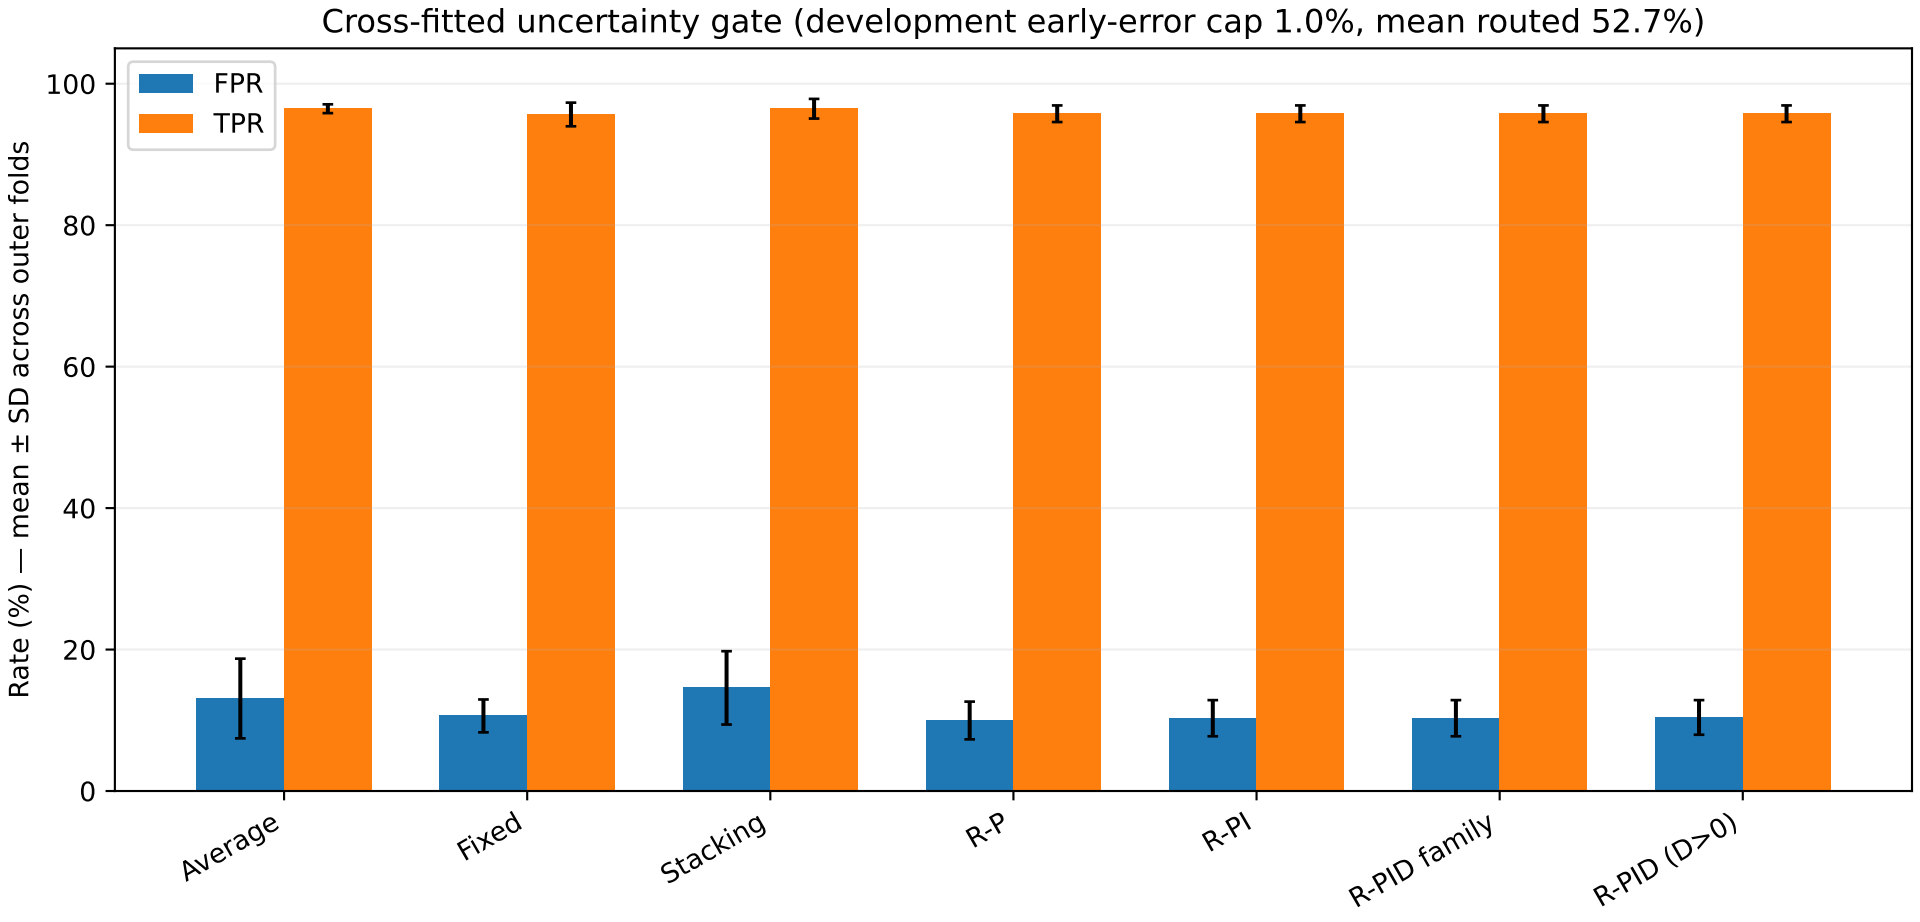
Cross-fitted uncertainty gate (development early-error cap 1.0%, mean routed 52.7%)
FPR
TPR
Rate (%) — mean ± SD across outer folds
100
80
60
40
20
0
Average
Fixed
Stacking
R-P
R-PI
R-PID family
R-PID (D>0)