


High-Pressure Compressed Air Hose--Static Conductive*

Brass Male NPT Fittings (Both Ends)

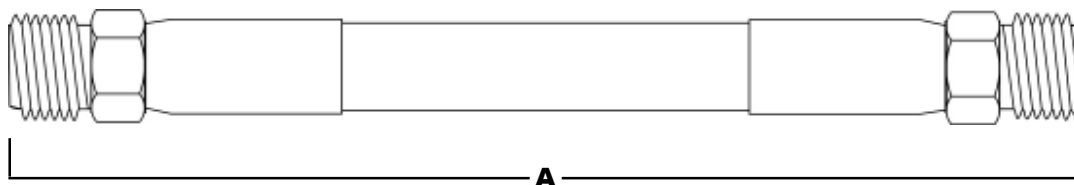


Size---.5-inch		Size---.75-inch		Size---1-inch	
Cat. #	"A" (ft.)	Cat. #	"A" (ft.)	Cat. #	"A" (ft.)
02043	3	02049	3		
02044	5	02050	5		
02045	10	02051	10	02054	10
02047	25	02046	25	02055	25
02048	50	02052	50	02056	50

*When connected to a grounded air supply system, the air-powered vacuum or venturi power unit is automatically grounded.

Quick Disconnect Type Pneumatic FittingsCompressed air-supply
hose

Coupler*

Nipple

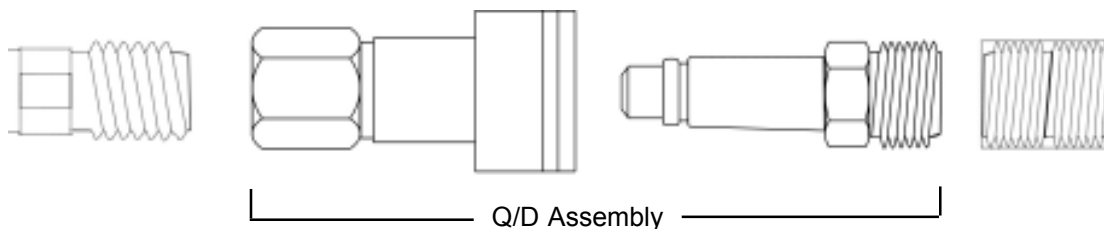Air Vac or
Venturi Power
Unit

Q D -Assemblies			
Size	Assy Cat. #	Coupler Cat. #	Nipple Cat. #
.5-inch	01245	01246	01247
.75-inch	01248	01249	01250
1-inch	43530	42670	43525

* All couplers include an automatic shut-off valve.

REVISION NO: 1 ECN NO: BY: EP DATE: 01/27/2000 APPD: REF PART NO: T62009

REVISION
DESC.
X Updated catalog numbers for Quick disconnect Assemblies on 02/03/2000

Pneumatic Accessories

DESIGNED BY:

DWN BY: Ernesto Pabon

APPD ENG:

CREATED IN FORMAT:

PM6.5

FILE NAME:
TDS50508

SHEET # 1 OF 1

TDS# 50508

REV.
1