

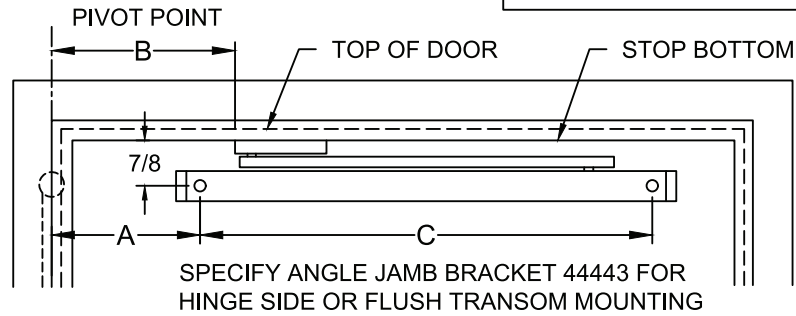



# 4400 SERIES SURFACE HOLDERS & STOPS

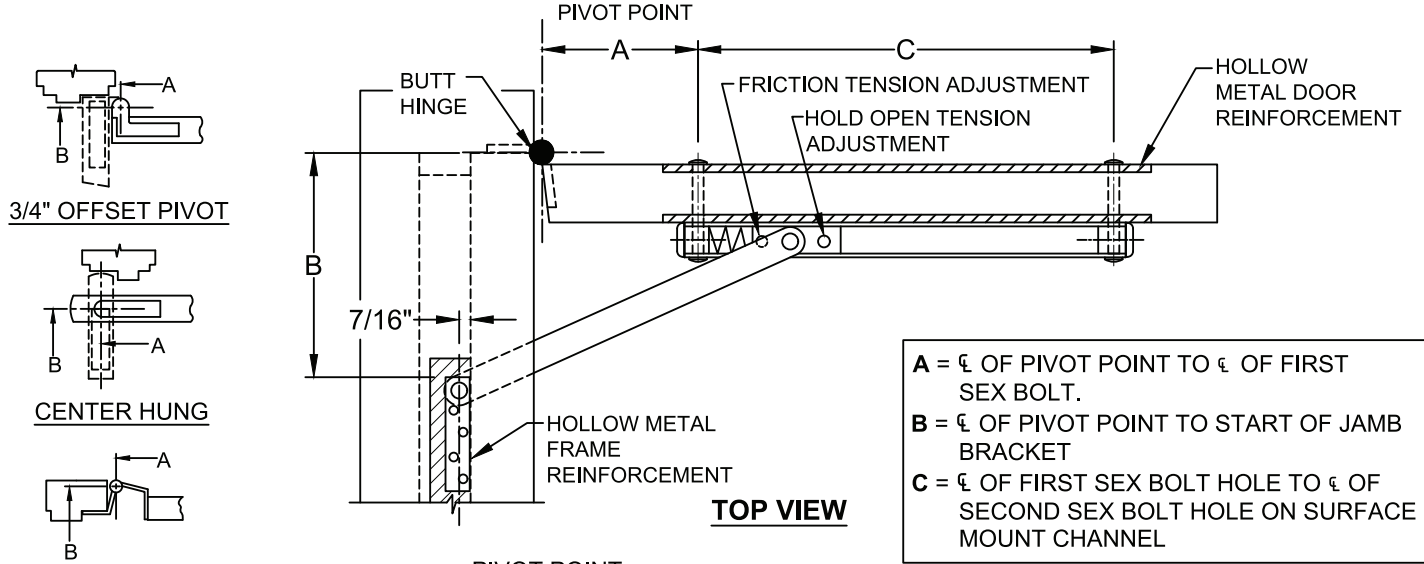

**FRONT VIEW**  
PUSH SIDE OF DOOR

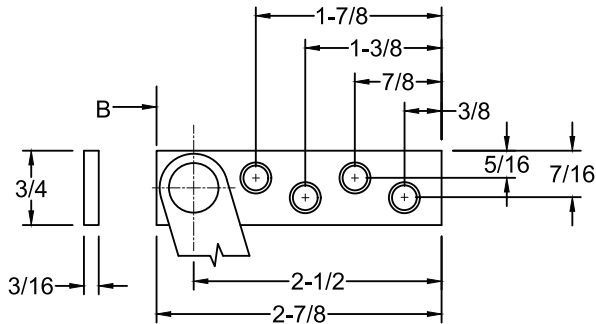

**JAMB BRACKET**

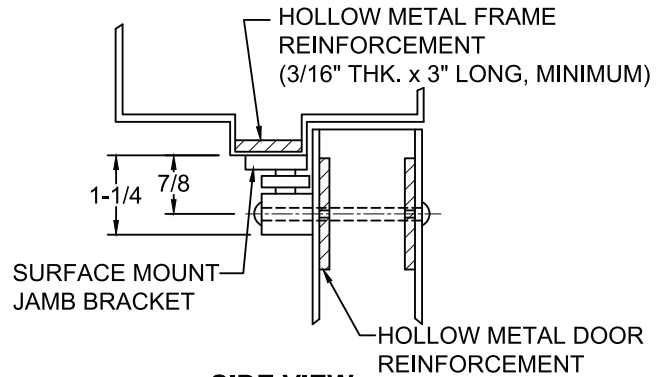

**SIDE VIEW**  
CROSS SECTION

| SCREW DETAIL |     |                                           |                                        |
|--------------|-----|-------------------------------------------|----------------------------------------|
|              | QTY | WOOD                                      | METAL                                  |
| JAMB         | 4   | • #10 x 1-1/2" FLAT HEAD WOOD SCREW       | • 10-32 x 1/2" FLAT HEAD MACHINE SCREW |
| DOOR         | 2   | • 10-32 x 1-1/2" TRUSS HEAD MACHINE SCREW |                                        |
|              |     | • 5/16" DIA. SEX BOLT                     |                                        |

## NOTES:

1. REVERSIBLE/ NON - HANDED
2. FOR SINGLE ACTING DOORS ONLY
3. ALL DRILLING & TAPPING TO BE DONE IN FIELD.
4. ALWAYS REQUEST LATEST TEMPLATE/ DRAWING FOR NEW INSTALLATIONS.
5. ALL DIMENSIONS ARE IN INCHES.
6. DRAWING IS NOT TO SCALE

# 4400 SERIES SURFACE HOLDERS & STOPS, SURFACE MOUNT

•4410 HOLD-OPEN •4420 STOP •4430 FRICTION

1. FOR DEAD STOP ADD 3/4" TO "A" DIMENSION

2. ALL DIMENSIONS ARE IN INCHES.

\* BUTT & 3/4" OFFSET PIVOT ONLY

| DOOR THICK-NESS                     | DEGREE    |                  | 85° H.O. |         | 90° H.O. |          | 95° H.O. |         | 100° H.O. |          | 105° H.O. |        | 110° H.O. |         |          |
|-------------------------------------|-----------|------------------|----------|---------|----------|----------|----------|---------|-----------|----------|-----------|--------|-----------|---------|----------|
|                                     | MODEL NO. | DOOR OPENING     | A        | B       | A        | B        | A        | B       | A         | B        | A         | B      | A         | B       | C        |
| 1-3/4" TO 2-3/8"                    | • 4411    | 18" TO 23-15/16" | 2-1/2 *  | 5-1/8 * | 2 *      | 4-7/16 * | 1-7/8 *  | 4-1/2 * | 1-11/16 * | 4-5/16 * | —         | —      | —         | —       | 13-11/16 |
|                                     | • 4421    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |
|                                     | • 4431    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |
|                                     | • 4412    | 24" TO 29-15/16" | 5        | 6-3/4   | 4-5/8    | 6-3/8    | 4-1/4    | 6       | 3-15/16   | 5-11/16  | 3-11/16   | 5-7/16 | —         | —       | 15-9/16  |
|                                     | • 4422    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |
|                                     | • 4432    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |
| BUTT HINGE, SWING CLEAR HINGE, 3/4" | • 4413    | 30" TO 35-15/16" | 10       | 7-11/16 | 9-1/2    | 7-3/16   | 9-1/16   | 6-3/4   | 8-3/4     | 6-7/16   | 8-7/16    | 6-1/8  | 8-1/8     | 5-13/16 | 16-7/16  |
|                                     | • 4423    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |
|                                     | • 4433    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |
|                                     | • 4414    | 36" TO 48"       | 14-3/8   | 9-3/16  | 13-13/16 | 8-5/8    | 13-5/16  | 8-1/8   | 12-7/8    | 7-11/16  | 12-1/2    | 7-5/16 | 12-1/8    | 6-15/16 | 18-1/16  |
| OFFSET PIVOT                        | • 4424    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |
|                                     | • 4434    |                  |          |         |          |          |          |         |           |          |           |        |           |         |          |

| DOOR THICK-NESS                     | DEGREE    |                  | 85° H.O. |         | 90° H.O. |          | 95° H.O. |         | 100° H.O. |          | 105° H.O. |         | 110° H.O. |        |          |
|-------------------------------------|-----------|------------------|----------|---------|----------|----------|----------|---------|-----------|----------|-----------|---------|-----------|--------|----------|
|                                     | MODEL NO. | DOOR OPENING     | A        | B       | A        | B        | A        | B       | A         | B        | A         | B       | A         | B      | C        |
| 1-3/8" TO 1-5/8"                    | • 4411    | 18" TO 23-15/16" | 2-3/4 *  | 5-3/8 * | 2-7/16 * | 5-1/16 * | 2-1/8 *  | 4-3/4 * | 1-15/16 * | 4-9/16 * | —         | —       | —         | —      | 13-11/16 |
|                                     | • 4421    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |
|                                     | • 4431    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |
|                                     | • 4412    | 24" TO 29-15/16" | 5-1/4    | 7       | 4-7/8    | 6-5/8    | 4-1/2    | 6-1/4   | 4-3/16    | 5-15/16  | 3-15/16   | 5-11/16 | —         | —      | 15-9/16  |
| BUTT HINGE, SWING CLEAR HINGE, 3/4" | • 4422    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |
|                                     | • 4432    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |
|                                     | • 4413    | 30" TO 35-15/16" | 10-1/4   | 7-15/16 | 9-3/4    | 7-7/16   | 9-5/16   | 7       | 9         | 6-11/16  | 8-11/16   | 6-3/8   | 8-3/8     | 6-1/16 | 16-7/16  |
|                                     | • 4423    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |
|                                     | • 4433    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |
| OFFSET PIVOT                        | • 4414    | 36" TO 48"       | 14-5/8   | 9-7/16  | 14-1/16  | 8-3/4    | 13-9/16  | 8-3/8   | 13-1/8    | 7-15/16  | 12-3/4    | 7-9/16  | 12-3/8    | 7-3/16 | 18-1/16  |
|                                     | • 4424    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |
|                                     | • 4434    |                  |          |         |          |          |          |         |           |          |           |         |           |        |          |

| DOOR THICK-NESS  | DEGREE    |                      | 85° H.O. |         | 90° H.O. |         | 95° H.O. |       | 100° H.O. |         | 105° H.O. |         | 110° H.O. |         |          |
|------------------|-----------|----------------------|----------|---------|----------|---------|----------|-------|-----------|---------|-----------|---------|-----------|---------|----------|
|                  | MODEL NO. | DOOR OPENING         | A        | B       | A        | B       | A        | B     | A         | B       | A         | B       | A         | B       | C        |
| 1-3/8" TO 2-3/8" | • 4411    | 22" TO 27-7/16"      | 3-1/8    | 5-3/4   | 2-13/16  | 5-7/16  | 2-1/2    | 5-1/8 | 2-5/16    | 4-15/16 | 2-3/16    | 4-13/16 | 2         | 4-5/8   | 13-11/16 |
|                  | • 4421    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |
|                  | • 4431    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |
|                  | • 4412    | 27-1/2" TO 33-7/16"  | 5-5/8    | 7-3/8   | 5-1/4    | 7       | 4-7/8    | 6-5/8 | 4-9/16    | 6-5/16  | 4-5/16    | 6-1/16  | 4-1/16    | 5-13/16 | 15-9/16  |
| CENTER HUNG      | • 4422    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |
|                  | • 4432    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |
|                  | • 4413    | 33-1/2" TO 38-15/16" | 10-5/8   | 8-5/16  | 10-1/8   | 7-13/16 | 9-11/16  | 7-3/8 | 9-3/8     | 7-1/16  | 9-1/16    | 6-3/4   | 8-3/4     | 6-7/16  | 16-7/16  |
|                  | • 4423    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |
|                  | • 4433    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |
|                  | • 4414    | 39" TO 48"           | 15       | 9-13/16 | 14-7/16  | 9-1/4   | 13-15/16 | 8-3/4 | 13-1/2    | 8-5/16  | 13-1/8    | 7-15/16 | 12-3/4    | 7-9/16  | 18-1/16  |
|                  | • 4424    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |
|                  | • 4434    |                      |          |         |          |         |          |       |           |         |           |         |           |         |          |

4400-2-11.DWG

## 4400 SERIES SURFACE HOLDERS & STOPS, SURFACE MOUNT

1. Select and determine degree of opening from chart on page 2.

2. Locate "A" and "B" dimensions, from page 2, on door and frame-  
Dimensions are from the centerline of the pivot point of the hinge being used. FIG. 1

3. Install Jamb bracket on stop with holes away from hinge edge. FIG. 2

FIG. 1






FIG. 2

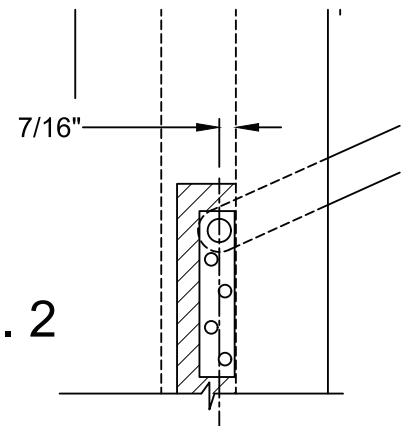

## 4400 SERIES SURFACE HOLDERS & STOPS, SURFACE MOUNT

1. Position channel on door with spring end located towards the hinge side. Drill 5/16" diameter hole, "A" dimension, 7/8" down from stop.
2. Install channel on door with "A" dimension sex bolt. Locate "C" dimension sex bolt hole making sure the channel is level and parallel with the stop. Drill 5/16" diameter sex bolt hole and finish installing holder.

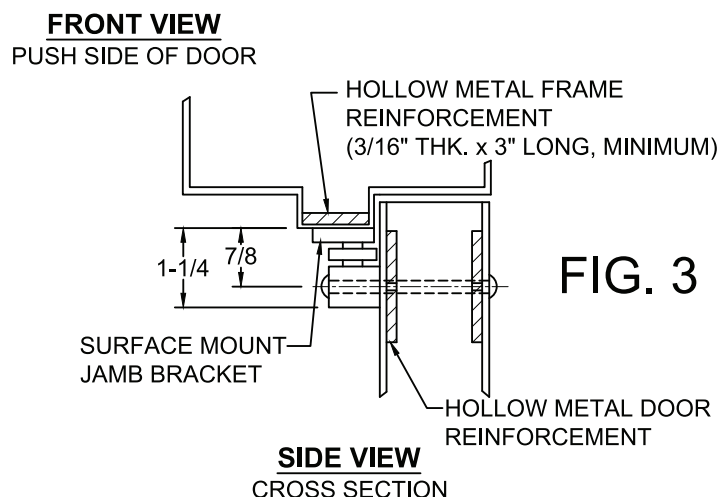

### NOTE:

- Location of swing clear hinge centerline to determine "A" and "B" dimensions. FIG. 4
- All hollow metal frames should be properly reinforced with 3/16" minimum thickness x 3" minimum length reinforcement plates.
- Suggest mounting door stop or holder first and then other hardware to clear. Contact factory if interference results with other hardware.
- Jamb Bracket to be on same centerline as channel.

