
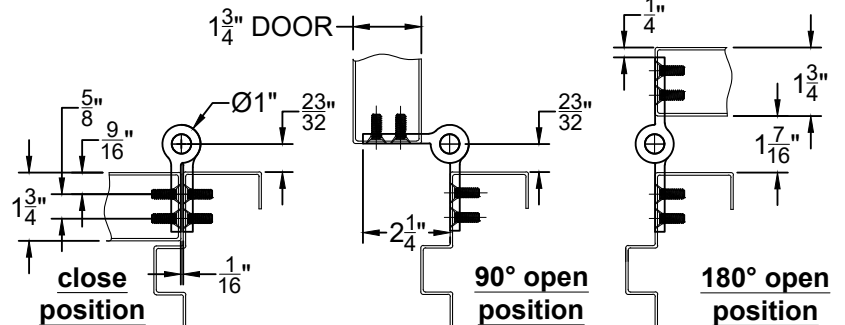
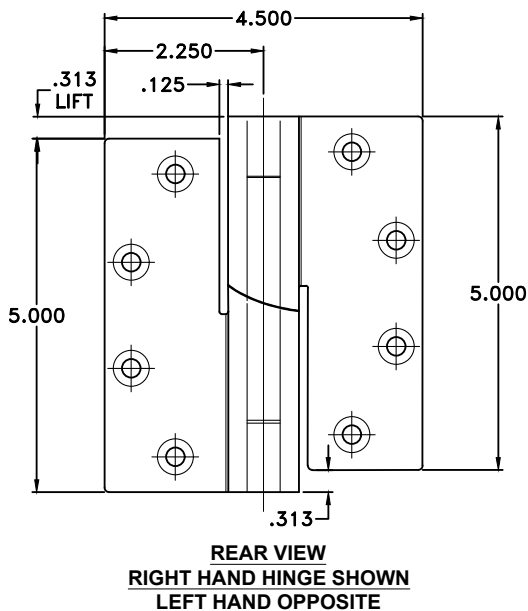
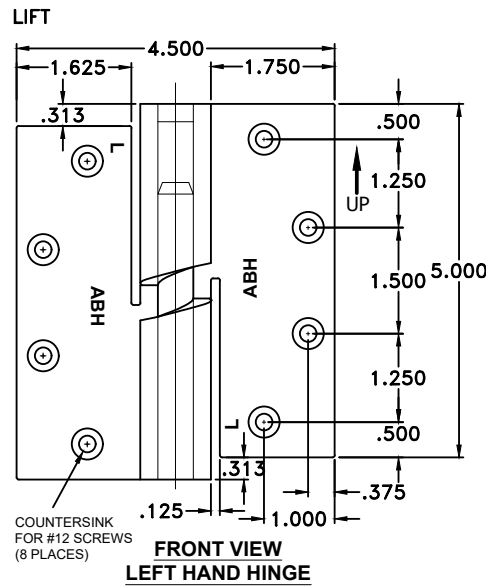
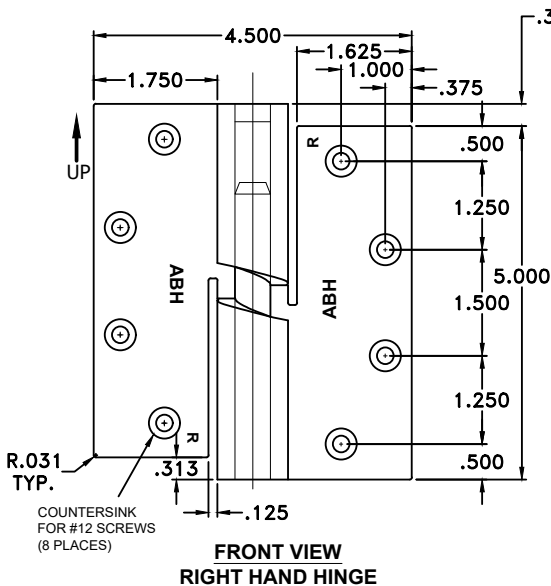
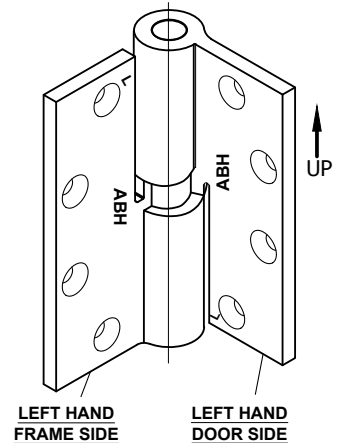
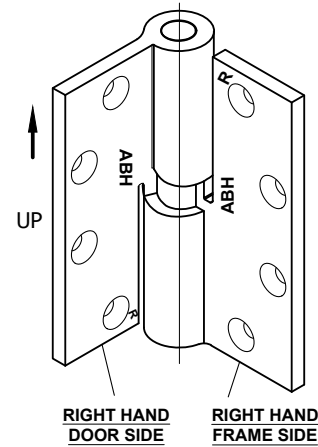



A950 CAM LIFT HINGE - MORTISED, HANDED, 5/16" LIFT

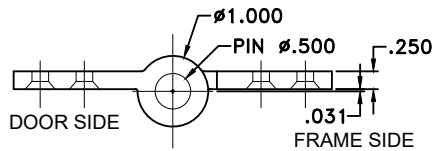

NOTES:

1. CAM LIFT PIVOT HINGE IS STAINLESS STEEL HINGE, DESIGNED TO BE INSTALLED MORTISE
2. WHEN SWING OPEN THE DOOR RISES TO MAX. HEIGHT OF 5/16" AT 180°.
3. DOOR RATING (1-1/2 PAIRS) UP TO 500 lbs.
4. MINIMUM CLEARANCE AT HEAD OF FRAME IS 3/16", FOR DOOR GREATER THAN 1-3/4" THICK, CLEARANCE IS 1/4".
5. CAN BE USED ON HOLLOW METAL OR WOOD FRAMES & DOORS.
6. SCREW DETAILS ARE GIVEN BELOW. SCREWS MUST BE ENGAGED MINIMUM .345" IN STEEL REINFORCEMENT PER ASTM A-36.
7. FOR USE WITH EM/RFI & SOUND INSULATING DOORS UTILIZING ACOUSTICAL SEALS.
8. THE CAM FUNCTION IMPROVES THE SEALING CHARACTERISTICS ALONG THE DOOR PERIMETER, LIFTING AND LOWERING THE DOOR WITH THE SWING.
9. HINGES ARE **HANDED**. SEE ABOVE PICTURE FOR RIGHT HAND & LEFT HAND.
 - (a) LEFT HAND DOOR, USE "LEFT HAND" HINGE.
 - (b) RIGHT HAND DOOR, USE "RIGHT HAND" HINGE
 - (c) RIGHT HAND REVERSE DOOR, USE "LEFT HAND" HINGES
 - (d) LEFT HAND REVERSE DOOR, USE "RIGHT HAND" HINGES
10. 1/32" TOLERANCE ON ALL PARTS
11. DO NOT SCALE DRAWING, ISOMETRIC VIEW IS FOR VISUAL REPRESENTATION.
12. ALL DIMENSIONS ARE IN INCHES, UNLESS NOTED OTHERWISE.

SCREW DETAIL	
QTY	DESCRIPTION
8	12-24x3/4" PHILLIPS FLAT HEAD MACHINE SCREW, S.S.
8	#12 x1-1/2" PHILLIPS FLAT HEAD SHT. METAL SCREW, S.S.