

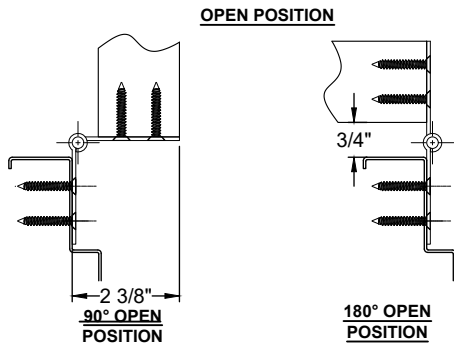
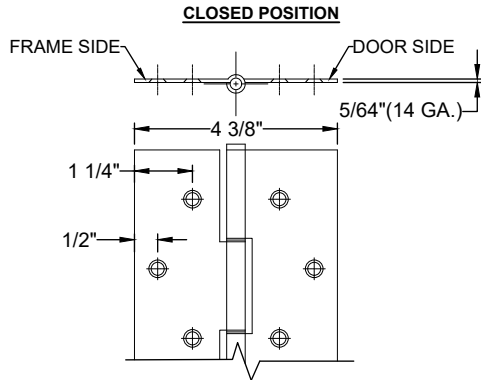
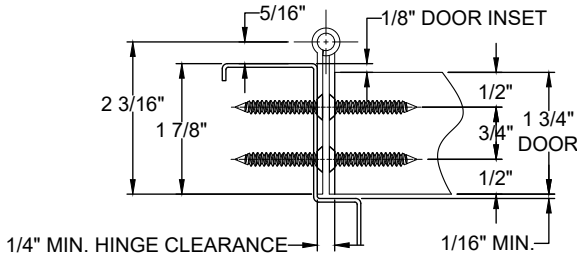


A500 - STAINLESS STEEL HINGE, FULL CONCEALED, EDGE MOUNT

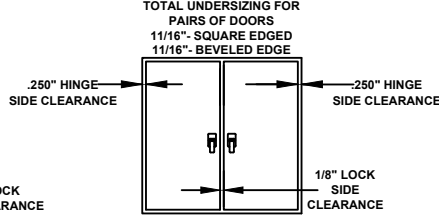


TOTAL DOOR UNDERSIZING*

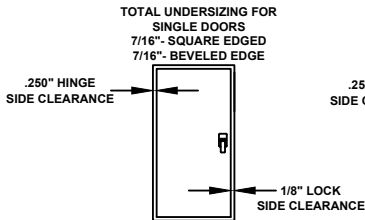

HINGE MODEL	SINGLE DOOR- SQUARE EDGED TOTAL UNDERSIZE	PAIRS OF DOORS SQUARE EDGED TOTAL UNDERSIZE	SINGLE DOOR- BEVELED EDGED*** TOTAL UNDERSIZE	PAIRS OF DOORS BEVELED EDGED*** TOTAL UNDERSIZE
A500	7/16" **	11/16" **	7/16" **	11/16" **

STANDARD HINGE SIZES & SCREW DETAIL SCREWS SHALL HAVE A TORQUE SPEC. OF 23 inch-lbs.

NOMINAL DOOR HEIGHT	6'8"	7'0"	7'2"	8'0"	10'0"
ACTUAL HINGE HEIGHT	78-3/4"	83-1/8"	85"	95"	118-3/4"
10-24 x 3/4" PHILLIPS FLAT HEAD, UNDERCUT, SELF-DRILLING TEK MACHINE SCREW	40	42	42	46	54
#10 x 1-1/4" PHILLIPS FLAT HEAD, UNDERCUT, SHEET METAL SCREW	40	42	42	46	54

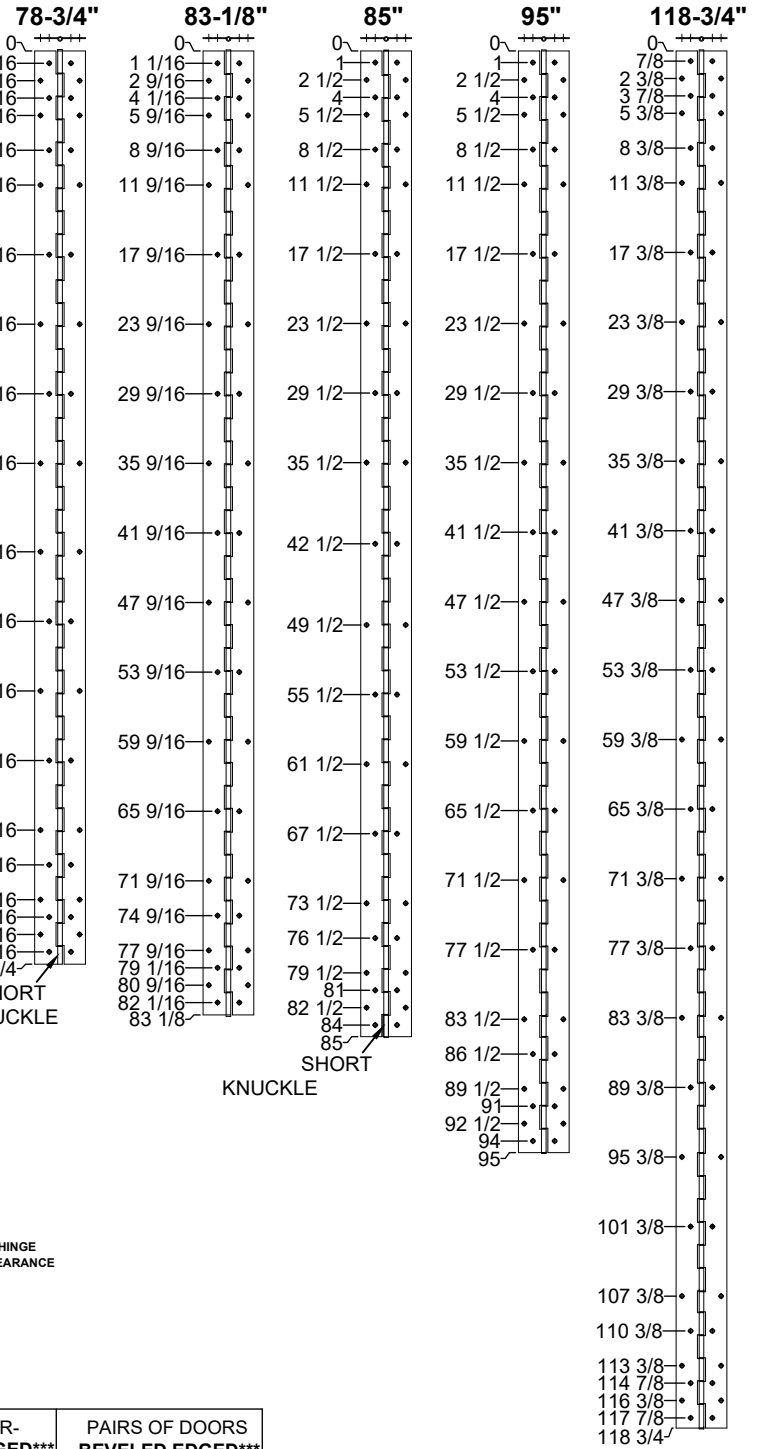

* REFER TO WWW.ABHMFG.COM FOR COMPLETE DOOR CLEARANCE CHART
 ** 1/16" FRAME IRREGULARITY INCLUDED (OPTIONAL)- NOT PERMITTED BY NFPA80
 *** FOR BEVELED DOORS 1/8"-IN-2" ON THE HINGE EDGE, CLEARANCE IS TAKEN FROM THE HIGH SIDE (WIDE SIDE) OF THE DOOR

NOTE:
 HINGES CUT TO CUSTOM LENGTH ARE CUT FROM THE BOTTOM
 A500 DOES NOT REQUIRE HANDING WHEN CUT.