Latency and cores taken per mitigation
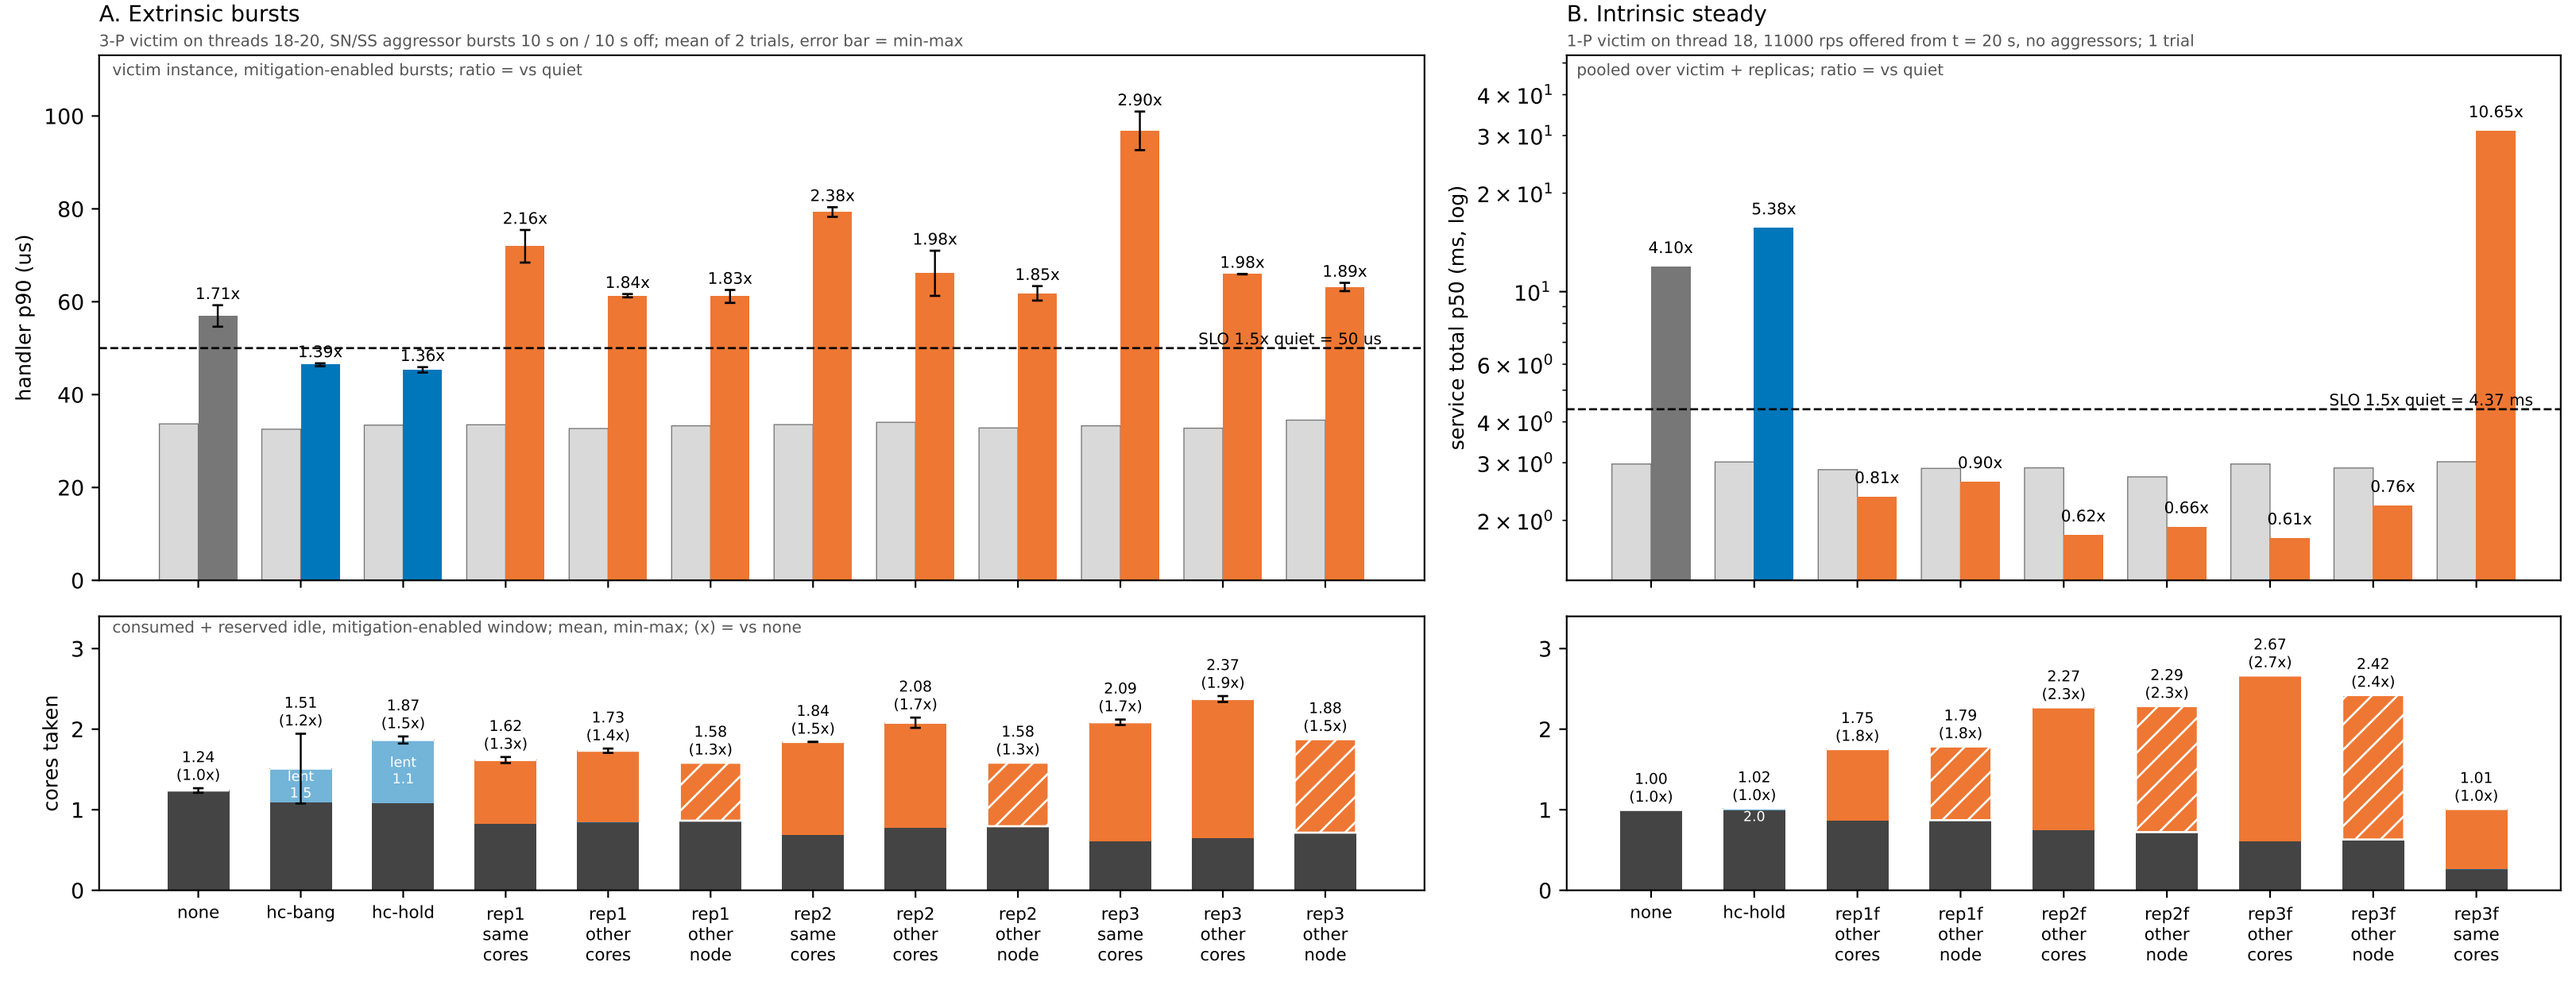
sm110p, SMT on, 2.4 GHz, July layout; per cell: quiet (p1) vs under contention with the mitigation enabled (p3)