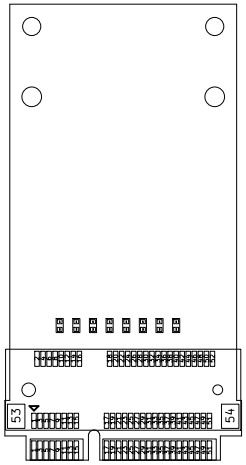

outline 60.30 x 30.00 mm (31.30 at the socket tabs)
all distances from the finger edge (bottom):
Bobcat hold-down dia 2.6: 48.05 mm, x +-12.10
RAK standoff (M2) dia 2.4: 57.35 mm, x +-12.10
RAK socket card-edge line: 9.30 mm
RAK socket front (pads/tabs): 4.20 mm (gap to the 2.55 mm fingers 1.65)
RAK card end (line + 50.95): 60.25 mm = stock card + 9.30
Mini CEM fig 2-7 top keep-out 3.20 (4.20 at key); tabs 0.30 from notch edge

50.00 mm — print at 100% (actual size) and measure this bar

Sheet: File: bobcat-rak-stack-adapter.kicad_pcb		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/1