


USB-powered XIAO carrier / single spare HDMI input

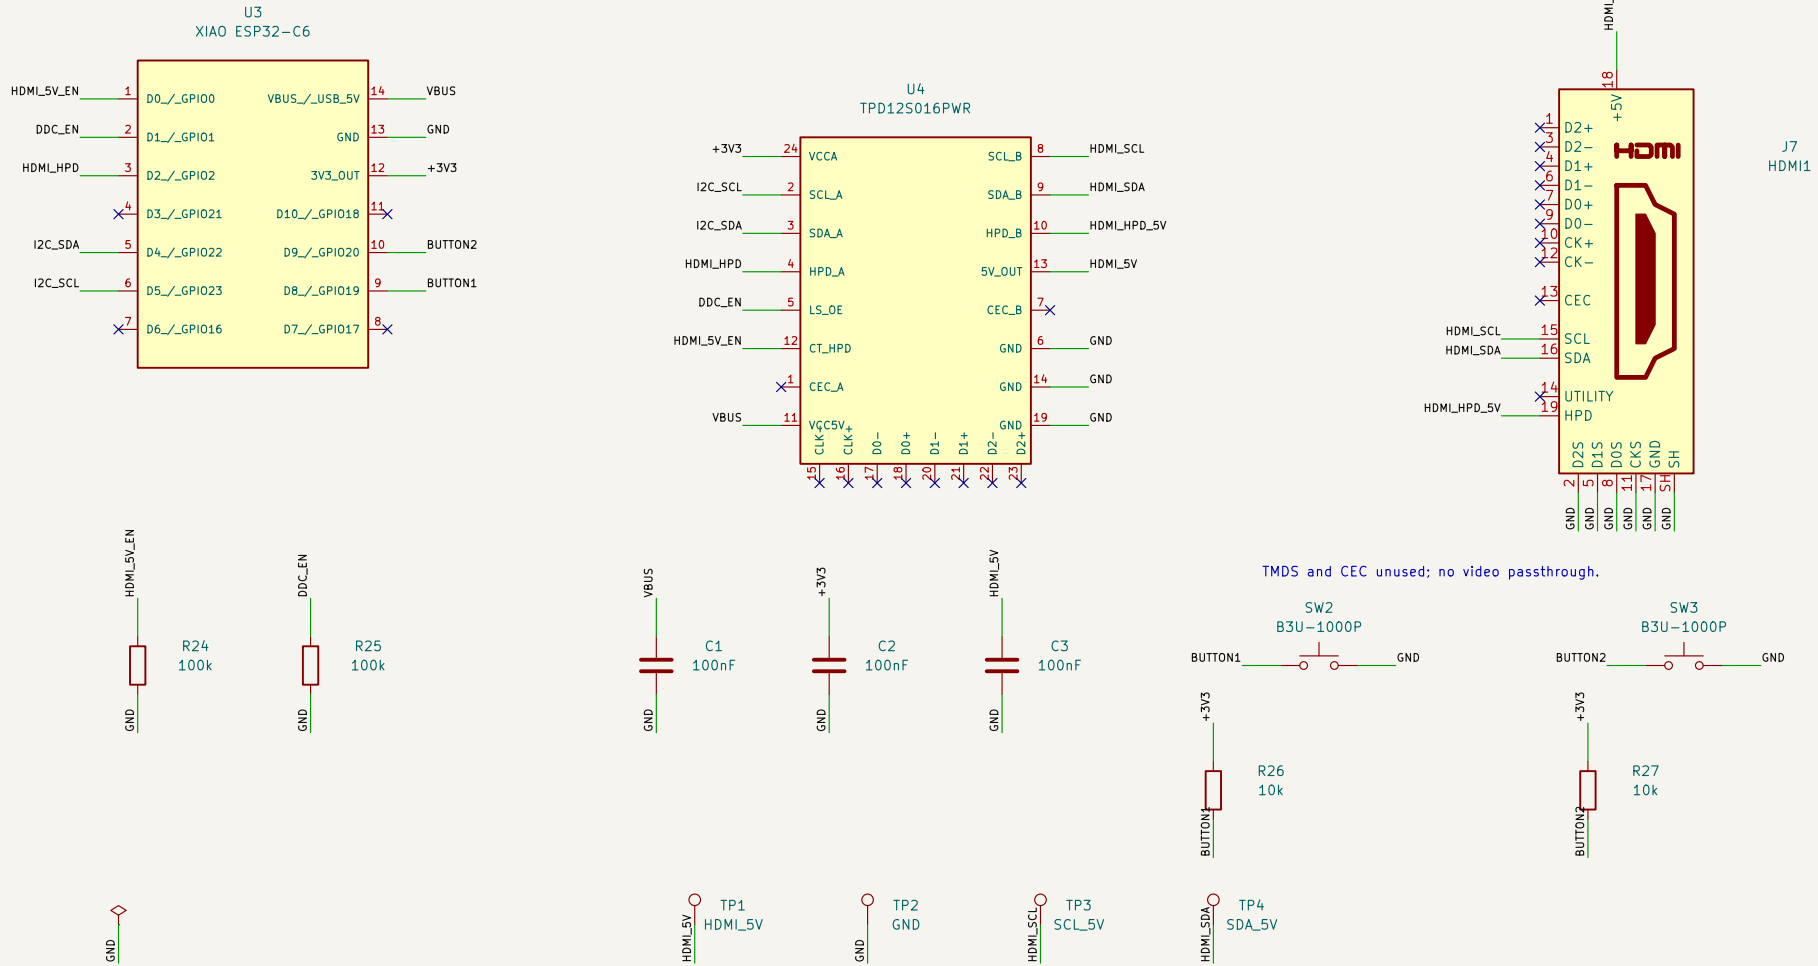

U3: Seeed XIAO ESP32-C6 V1.0, 14 castellated pads. No battery connection.

U4: PW / TSSOP-24 pinout. Integrated pull-ups; no extra DDC pull-ups.

Firmware: D0=HDMI_5V_EN, D1=DDC_EN, D2=HPD, D4=SDA, D5=SCL.

Enable 5 V before DDC; disable DDC before removing 5 V. Both default off.

GPIO19/20 buttons are active low. Reserve GPIO3/14 for XIAO RF switch.

HDMI2C / original project by wlxc

Sheet: /
File: hdmi2c.kicad_sch

Title: HDMI2C – XIAO ESP32-C6 monitor controller

Size: A4 Date: 2026-09-12

KiCad E.D.A. 10.0.6

Rev: rev2

Id: 1/1