

FILE NO. 2008.1.31 현재

PROJ. NO :

PROJ. NAME: _____

TITLE : ELECTRICAL WIRING DIAGRAM

EN81-1 적용 SSVF5 표준회로도
(2005.12.1 이후 건축허가분)

△ HYUNDAI ELEVATOR CO., LTD.

COL1E, COL2G, COL3E, COL3E-1, COL4H, COL7E, COL8E 이외의 도면은 표준도면임

SSVF5-EN

COL NO.	DRAWING NO.	REMARK
INDEX	HEC 1833	
COL1E	HEC 2210	INVERTER (700SS)
COL1F	HEC 2211	INVERTER (900SS)
COL1P	HEC 2338	INVERTER (2000SS)
COL2G	HEC 2212	POWER
COL3E	HEC 2213	SAFETY LINE & LIMIT SW.
COL3E-1	HEC 2216	SAFETY LINE CONNECTION
COL4A	HEC 1910	CAR & ROPE BRAKE
COL4H	HEC 2214	TM. BRAKE & LCD SENSOR
COL5A	HEC 2030	CCB-3 Bd CONNECTION
COL6A	HEC 2031	DOOR INVERTER(HIDC)
COL7E	HEC 2217	PC Bd CONNECTION
COL7C	HEC 2046	DPRAM Bd
COL8D	HEC 2199	HALL CALL (CAN)
COL8E	HEC 2215	CAR CALL & SW.
COL8B	HEC 2034	DISABLE CAR CALL
COL10A	HEC 1933	FINAL LIMIT SW.
COL11C	HEC 2158	GROUP(W/ HALL LANTERN AND W/ DISABLE)
COL11D	HEC 2200	GROUP(W/O HALL LANTERN) - CAN
COL11E	HEC 2201	GROUP(HALL LANTERN) - CAN
COL13	HEC 1992	EMP
COL14A	HEC 2059	T-CABLE TABLE
COL15	HEC 2019	MAIN & DISABLE OPB ELEC W .DIAGRAM
COL16	HEC 2023	SUB & SUB DISABLE OPB ELEC W .DIAGRAM
COL17	HEC 2074	OBSERVATION
COL18	HEC 2168	GROUP CONNECTION
COL18A	HEC 2303	2-CAR CAN GROUP CONNECTION

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

배 부 처

CHANGE
개정판

A1	개 정 함	WAS NOT ON(2F)
----	-------	----------------

2007.6.25 T.R LEE
S.H. JEON

B1 WAS NOT ON(2B)
20071217 TP 1EE

2007.12.17 I.R. LEE
K.J. LEE

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN FINISH DIA OF HOLE	MILD. DIE CAST. FRCALSTO DRAM.	SLMET WELD GAS CTR.	CSTG FORM.
SIZE	TO INCL.				
OVER	TO INCL.				
1	.4	± .01	± .02	± .03	± .05
4	.16	± .02	± .03	± .05	± .07
16	.03	± .03	± .04	± .07	± .09
63	250	± .04	± .08	± 1.2	± 1.3
250	500	± .06	± .08	± 1.5	± 1.8
500	1000	± .08	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE	± 25°	± .5°	± 1.0°	± 2.0°	± 3.0°



HYUNDAI
ELEVATOR CO., LTD.

표준

DRW
711

DSNE
A-4

CHKD
거

APPENDIX

UNIT
다위

MM. ~~INCH~~

APPAR.

SSVF5-EN

SCALE

3RD ANGLE
3 각 법

REF. NO
참고도면

TITLE

SSVF5-EN KEYSHEET

DWG. NO
드림버전

HEC2209

1/1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO

배 부 처

CHANGE
개 정 린

A1 WAS NOT ON(3B)
A2 WAS NOT ON(4D)
A3 APPAR WAS STVF3(INDEX)
A4 WAS NOT ON(4E)
2004.7.14 S.C.KIM
B1 APPAR WAS STVF3 & 3MRL
& 5 & 5MRL
2005.7.19 T.R.LEE H.C.A.B

TOLERANCES--UNLESS OTHERWISE SPECIFIED					
WORK SIZE	TURN PITCH DST OF HOLE STR.	MISC. DE. CSTG. FRACTION DRAW.	SHMET WELD GAS CIG.	CSTG. FDRG.	
OVER TO 1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°

HYUNDAI
ELEVATOR CO., LTD.

표 준	DRWN BY	DSND BY	CHKD BY	APPD BY
제 도	설 계	검 토	승 인	
임 시	H.S. PARK			
보 류				

UNIT 단 위	MM. INCH
SCALE 척 도	1/1
3RD ANGLE 3 각 법	
REF. NO 참 고 도 면	

APPAR.	STVF3&3MRL&5&5MRL&ST5GL
TITLE 제 목	ELEM. W. DIAGRAM
DWG. NO 도 면 번 호	HEC1833
	1/1


INDEX

ITEM	SYMBOL	REMARK	ITEM	SYMBOL	REMARK	ITEM	SYMBOL	REMARK
TERMINAL BLOCK		SW-0S-nP	LED & LAMP		TLR123A TLG123 GLBKG21	CONNECTION LINE IN C/P OR Bd		
CONNECTOR		BnP-VH (M) VHR-nN (F) 5045-nA (M) 5051-n (F) 5273-nA (M) 5239-n (F) 35313-n10 (M) 35156-n00 (F) 5267-n00 (F) 5264-n00 (M)	MICRO SWITCH			FIELD CONNECTION LINE		
			TOGGLE SWITCH		SP1-100 R19A	PARTS DIVISION LINE		
			PUSH SWITCH			SHIELD LINE		
HARNESS CONNECTOR		171363-1 (M) 172501-1 (F) 171457-1 (M) 172500-1 (F)	PUSH BUTTON		KPT-1104T	TWISTED LINE		
			SENSOR CONTACT			I/O MODULE		
RELAY & CONTACTOR		MY4 LY2 RTE24024 RT24110 HG2 TQ2-24	NFB OR PROTECTOR					
			RECEPTACLE					
			EARTH					
			GROUND					
			BUZZER					
			FAN					
FUSE			SPEAKER					

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

1/1 HEC2210

ON 9MO

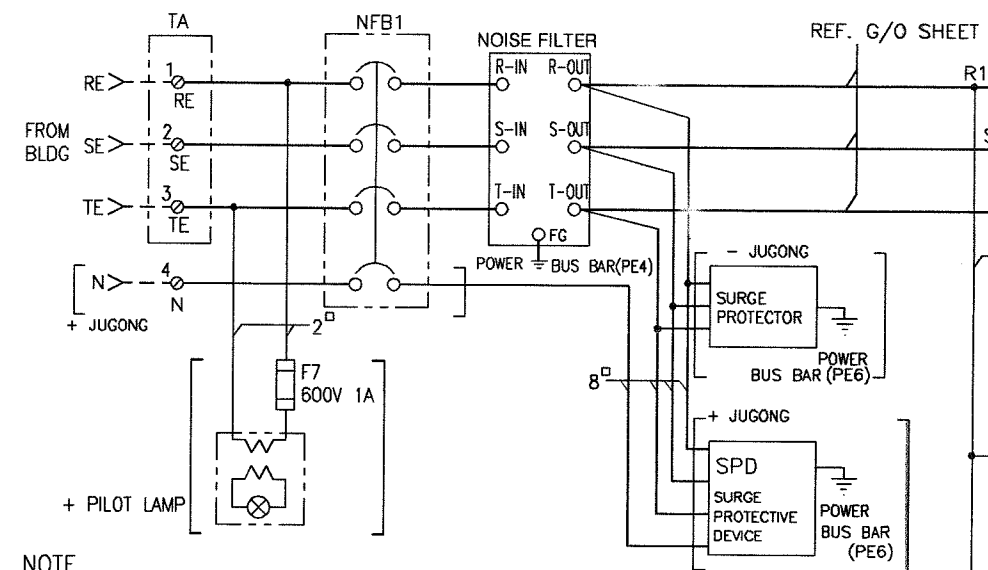

NOTE

- 1.NFB4의 2차측은 구출목적으로 브레이크를 강제 개방할 때만 현장에서 결선한다
- 2.NFB4의 2차측 결선용 CABLE을 입고할것 (204B149도면 참조)

TC : TERMINAL BLOCK

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
MT30	PH	PH	PH	PH	SPK	SPK	N24	22	22	A	B	A	B	N	N	P	P	22	22
	1	2	3	4	1	2	T	X	Y	110	110	220	220	24	24	24	24	X	Y

TD : TERMINAL BLOCK

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
GOV	BLS	P110	FMR	PARK	ALARM	BKOP	P24	N24	B	B3	B4	RBK2	RBK1	RBKIN	BRT	P24	OBS	22X	22Y

TE : TERMINAL BLOCK

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
LI(A)	FULL	OVLD	EMPP	EMPA	EMPR	EMPS	EQS	EQSS	EQP	ELDI	ELDO	TH1	TH2	LI(B)

TA : TERMINAL BLOCK

1	2	3
RE	SE	TE

TABLE 1

MOTOR CAPA	APPLICATION
UNDER 11KW	HX57WDH04(Ø31)
OVER 15KW	HX57WDH03(Ø43)

T1 : CONNECTOR (TCB-3)

1	3	5	7	9	11	13	15	17	19
CANH		FMR	ILU	DLA	PITS	P110			
2	4	6	8	10	12	14	16	18	20
CANL		ULA	ILD	GS	ESIN	INTL			XAUTO

T1B : CONNECTOR

1	3	5	7	9
A220	N24	P24		
2	4	6	8	10
B220	N24	P24		


T2 : CONNECTOR

1	3	5	7	9	11
	PH2	PH4	SPK2	22X	
2	4	6	8	10	12
	PH1	PH3	SPK1	N24	22Y

TG : TERMINAL BLOCK


1	2	3
P24(B)		N24(B)

COL 1E

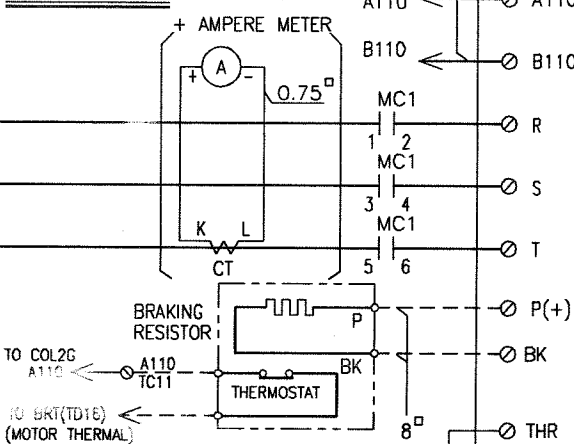


DRIVE UNIT
HIVD700SS

INVERTER

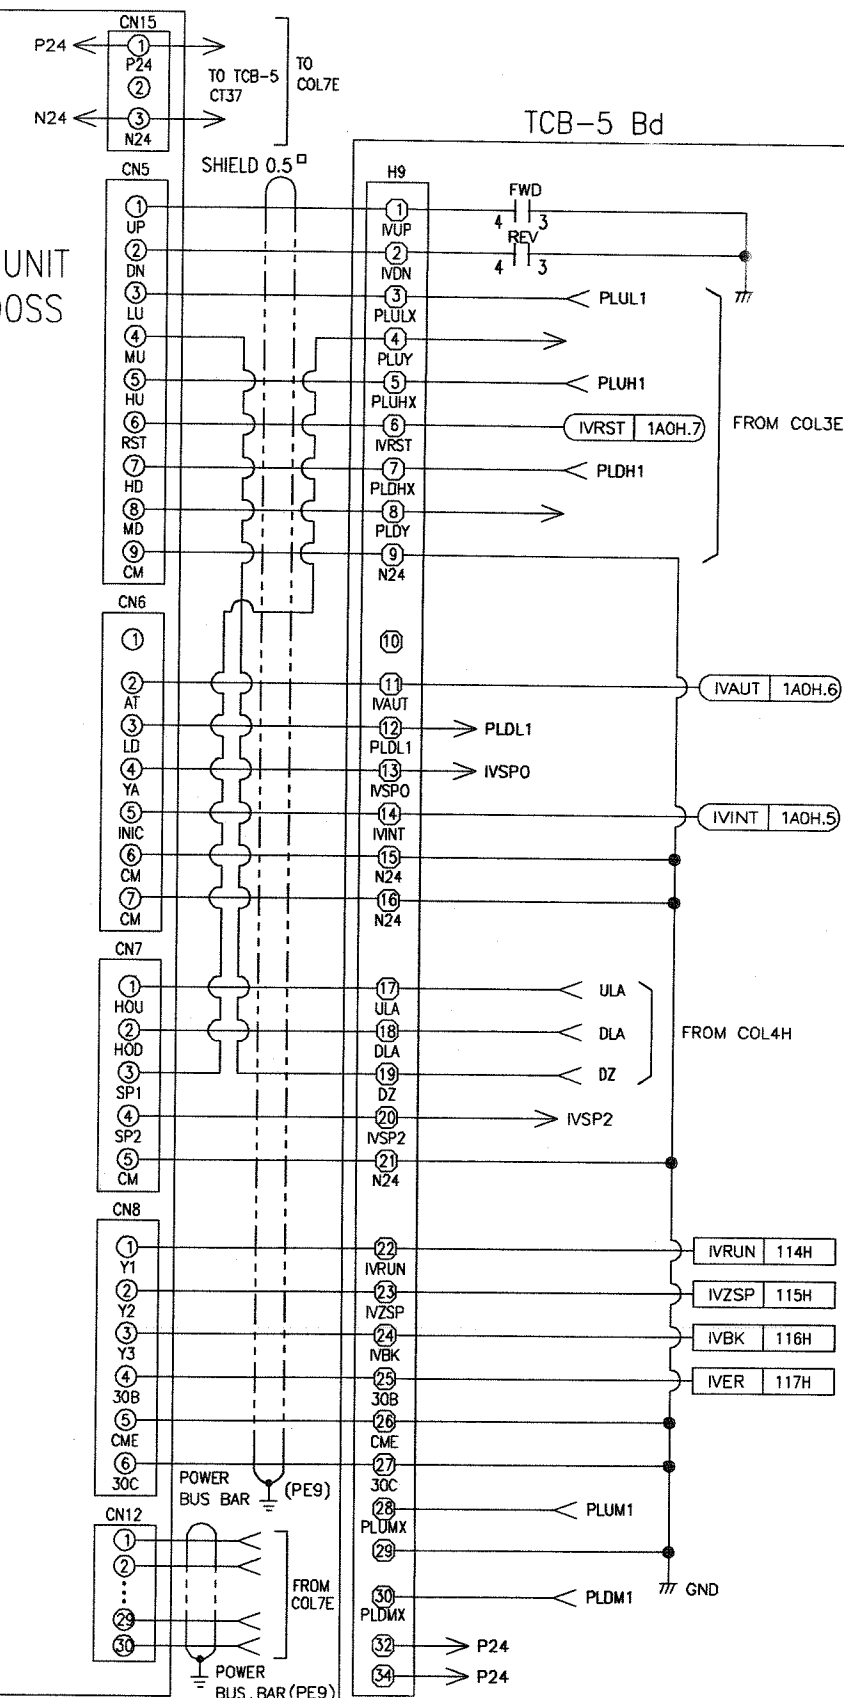

TCB-5 Bd

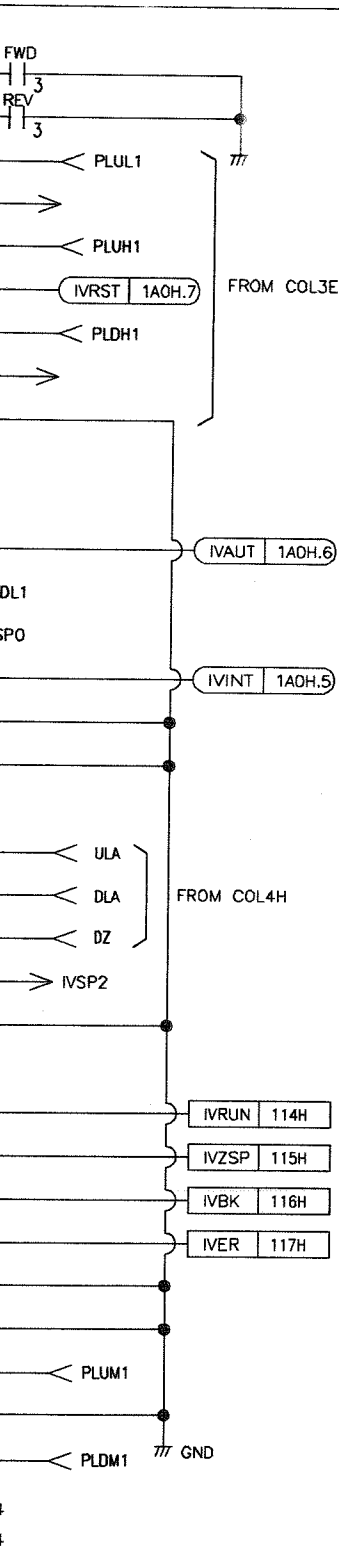

TOLERANCES-UNLESS OTHERWISE SPECIFIED

WORK	TURN	M.D.C.	SH MET	CSTG.
SIZE	INCL	DE CSTG.	WELD	FORG.
1	4	± 0.1	± 0.2	± 0.3
4	16	± 0.2	± 0.3	± 0.5
16	63	± 0.3	± 0.4	± 0.7
63	250	± 0.4	± 0.6	± 1.2
250	500	± 0.6	± 0.8	± 1.5
500	1000	± 0.8	± 1.0	± 2.0
1000	2000	± 1.2	± 1.5	± 2.5
ANGLE		± 25'	± 5'	± 10'

HYUNDAI
ELEVATOR CO., LTD.


표준	DRWN BY	DSND BY	CHKD BY	APPD BY
	제도	설계	검토	승인
임시				
보류				
	T.R. LEE			
	2006.3.14			

UNIT
단위

SCALE	척도
1/1	
3RD ANGLE	3 각 법
REF. NO	참고도면

SSVF5-EN (HIVD 700SS)

TITLE	제목
ELEM. W. DIAGRAM	
DWG. NO	도면번호
HEC2210	
1/1	

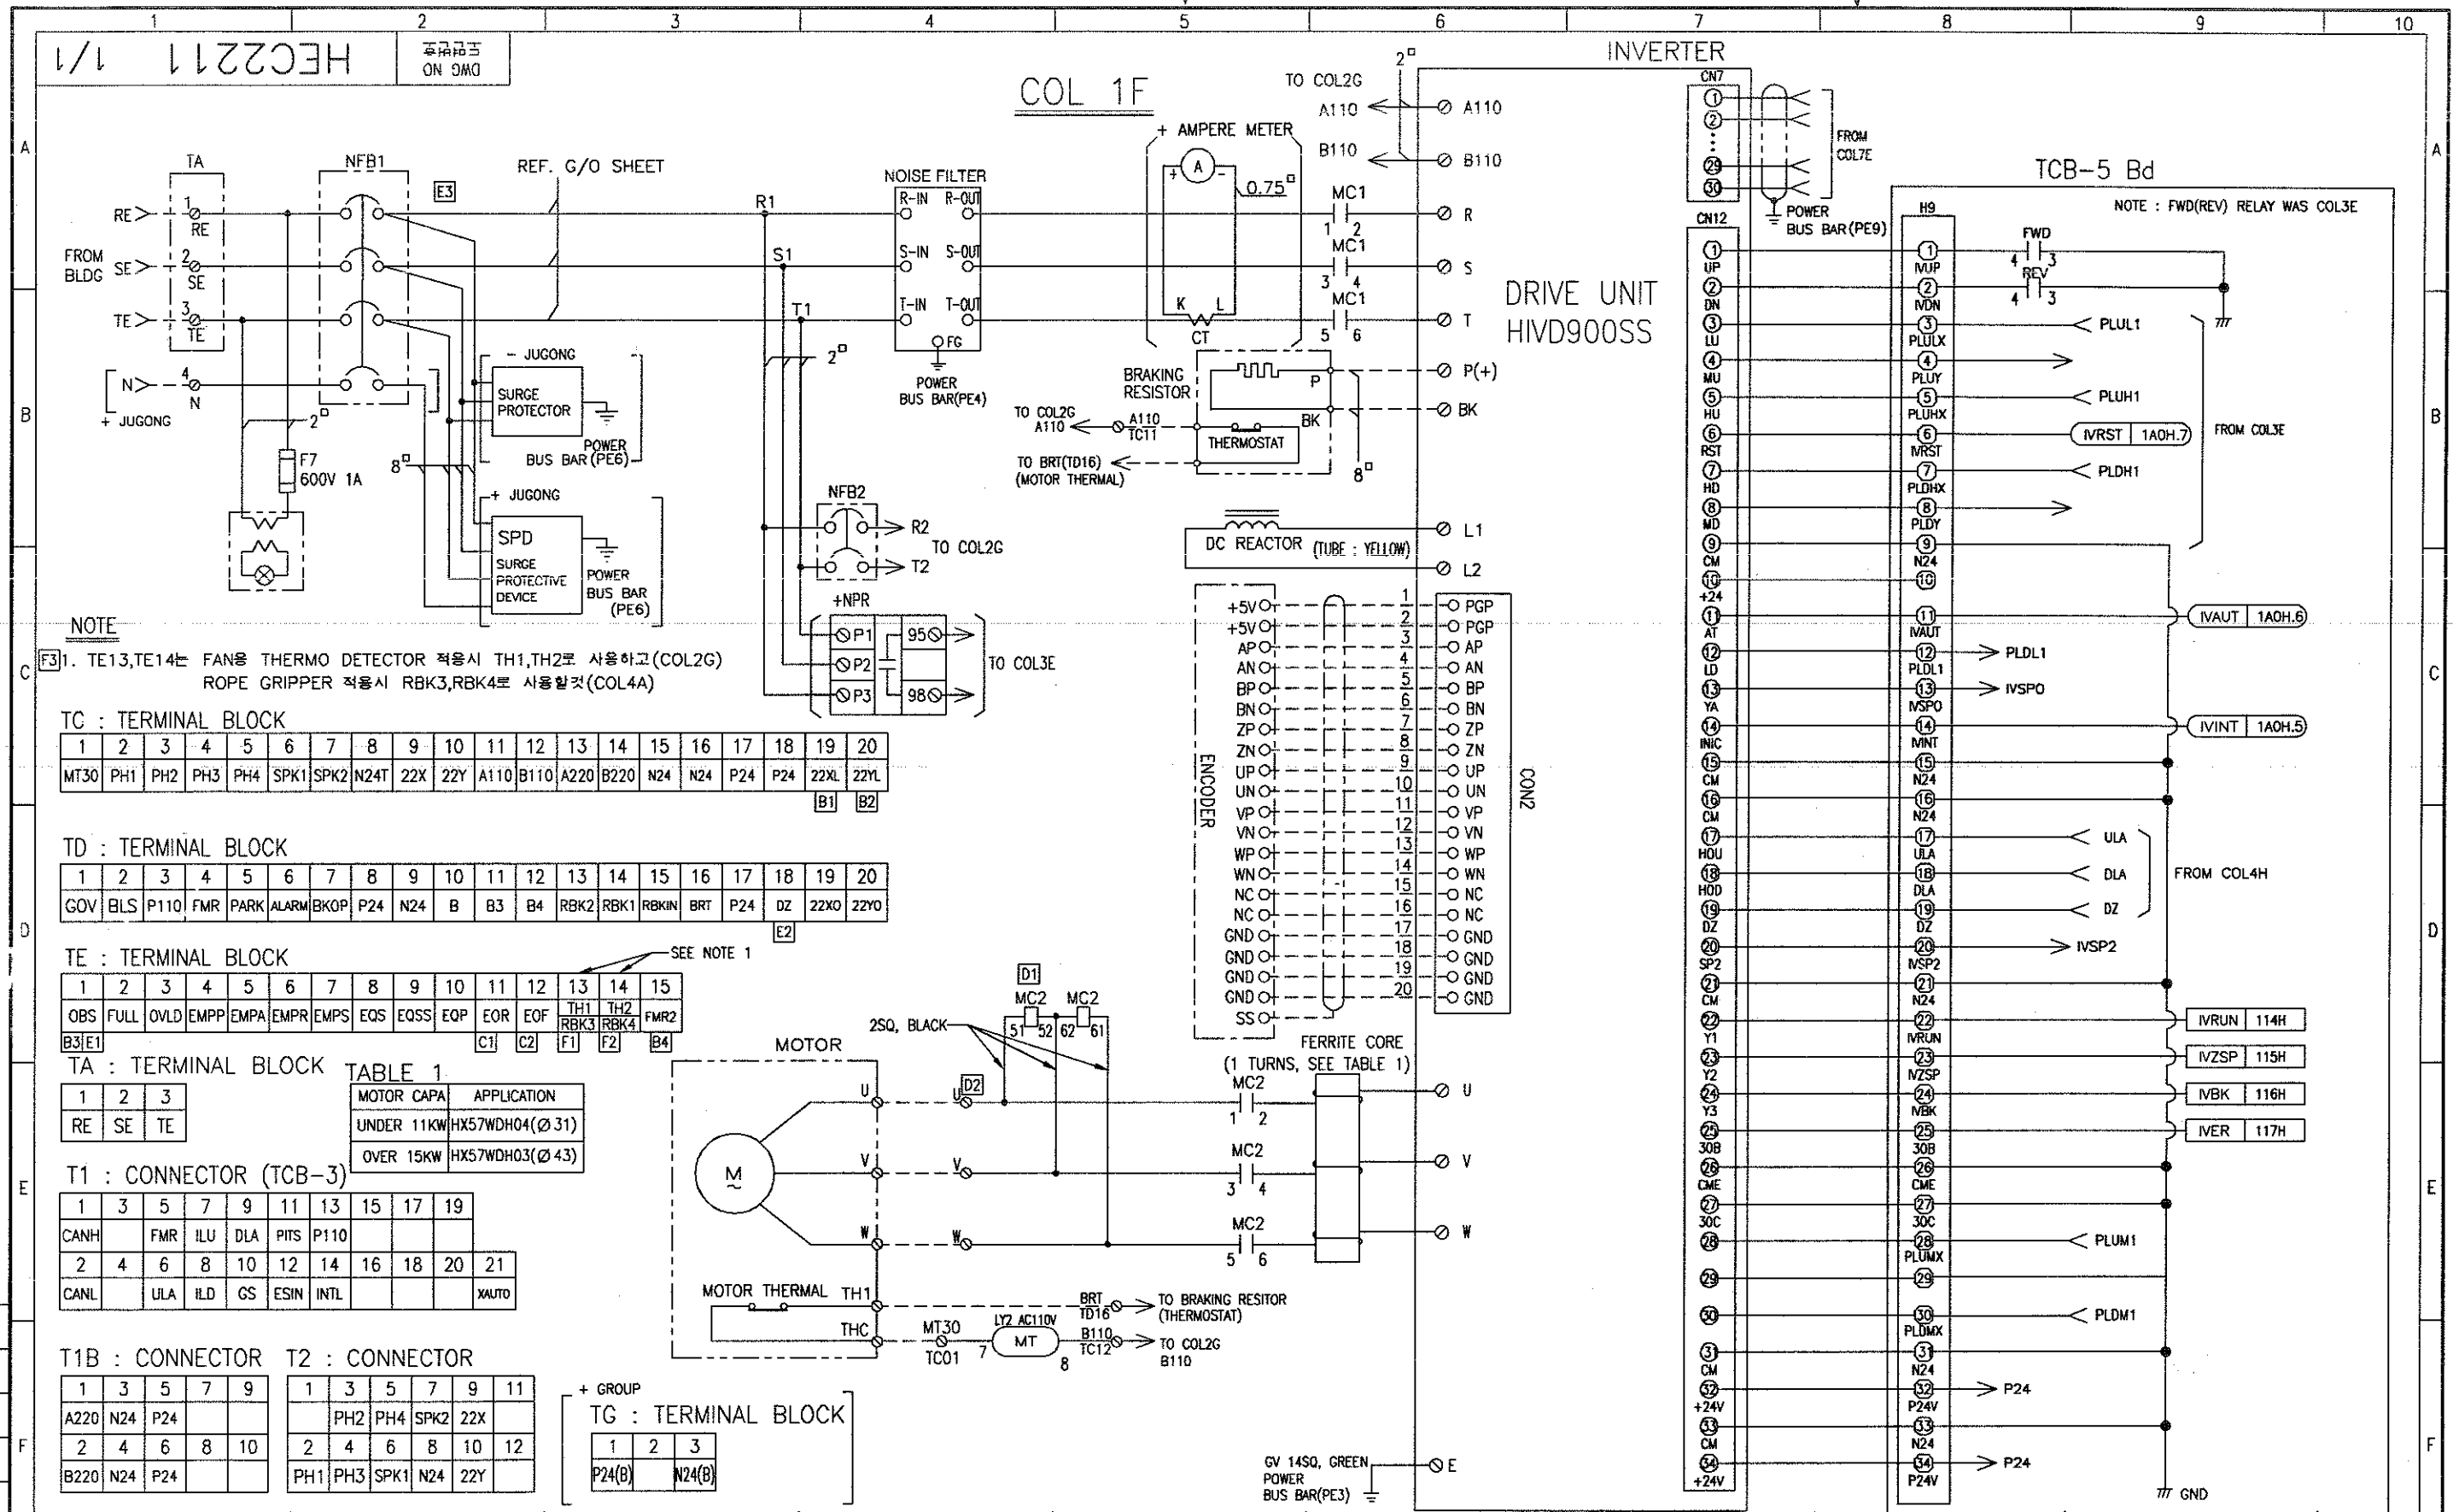

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN FINISH FRACTION OF HOLE STR.	M.D.C. DIE CASTING FRACTION DRAWN.	SHEET WELD GAS CUT.	CASTING FORG.
SIZE	TO FIN.				
OVER	1/16				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°




HYUNDAI
ELEVATOR CO., LTD.

표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시	T.R.LEE 정영원		M.S.JO	정영원
보류				
	2006.3.21		10/30	

UNIT 단위	MM. #NCH
SCALE 척도	1/1
3RD ANGLE 3 각 법	
REF. NO 참고도면	

APPAR.	SSVF5-EN (HIVD 900SS)	
TITLE	ELEM. W. DIAGRAM	
제목		
DWG. NO	HEC2211	1/1
도면번호		

허가없이 복사할 수 없음

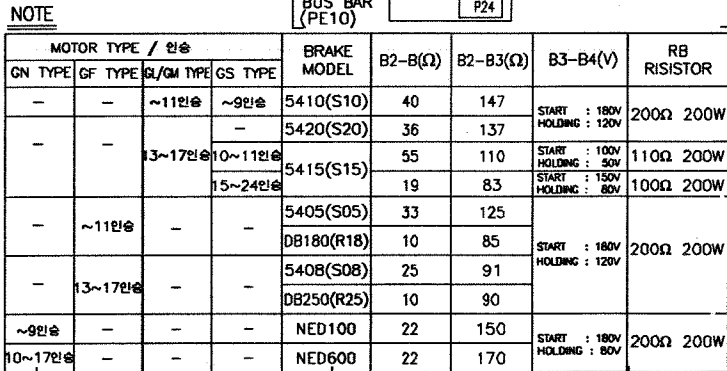


NOTE				BUS BAR (PE10)		P24			
A2	MOTOR TYPE / 한송				BRAKE MODEL	B2-B(Ω)	B2-B3(Ω)	B3-B4(V)	RB RISISTOR
	GN TYPE	GF TYPE	GL/GM TYPE	GS TYPE					
	-	-	~11한송	~9한송	5410(S10)	40	147	START HOLDING : 180V : 120V	200Ω 200W
	-	-	13~17한송	-	5420(S20)	36	137	START HOLDING : 100V 80V	110Ω 200W
	-	-		10~11한송	5415(S15)	55	110		
C3				15~24한송		19	83	START HOLDING : 150V 80V	100Ω 200W
	-	~11한송	-	-	5405(S05)	33	125	START HOLDING : 180V : 120V	200Ω 200W
					DB180(R18)	10	85		
	-	13~17한송	-	-	5408(S08)	25	91		
					DB250(R25)	10	90		
	~9한송	-	-	-	NED100	22	150	START HOLDING : 180V : 80V	200Ω 200W
	10~17한송	-	-	-	NED600	22	170		

UNIT 단위	MM. INCH	APPAR.	SSVF5-EN
SCALE 척도	N/S	TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2212	1/

허가없이 복사할 수 없음

6

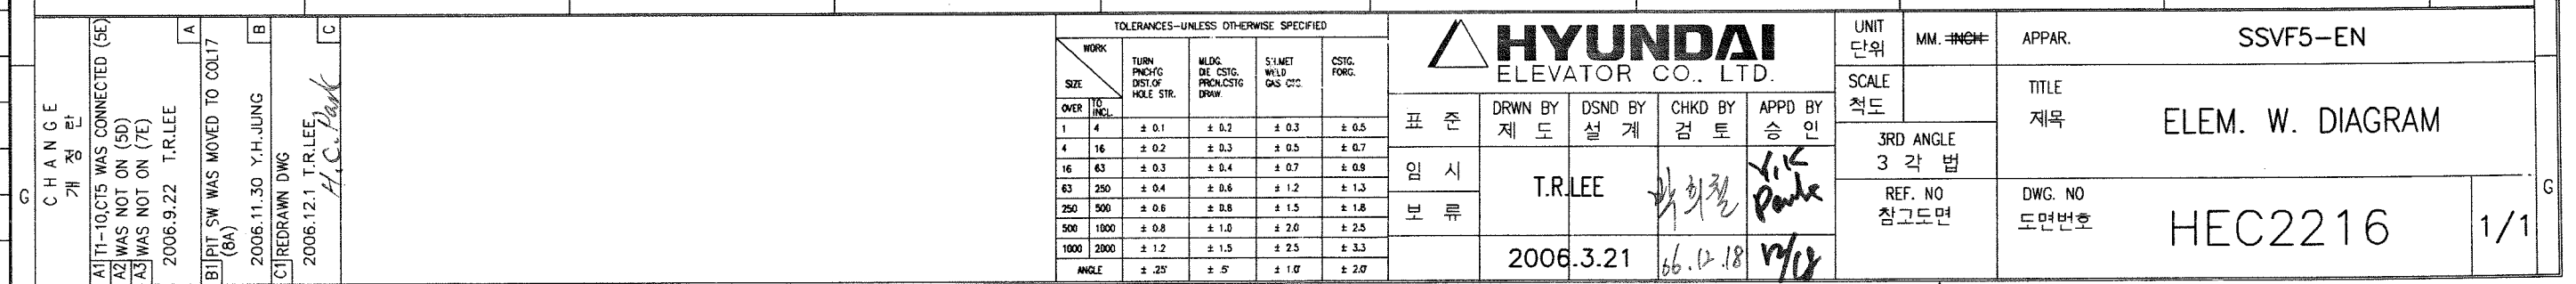[illegible]

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

표준


표준

표준

표준

표준

표준

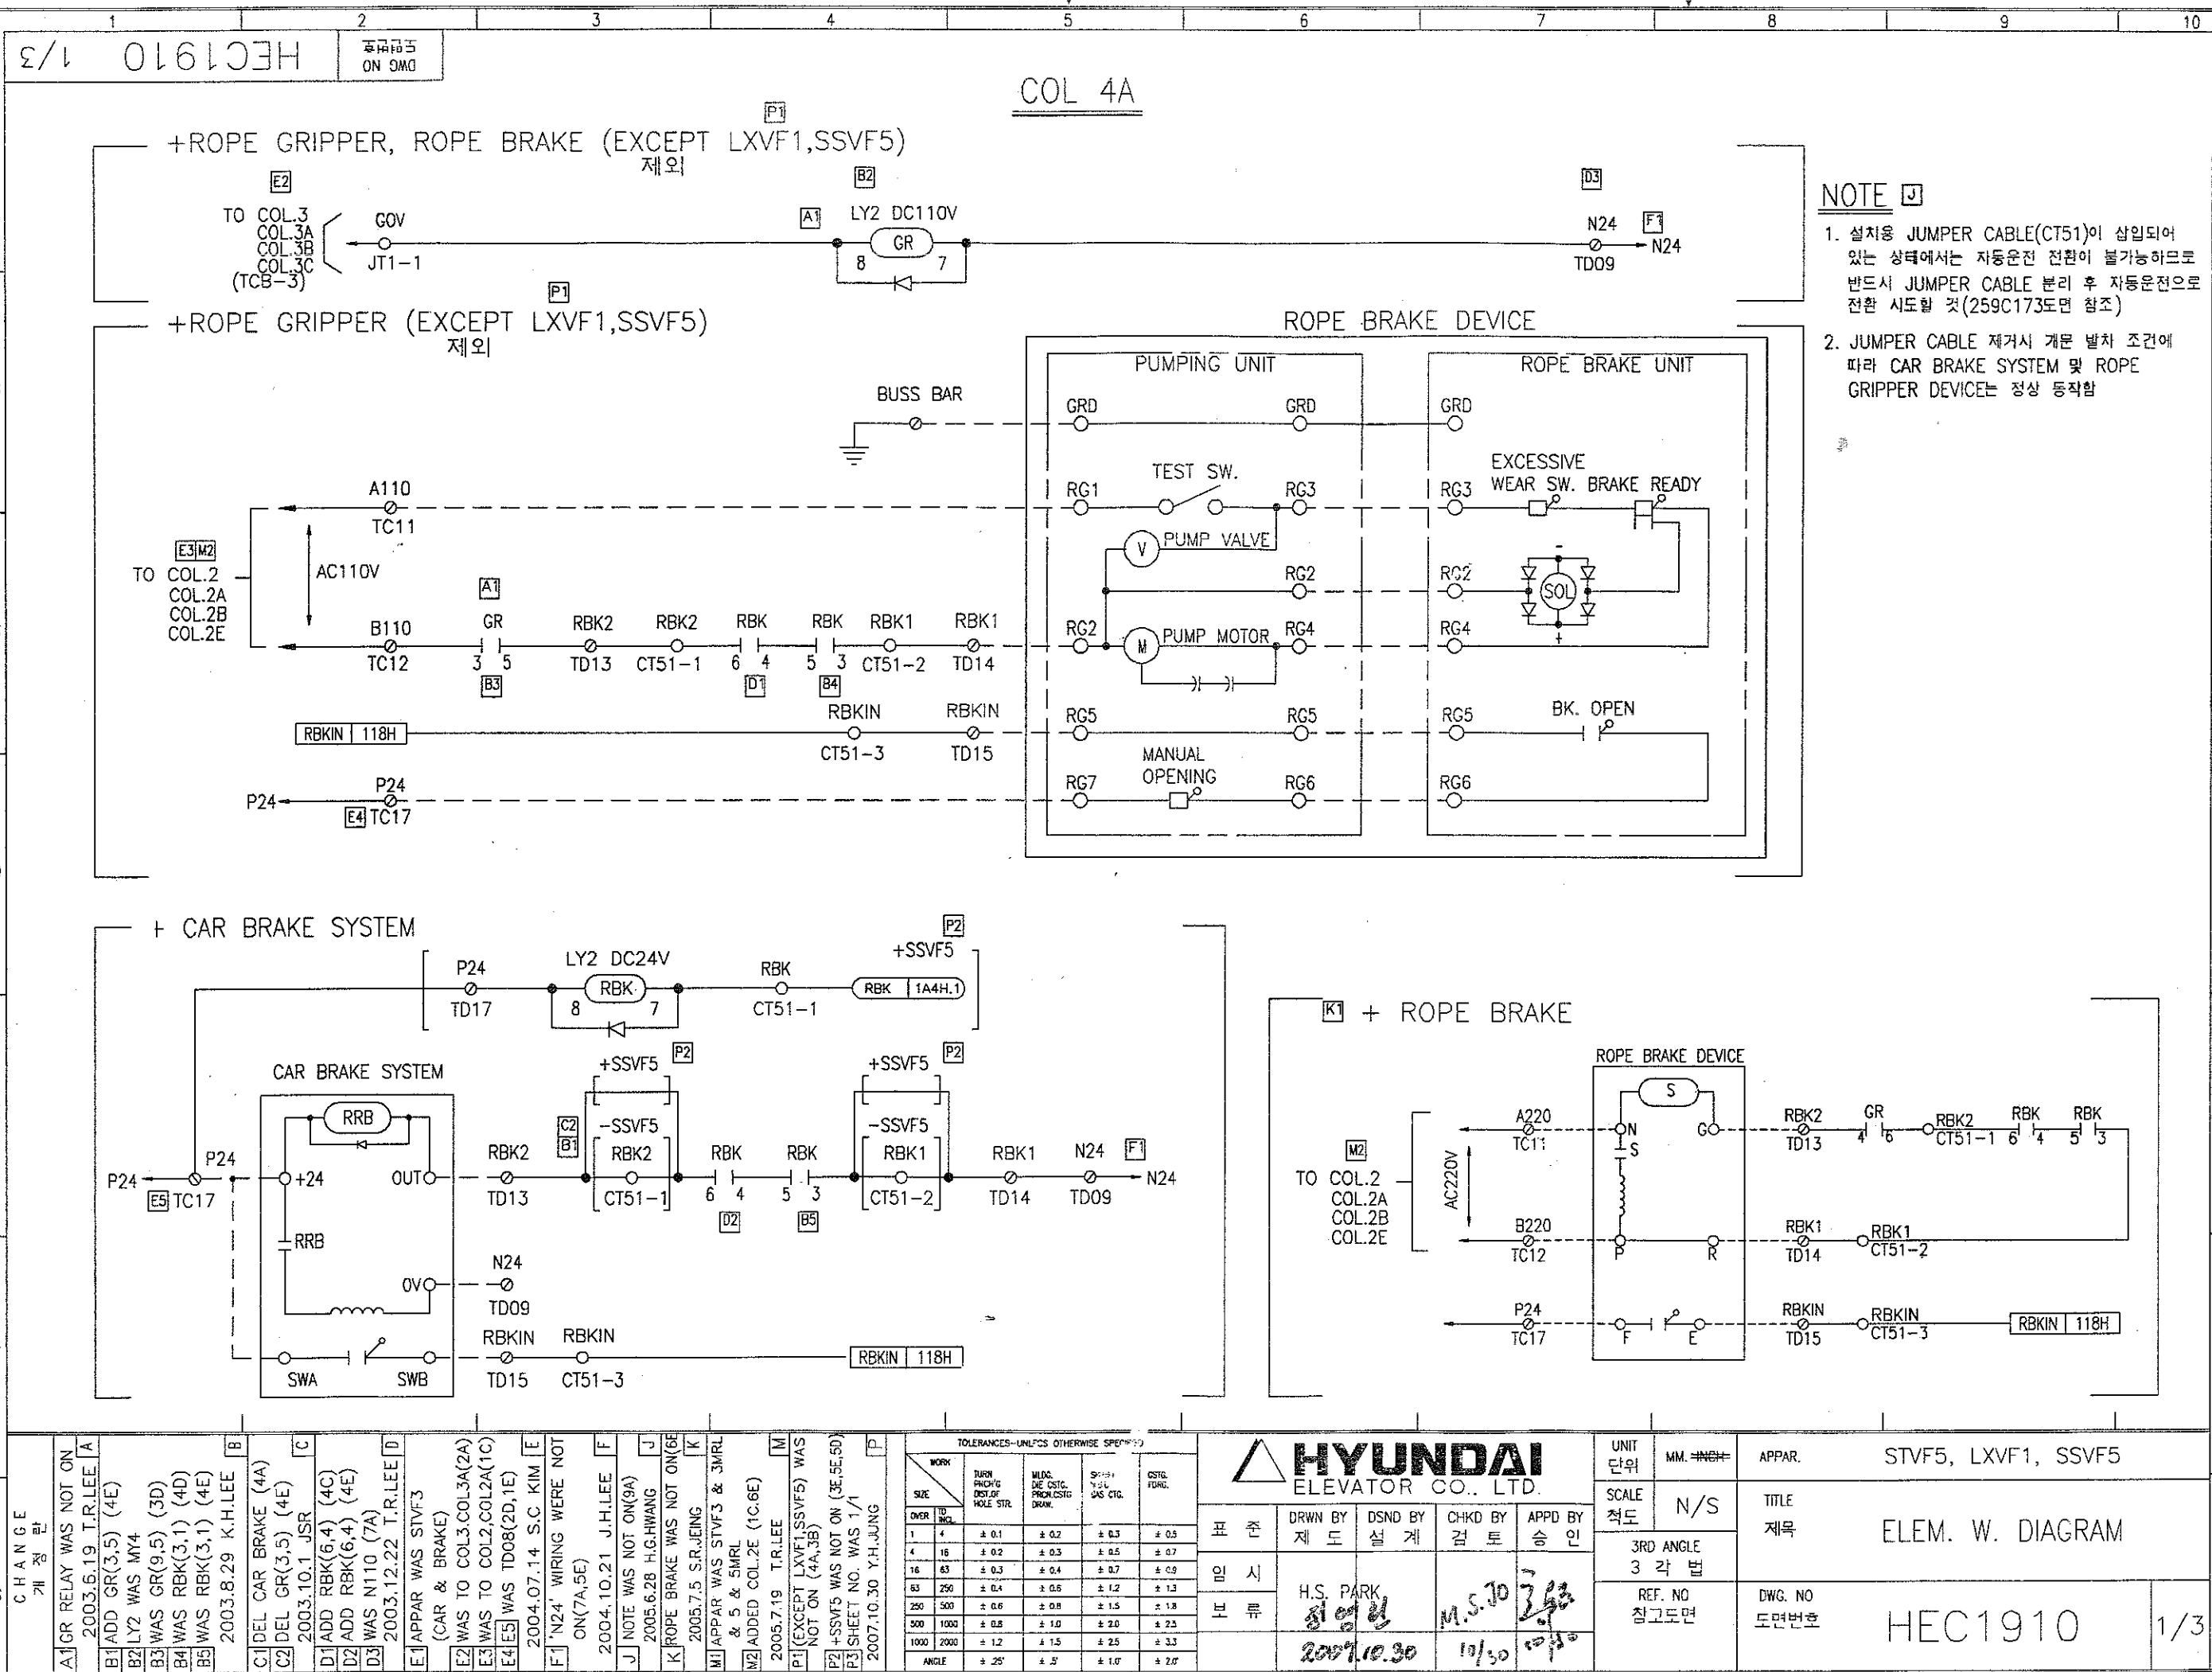




COL 4A

+ROPE GRIPPER (ONLY SSVF5)

E/L CONTROL PANEL.

ROPE GRIPPER TRANSFORMER BOX

ROPE GRIPPER DEVICE

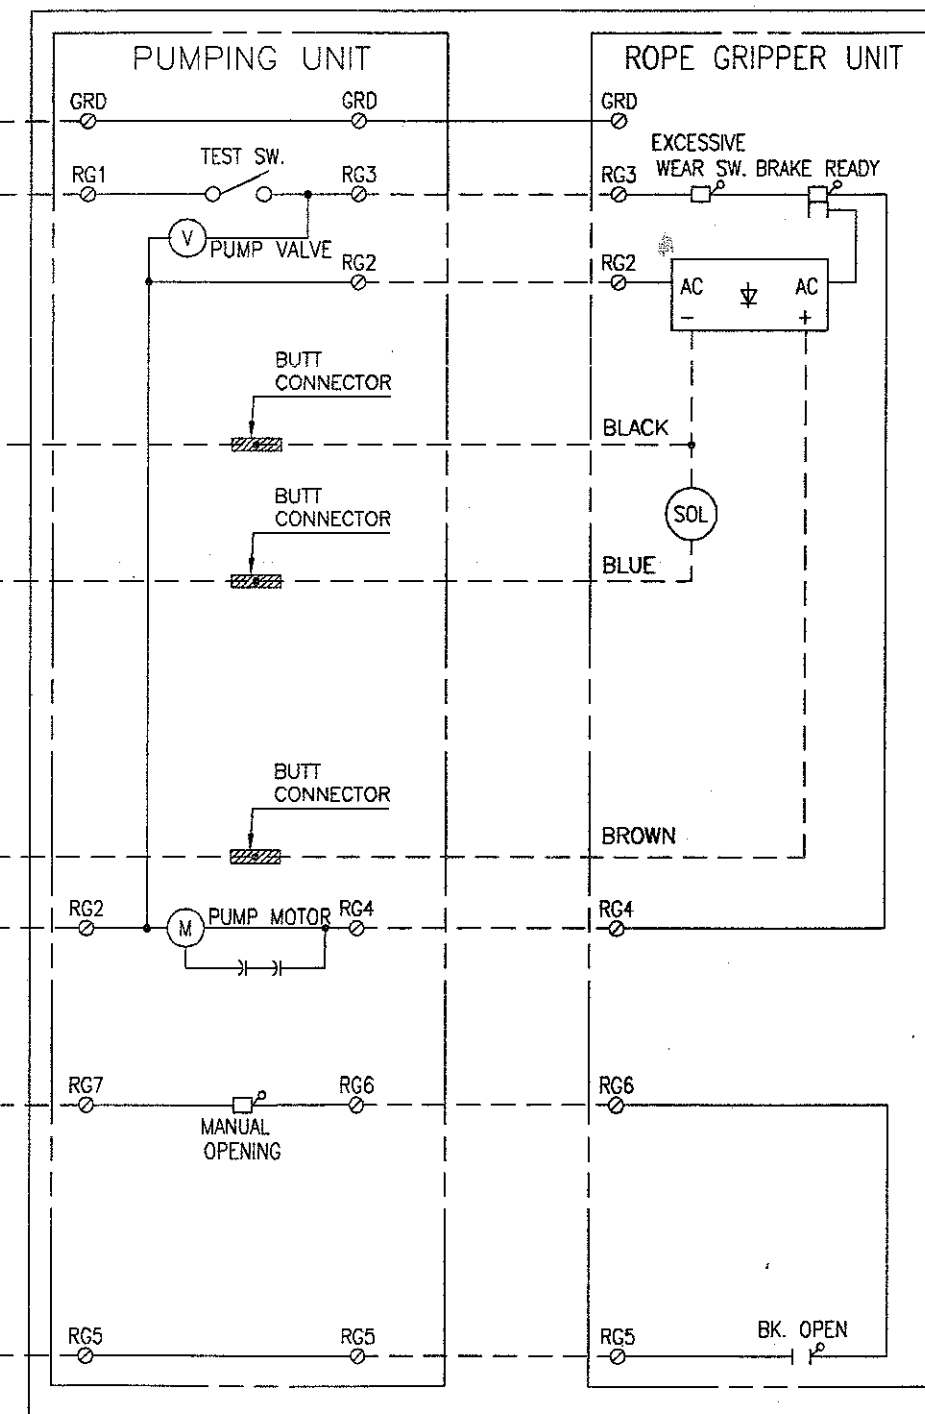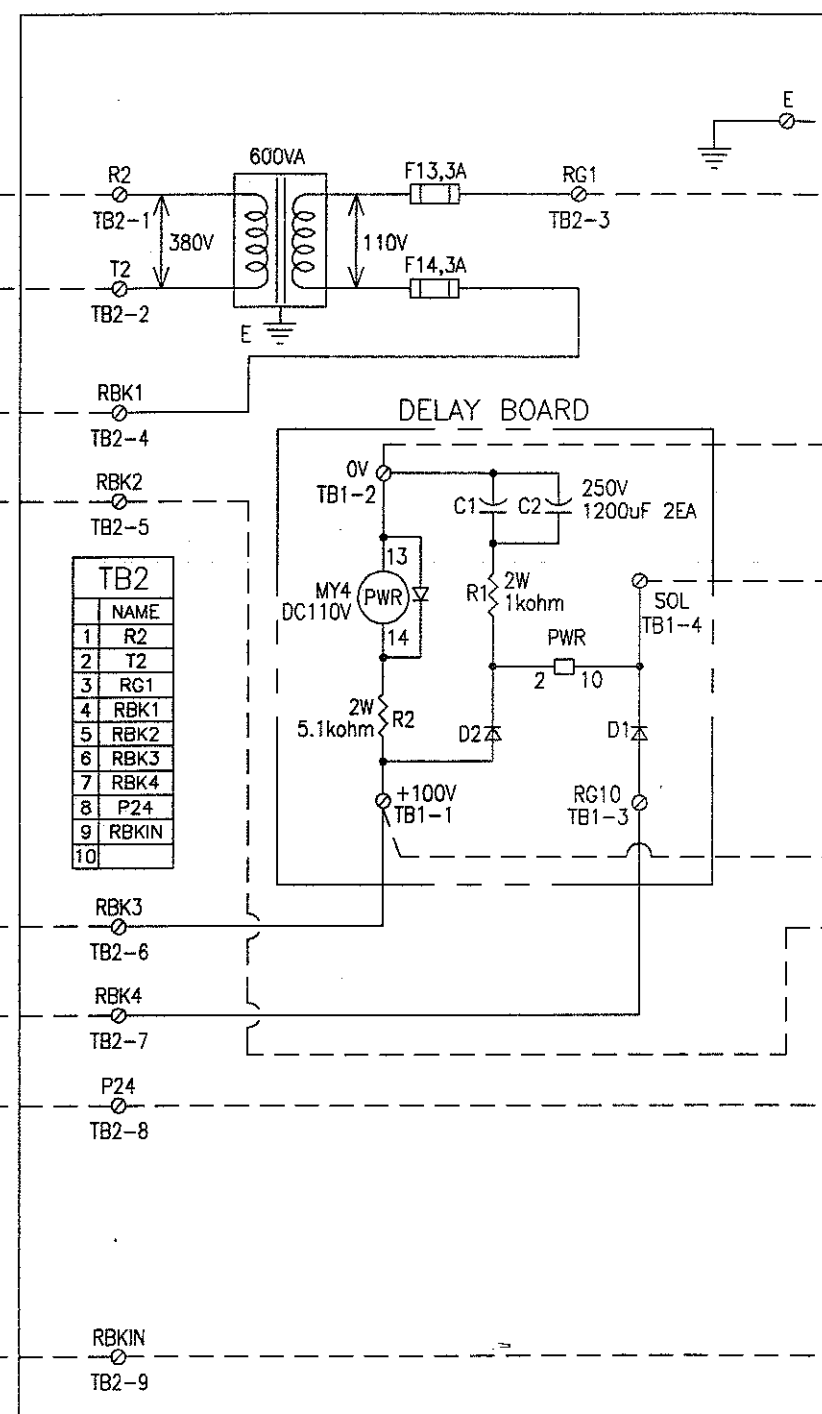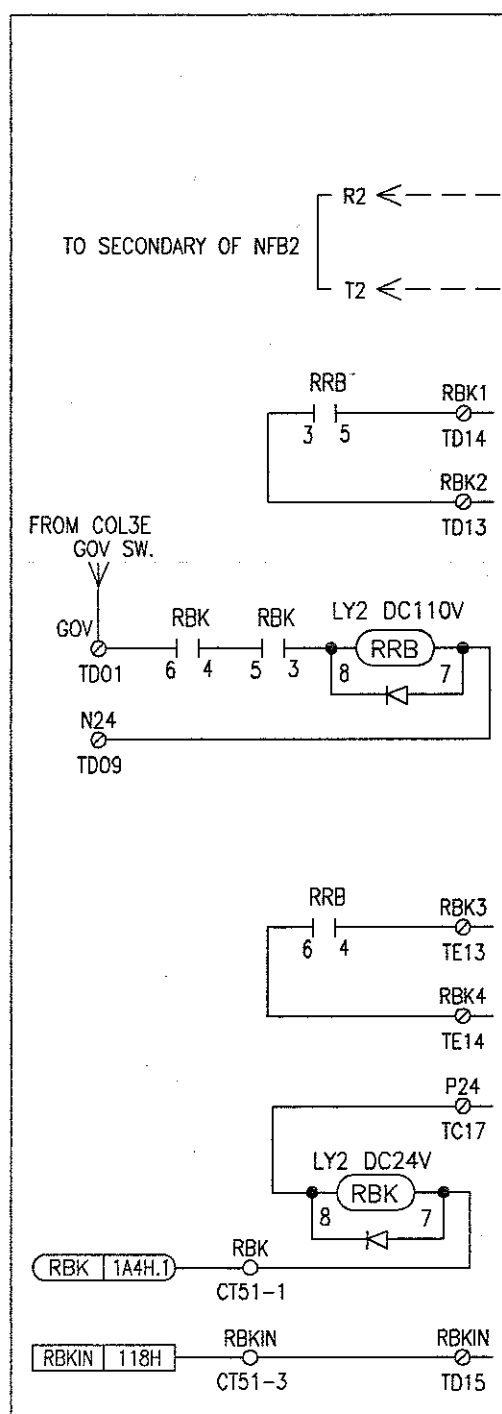

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

TB2	
	NAME
1	R2
2	T2
3	RG1
4	RBK1
5	RBK2
6	RBK3
7	RBK4
8	P24
9	RBKIN
10	

TOLERANCES—UNLESS OTHERWISE SPECIFIED						
WORK SIZE		TURN PRECISE DIST. OF HOLE STR.	MILDG. DE. CSTG. PRECISE CSTG. DOWN.	SHMET WELD GAS CTG.	CSTG. FORDG.	
OVER	1 TO INCL.					
1	4	± 0.1	± 0.2	± 0.3	± 0.5	
4	16	± 0.2	± 0.3	± 0.5	± 0.7	
16	63	± 0.3	± 0.4	± 0.7	± 0.9	
63	250	± 0.4	± 0.6	± 1.2	± 1.3	
250	500	± 0.6	± 0.8	± 1.5	± 1.8	
500	1000	± 0.8	± 1.0	± 2.0	± 2.5	
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3	
ANGLE	± 25°	± 5°	± 1.0°	± 2.0°		




HYUNDAI
ELEVATOR CO., LTD.

포	존	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
인	시	Y.H.JUNG 정영호		M.S.JO 조민수	[Signature]
보	류				
		2007.10.30	10/30	10/30	10/30

UNIT 단위	MM. HEC	APPAR.	STVF5, LXVF1, SSVF5
SCALE 척도	N/S	TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면		DWG. NO 도면번호	HEC1910 3/3

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
이 기밀이 복사될 수 없음

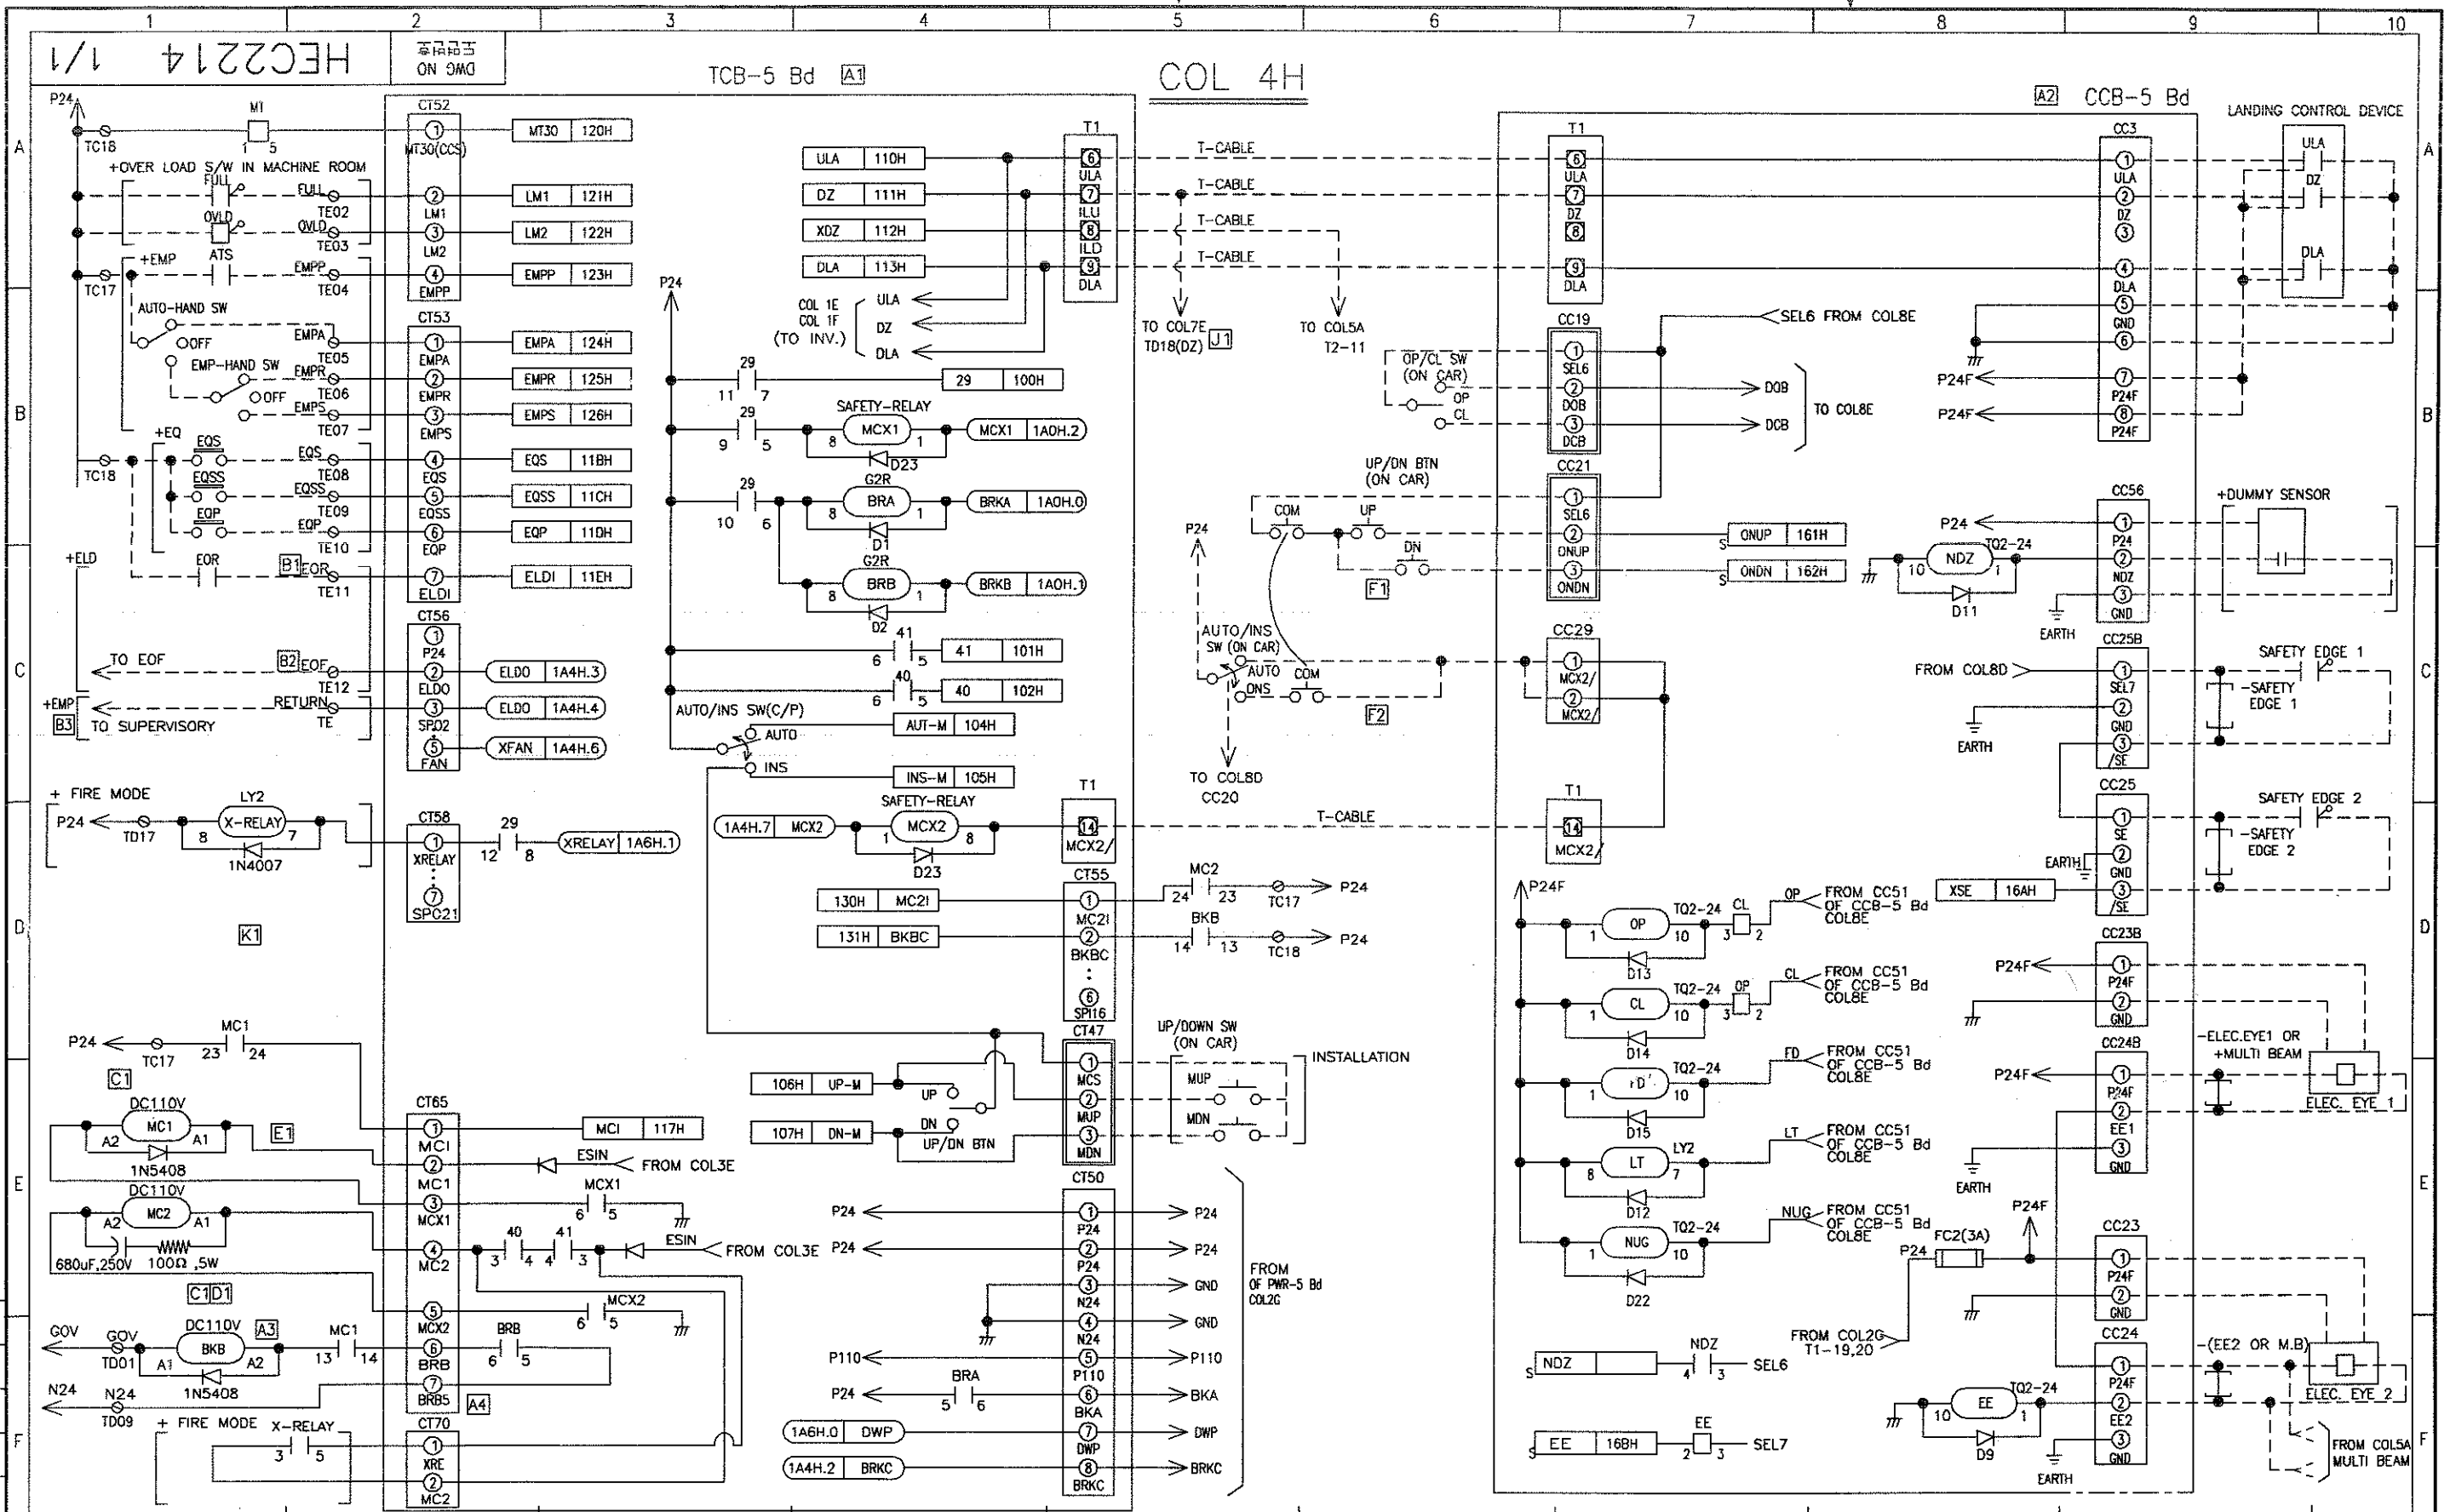


C CHANGE 개정안		A1 TCB-5 Bd VERSION UPDATED (4A) (H11 --> H22) A2 CCB-5 Bd VERSION UPDATED (8A) (H11 --> H22) A3 BKB WAS AC220V (1F) A4 BRB5 WAS A220 (2F) 2006.11.27 T.R.LEE A B1 WAS ELDI (1C) B2 WAS ELDI (1C) B3 WAS NOT ON (1C) 2007.1.26 S.R.JOENG B C1 200391K WAS NOT ON (1E) 2007.1.11 T.R.LEE C D1 200391K WAS ON (1E) 2007.4.16 T.R.LEE D E1 NFB4 CONTACT WAS ON (1E) 2007.6.11 S.H.HWANG E F1 SPEC. OF ON CAR UP/DOWN SWITCH WAS CHANGED (20 -> 10) (6C) 2007.6.27 Y.H.JUNG F J1 CONNECTION FORM T1-7 TO TD18 WAS NOT ON (5B) 2007.7.27 S.H.HWANG J K1 BRK RELAY FOR CAR BRAKE, ROPE GRIPPER WAS ON (1D) 2007.10.30 Y.H.JUNG K										TOLERANCES-UNLESS OTHERWISE SPECIFIED WORK SIZE OVER TO ANG 1 4 ± 0.1 ± 0.2 ± 0.3 ± 0.5 4 16 ± 0.2 ± 0.3 ± 0.5 ± 0.7 16 63 ± 0.3 ± 0.4 ± 0.7 ± 0.9 63 250 ± 0.4 ± 0.6 ± 1.2 ± 1.3 250 500 ± 0.6 ± 0.8 ± 1.5 ± 1.8 500 1000 ± 0.8 ± 1.0 ± 2.0 ± 2.5 1000 2000 ± 1.2 ± 1.5 ± 2.5 ± 3.3 ANGLE ± 25' ± 5' ± 10' ± 20'					HYUNDAI ELEVATOR CO., LTD. 표준 제도 임시 표류 DRWN BY T.R.LEE 2006.3.21 DSND BY 설계 CHKD BY M.S.JO 10/30 APPD BY 승인 2007.10.30				UNIT 단위 SCALE 척도 3RD ANGLE 3 각 법 REF. NO 참고도면	MM. ≒ DWG. NO 도면번호	APPAR. TITLE 제목 SSVF5-EN ELEM. W. DIAGRAM HEC2214	1/1
--------------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--------------------------	--	-----

[illegible]

CHANGE 개 정 란		A 2004.9.06 S.C.KIM		B 2004.11.25 D.Y. KIM		C 2005.06.01 M.S. KIM		D 2005.7.19 T.R. LEE		E 2005.11.14 M.S. KIM		F 2006.11.30 Y.H. JUNG	
A1 A2 WAS NOT ON (2B,6A)		B1 ON1 WAS NOT ON AND VOICE ANNOUCE WIRNG WAS CHNAGED. (5D)		C1 DUMMY SENSOR WAS ON(2F) C2 NOTE WAS NOT ON (7F) C3 DELETED INDICATOR AND CAN COMMUNICATION CONNECTIONS (7F)		D1 APPAR WAS STVF5 & 5MRL D2 ADDED COL2E (2D) D3 ADDED COL4E (1E,2D)		E1 WAS NOT ON (5D) E2 WAS CHANGED (7C)		F1 INTERPHONE(IN PIT) FOR SSVF5 WAS NOT ON(1C) INTERPHONE(ON CAR TOP) FOR SSVF5 WAS NOT ON(8B)		F2 DI PBX PHONE(IN PIT) FOR SSVF5 WAS NOT ON(2A) DI PBX PHONE(ON CAR TOP) FOR SSVF5 WAS NOT ON(9D)	
B2 CC27 WAS NOT HARNESS(5D)		B3 BATTERY WAS NOT ON. (6E)		C4 C5 [6] "-DI PBX" WAS NOT ON (6A,7B,1B) C7 C8 [9] "+DI PBX" WAS NOT ON (7B,6C,1A) 2005.05.25 K.H. LEE		C9 CN1 WAS CN2 (5E)		D4 CN2 WAS CN1 (5D)		E3 CN1 WAS CN2 (5E)		F3 CN1 WAS CN2 (5E)	
C1 DUMMY SENSOR WAS ON(2F)		C2 NOTE WAS NOT ON (7F)		C3 DELETED INDICATOR AND CAN COMMUNICATION CONNECTIONS (7F)		C4 C5 [6] "-DI PBX" WAS NOT ON (6A,7B,1B) C7 C8 [9] "+DI PBX" WAS NOT ON (7B,6C,1A) 2005.05.25 K.H. LEE		C9 CN1 WAS CN2 (5E)		D4 CN2 WAS CN1 (5D)		E3 CN1 WAS CN2 (5E)	
C10 DI3 WAS NOT ON (5D)		C11 CN2 WAS CN1 (5D)		C12 CN1 WAS CN2 (5E)		D4 CN2 WAS CN1 (5D)		E3 CN1 WAS CN2 (5E)		F3 CN1 WAS CN2 (5E)		F4 CN1 WAS CN2 (5E)	

TOLERANCES--UNLESS OTHERWISE SPECIFIED						 HYUNDAI ELEVATOR CO., LTD.		UNIT 단위		MM. MM		APPAR. STVF5 & 5MRL & ST5GL			
WORK SIZE		TURN PUNCH'G DIST. OF HOLE STR.		M.D.C. DIE. CSTG. PRON. CSTG DRAW.				SH.WET WELD GAS CTC.		CSTG. FORG.		SCALE 척도		TITLE 제목	
OVER TO INCH		1 4 ± 0.1 ± 0.2 ± 0.3 ± 0.5		4 16 ± 0.2 ± 0.3 ± 0.5 ± 0.7		16 63 ± 0.3 ± 0.4 ± 0.7 ± 0.9		63 250 ± 0.4 ± 0.6 ± 1.2 ± 1.3		250 500 ± 0.6 ± 0.8 ± 1.5 ± 1.8		500 1000 ± 0.8 ± 1.0 ± 2.0 ± 2.5		1000 2000 ± 1.2 ± 1.5 ± 2.5 ± 3.5	
ANGLE		± 25° ± 5° ± 1.0° ± 2.0°										3RD ANGLE 3 각 법		REF. NO 참고도면	
DRWN BY 제 도		DSND BY 설 계		CHKD BY 검 토		APPD BY 승 인						DWG. NO 도면번호		1/1	
S. C. KIM 성명호 2004.7.14		M.S. JO 이재호 11/30		4/30								HEC2030			

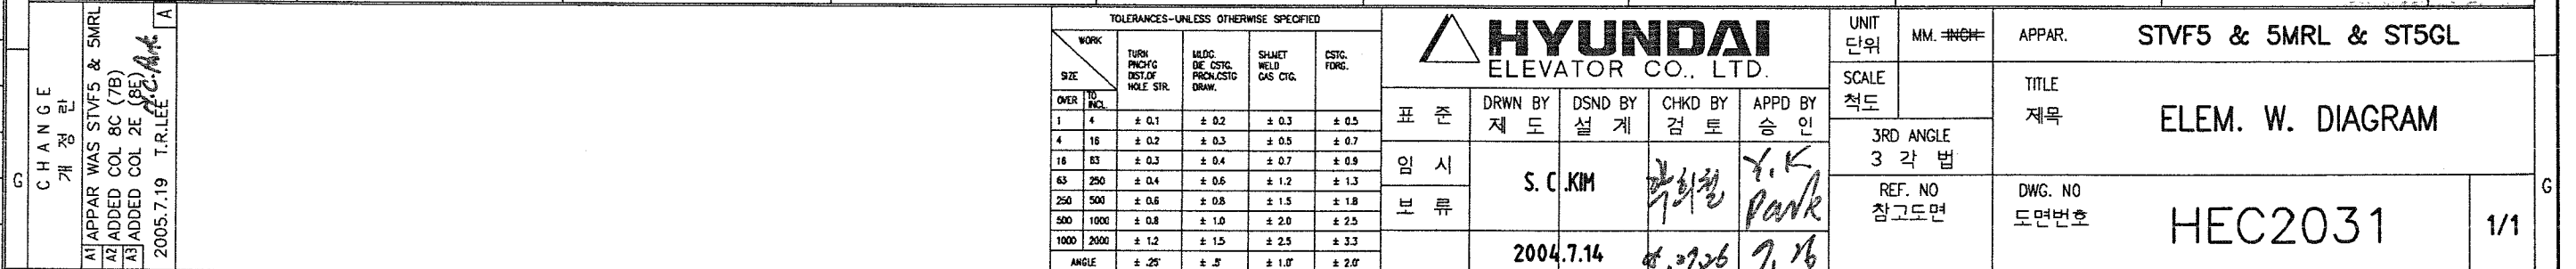



채 부 처



HYUNDAI
ELEVATOR CO., LTD.

UNIT 단위	MM. MM.	APPAR.	STVF5 & 5MRL & ST5GL
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2226	1/1


THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

REV	DATE	BY	CHK	APP

CHANGE
개정
A
A/APPAR WAS STVF5 & SMRL
A/ADDED COL 2E (3F)
2005.7.19 T.R.LEE


HEC2046
DWS NO
ON SMD

COL 7C

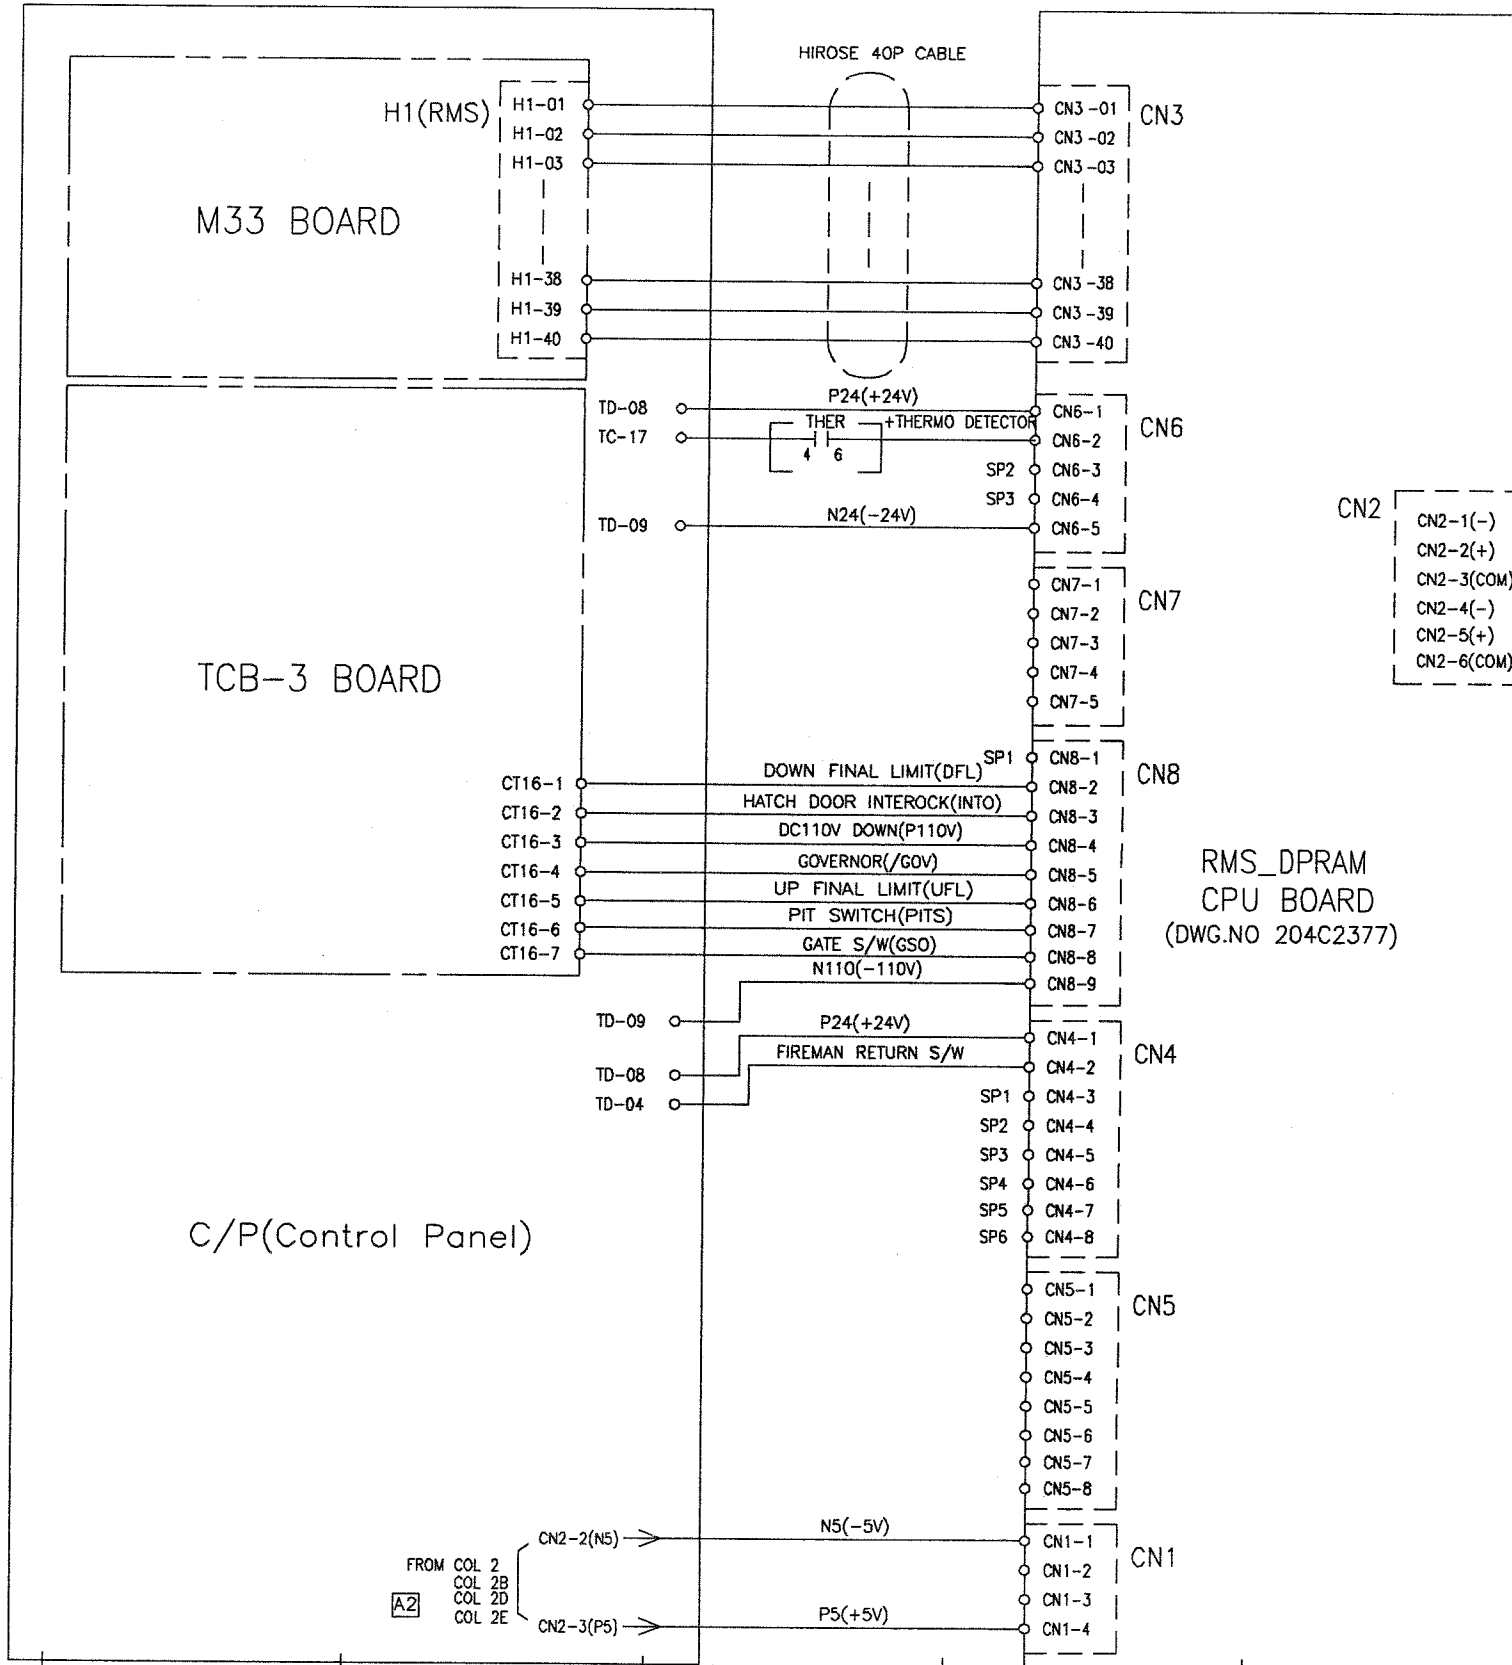

NOTE

- *. 통신선은 감시반 통신선 결선 요령서 (CM-204-8A001) 를 참조할 것.
- *. 통신선은 현장결선사항임

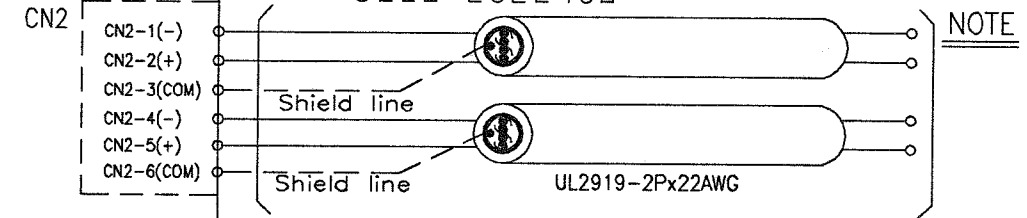

NOTE

RMS_DPRAM
CPU BOARD
(DWG.NO 204C2377)

TOLERANCES-UNLESS OTHERWISE SPECIFIED					
WORK	TURN	MOLD.	SHMET	CSTG.	
SIZE	PHOTO	DE. CSTG.	WELD	FORG.	
OVER	TO	DI. OF	GAS		
	IND.	HOLE STR.	CTG.		
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± 25°	± 5°	± 1.0°	± 2.0°


HYUNDAI
ELEVATOR CO., LTD.

표준	DRWN BY	DSND BY	CHKD BY	APPD BY
제도	설계	검토	승인	
임시	S.C KIM			
분류				
	2004.7.14			

UNIT	MM. #NCH	APPRO. VF5&5MRL&ST5GL (FOR DPRAM 3000)	
단위		TITLE	
SCALE		제목	ELEM. W. DIAGRAM
척도		DWG. NO	HEC2046
3RD ANGLE		도면번호	1/1
3 각 법			
REF. NO			
참고도면			


THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

REV	DATE	DESCRIPTION
1	2006.9.5	T.R.LEE
2	2007.4.13	S.H.HWANG
3	2007.4.17	T.R.LEE
4	2007.7.27	S.H.HWANG

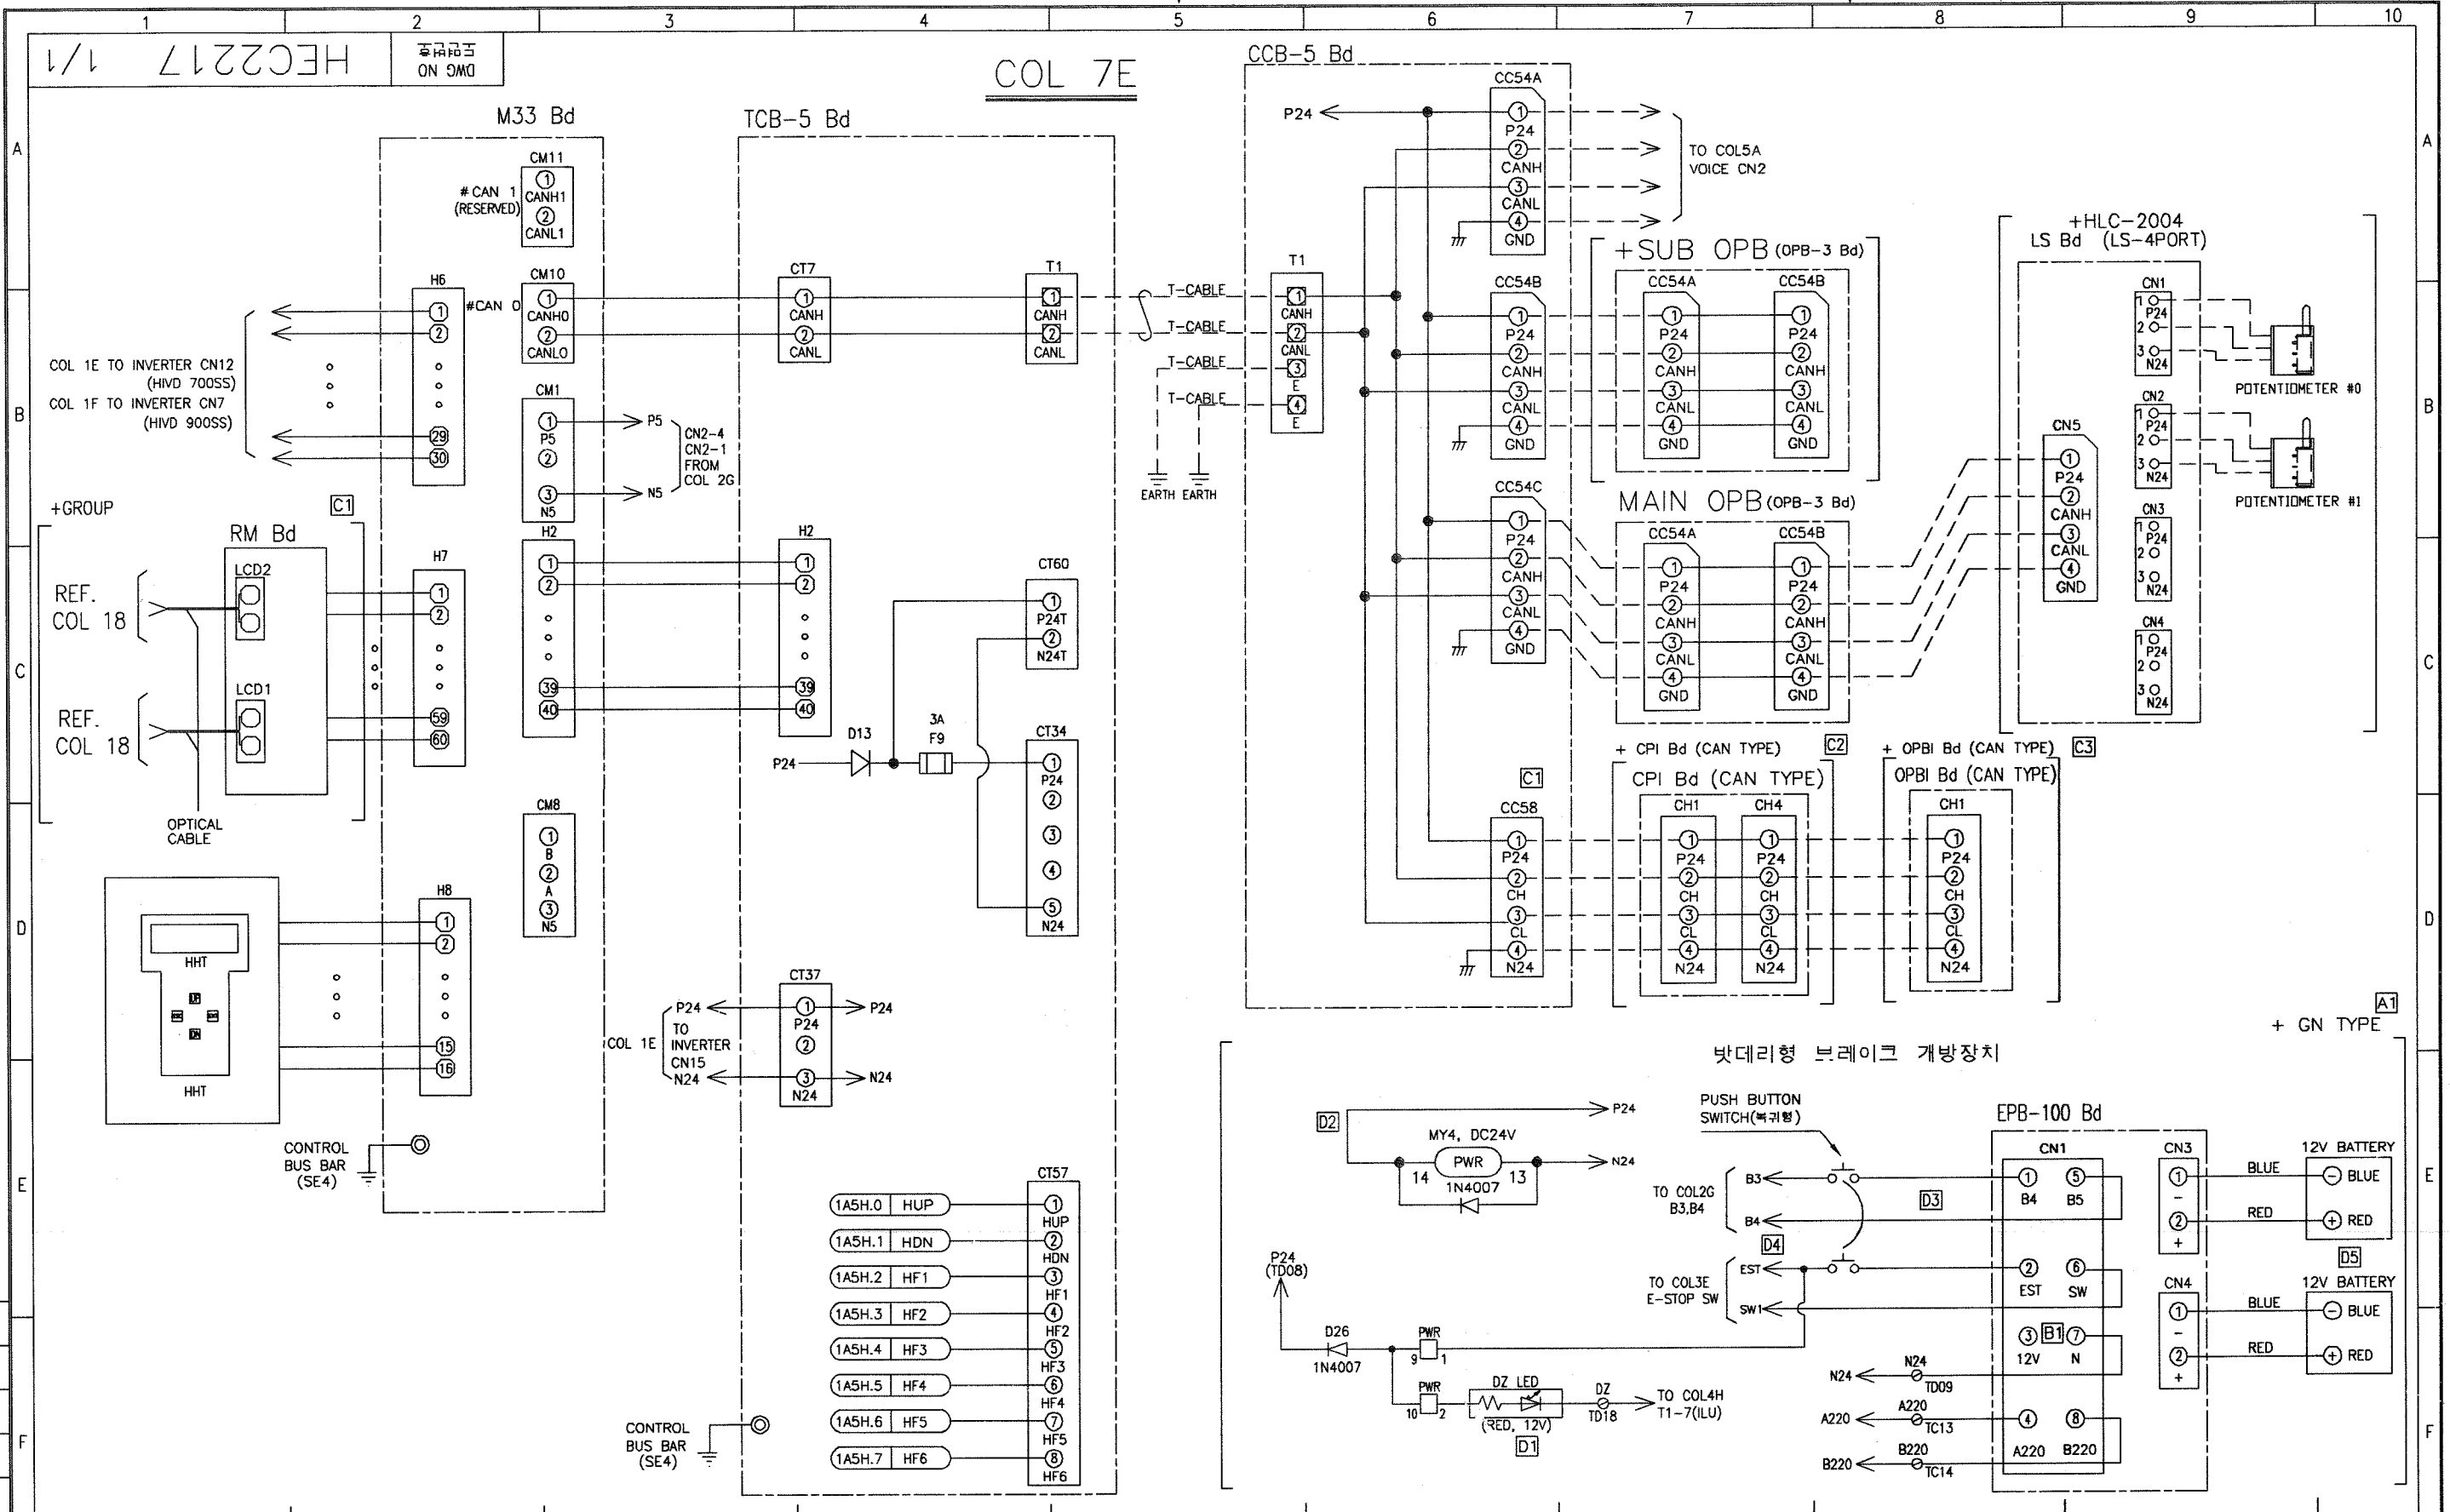

CHANGE 개 정 란		A B1] 12V WAS NOT ON (9E) 2006.9.5 T.R.LEE		B 2007.4.13 S.H.HWANG C1] CC58 WAS NOT ON (6D) C2] WAS NOT ON (7D) C3] WAS NOT ON (8D) 2007.4.17 T.R.LEE		C S.H. JEON D1] DZ LED CIRCUIT ADDED (6F) D2] PWR RELAY WAS NOT ON (6E) D3] CB02, CB03 CONNECTOR WAS ON (8E) D4] CONNECTION OF B3B4 & EST. SW1 WAS CHANGED (7E) D5] 12V BATTERYS WERE NOT ON (10E) 2007.7.27 S.H.HWANG		D																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					

COL 8D

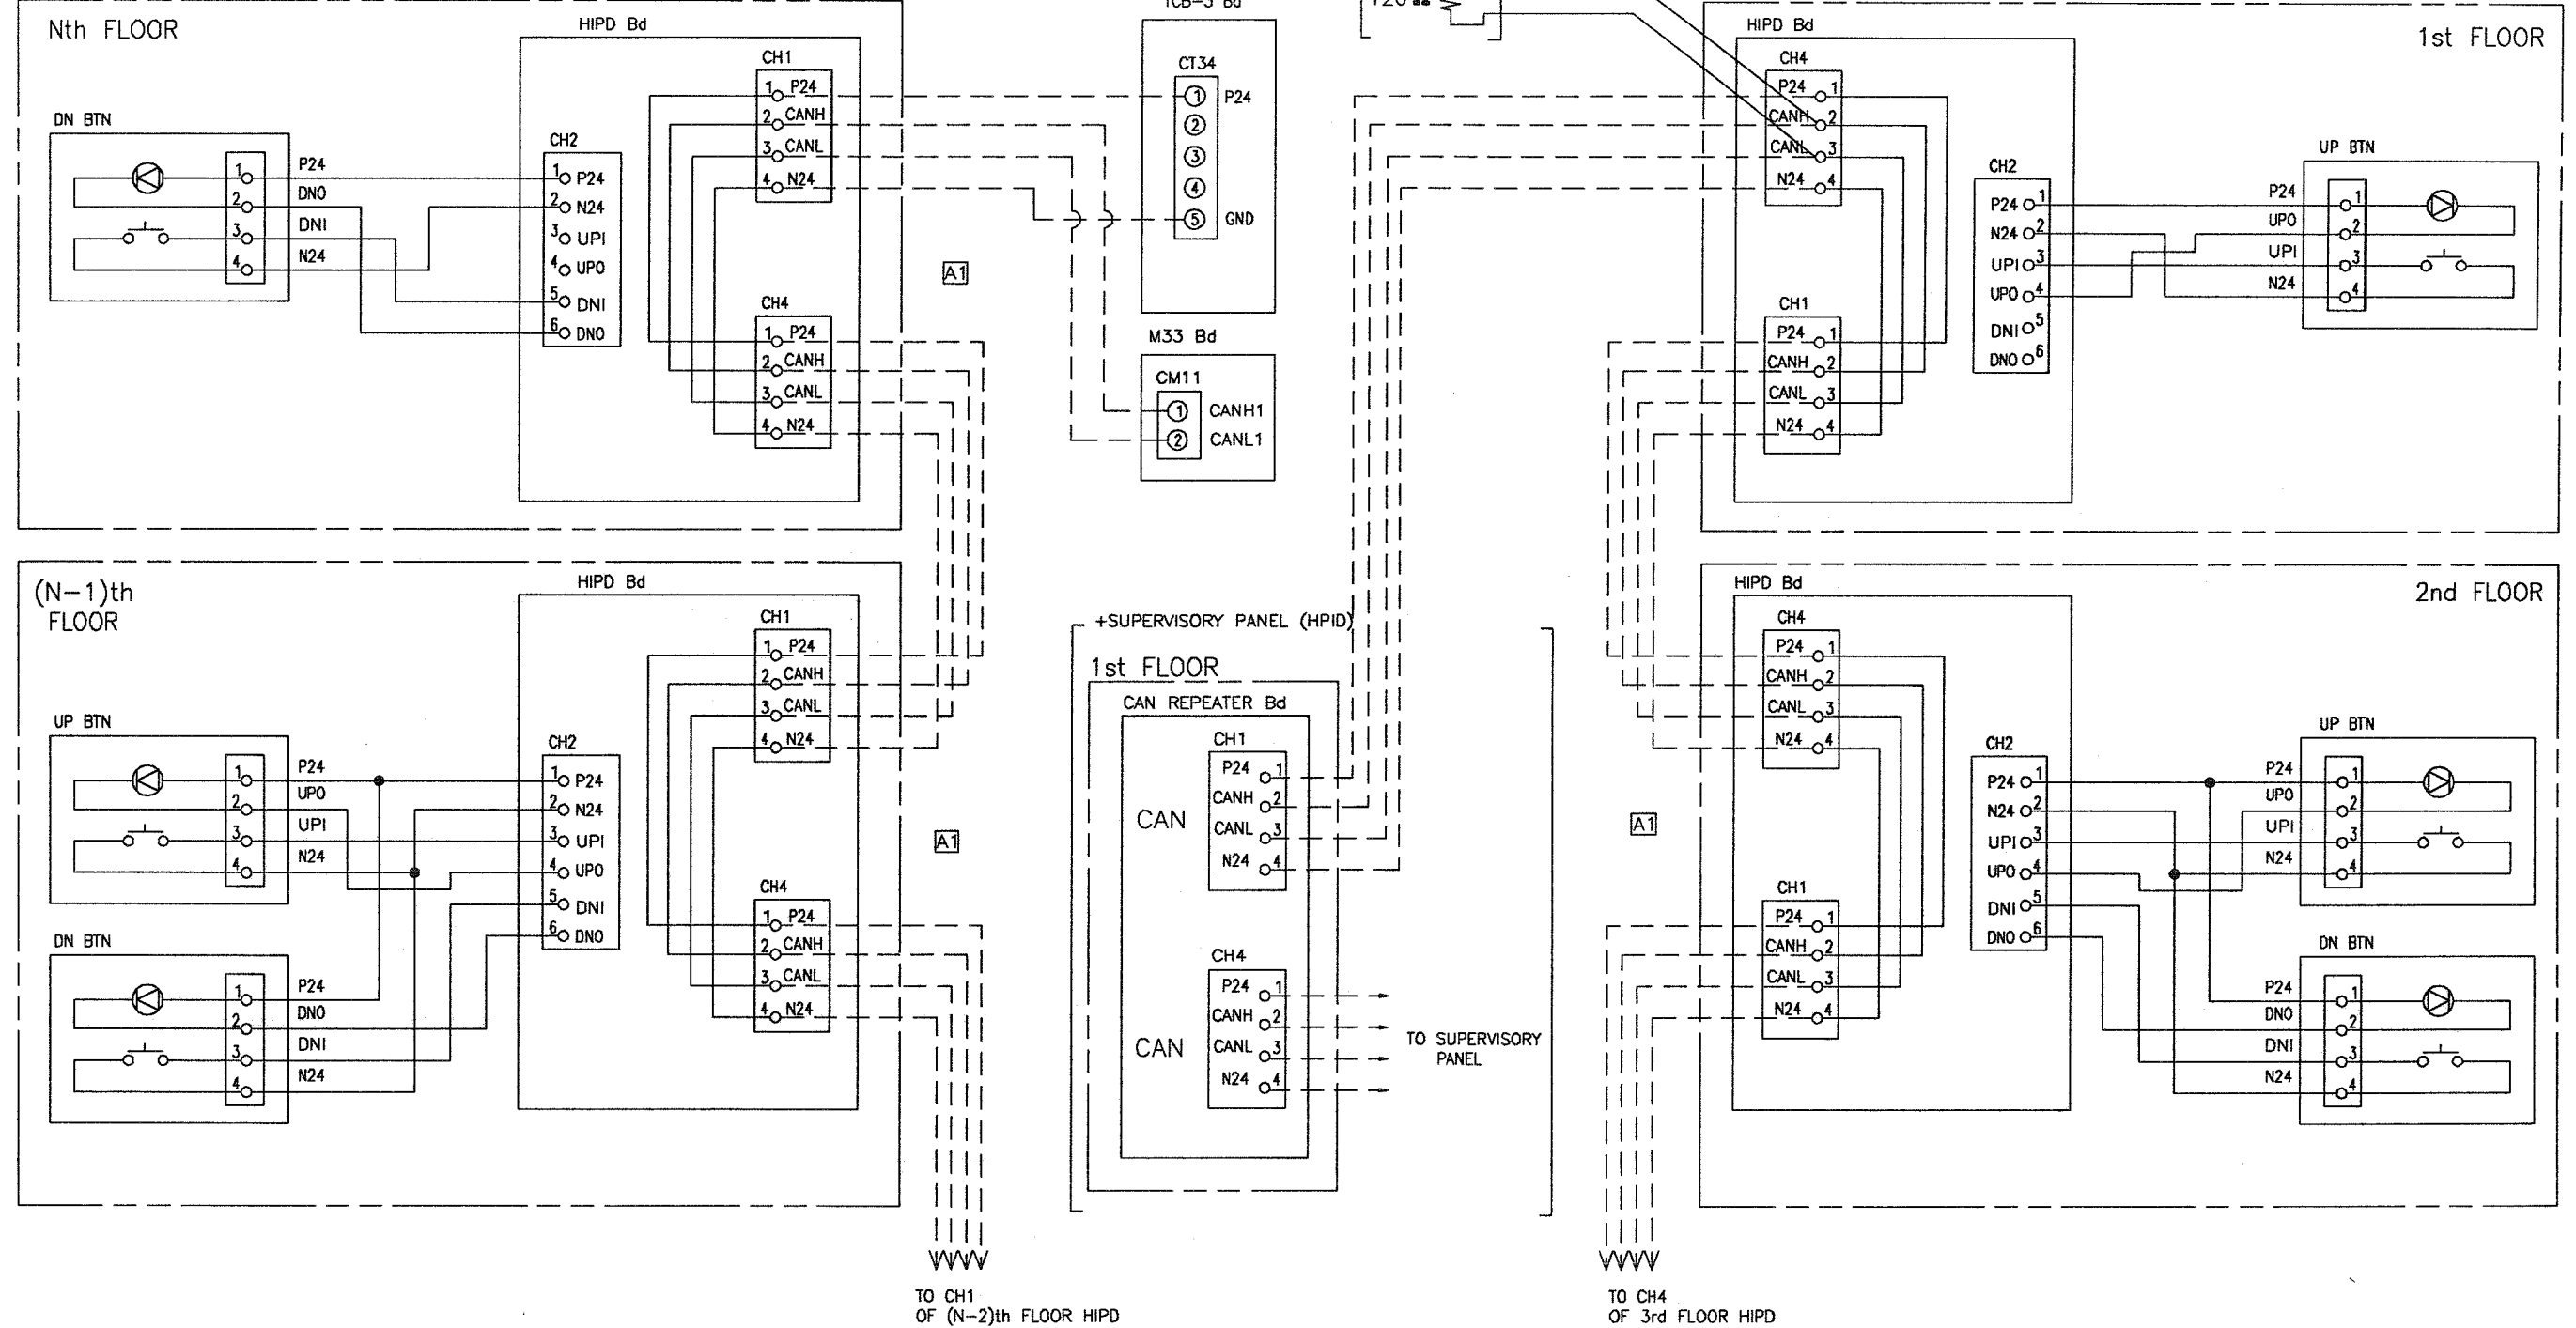

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

[illegible]

CHANGE

개 정 란	CH ₁ , CH ₄ 결선법 변경 - JUMPER 본리 (4B, 4D, 7D)	2006. 2.9	TRILEE	A
-------	--	-----------	--------	---

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN PROF'G DIST. L. HOLE STR.	MOLD. DE. CSTG. PROF'G DRAW.	SLUET WELD CAS. CTG.	CSTG. FURD.
SIZE	TO INCL.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°



HYUNDAI
ELEVATOR CO., LTD.

표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시	T.RILEE		박희만	Y.K. Park
보류				
	2005.12.2	12월 2일		

UNIT 단위	MM. INCH
SCALE 척도	N/S
3RD ANGLE 3 각 법	
REF. NO 참고도면	

APPRT	VF5 & 5MRL & ST5GL & ST5(CHINA)		G
TITLE		1 / 1	
제목 ELEM. W. DIAGRAM			
DWG. NO	4563188		
도면번호			

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
해기없이 복사할 수 없음

배 부 처	구분	수량	비고

CHANGE
개 정 란

1/1





HEC2215

ON 3MD


COL 8E

OPB-5 Bd

CCB-5 Bd

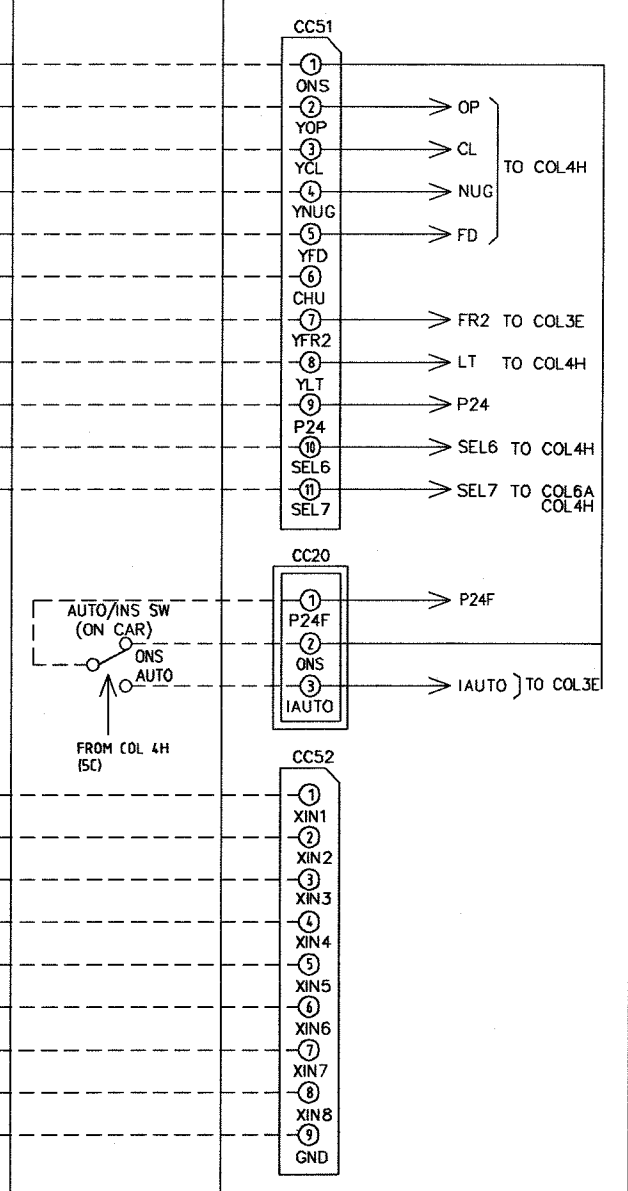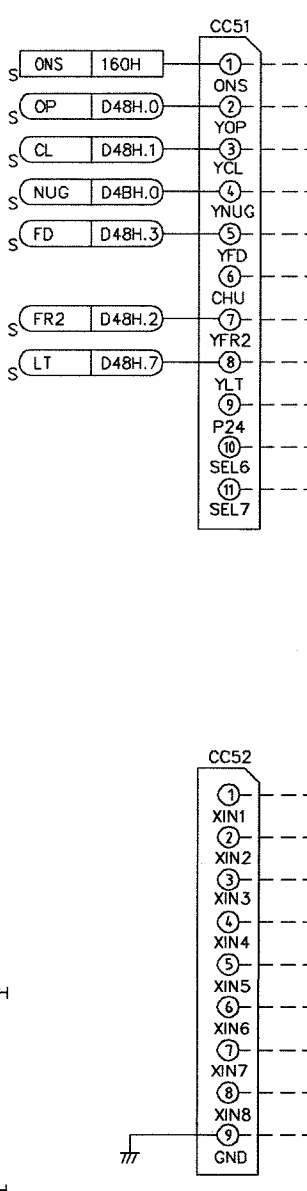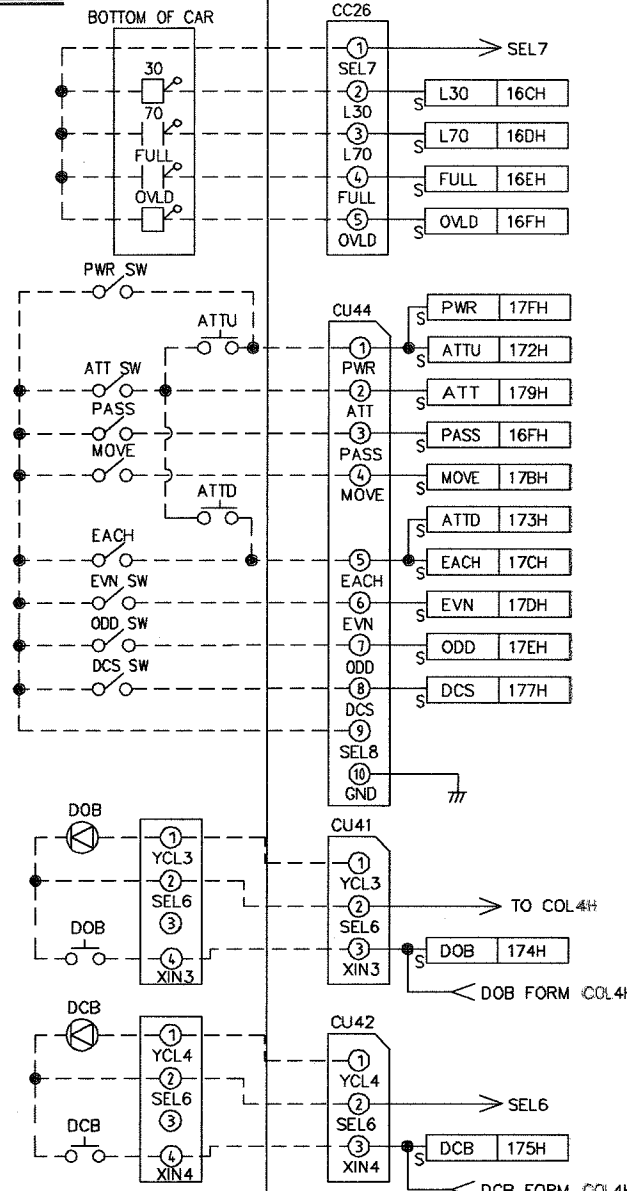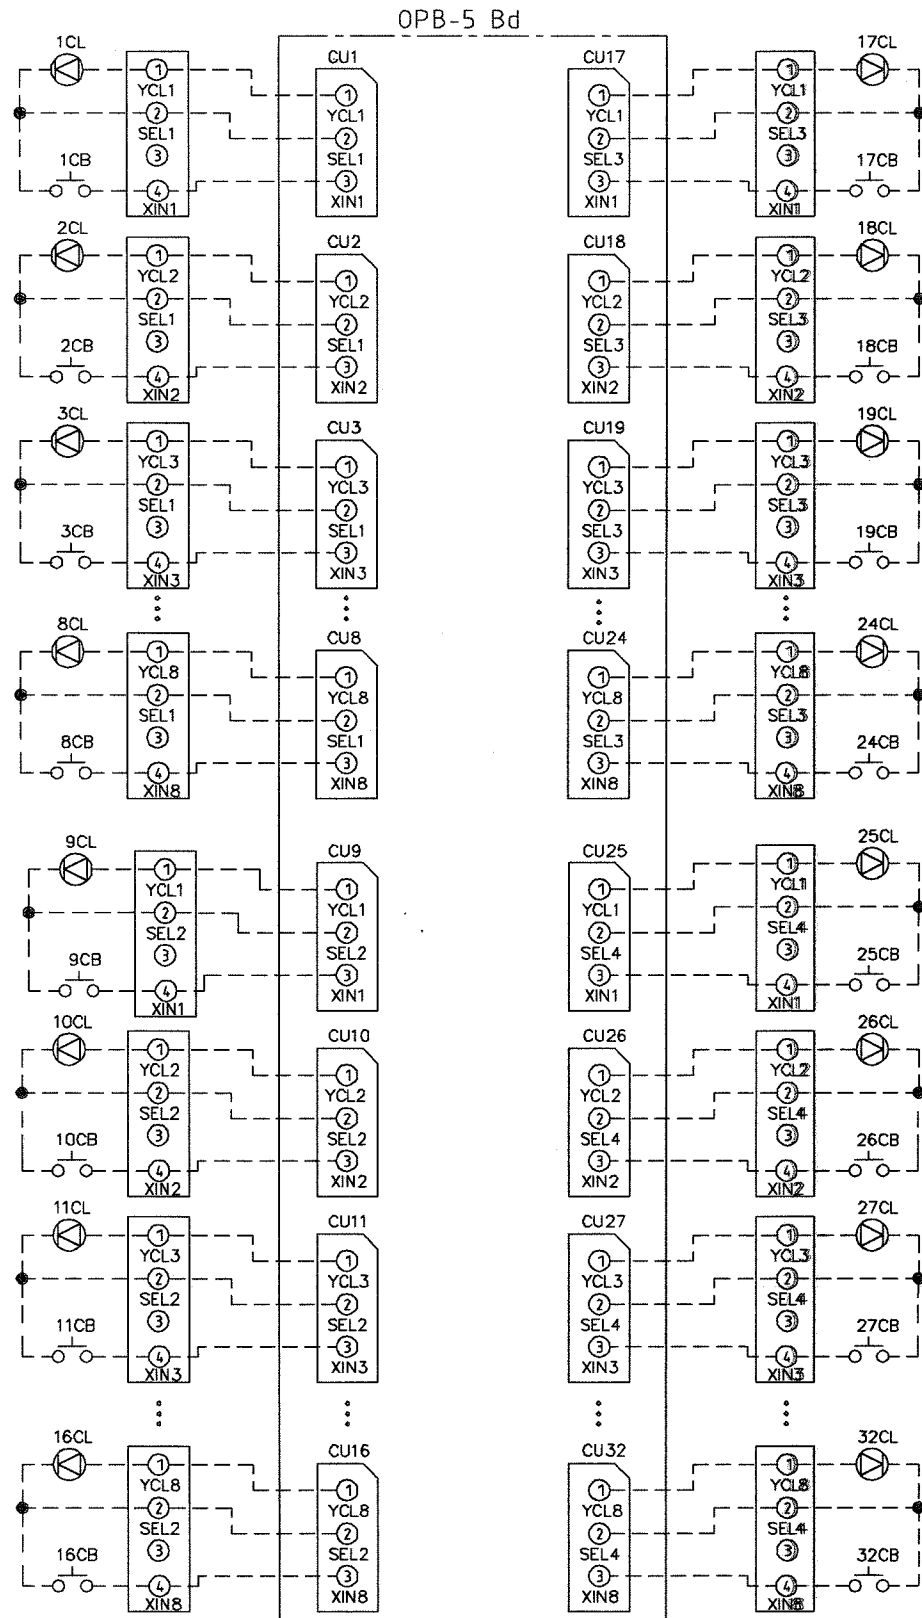

TCB-5 Bd

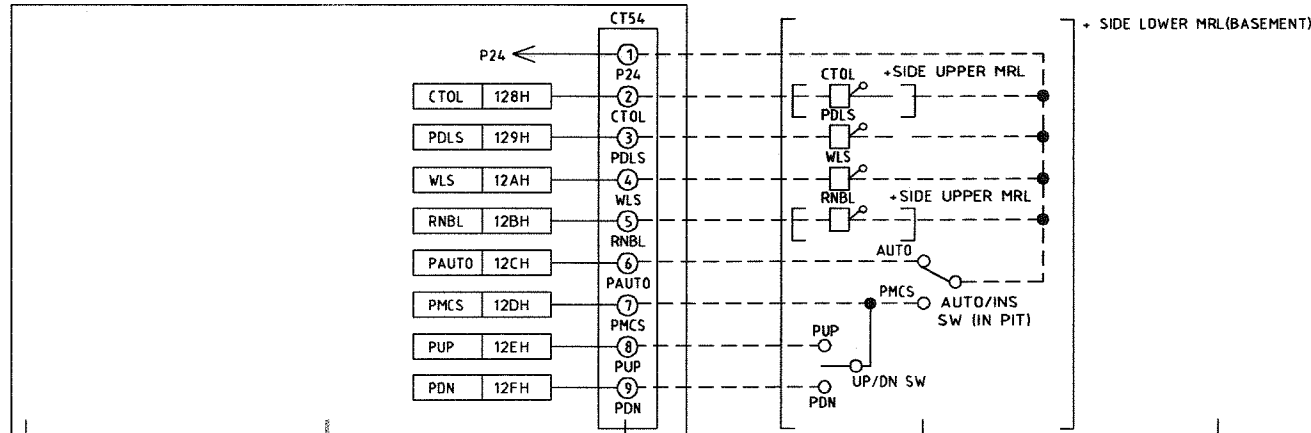


WORK	TURN PUNCHING DIST. OF HOLE STR.	MOLD. DIE CASTING, PUNCH CASTING, DRAW.	SHAWT MOLD GAS CTG.	CSTG. FORG.
SIZE	OVER 10	10	10	10
1	± 0.1	± 0.2	± 0.3	± 0.5
4	± 0.2	± 0.3	± 0.5	± 0.7
16	± 0.3	± 0.4	± 0.7	± 0.9
63	± 0.4	± 0.6	± 1.2	± 1.3
250	± 0.6	± 0.8	± 1.5	± 1.8
500	± 0.8	± 1.0	± 2.0	± 2.5
1000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE	± 25°	± 5°	± 1.0°	± 2.0°

HYUNDAI
ELEVATOR CO., LTD.

표준	DRWN BY	DSND BY	CHKD BY	APPD BY
제 도	설 계	검 토	승 인	
임 시	T. LEE			
보 류	2006.3.21	06.02.23		

UNIT	MM. INCH
SCALE	3RD ANGLE
척도	3 각 법
REF. NO	참고도면

APPAR.	SSVF5-EN
TITLE	ELEM. W. DIAGRAM
DWG. NO	HEC2215
도면번호	1/1



CHANGE
G

A1 APPAR WAS STVF5 & ST5GL (9F)
2006.9.5 T.R LEE
H.C. Park A

 HYUNDAI ELEVATOR CO., LTD.				
표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
민시	T. R. LEE			
내류				
	2006.5.30	06.09.19	9/18	





UNIT 단위	MM. inch
SCALE 척도	
3RD ANGLE 3 각 법	
REF. NO 참고도면	

APPAR STVF5 & ST5GL & SSVF5 & SS5EN		
TITLE 제목 ELEM. W. DIAGRAM		
DWG. NO 도면번호	HEC2227	1/1


배 부 처

DWG NO	HEC 1933
5/11/2013	1/1


COL 10A

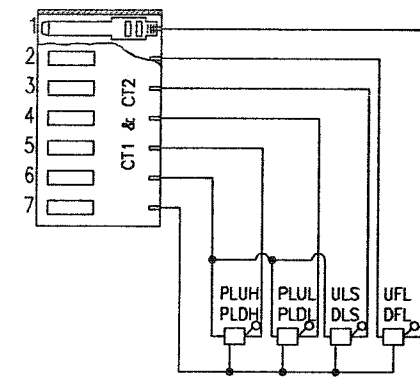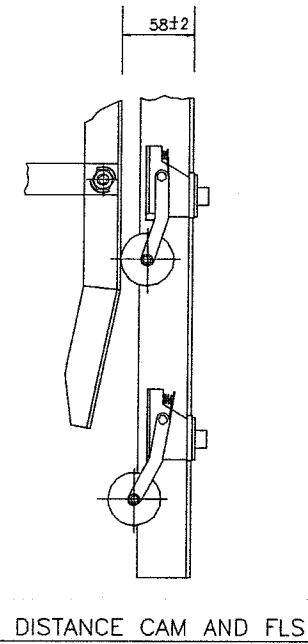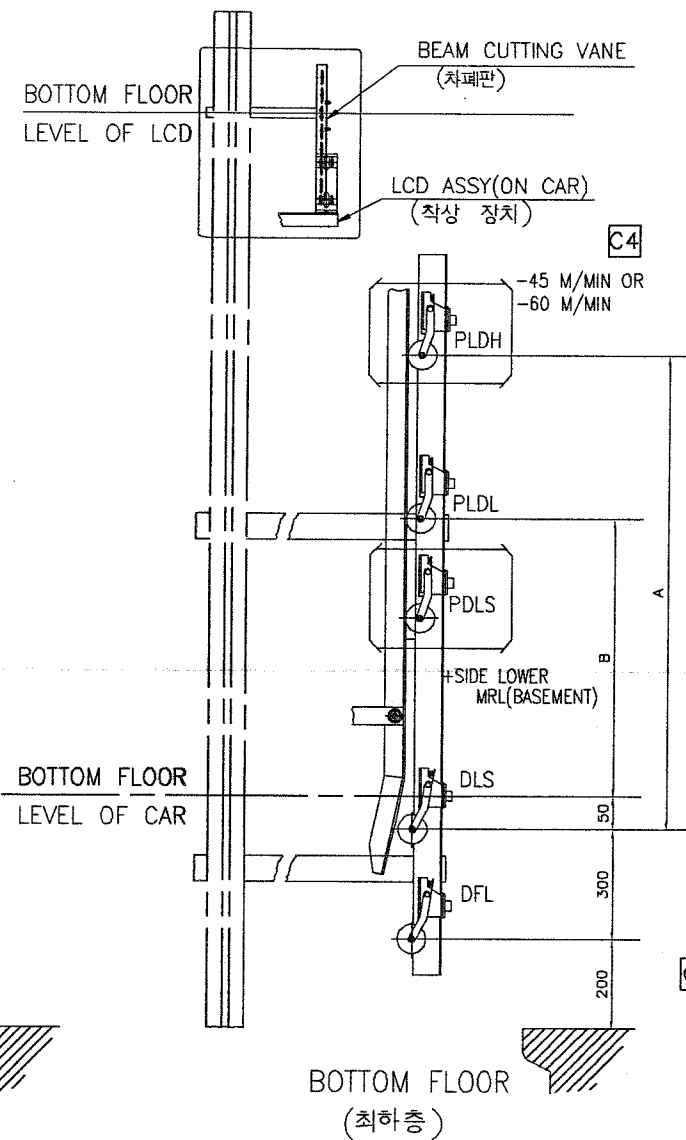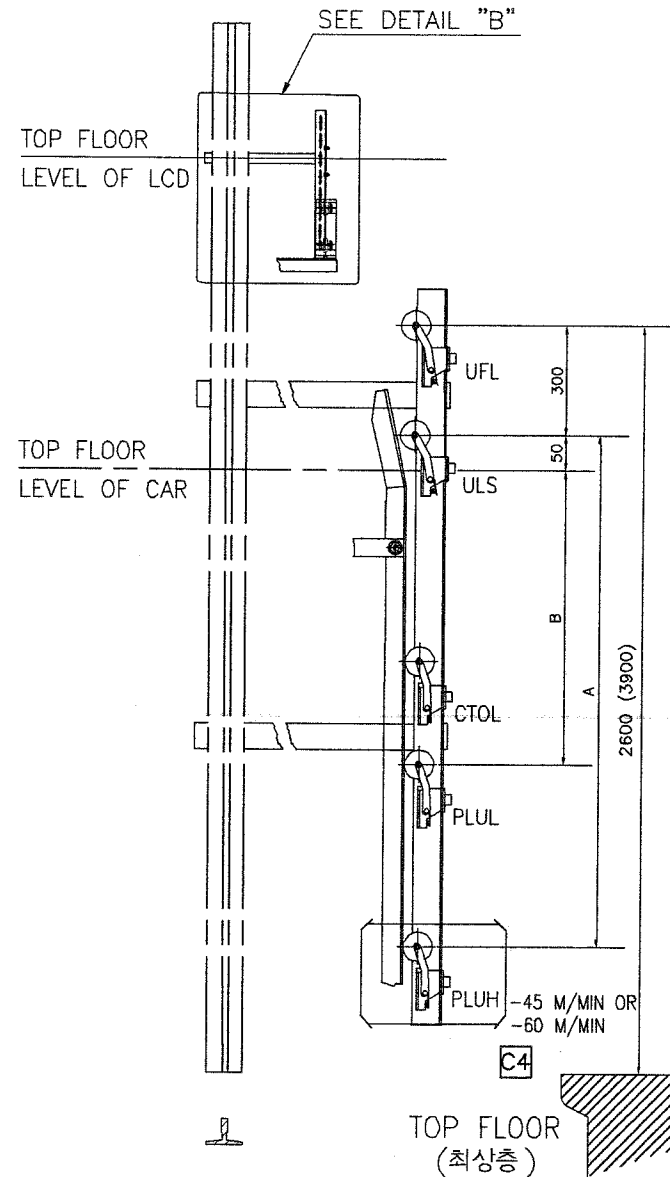


CT1&CT2 CONNECTION DIAGRAM
(속도 90 M/MIN 이상)

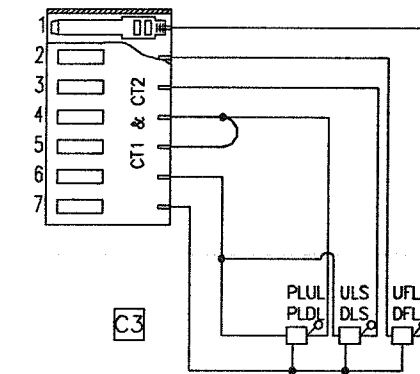

CT1&CT2 CONNECTION DIAGRAM
(속도 60 M/MIN 이하)

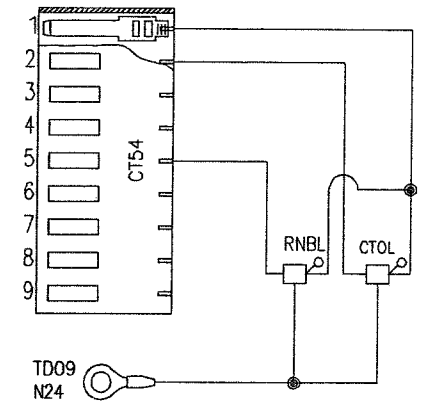

CT54 CONNECTION DIAGRAM
(SIDE UPPER MRL)

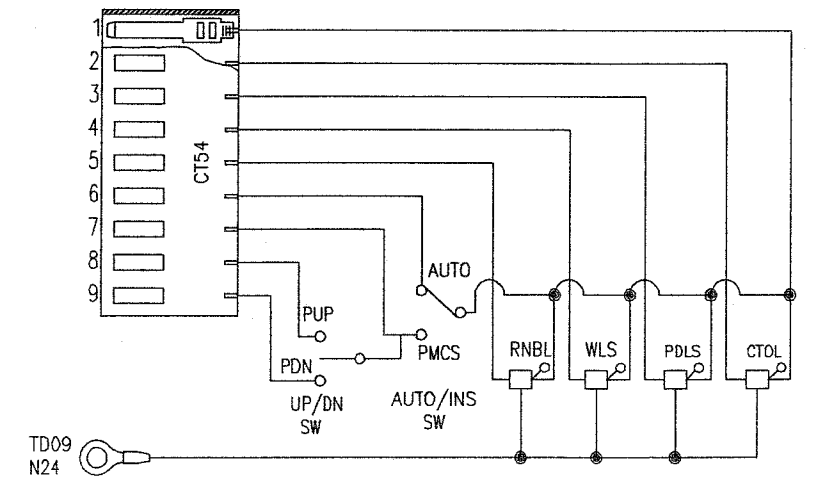

CT54 CONNECTION DIAGRAM (SIDE LOWER MRL(BASEMENT))

LENGTH TABLE

	SPEED (M/MIN)	A (MM)	B (MM)
1	45		650
2	60		1250
	90	2,600	1,150
	105	3,400	1,150
	120	4,300	1,150

- 1).THE DIMENSIONS SHOWN ON TABLE
ARE HELCO STANDARD, SO YOU CAN
ADJUSTABLE THE LENGTH ACCORDING
TO FIELD CONDITIONS.
- # 상기 테이블의 치수는 HELCO 표준
거리를 나타낸 것이므로 현장 조건에
따라 거리를 조정하여 사용할것

- NOTE

 1. PARANTHESES DISTANCE FOR FLS TO BE APPLIED FOR SPEED 90.105M/MIN.
FLS 거리를 나타내는 괄호안의 숫자는 90.105M/MIN 일 경우에 적용할 것 .
 2. CHECK THE ACTUATION OF PLUL.PLDL LIMIT S/W BY ENFORCED DECELERATION CAM.
감속 CAM에 의하여 PLUL.PLDL S/W가 동작하는지 확인할 것 .
 3. LCD ASSY DRAWING NO. : 242B009. 242B017
 4. 최상 .최하층에서 PLUH.PLDH S/W 위치가 INV. LONG DEC. POSITION 보다 약 50mm 짧게 설치 되었는지 확인할 것
BE SURE TO CHECK AT THE TOP OR BOTTOM FLOOR, POSITION OF THE PLUL.PLDL S/W IS INSTALLED 50mm SHORTTER THAN INV. LONG DEC. POSITION
 5. PLUH,PLDH S/W는 60M/MIN 이하에서는 사용하지 않음.

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN FINISH DIST. HOLE STR.	MDC. DE. CSTG. FINISH/CSTG. DRAW.	SHMET WELD GAS CTG.	CSTG. FORD.
SIZE	TO FIN.				
OVER	TO FIN.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°



HYUNDAI
ELEVATOR CO., LTD.

표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시	T.R. LEE	박희철	2005.11.1	朴榮
분류				
		2010.1		

UNIT	MM. INCH
------	---------------------

단위	
SCALE	

척도	N/
3RD ANGLE	
3 각 법	

REF. NO
참고도면

APPAR. STVF3MRL & 5MRL (FLS)

TITLE
제목 ELEM. W. DIAGRAM

DWG. NO
도면번호

HEC1933

17

REMARK1: CONNECTIONS OF GROUP
REFER TO COL18
REMARK2: DISABLE E/L---> 장애자 호기


TO MACHINE ROOM
#1 CONTROLLER

TO MACHINE ROOM
#2 CONTROLLER

TO MACHINE ROOM
#3 CONTROLLER

3 CAR—→

TO MACHINE ROOM
#4 CONTROLLER

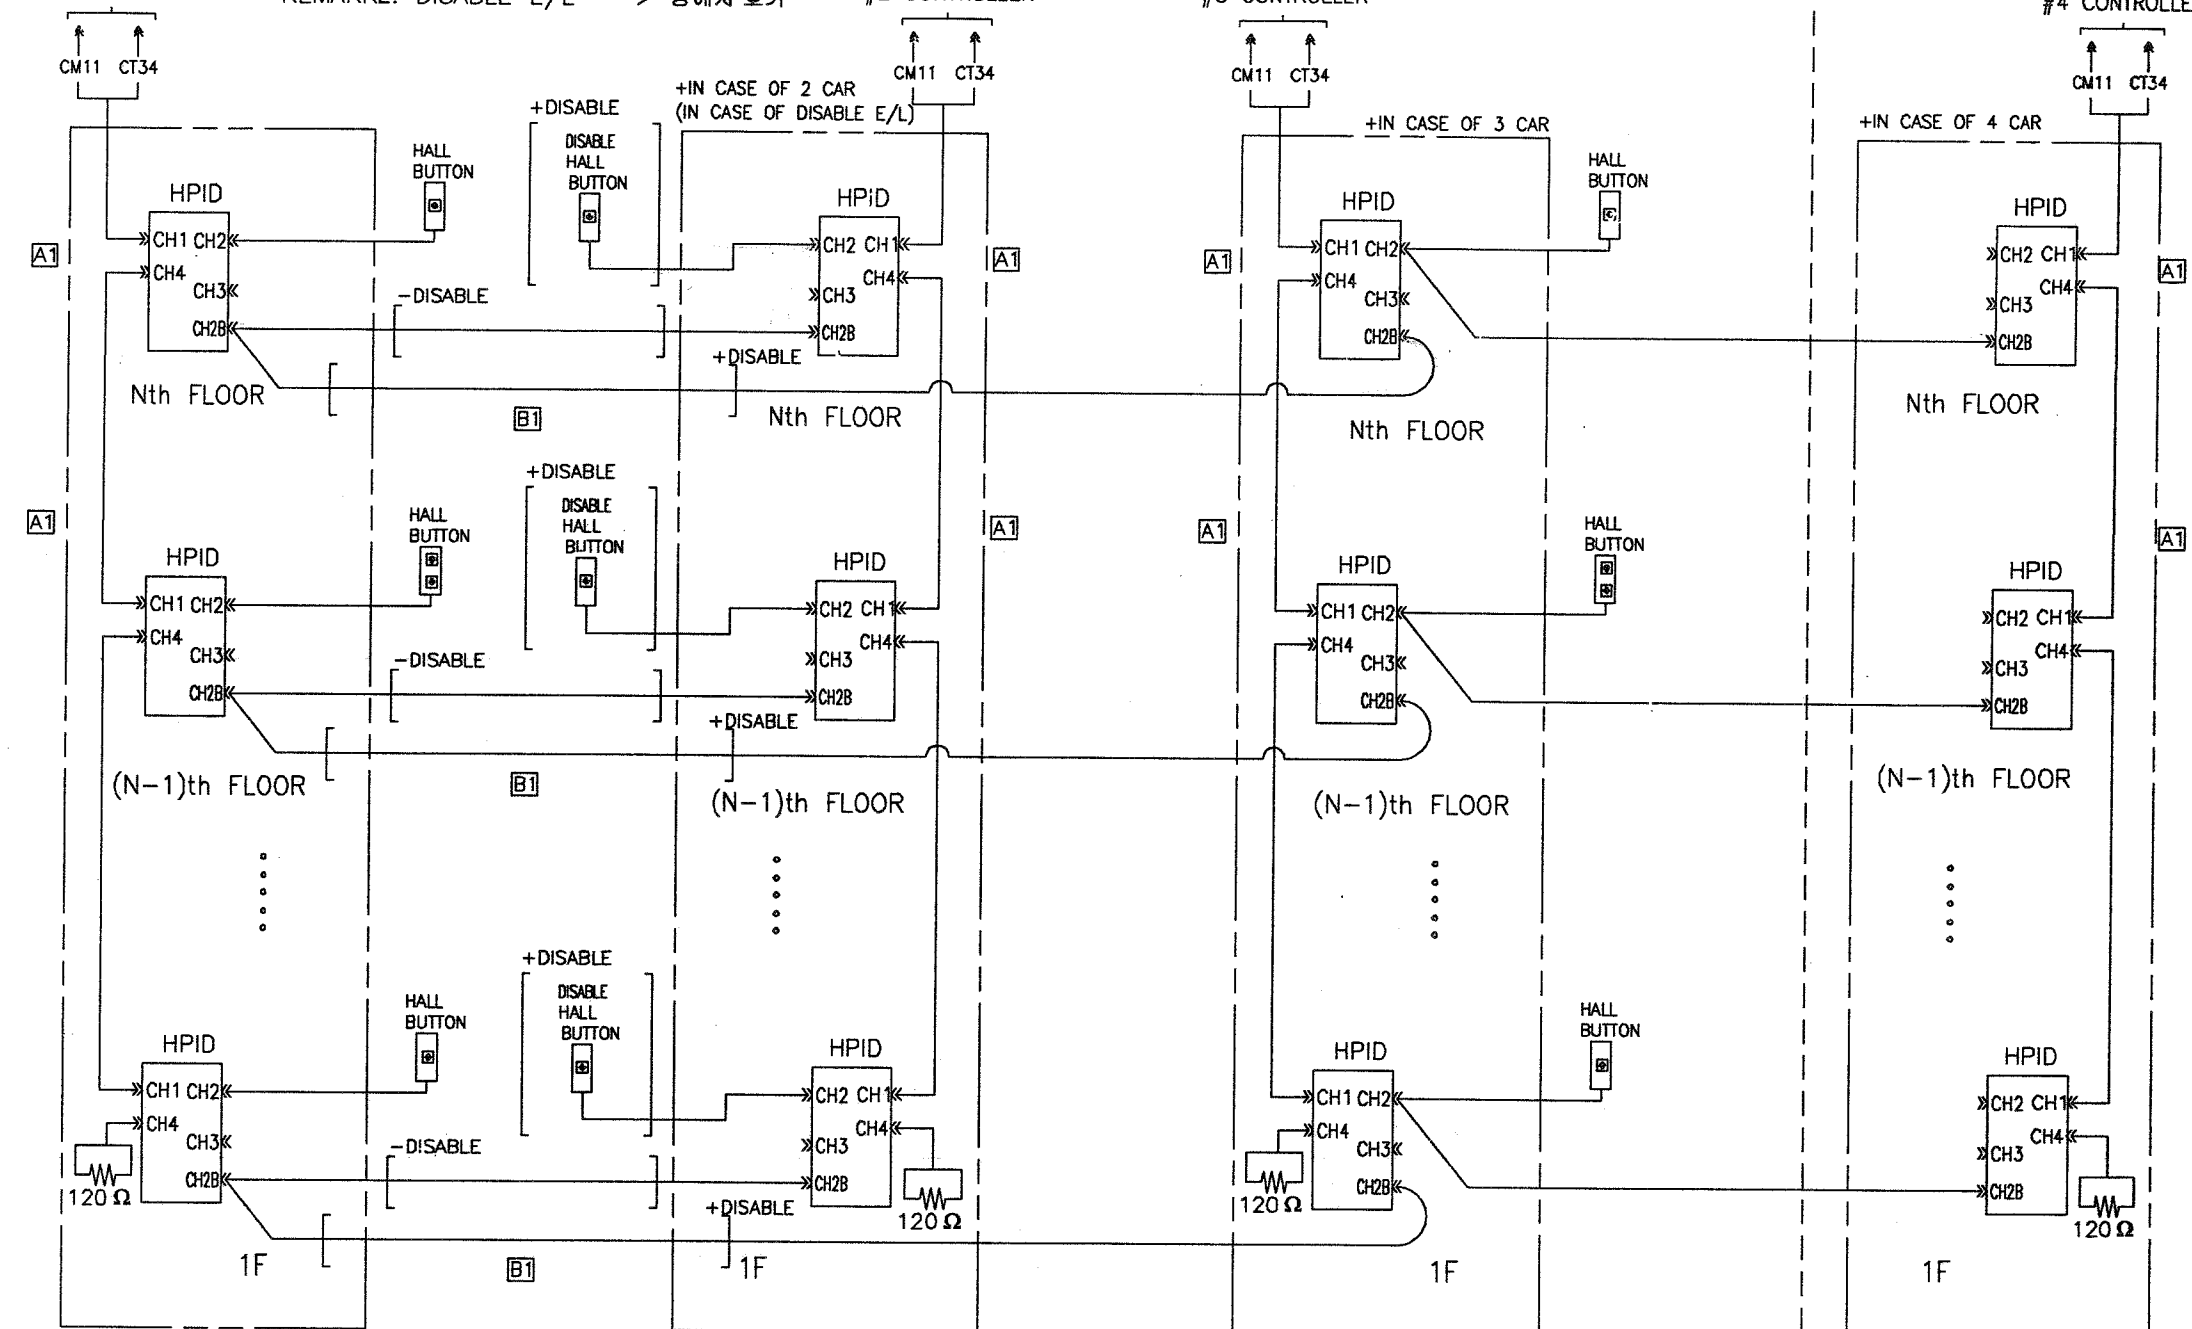

HPID-PIN ARRANGEMENT

CH1		CH2	DNO
4	N24		DNI
3	CANL		UP0
2	CANH		UPI
1	P24		N24
			P24
		CH2B	DNO
			DNI
			UP0
			UPI
			N24
			P24
CH4		CH3	DLT
4	N24		DCHM
3	CANL		ULT
2	CANH		UCHM
1	P24		N24
			P24

CT34

CABLE NO.	SIGNAL NAME
1	P24
2	
3	
4	
5	GND

CM1 1

CABLE NO.	SIGNAL NAME
1	CANH1
2	CANL1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

NOTE:

1. 2CAR에서 하나의 층에 HALL BUTTON이 한개면 1호기의 CH2에 연결하고 HALL BUTTON이 두개면 1호기와 2호기의 CH2에 각각 연결한다.
2. 3CAR에서 하나의 층에 HALL BUTTON이 두개면 1호기와 3호기의 CH2에 각각 연결하고 HALL BUTTON이 세개면 1호기, 2호기, 3호기의 CH2에 각각 연결한다.
3. 4CAR에서 하나의 층에 HALL BUTTON이 두개면 1호기와 4호기의 CH2에 각각 연결하고 HALL BUTTON이 세개면 1,2,3호기와 4호기를 3CAR-1CAR 로 보고 1호기, 3호기, 4호기의 CH2에 각각 연결하고 HALL BUTTON이 네개면 1호기, 2호기, 3호기,4호기의 CH2에 각각 연결한다.
4. 장애자용 HALL BUTTON은 GROUP에서 장애자 HALL CALL과 일반 HALL CALL이 분리되어 있을때 장애자 호기 HPID의 CH2에 연결한다. 이때 일반호기 HPID의 CH2B와 장애자호기 HPID의 CH2B는 연결하지 않는다.
5. GROUP 운행중인 CAR의 수와 한층에 있는 HALL 버튼의 수가 같으면 HPID 간에 JUMPER를 연결할 필요 없음.

[illegible]

CHANGE 개정안	
11	CH1,CH4 결선변별 변경-JUMPER 보러 (1B,1C,4B,4C,5B,5C,8B,8C)
21	NOTES WAS NOT ON (1F)
2056. 2.9	T.R.LEE
11	CH2,CH2B 결선변별 변경 (3B,3D,3E)
2056. 5.30	T.R.LEE

TOLERANCES-UNLESS OTHERWISE SPECIFIED					
WORK		TURN FINISH DIN/ST HOLE STR.	ALD.C DE CSTG. FINISH/CSTG. DROW.	SWMET WELD GAS CUT	CSTG. FARG.
SIZE	TO INCL.				
OVER					
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.1	± 0.3	± 0.5	± 0.7
16	83	± 0.3	± 0.4	± 0.7	± 0.9
83	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°



HYUNDAI
ELEVATOR CO., LTD.


표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD 승
임시	T.R.	LEE	박해원	K.I.S Park
보류				
	2005.12.7		2005.12.7	Shin

UNIT 단위	MM. MM	APPA STVF5& 5MRL & ST5GL & ST5(CHINA	
SCALE 척도	N/S	TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2200	1/1

COL 11E (W/ HALL LANTERN AND W/O DISABLE)

주) 클렌터 결선시 전압사양을 필히 확인 할것.

HALL CAN Bd TYPE

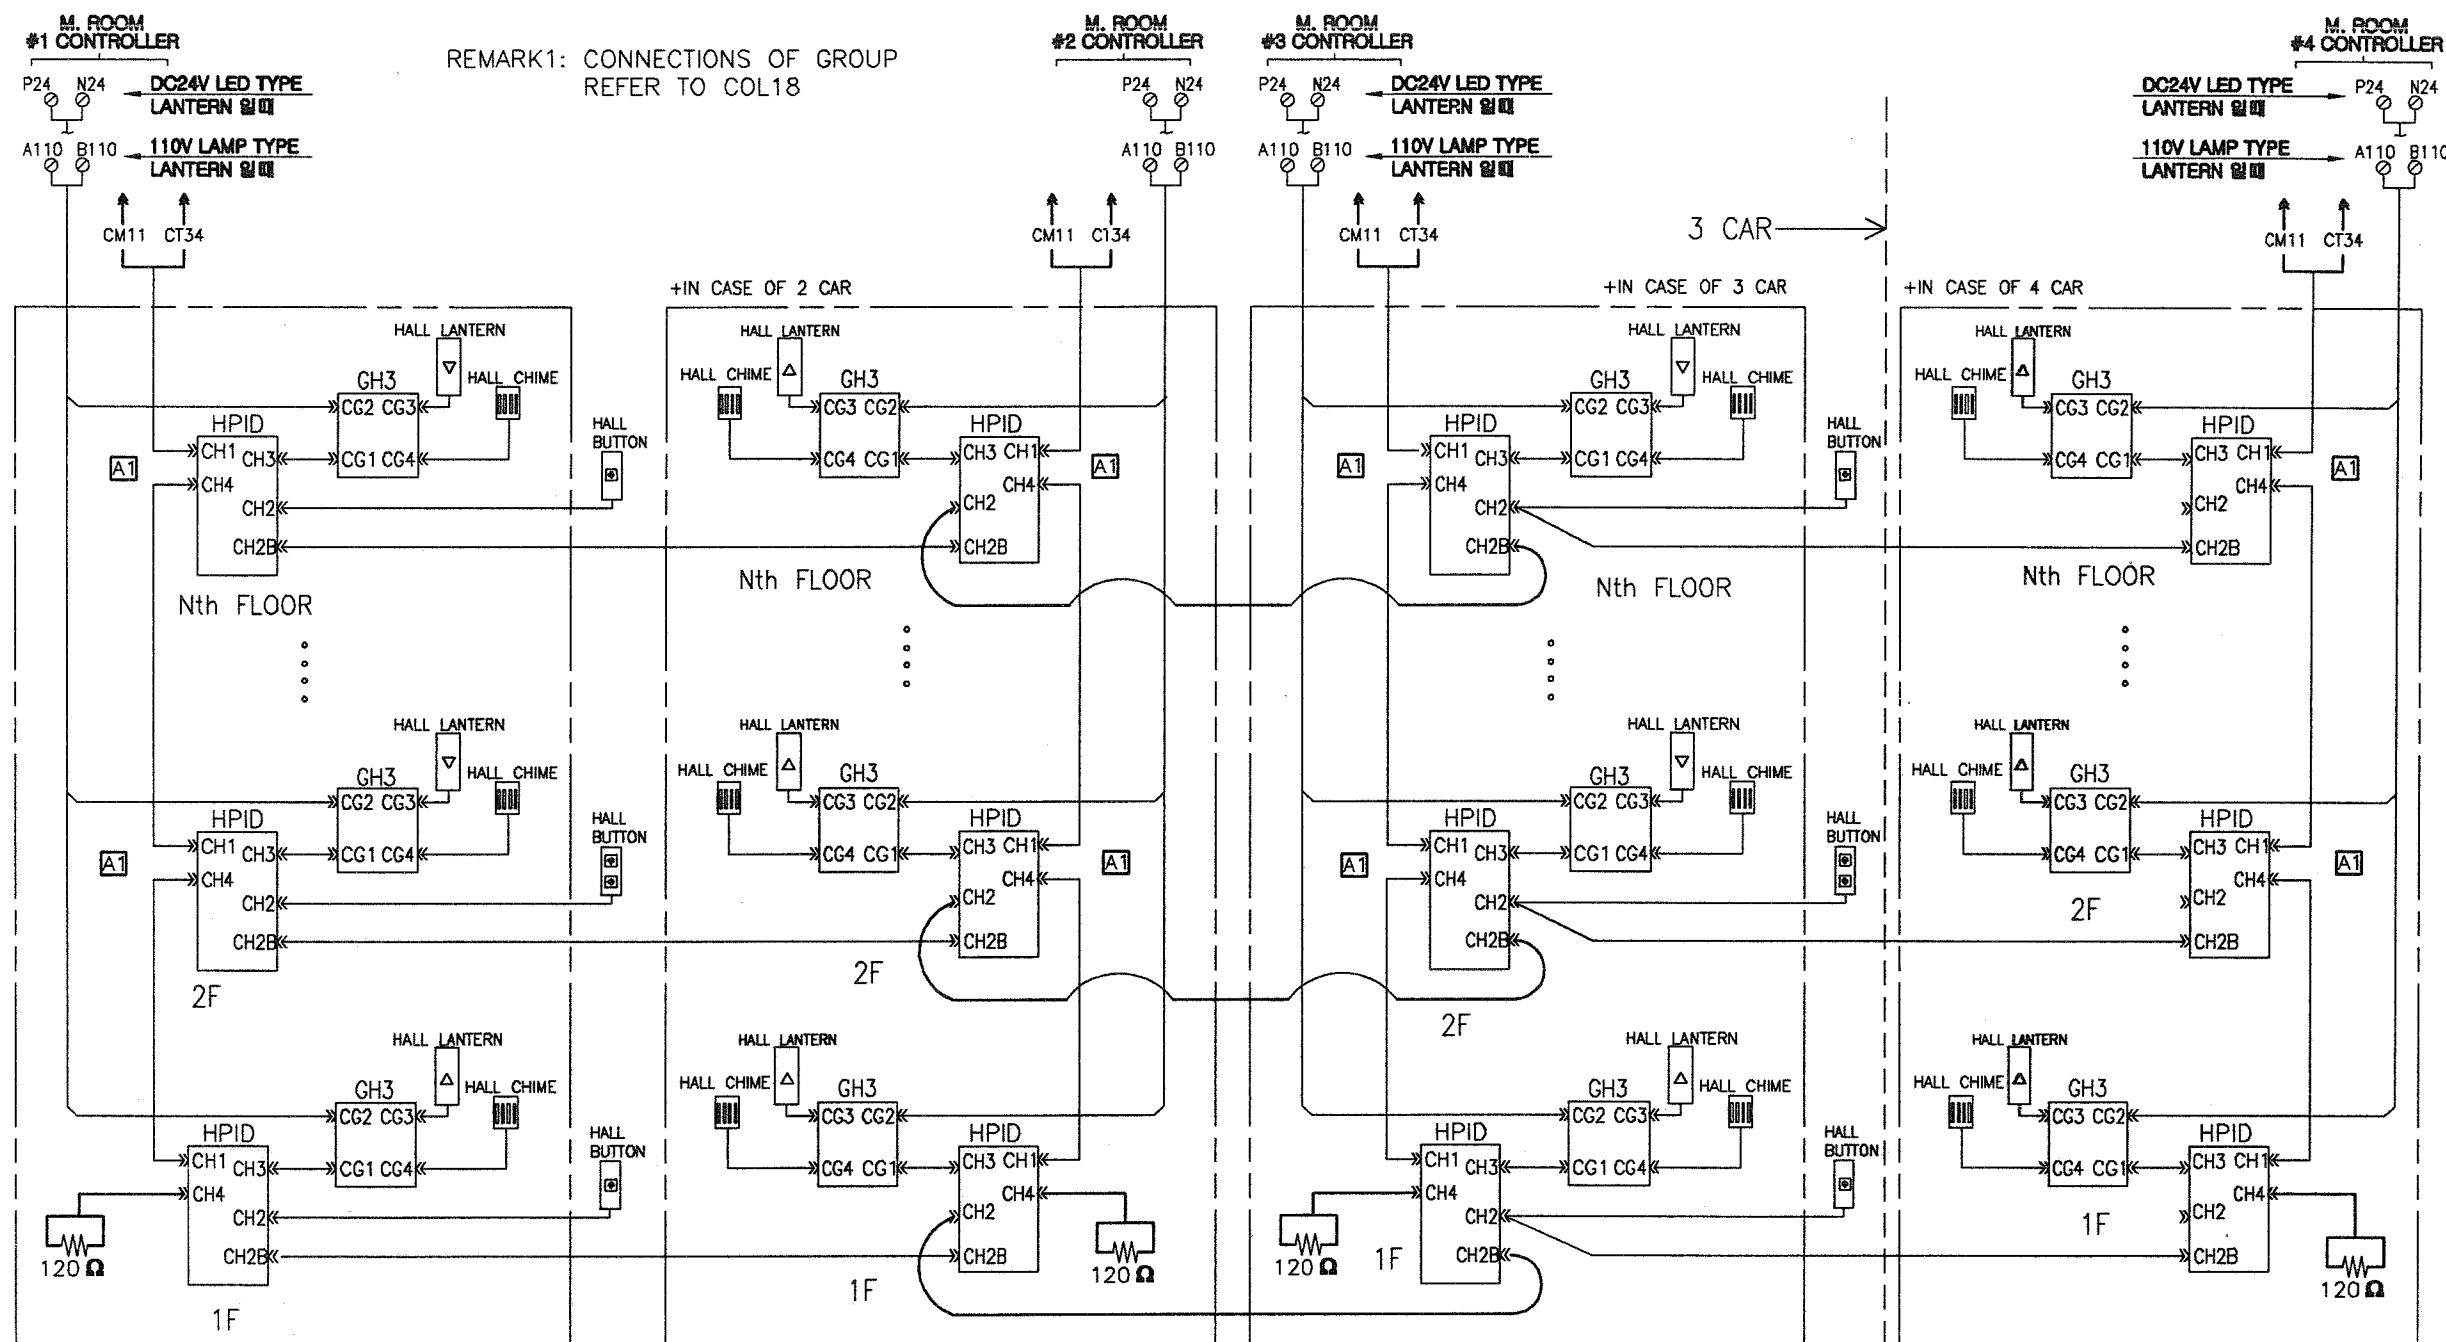

GH3-PIN ARRANGEMENT

6	DLT	CG3	B110	5
5	DCHM		X	4
4	ULT	CG1	DLT	3
3	UCHM		ULT	2
2	N24		X	1
1	P24			
3	GND	CG4	N24	4
2	B110		DCHM	3
1	A110		UCHM	2
			P24	1

HPID-PIN ARRANGEMENT

CH1		CH2	DNO	6
			DNI	5
4	N24		UPO	4
3	CANL		UPI	3
2	CANH		N24	2
1	P24		P24	1

CH4		CH2B	DNO	6
			DNI	5
4	N24		UPO	4
3	CANL		UPI	3
2	CANH		N24	2
1	P24		P24	1

CH3		DLT	6
		DCHM	5
		ULT	4
		UCHM	3
		N24	2
		P24	1

CABLE NO.	SIGNAL NAME
1	P24
2	
3	
4	
5	GND

CABLE NO.	SIGNAL NAME
1	CANH1
2	CANL1

- NOTE: 1. 2CAR에서 하나의 층에 HALL BUTTON이 한개면 1호기의 CH2에 연결하고 HALL BUTTON이 두개면 1호기와 2호기의 CH2에 각각 연결한다.
2. 3CAR에서 하나의 층에 HALL BUTTON이 두개면 1호기와 3호기의 CH2에 각각 연결하고 HALL BUTTON이 세개면 1호기, 2호기, 3호기의 CH2에 각각 연결한다.
3. 4CAR에서 하나의 층에 HALL BUTTON이 두개면 1호기와 4호기의 CH2에 각각 연결하고 HALL BUTTON이 세개면 1,2,3호기와 4호기를 3CAR-1CAR 로 보고 1호기, 3호기, 4호기의 CH2에 각각 연결하고 HALL BUTTON이 네개면 1호기, 2호기, 3호기, 4호기의 CH2에 각각 연결한다.
A2 4. GROUP 운행중인 CAR의 수와 한층에 있는 HALL 버튼의 수가 같으면 HPID 간에 JUMPER를 연결할 필요 없음.
B1 5. ONLY 기준층 올랜틴인 경우 GH3 Bd가 기준층에만 있으므로 GH3 Bd의 CG2로 연결되는 24V 전원케이블은 259D355 도면의 케이블을 사용하여 결선할것.

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN DRY PATCH OF HOLE STR.	MLDC DC CTC. PROCLCTG DRAW.	SHMET WELD GAS CTC.	CTG. FORG.
SIZE	TO HOLD				
OVER 1	TO HOLD				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.0
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°



HYUNDAI
ELEVATOR CO., LTD.

표 준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임 시	T.R.LEE			
보 류				
	2005.12.7	06.06.27		


UNIT 단위	MM. #HCP	APP. STV5 & 5MRL & ST5GL & ST5(CHINA)
SCALE 척도	1/1	TITLE 제목 ELEM. W. DIAGRAM
3RD ANGLE 3 각 법		
REF. NO 참고도면	DWG. NO 도면번호 HEC2201	1/1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
해기없이 복사할 수 없음

1/1 HEC1992
DWG NO ON 3MD

COL13

MANUAL EMP OPERATION

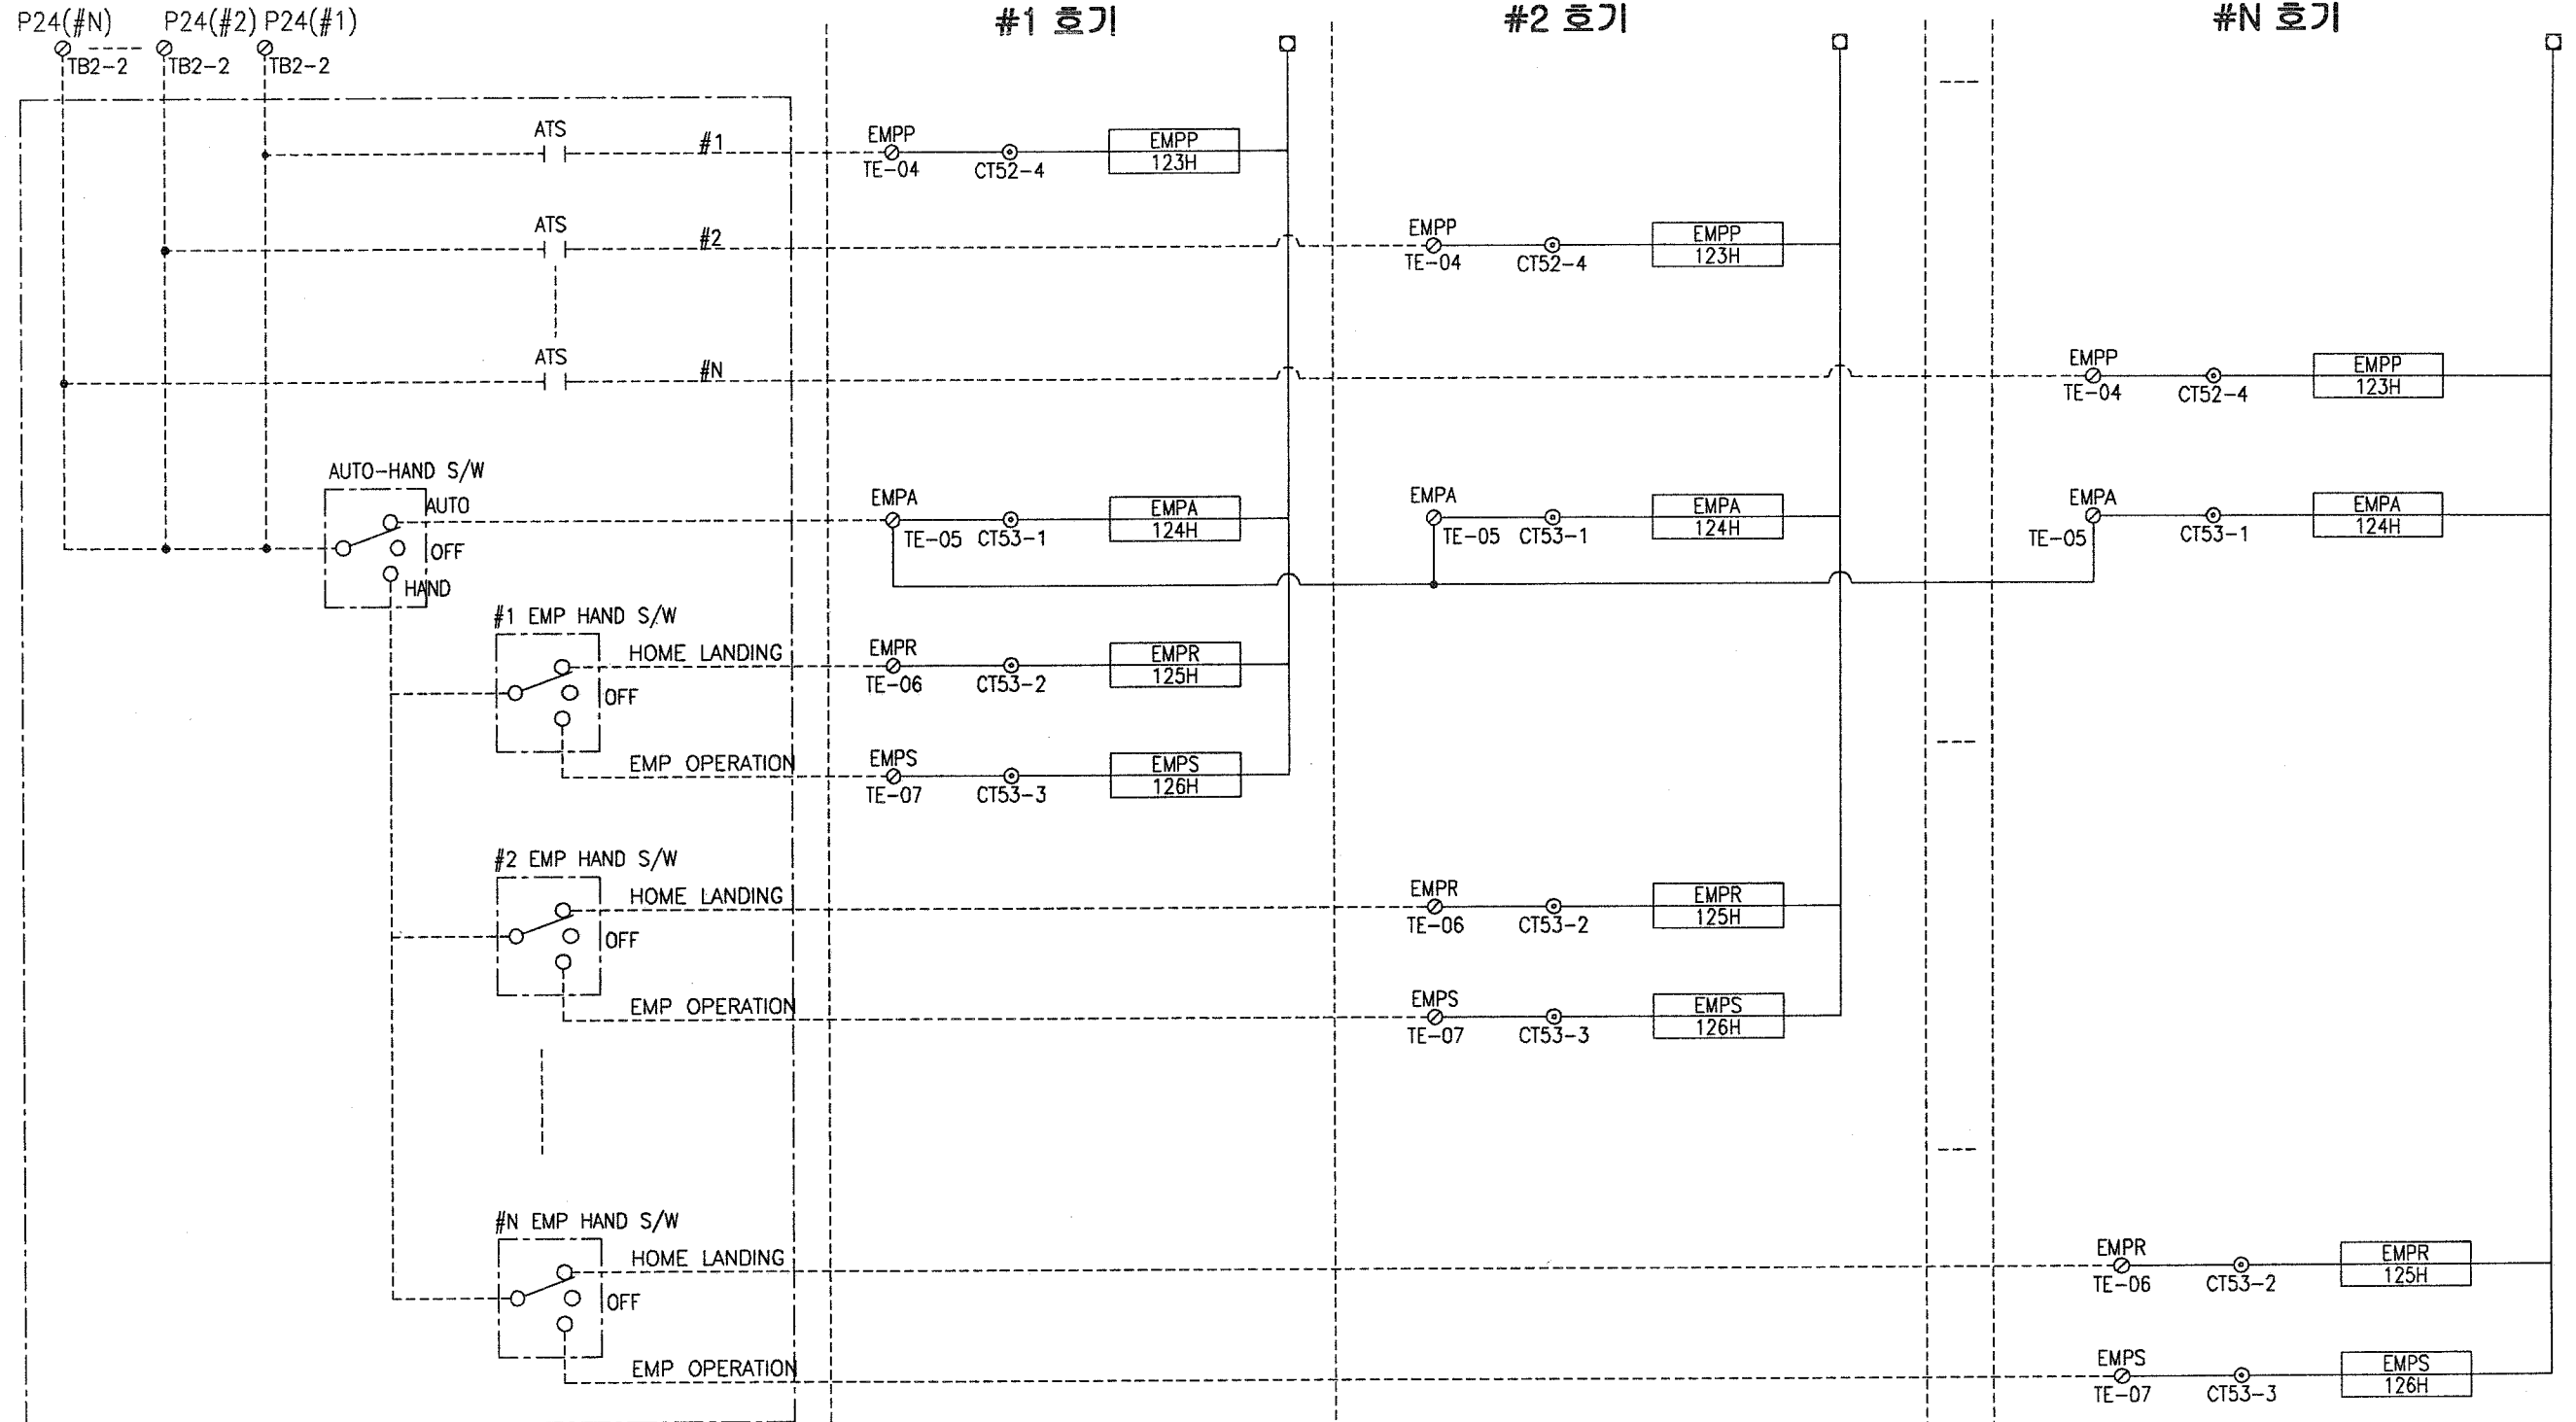

IN SUPERVISORY ROOM

* ATS : FROM BUILDING GENERATOR POWER SIGNAL
; CONTACT WILL BE CLOSE WHEN GENERATOR IS OPERATED.

배 부 처

CHANGE

APPAR WAS STVF3 & 3MRL
(EMP OPERATION)
2004.7.14 S.C KIM
APPAR WAS STVF3 & 3MRL
& 5 & 5MRL
2005.7.19 T.R. LEE

TOLERANCES-UNLESS OTHERWISE SPECIFIED

WORK		TURN PITCH'S OF HOLE STR.	MEDG. DE. CIRC. FROM CIRCSTG DRAW.	SHMET WELD GAS CIG.	CSTG. FORG.
SIZE					
OVER	TO INCL.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± 25°	± 5°	± 1.0°	± 2.0°

HYUNDAI
ELEVATOR CO., LTD.

표 준	DRWN BY	DSND BY	CHKD BY	APPD BY
제 도	설 계	검 토	승 인	
임 시	T.R. LEE			
보 류				

UNIT 단위	MM. INCH
SCALE 척도	N/S
3RD ANGLE 3 각 법	
REF. NO 참고도면	

APPAR.	STVF3 & 3MRL & 5 & 5MRL & ST5GL
TITLE 제목	ELEM. W. DIAGRAM
DWG. NO 도면번호	HEC1992
	1/1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

1/1 HEC2059 5902059 ON 0MG

COL 14A

CABLE TAG : TH01 (0.75SQ, 30C)

CABLE TAG : TH02 (0.75SQ, 40C)

CABLE TAG : TH04 (0.75SQ X 28C + 0.5SQ X 2P)
SHIELDED + 5C-2V COAXIAL

CABLE TAG : TH03 (0.75SQ X 28C + 0.5SQ X 2P)
SHIELDED + 2.0-3C

STVF5 / ST5GL A2

T1			T1B			T1			T2		
PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE
NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER
1	CANH	01	1	A220	15	1	CANH	01	1	PH1	22
2	CANL	02	2	B220	16	2	CANL	02	2	PH2	23
3			3	N24	17	3			3	PH3	24
4			4	N24	18	4			4	PH4	25
5	FMR	08	5	P24	19	5	FMR	08	5	PH4	25
6	ULA	06	6	P24	20	6	ULA	06	6	SPK1	26
7	DZ	07	7			7	DZ	07	7	SPK2	27
8			8			8			8	GND	28
9	DLA	09	9			9	DLA	09	9	22X	29
10	GS	10	10			10	GS	10	10	22Y	30
11	PITS	11	11			11	PITS	11	11		
12	ESIN	12	12			12	ESIN	12	12		
13	P110	13	13			13	P110	13	13		
14	INTL	14	14			14	INTL	14	14		
15			15			15			15		
16			16			16			16		
17			17			17			17		
18			18			18			18		
19			19			19			19		
20			20			20			20		
21	XAUTO	21	21			21	XAUTO	21	21		

여유분 CABLE : X
EARTH 03

EARTH 05
EARTH 04

NOTE: T-CABLE DWG NO. HX58C-H01
T-CABLE HARNESS ASSY DWG NO. 259C172(1/4)

T1			T1B			T1			T2		
PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE
NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER
1	CANH	01	1	A220	15	1	CANH	01	1	PH1	22
2	CANL	02	2	B220	16	2	CANL	02	2	PH2	23
3			3	N24	17	3			3	PH3	24
4			4	N24	18	4			4	PH4	25
5	FMR	08	5	P24	19	5	FMR	08	5	PH4	25
6	ULA	06	6	P24	20	6	ULA	06	6	SPK1	26
7	DZ	07	7			7	DZ	07	7	SPK2	27
8			8			8			8	GND	28
9	DLA	09	9			9	DLA	09	9	22X	29
10	GS	10	10			10	GS	10	10	22Y	30
11	PITS	11	11			11	PITS	11	11		
12	ESIN	12	12			12	ESIN	12	12		
13	P110	13	13			13	P110	13	13		
14	INTL	14	14			14	INTL	14	14		
15			15			15			15		
16			16			16			16		
17			17			17			17		
18			18			18			18		
19			19			19			19		
20			20			20			20		
21	XAUTO	21	21			21	XAUTO	21	21		

22X0 35,36,37
22Y0 38,39,40
OBS 34

여유분 CABLE : 31,32,33
EARTH 05
EARTH 04
EARTH 03

NOTE: T-CABLE DWG NO. HX58C-H02
T-CABLE HARNESS ASSY DWG NO. 259C172(2/4)

T1			T1B			T1			T2		
PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE
NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER
1	CANH	01	1	A220	13	1	CANH	01	1	PH1	22
2	CANL	02	2	B220	14	2	CANL	02	2	PH2	23
3			3	N24	15	3			3	PH3	24
4			4	N24	16	4			4	PH4	25
5	FMR	01	5	P24	17	5	FMR	01	5	PH4	25
6	ULA	02	6	P24	18	6	ULA	02	6	SPK1	26
7	DZ	03	7			7	DZ	03	7	SPK2	27
8	XDZ	04	8			8	XDZ	04	8	GND	28
9	DLA	05	9			9	DLA	05	9	22X	29
10	GS	06	10			10	GS	06	10	22Y	30
11	PITS	09	11			11	PITS	09	11		
12	ESIN	10	12			12	ESIN	10	12		
13	P110	11	13			13	P110	11	13		
14	INTL	12	14			14	INTL	12	14		
15			15			15			15		
16			16			16			16		
17			17			17			17		
18			18			18			18		
19			19			19			19		
20			20			20			20		
21	XAUTO	21	21			21	XAUTO	21	21		

여유분 CABLE : 20
EARTH 06

EARTH 19
EARTH 07
EARTH SHIELD CABLE
(CANH,CANL용)

NOTE: T-CABLE DWG NO. HX58C-H04
T-CABLE HARNESS ASSY DWG NO. 259C172(3/4)

T1			T1B			T1			T2		
PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE
NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER
1	CANH	01	1	A220	13	1	CANH	01	1	PH1	22
2	CANL	02	2	B220	14	2	CANL	02	2	PH2	23
3			3	N24	15	3			3	PH3	24
4			4	N24	16	4			4	PH4	25
5	FMR	01	5	P24	17	5	FMR	01	5	PH4	25
6	ULA	02	6	P24	18	6	ULA	02	6	SPK1	26
7	DZ	03	7			7	DZ	03	7	SPK2	27
8	XDZ	04	8			8	XDZ	04	8	GND	28
9	DLA	05	9			9	DLA	05	9	22X	29
10	GS	06	10			10	GS	06	10	22Y	30
11	PITS	09	11			11	PITS	09	11		
12	ESIN	10	12			12	ESIN	10	12		
13	P110	11	13			13	P110	11	13		
14	INTL	12	14			14	INTL	12	14		
15			15			15			15		
16			16			16			16		
17			17			17			17		
18			18			18			18		
19			19			19			19		
20			20			20			20		
21	XAUTO	21	21			21	XAUTO	21	21		

여유분 CABLE : X
EARTH 06
EARTH 07

EARTH 19
EARTH 20
EARTH SHIELD CABLE
(CANH,CANL용)

NOTE: T-CABLE DWG NO. HX58C-H03
T-CABLE HARNESS ASSY DWG NO. 259C172(4/4)

STVF5 MRL

T1			T1B			T1			T2		
PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE
NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER
1	CANH	01	1	A220	15	1	CANH	01	1	PH1	22
2	CANL	02	2	B220	16	2	CANL	02	2	PH2	23
3			3	N24	17	3			3	PH3	24
4			4	N24	18	4			4	PH4	25
5	FMR	08	5	P24	19	5	FMR	08	5	PH4	25
6	ULA	06	6	P24	20	6	ULA	06	6	SPK1	26
7	DZ	07	7			7	DZ	07	7	SPK2	27
8			8			8			8	GND	28
9	DLA	09	9			9	DLA	09	9	22X	29
10	GS	10	10			10	GS	10	10	22Y	30
11	PITS	11	11			11	PITS	11	11		
12	ESIN	12	12			12	ESIN	12	12		
13	P110	13	13			13	P110	13	13		
14	INTL	14	14			14	INTL	14	14		
15			15			15			15		
16			16			16			16		
17			17			17			17		
18			18			18			18		
19			19			19			19		
20			20			20			20		
21	XAUTO	21	21			21	XAUTO	21	21		

여유분 CABLE : X
EARTH 03

EARTH 05
EARTH 04

NOTE: T-CABLE DWG NO. HX58C-H01
T-CABLE HARNESS ASSY DWG NO. 259C174(1/6)-BASEMENT
T-CABLE HARNESS ASSY DWG NO. 259C174(4/6)-UPPER MRL

T1			T1B			T1			T2		
PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE	PN	SIGNAL	CABLE
NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER	NO	NAME	NUMBER
1	CANH	01	1	A220	15	1	CANH	01	1	OBS	34
2	CANL	02	2	B220	16	2	CANL	02	2	PH1	22
			3	N24	17	3			3	PH2	23
			4	N24	18	4			4	PH3	24
5	FMR	08	5	P24	19	5	FMR	08	5	PH4	25
6	ULA	06	6	P24	20	6	ULA	06	6	SPK1	26
7	DZ	07	7			7	DZ	07	7	SPK2	27
8			8			8			8	GND	28
9	DLA	09	9			9	DLA	09	9	22X	29
10	GS	10	10			10	GS	10	10	22Y	30
11	PITS	11	11			11	PITS	11	11		
12	ESIN	12	12			12	ESIN	12	12	EN	33
13	P110	13	13			13	P110	13			
14	INTL	14	14			14	INTL	14			
15			15			15	A220	15			
16			16	PH1	22	16	B220	16			
17			17	PH2	23	17	GND	17			
18			18	PH3	24	18	GND	18			
19	EN	33	19	PH4	25	19	P24	19			
20			20	SPK1	26	20	P24	20			
21	XAUTO	21	21	SPK2	27	21	XAUTO	21			
			22	N24	28						
			23	22X	29						
			24	22Y	30						
			25								
			26								

T2		
PN	SIGNAL	CABLE
NO	NAME	NUMBER
1		
2		
3	PH1	22
4	PH2	23
5	PH3	24
6	PH4	25
7	SPK1	26
8	SPK2	27
9	N24	28
10	22X	29
11	22Y	30
12		

CO3		
PN	NAME	T-CABLE
NO		
1	22X0	35
2	22X0	36
3	22X0	37
4	22Y0	38
5	22Y0	39
6	22Y0	40

여유분

CABLE

:

31.32


THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

1/1 HEC2019

ON DMC

COL 15

FOR DISABLE OPB

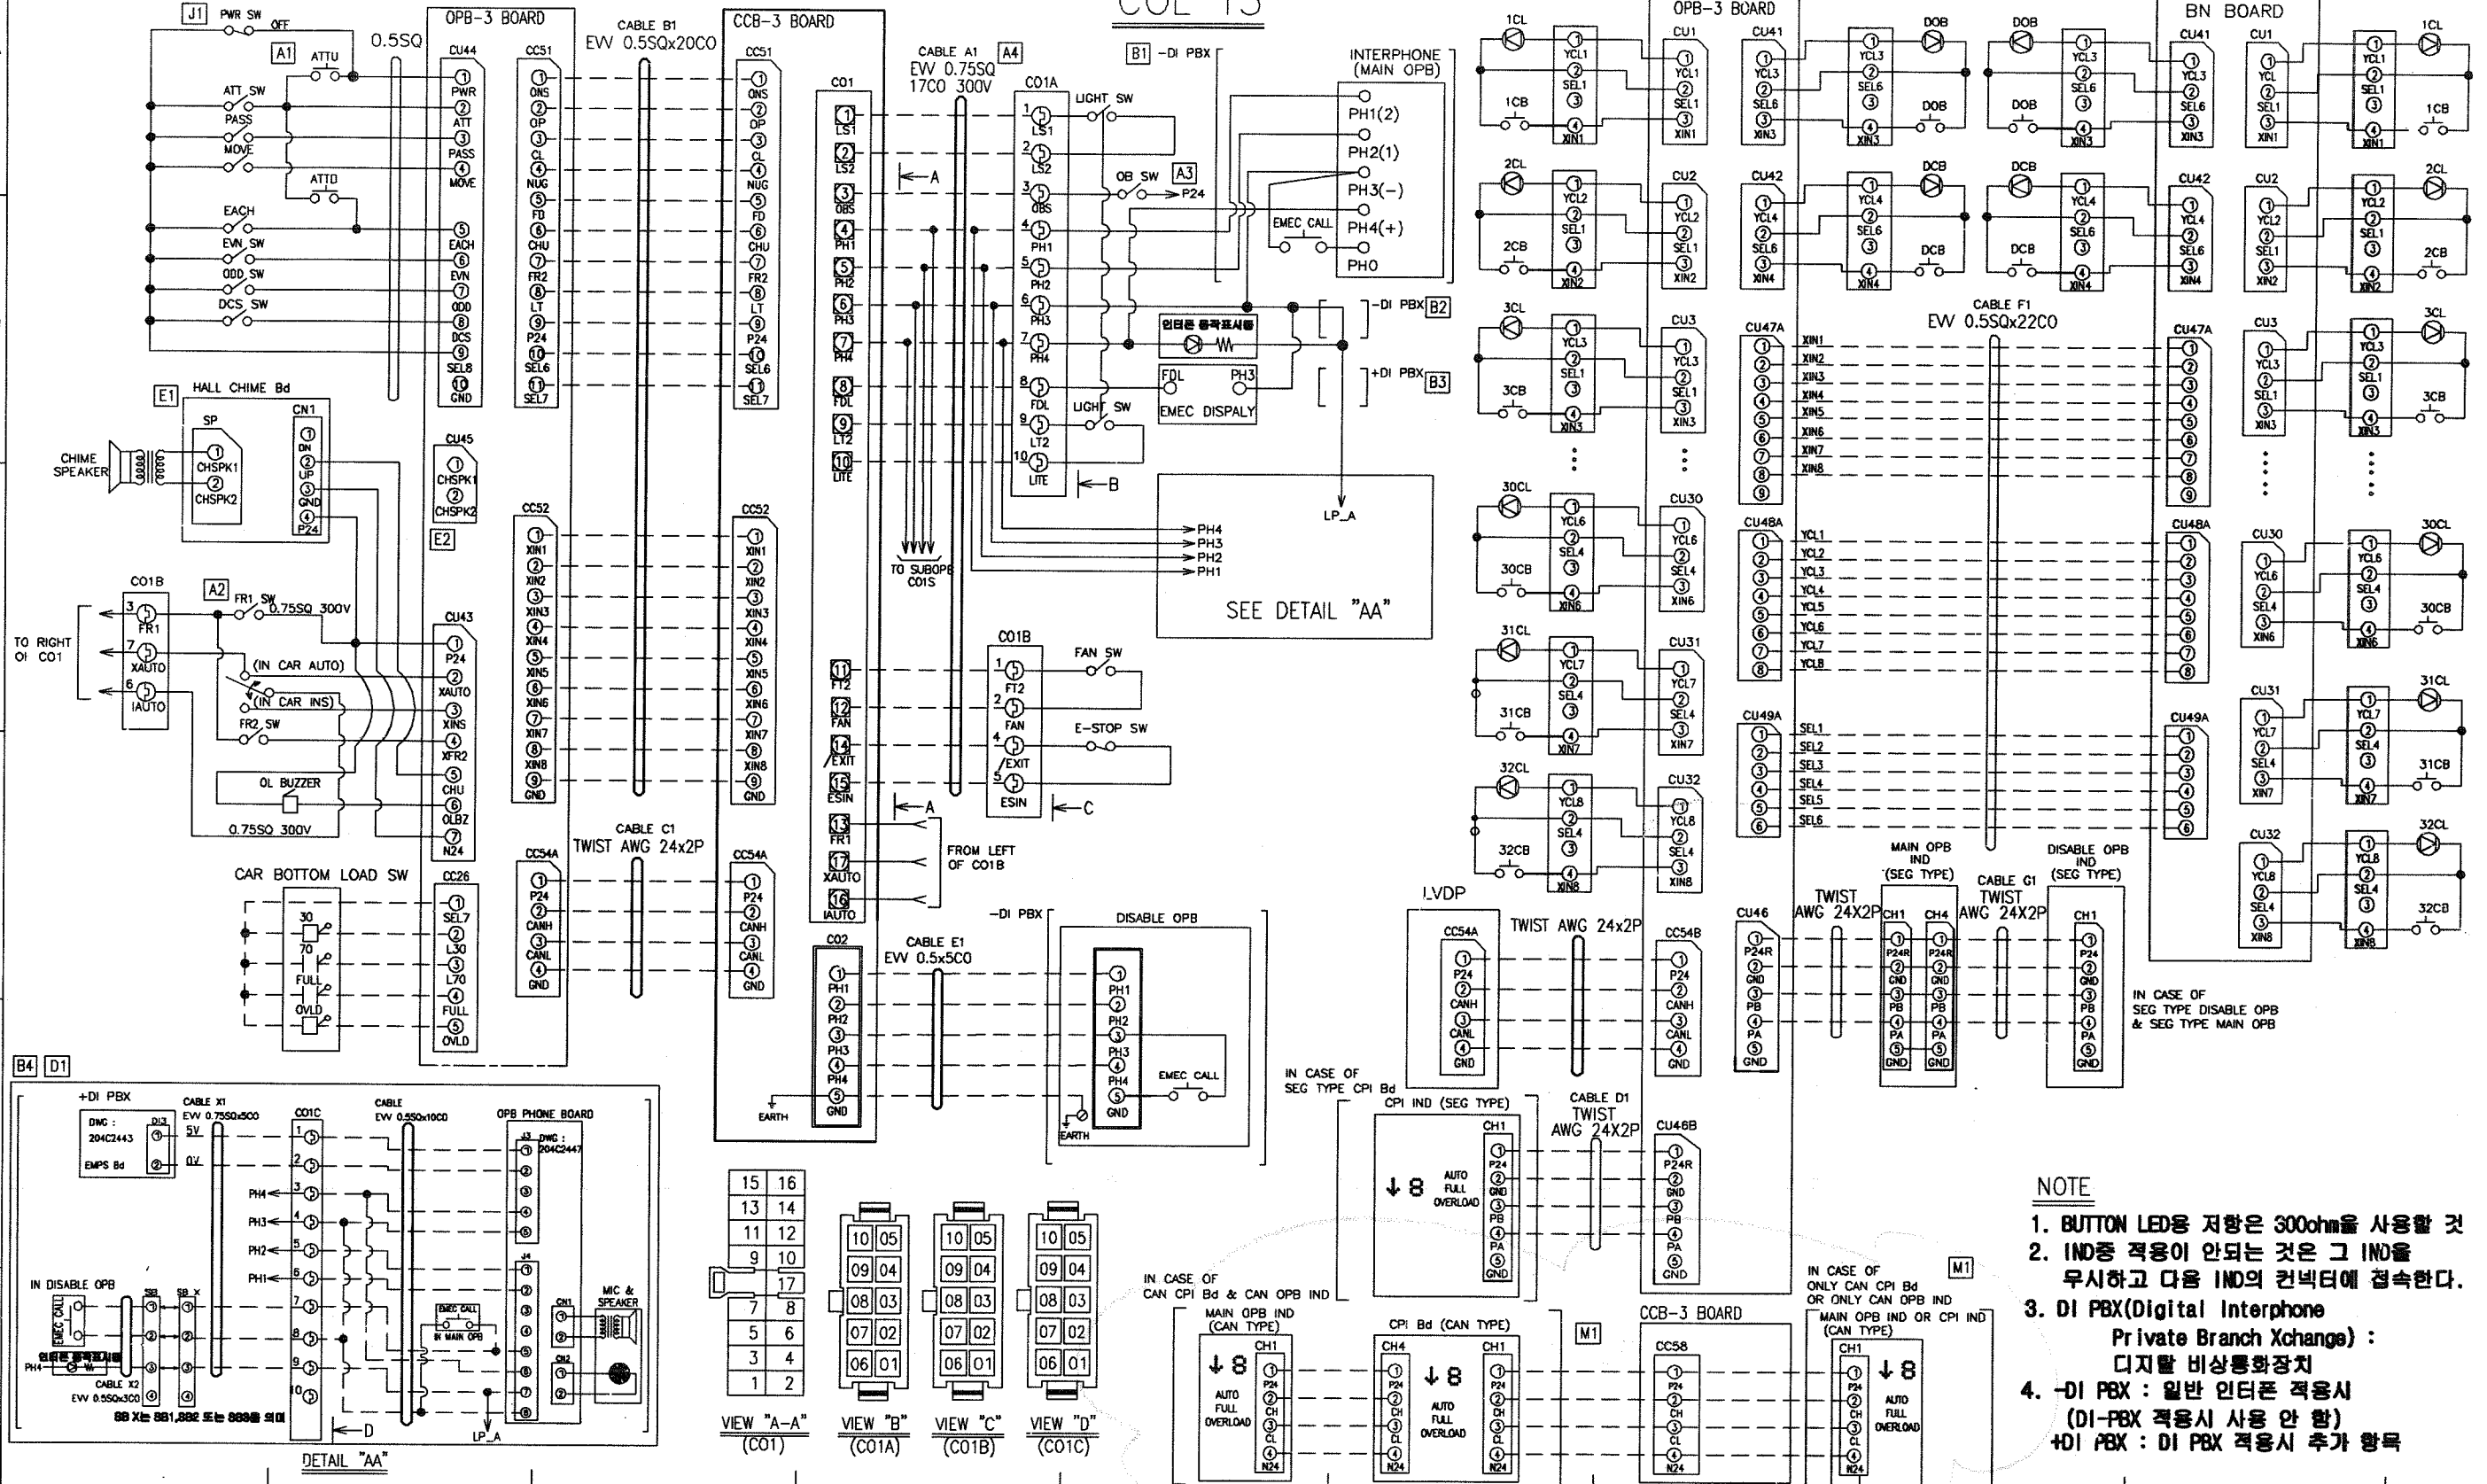

NOTE

1. BUTTON LED용 저항은 300ohm을 사용할 것
2. IND중 적용이 안되는 것은 그 IND를 무시하고 다음 IND의 커넥터에 접속한다.
3. DI PBX(Digital Interphone Private Branch Xchange) : 디지털 비상통화장치
4. -DI PBX : 일반 인터폰 적용시 (DI-PBX 적용시 사용 안 함)
+DI PBX : DI PBX 적용시 추가 항목

CHANGE	개정	DATE	REASON
A1	CONNECTION CHANGED (1A,1C)	2004.8.20	S.C.KIM
A3	ADD OB SW(5A)	2004.8.20	S.C.KIM
A4	WAS EV 0.75SQ 16CO(5A)	2004.8.20	S.C.KIM
B1	"-DI PBX" WAS NOT ON (5A,6B)	2005.05.27	K.H. LEE
B3	"+DI PBX" WAS NOT ON(6B)	2005.05.27	K.H. LEE
B4	"+DI PBX" WAS NOT ON(1E)	2005.06.01	M.S. KIM
C1	APPAR WAS STVF5 & 5MRL	2005.7.19	T.R. LEE
D1	WAS CHANGED (1E)	2005.11.14	M.S. KIM
E1	HALL CHIME BD WAS NOT ON (1B)	2005.12.26	T.R. LEE
E2	CU45 CONNECTION WAS REMOVED (2C)	2005.12.26	T.R. LEE
F1	APPAR WAS STVF5 & 5MRL & ST5GL (9F)	2006.5.30	T.R. LEE
J1	PWR SW WAS NOT ON(1A)	2006.9.6	Y.H. JUNG
K1	APPAR WAS SSVF5 (9F)	2006.9.8	T.R. LEE
M1	OPB IND & CPI CONNECTION WAS CHANGED (6E,8F)	2007.4.17	T.R. LEE

VIEW	VIEW	VIEW	VIEW
VIEW "A-A"	VIEW "B"	VIEW "C"	VIEW "D"
(C01)	(C01A)	(C01B)	(C01C)

WORK	TURN PUNCHING DIST. OF HOLE STR.	MOLD. DIE CASTING PRECISION DRAW.	SHEET WELD GAS CUT.	CSTG. FORG.
SIZE	OVER 10 INCH	1/16	1/16	1/16
1	± 0.1	± 0.2	± 0.3	± 0.5
4	± 0.2	± 0.3	± 0.5	± 0.7
16	± 0.3	± 0.4	± 0.7	± 0.9
63	± 0.4	± 0.6	± 1.2	± 1.3
250	± 0.6	± 0.8	± 1.5	± 1.8
500	± 0.8	± 1.0	± 2.0	± 2.5
1000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE	± 25'	± 5'	± 10'	± 20'


DRWN BY	DSND BY	CHKD BY	APPD BY
S.C. KIM	S.C. KIM	S.C. KIM	S.C. KIM
2004.7.16	2004.7.16	2004.7.16	2004.7.16

UNIT	MM:INCH	SCALE	REF. NO
단위	MM:INCH	3 각 법	참고도면
APPAR	TITLE	DWG. NO	도면번호
STVF5 & ST5GL & SSVF5 & SS5EN	OPB ELEM. W. DIAGRAM	HEC2019	1/1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

1/2 HEC2231

COL 15C (ABOVE 33FL OR DIVIDED HANDICAP)

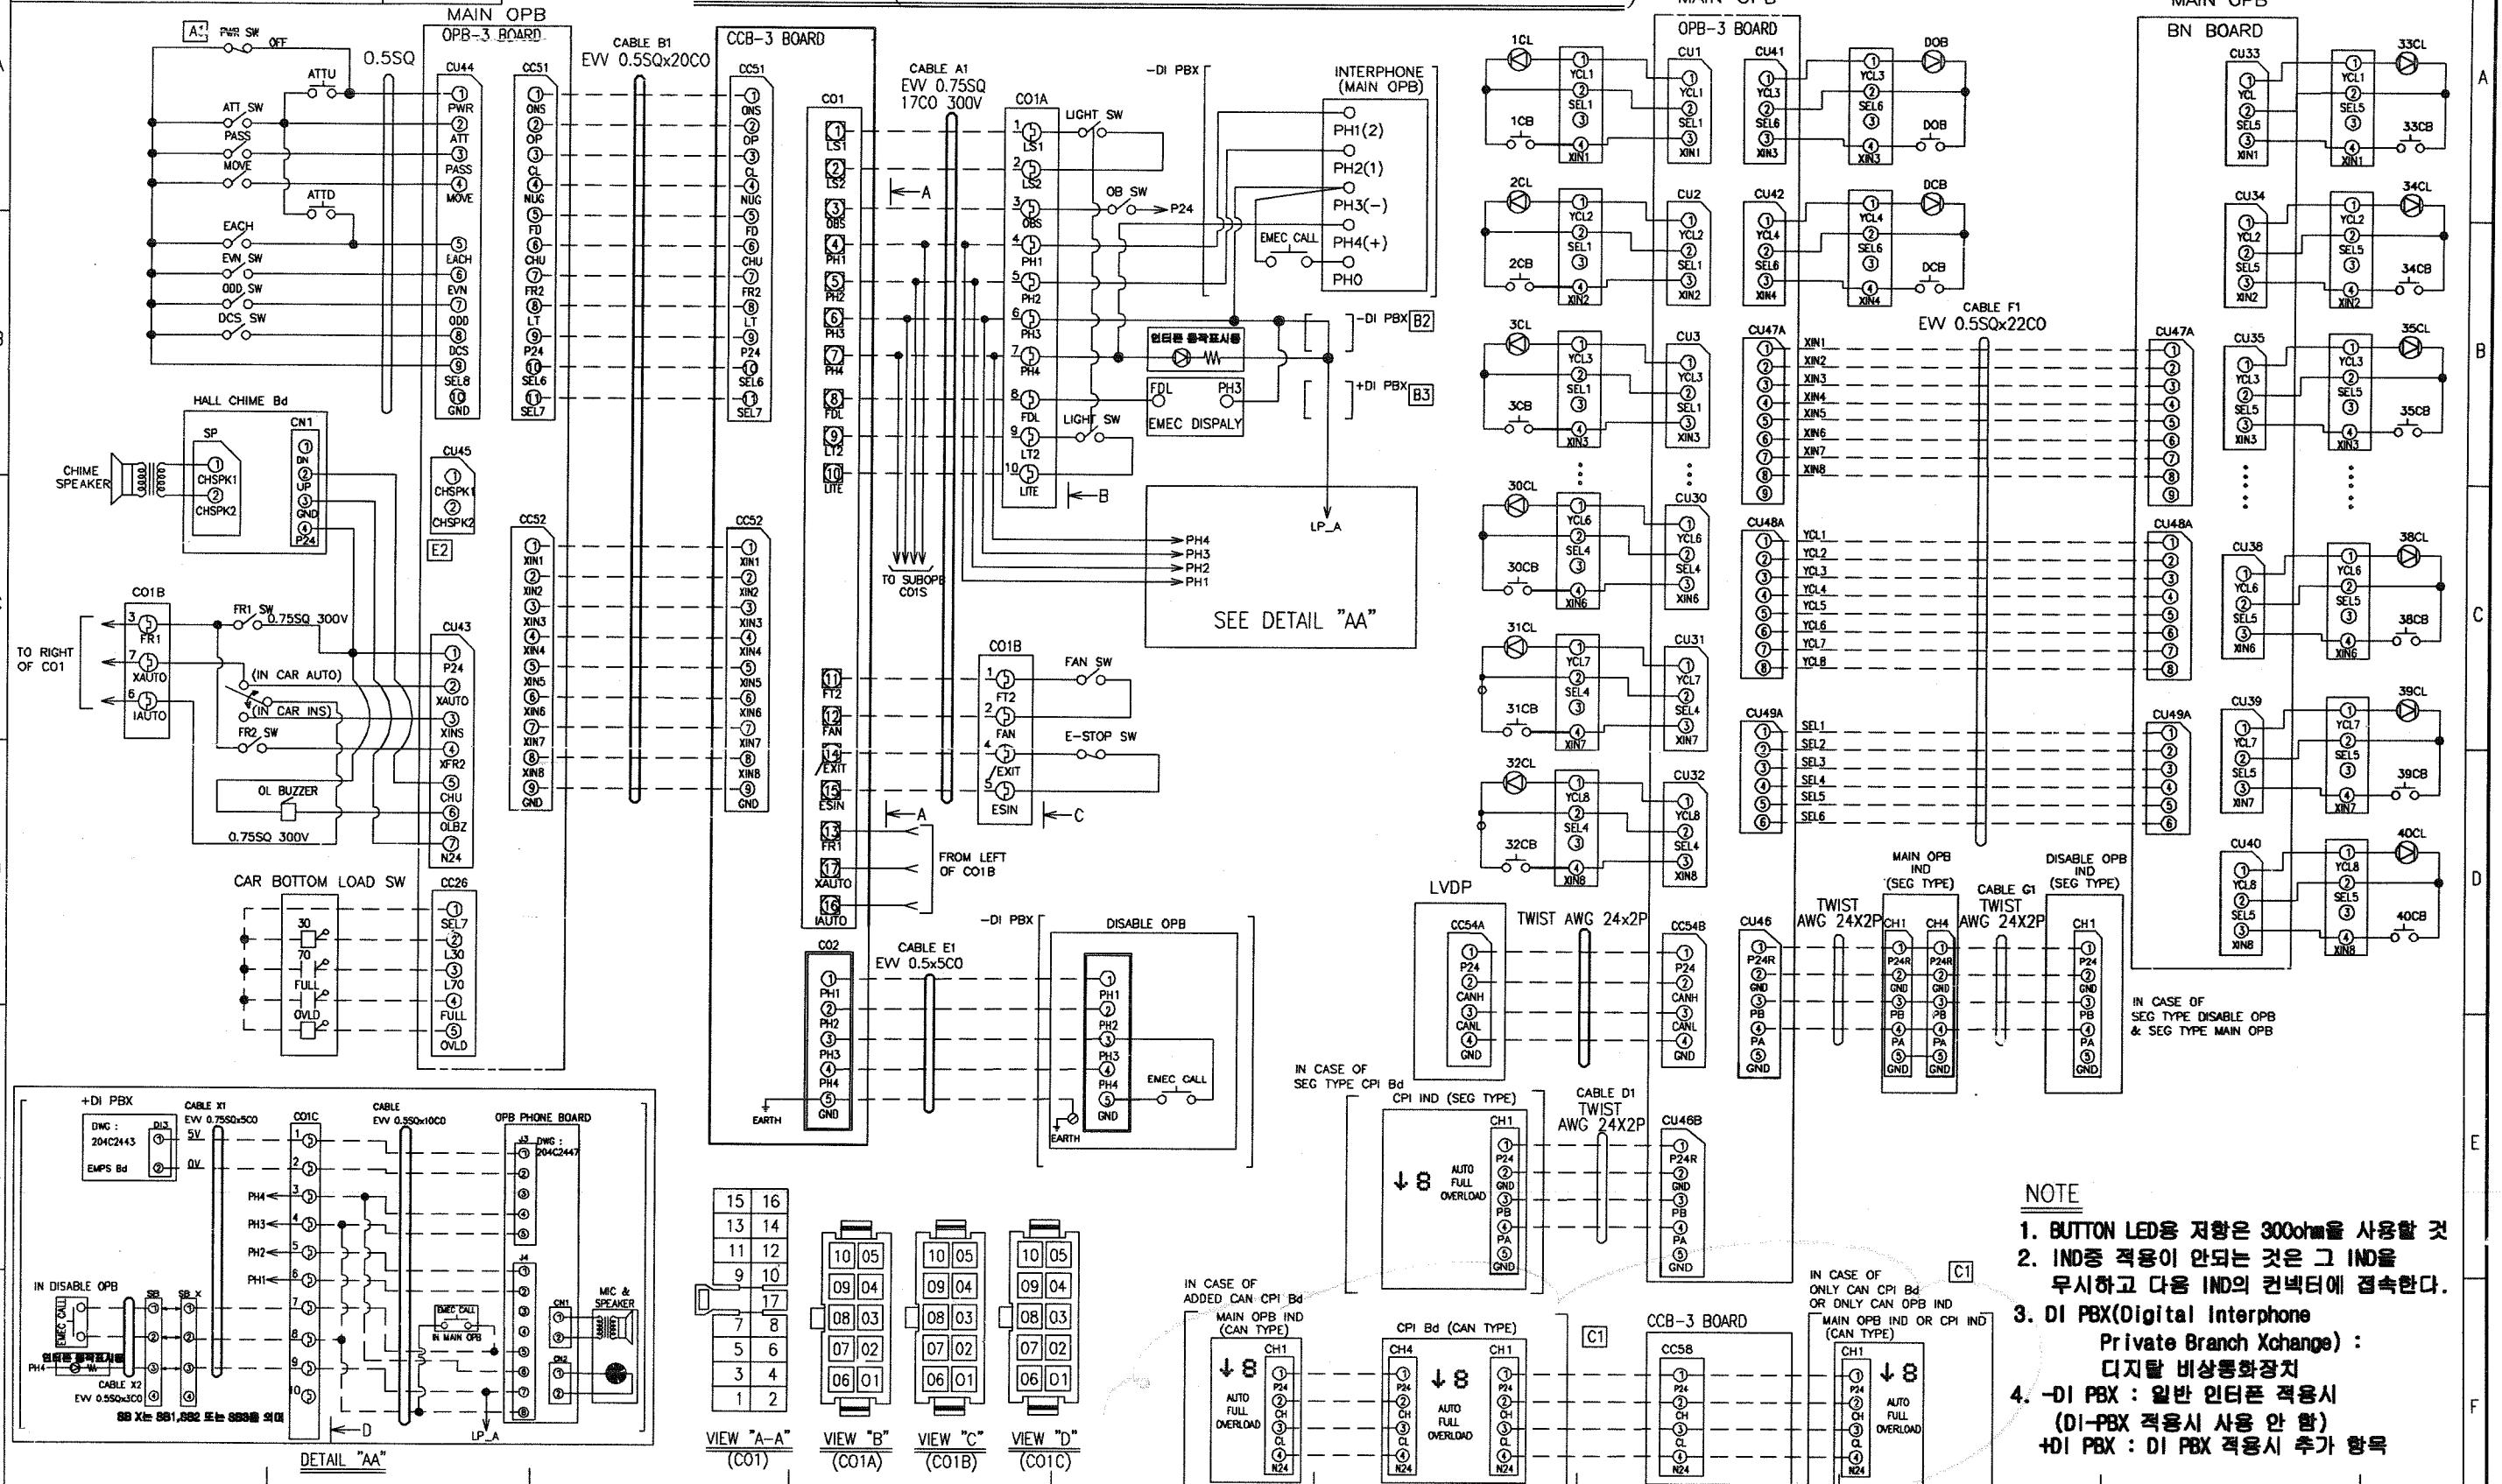

- NOTE
1. BUTTON LED용 저항은 300ohm을 사용할 것
 2. IND중 적용이 안되는 것은 그 IND를 무시하고 다음 IND의 컨택터에 접속한다.
 3. DI PBX(Digital Interphone Private Branch Xchange): 디지털 비상통화장치
 4. -DI PBX: 일반 인터폰 적용시 (DI-PBX 적용시 사용 안 함)
+DI PBX: DI PBX 적용시 추가 항목

대 부 처

CHANGE
개 정 란
A) PWR SW WAS NOT ON(1A)
2006.9.6 Y.H.JUNG
B) APPAR WAS STVF5 & ST5GL (9F)
2006.9.8 T.R. LEE
C) OPB IND & CPI CONNECTION WAS
CHANGED (6E.8F)
2007.4.17 T.R. LEE
S.H. JEON



WORK	TURN PUNCHING DIST. OF HOLE STR.	M.L.D. DIE CAST. PRON. CAST. DRAW	SHEET WELD QWS CTC.	CSTG. FORG.
SIZE	TO INCL.			
OVER				
1	4	± 0.1	± 0.2	± 0.3
4	16	± 0.2	± 0.3	± 0.5
16	63	± 0.3	± 0.4	± 0.7
63	250	± 0.4	± 0.6	± 1.2
250	500	± 0.6	± 0.8	± 1.5
500	1000	± 0.8	± 1.0	± 2.0
1000	2000	± 1.2	± 1.5	± 2.5
ANGLE		± .25°	± .5°	± 1.0°

HYUNDAI
ELEVATOR CO., LTD.

표 준
DRWN BY
제 도
설 계
DSND BY
T.R. LEE
CHKD BY
S.M. Jang
APPD BY
Y.K. Park
2006.5.30
07.1.29 5/29

UNIT
단위
MM. #INCH#
SCALE
척도
3RD ANGLE
3 각 법
REF. NO
참고도면
DWG. NO
도면번호
HEC2231
1/2

LINE CONNECTION

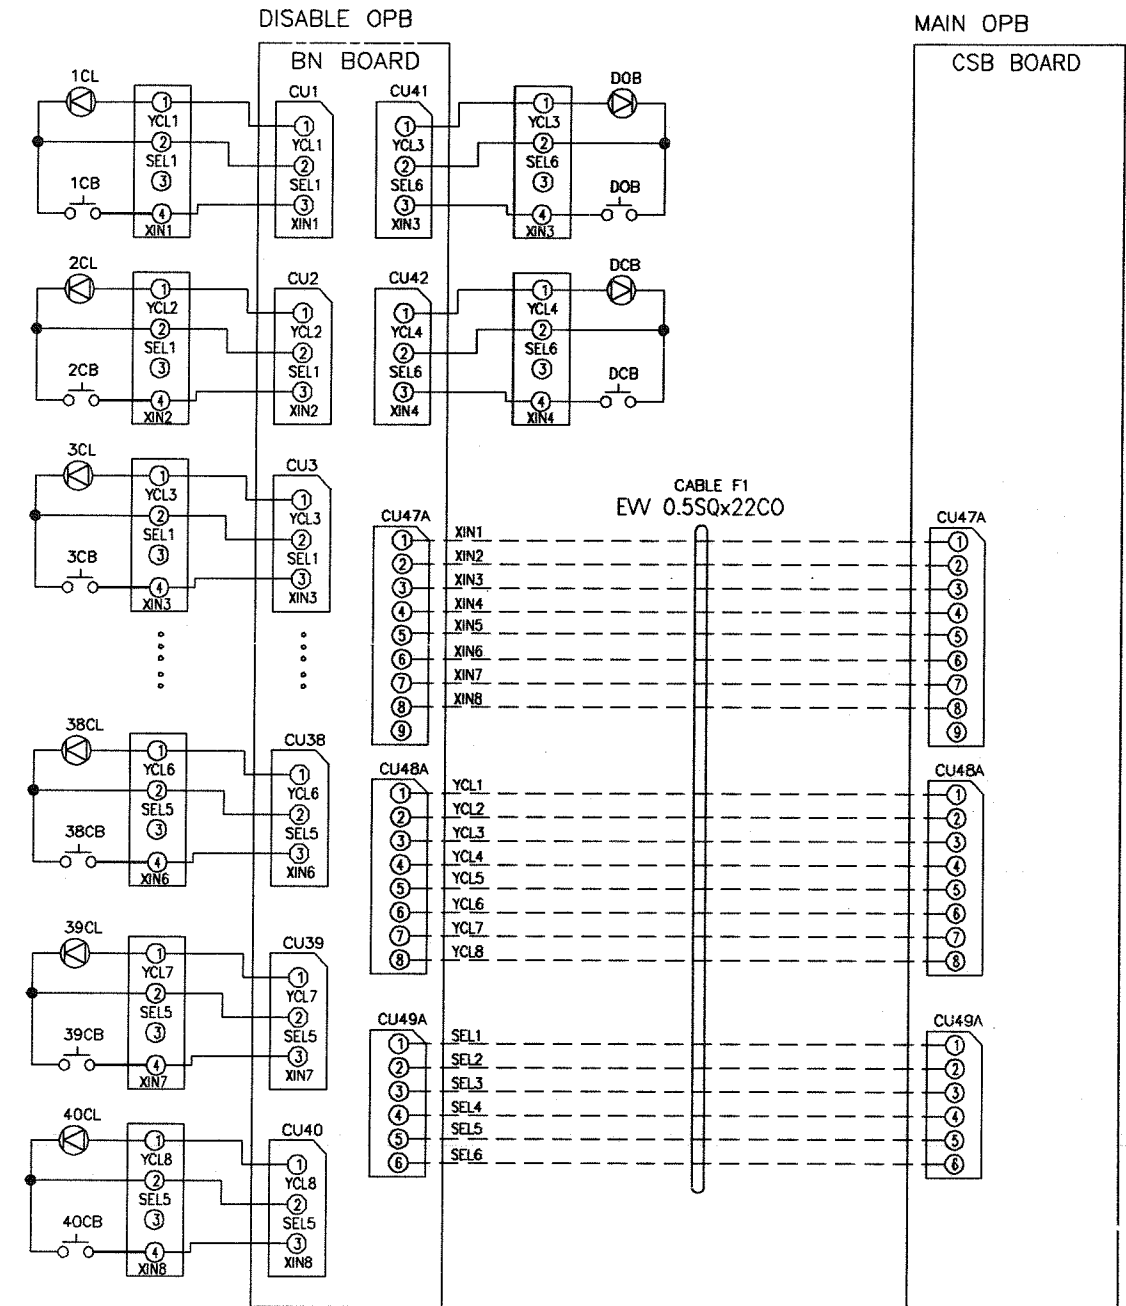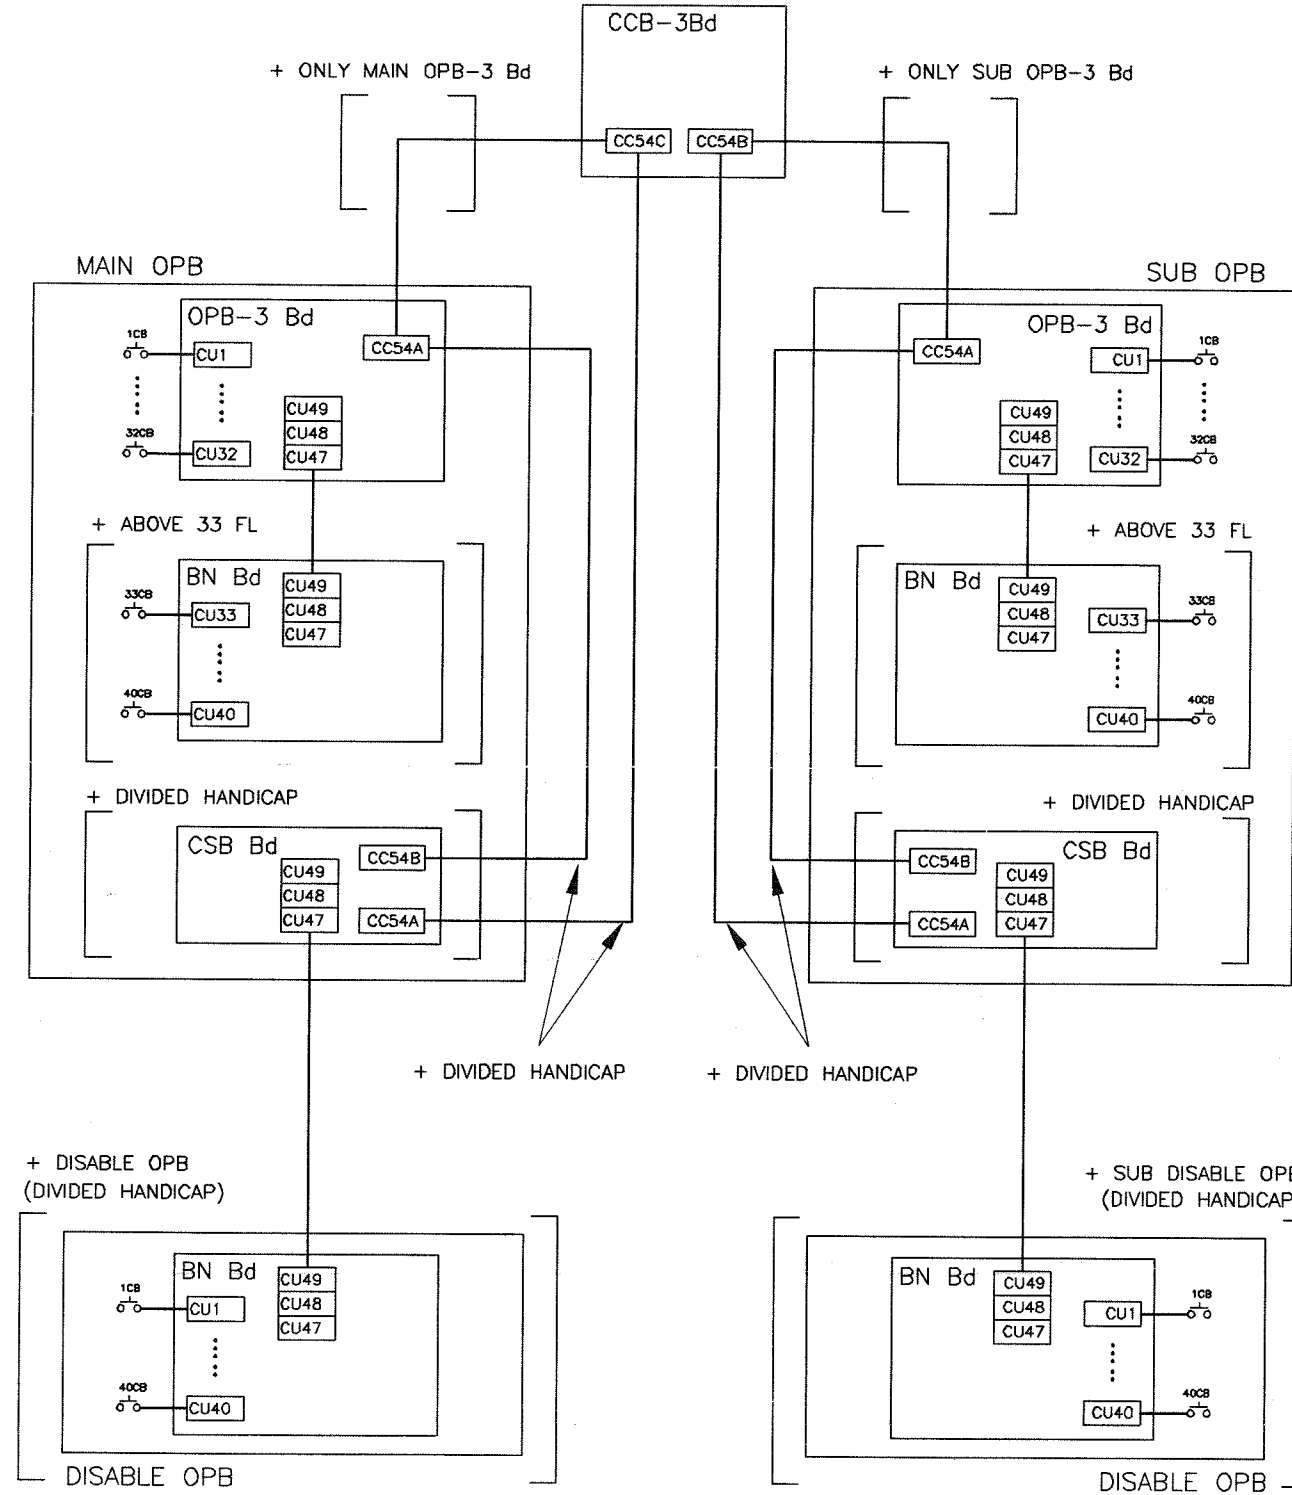

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

배 부 처

CHANGE	개 정 란
A	SHEET 1/2 개정에 맞음 (9F) 2006.9.5 T.R LEE
B	APPAR WAS STVF5 & ST5GL (9F) 2006.9.5 T.R LEE
C	SHEET 1/2 개정에 맞음 (9F) 2007.4.17 T.R LEE S.H.JEON

TOLERANCES-UNLESS OTHERWISE SPECIFIED					
WORK	TURB. PUNCHING	MOLD. DIE CASTING	SH. MET. WELD	CAST. FORG.	CAST. FORG.
SIZE	OVER	TO INCL.	TO INCL.	TO INCL.	TO INCL.
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± 25'	± 3'	± 1.0'	± 2.0'

HYUNDAI ELEVATOR CO., LTD.				
표 준	DRWN BY	DSND BY	CHKD BY	APPD BY
제 도	T.R LEE	설 계	검 토	승 인
임 시				
보 류				
	2006.5.30			

UNIT	MM. #NCH	APPAR. STVF5 & ST5GL & SSVF5 & SS5EN
SCALE	척도	TITLE
3RD ANGLE	3 각 법	제 목 OPB ELEM. W. DIAGRAM
REF. NO	참고도면	DWG. NO
		도면번호 HEC2231
		2/2


COL 16B (ABOVE 33FL OR DIVIDED HANDICAP)

HEC2232

ON 3MD


FOR SUB OPB

OPB-3 BOARD




FOR SUB OPB

BN BOARD




FOR SUBDISABLE OPB

BN BOARD




FOR SUB OPB

CSB BOARD

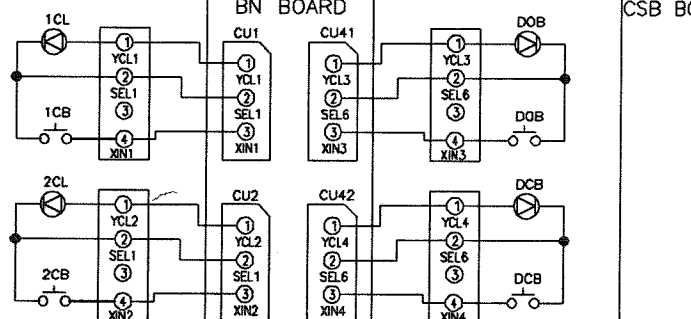


CAN LINE CONNECTION


IN CASE OF ONLY SUB OPB




IN CASE OF SUB OPB + DISABLE SUB OPB

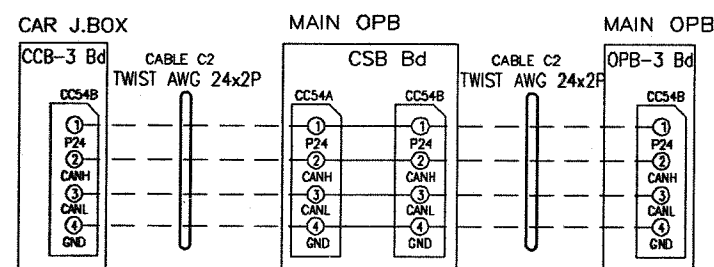


SUB DISABLE




SUB OPB IND




CU46




B1




SUB OPB IND




-DI PBX

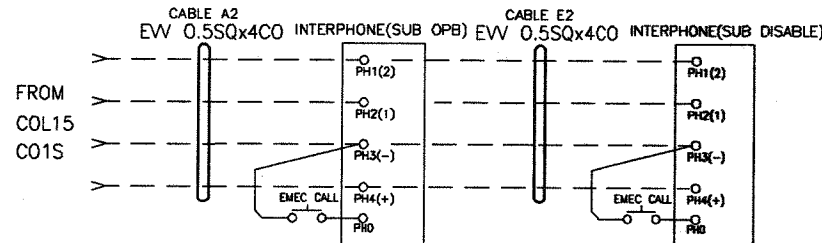

+DI PBX

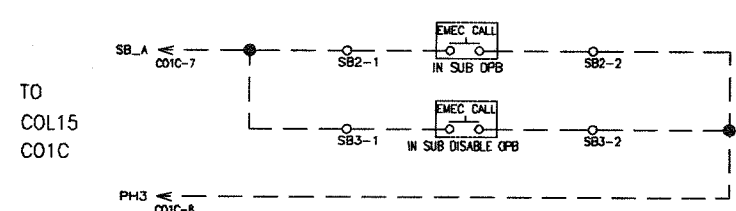

IN SUPERVISORY

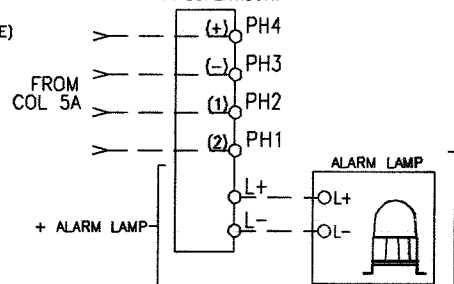

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

배 부 처

F

CHANGE	개 정 란	A	B
1	APPAR WAS STVF5 & ST5GL (9F)		
2	2006.9.5 T.R LEE		
3	CONNECTION WAS NOT ON (3F)		
4	2007.4.17 T.R LEE		
5	S.H.JEON		

TOLERANCES-UNLESS OTHERWISE SPECIFIED				
WORK	TURN	ALDG.	SH MET	OSTG.
SIZE	PINCH/G	DE. CSTG.	WELD	FORG.
OVER	DIST. OF	PRON. CSTG.	GAS CTO.	
TO INCL.	HOLE STR.	DRAW.		
1	± 0.1	± 0.2	± 0.3	± 0.5
4	± 0.2	± 0.3	± 0.5	± 0.7
16	± 0.3	± 0.4	± 0.7	± 0.9
63	± 0.4	± 0.6	± 1.2	± 1.3
250	± 0.6	± 0.8	± 1.5	± 1.8
500	± 0.8	± 1.0	± 2.0	± 2.5
1000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE	± 25'	± 5'	± 1.0'	± 2.0'

HYUNDAI
ELEVATOR CO., LTD.

DRWN BY	DSND BY	CHKD BY	APPD BY
T.R. LEE	S.H. JEON	Y.K. PARK	
2006.5.30	07.1.29	5/28	


UNIT	MM. INCH	APPAR
SCALE		STVF5 & ST5GL & SSVF5 & SS5EN
3RD ANGLE		
REF. NO		
DWG. NO		
도면번호		

OPB ELEM. W. DIAGRAM

HEC2232

1/1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

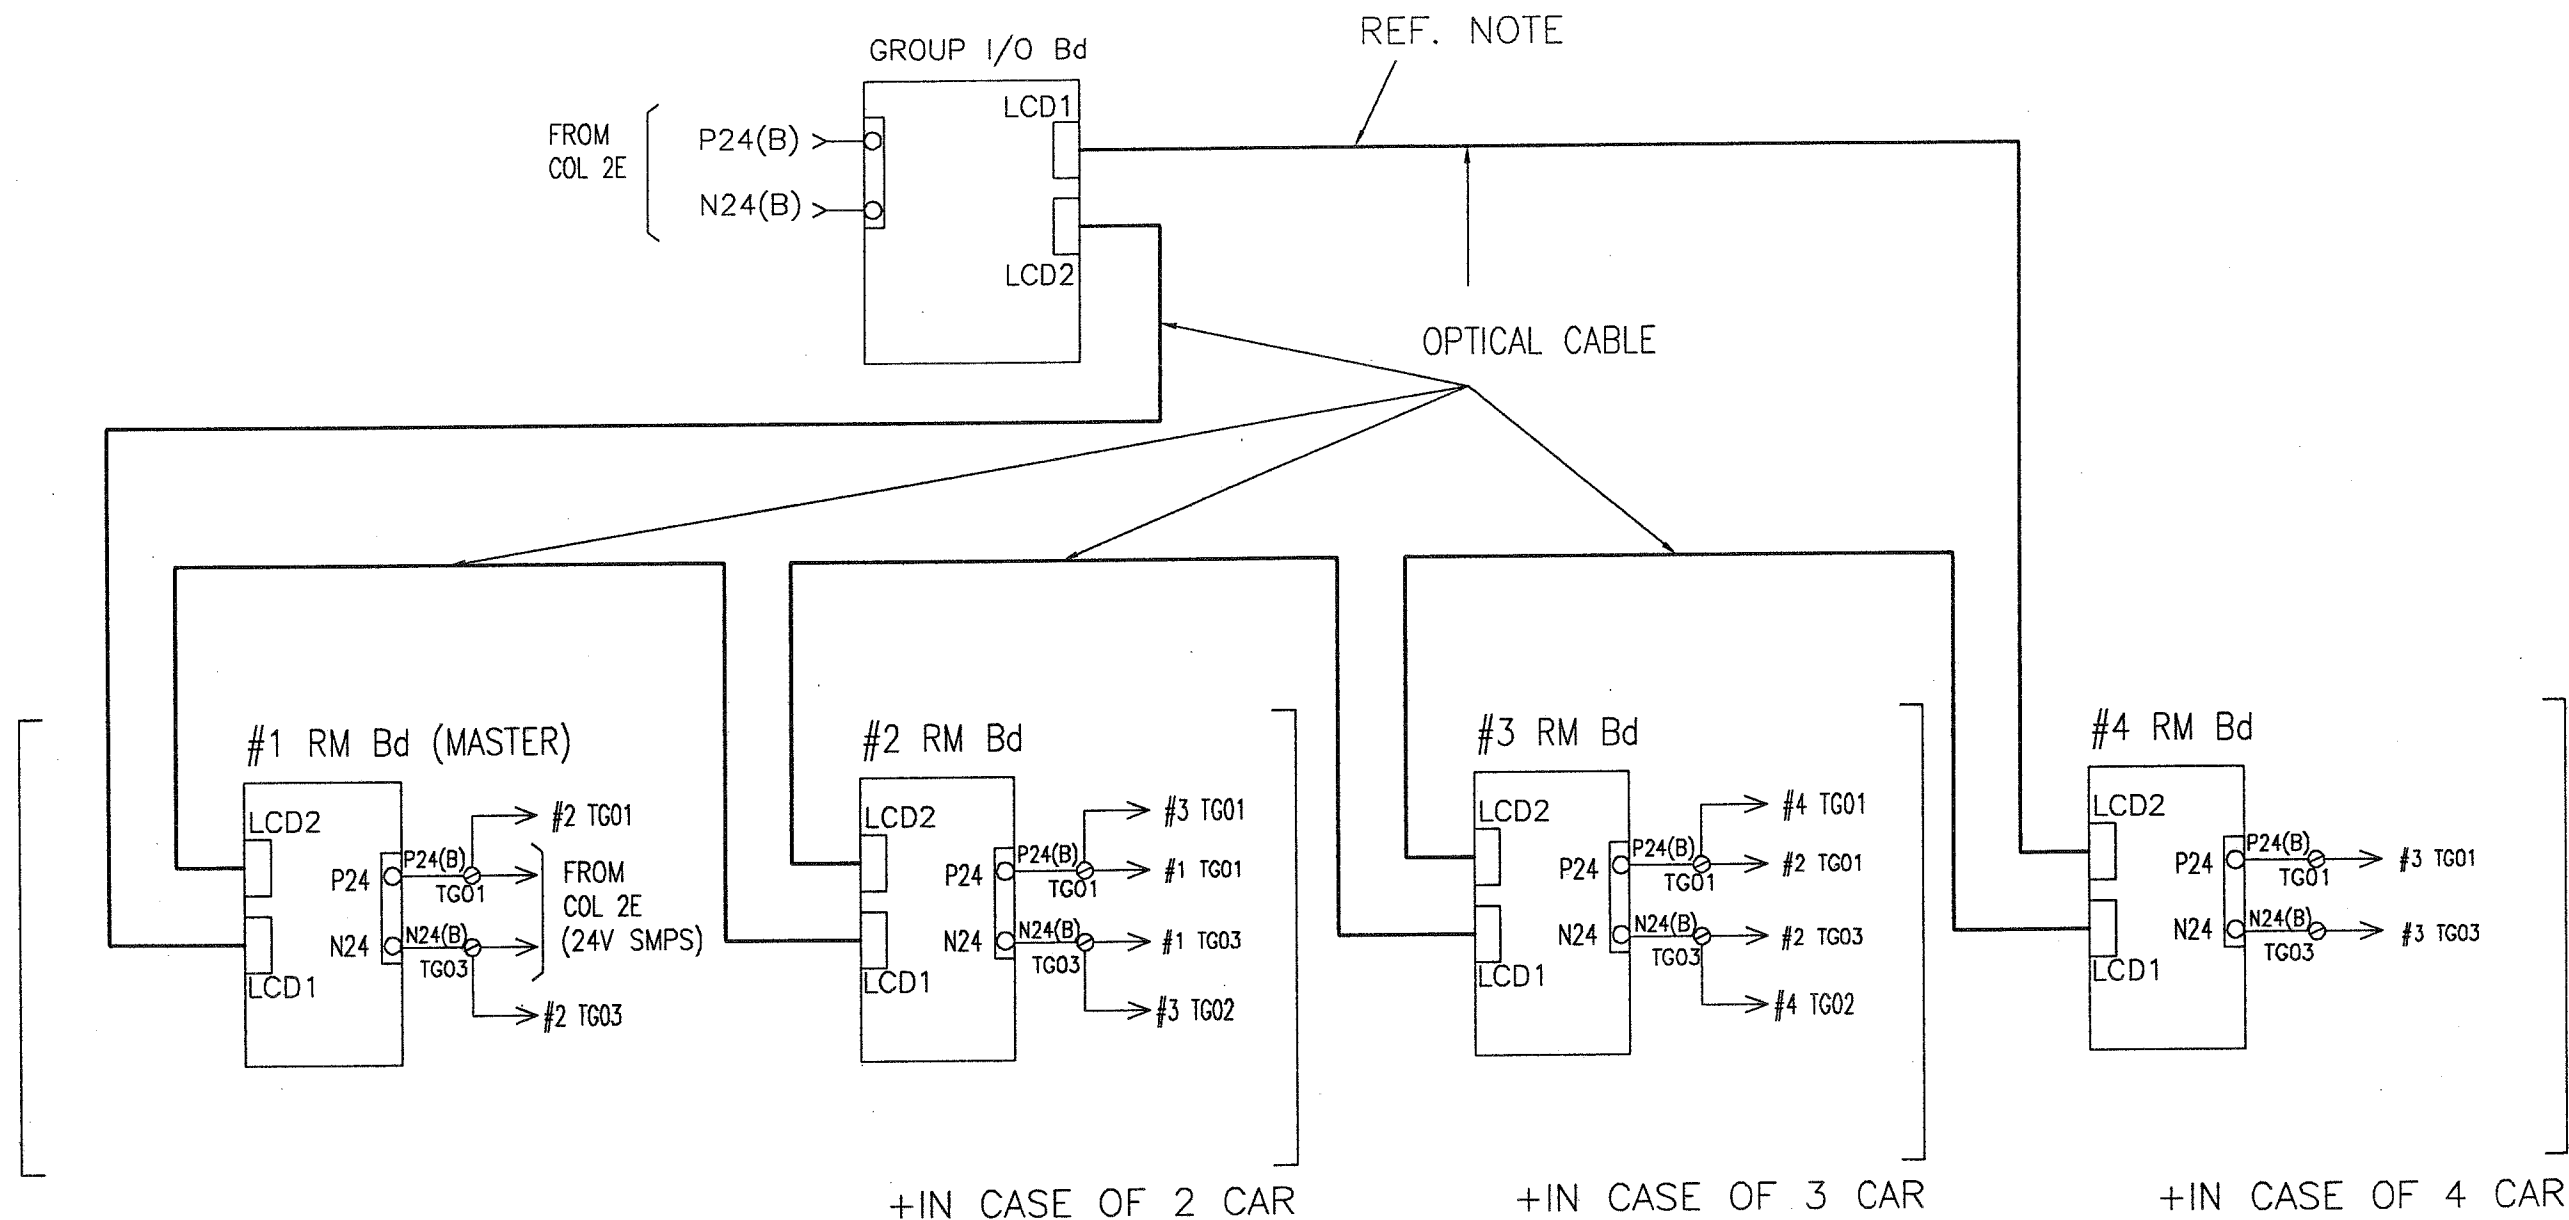

NOTE

IN CASE OF 2CAR, IT CONNECTED WITH LCD2 OF #2 RM Bd,
IN CASE OF 3CAR, IT CONNECTED WITH LCD2 OF #3 RM Bd.

(2CAR 의 경우 2호기 RM Bd의 LCD2와 연결되고,
3CAR 의 경우 3호기 RM Bd의 LCD2와 연결된다)

[illegible]

TOLERANCES—UNLESS OTHERWISE SPECIFIED					
WORK		TURN FINISH BY HOLE STR.	H.D.G. DE. CTS. FINISH DRAW.	SHAFT WELD GAS CUT.	CSFG. FORM.
SIZE	TO FIN.				
OVER 1	TO FIN.				
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.5	± 1.2	± 1.3
250	3000	± 0.6	± 0.8	± 1.5	± 1.8
500	10000	± 0.8	± 1.0	± 2.0	± 2.5
10000	20000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°


 HYUNDAI ELEVATOR CO., LTD.				
표준	DRWN BY 제 도	DSND BY 설 계	CHKD BY 검 토	APPD BY 승 인
임시	T. R. LEE		김희철	技術研究所 2005. 7. 26
비류				
	2004.7.19	25.07.26	朴榮基	

UNIT 단위	MM. MM.	APPAR.	STVF5 & 5MRL & ST5GL
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM
3RD ANGLE 3 각 법			
REF. NO 참고도면	DWG. NO 도면번호	HEC2168	1/1


THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
해기없이 복사할 수 없음

COL 18A
(2 CAR 전용 시스템)

#1 CONTROL PANEL

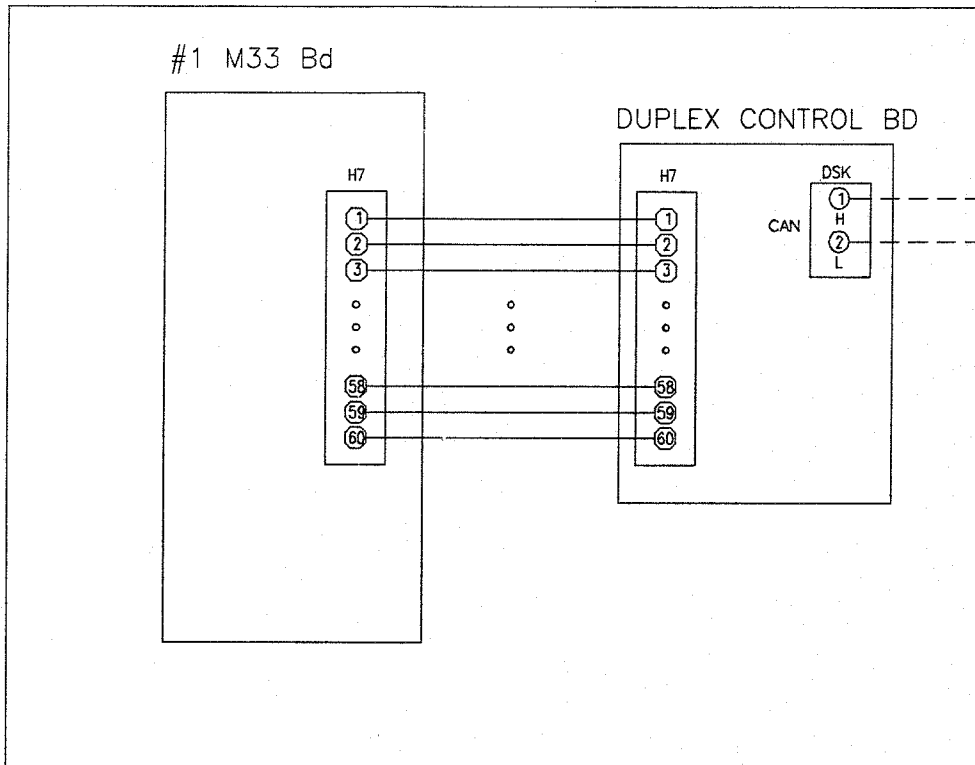

#2 CONTROL PANEL

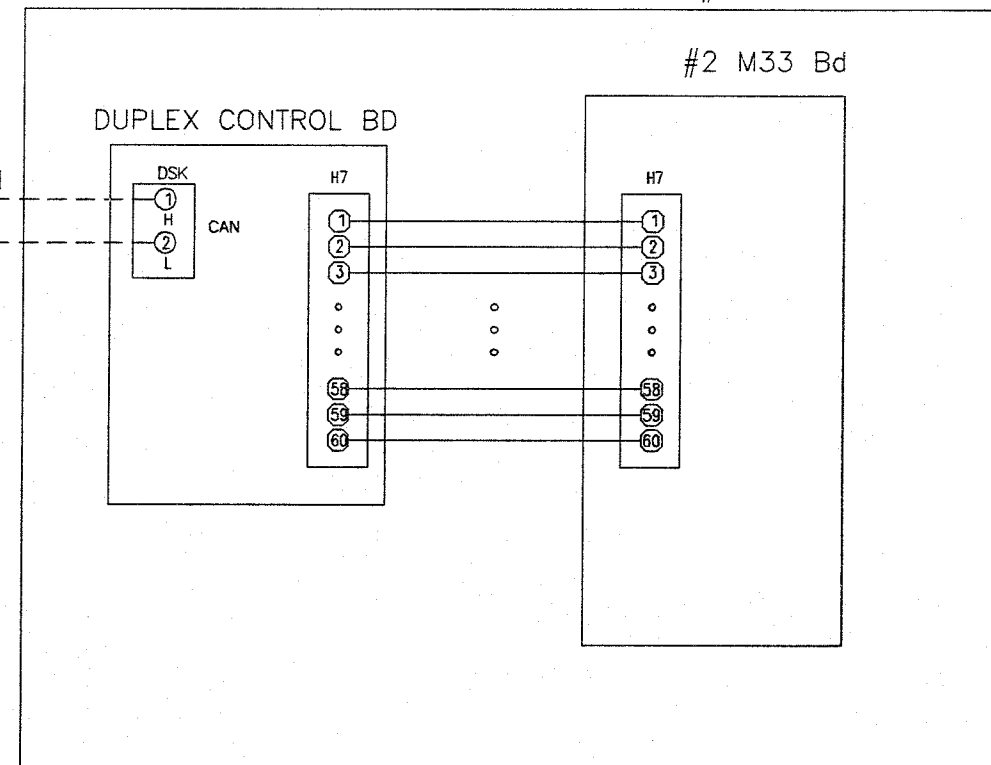

NOTE

- 상기 결선은 CAN 통신을 이용한 2-CAR 전용 시스템에만 적용되며 2-CAR RING TYPE 군관 리 또는 3-CAR이상의 그룹 결선은 COL18(HEC2168)을 참고할것.
(IN CASE OF A EXCLUSIVE 2-CAR SYSTEM (CAN COMMUNICATION FORM), IN CASE OF 2-CAR RING TYPE GROUP OR ABOVE 3-CAR GROUP, REFER TO COL18(HEC2168).)
- HALL측 결선은 COL11D (HEC2200), COL11E(HEC2201) 을 참고할것.
(CONNECT HALL COMMUNICATION LINE, REFER TO COL11D (HEC2200), COL11E(HEC2201))
- CABLE 1 의 제작은 259D202 G04 를 참고 할것.
(MANUFACTURE CABLE1 ,REFER TO 259D202G04)

배 부 처

CHANGE
개 정 리

TOLERANCES-UNLESS OTHERWISE SPECIFIED					
WORK	TURN PHOTO DIST. OF HOLE STR.	MISC. DE. CSTG. PRON. CSTG. DRANK.	SHEET WELD GAS CTG.	CSTG. FORG.	
SIZE					
OVER 10 IN.					
1	4	± 0.1	± 0.2	± 0.3	± 0.5
4	16	± 0.2	± 0.3	± 0.5	± 0.7
16	63	± 0.3	± 0.4	± 0.7	± 0.9
63	250	± 0.4	± 0.6	± 1.2	± 1.3
250	500	± 0.6	± 0.8	± 1.5	± 1.8
500	1000	± 0.8	± 1.0	± 2.0	± 2.5
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°

HYUNDAI
ELEVATOR CO., LTD.

표 준	DRWN BY	DSND BY	CHKD BY	APPD BY
제 도	설 계	검 토	승 인	
임 시	T.R. LEE			
보 류				
	2007.6.7			

UNIT 단위	MM. #	APPAR.	STVF5 SERIES	
SCALE 척도		TITLE 제목	ELEM. W. DIAGRAM	
3RD ANGLE 3 각 법		REF. NO 참고도면	DWG. NO 도면번호	
			HEC2303	1/1

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
해기없이 복사할 수 없음

CONTROL PANEL

STVF3 / SSVF3			STVF5 / SSVF5			ST-VF		
COL	NAME	T-BLOCK	COL	NAME	T-BLOCK	COL	NAME	T-BLOCK
COL1	TE	TA3	COL1	T	TB1-3	COL1	SE	TA2
	RE	TA1		S	TB1-2		RE	TA1
				R	TB1-1			
COL4	P24	TC17	COL4A	N24	TB3-12			
ELDI 11EH	ELDI CT53-7	ELDI TE11	XELD 11CH	SP11 CS3-1	EOR TB(-)			
ELDO 1A4.3H	ELDO CT56-2	ELDO TE12	EUPS 1FCH	SP01 CS3-5	EOF TB(-)			
COL4	P24	TD08	COL5	P24	TB3-11			
COL1	NPR 98	NPR 98	COL3	B3	TB2-9	COL3	NPR 98	TB2-14
	NPR 95	NPR 95		B4	TB2-10		NPR 95	TB2-15

* REFER TO POWER CABLE

FROM BUILDING

COL E1

ELD SYSTEM

NOTE A4

1. LOAD SWITCH SETTING

SWITCH NAME	SW1(N.C)	SW2(N.O)	SW3(N.O)	SW4(N.C)
WITHOUT ELD	30%	70%	80%	100%
WITH ELD	25%	50%	75%	100%

N.C: NORMAL CLOSE, N.O: NORMAL OPEN

2. *: ADDRESS, **: BOARD PIN NO & NAME

CHANGE	개정	DATE	REVISION
A1	STVF3,SSVF3 WERE NOT ON (1B)	2004.2.4. JSR	
A2	WAS N24 (3D)		
A3	WAS P24 (3D)		
A4	NOTE WAS CHANGED (8E)		
B1	STVF5,SSVF5 WERE NOT ON (1B)	2005.2.18. S.R.-JEONG	


TOLERANCES-UNLESS OTHERWISE SPECIFIED					
WORK SIZE	TURN. PUNCHING DIST. OF HOLE STR.	M.L.D. DIE CASTING PROX. CASTING DRAW.	SHMET WELD GAS CTG.	CSTG. FORG.	
1 4	± 0.1	± 0.2	± 0.3	± 0.5	
4 16	± 0.2	± 0.3	± 0.5	± 0.7	
16 63	± 0.3	± 0.4	± 0.7	± 0.9	
63 250	± 0.4	± 0.6	± 1.2	± 1.3	
250 500	± 0.6	± 0.8	± 1.5	± 1.8	
500 1000	± 0.8	± 1.0	± 2.0	± 2.5	
1000 2000	± 1.2	± 1.5	± 2.5	± 3.3	
ANGLE	± .25°	± .5°	± 1.0°	± 2.0°	

HYUNDAI
ELEVATOR CO., LTD.


표준	DRWN BY	DSND BY	CHKD BY	APPD BY
제도	설계	검토	승인	
임시				
보류				

UNIT	MM	APPAR.	HELD-2000(ELD)-STVF1/STVF3
SCALE	N	TITLE	ELEM. W. DIAGRAM
척도	S	제목	
3RC ANGLE		DWG. NO	HEC1497
3 각 법		도면번호	1/2
REF. NO			
참고도면			

ELD SYSTEM

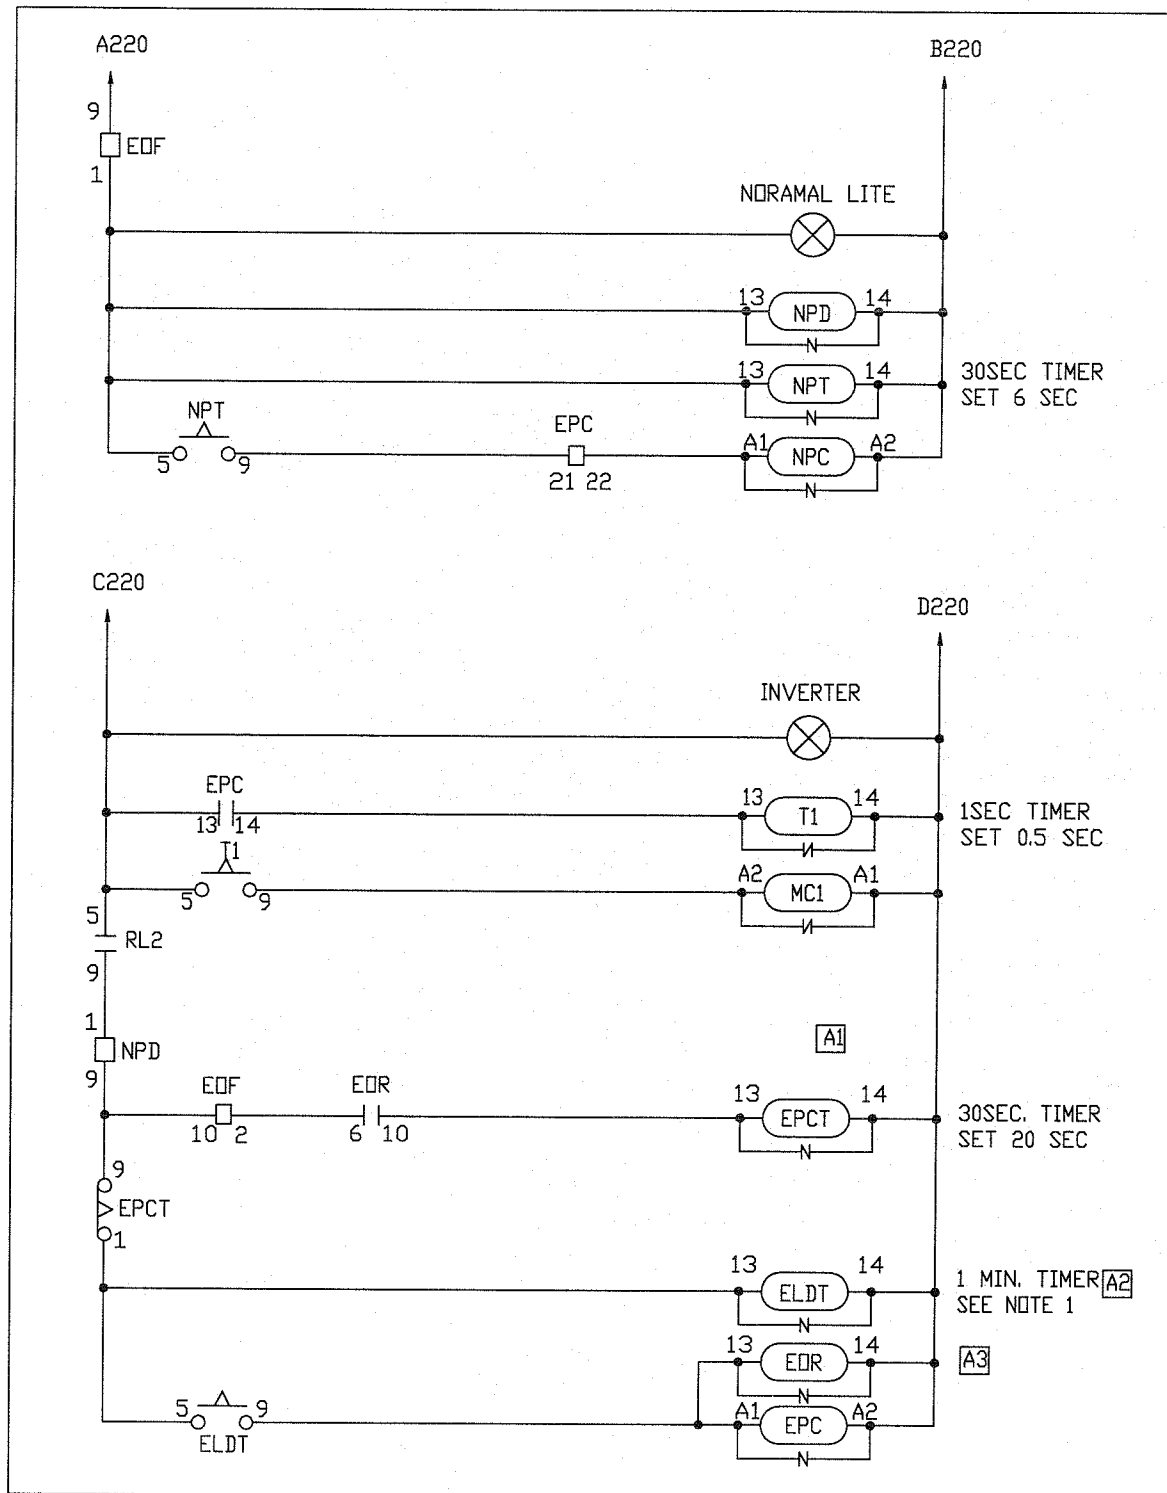

RELAY & TIMER TIME CHART

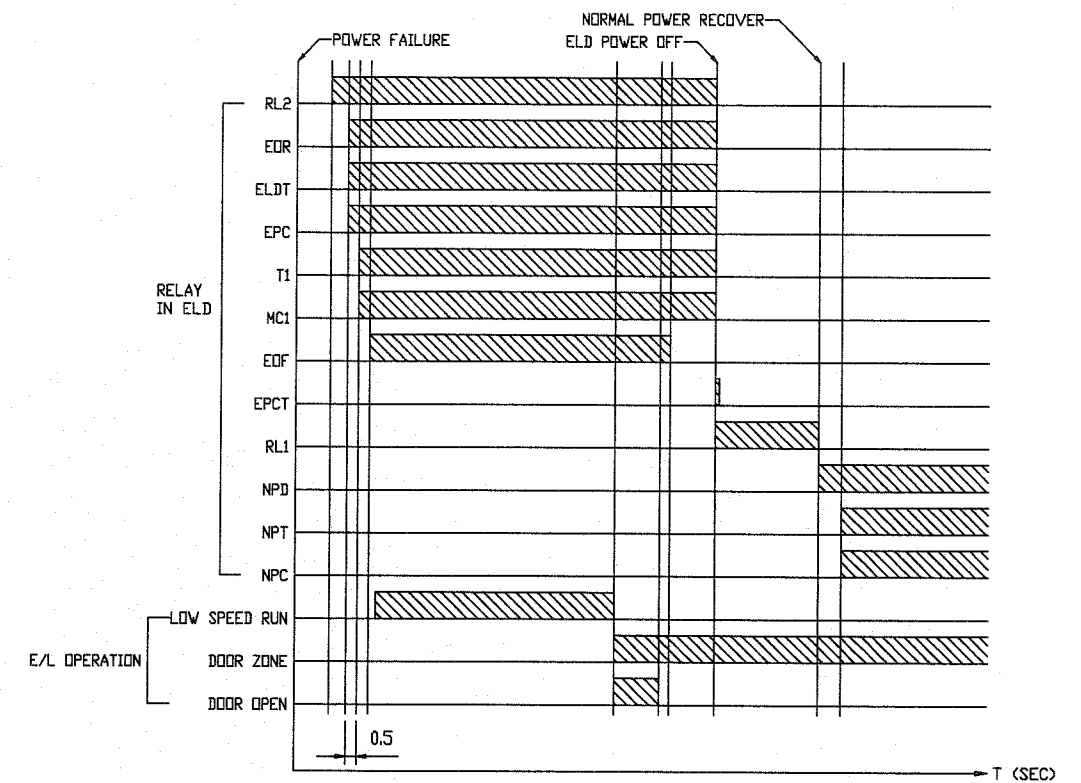

RELAY & TIMER COUNTER TABLE

[illegible]

NAME	SET(A)		RESET(B)		TYPE	VOLT
	5/10	4/11	1/10	8/11		
RL1			○		MY2K	DC24V

NAME	MAKE(A)				BREAK(B)		TYPE	VOLT
	1/2	3/4	5/6	13/14	21/22			
EPC	○	○			○		HMC-20W11	AC220V
MC1	○	○					HMC-20W11	AC220V
NPC	○	○	○				HMC-50(80)	AC220V

A4 NOTE

1. "ELDT" TIMER의 설정시간은 8초로 하되 ELD 동작 지연요청이 있을 경우 설정시간은 SPEC 지정에 따를 것. <설정시간 = 동작지연시간 - 5초>
(TIMER "ELDT" SHOULD BE SET TO 8SEC.
BUT IF ELD OPERATION IS DELAYED MORE
SETTING TIME IS AS FOLLOWING :
<SETTING TIME = DELAY TIME - 5SEC.>)

THIS DRAWING IS PROPRIETARY TO HELCO
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF HELCO
허가없이 복사할 수 없음

배 부 처

CHANGE

A1	RELAY 'EDR' WAS REMOVED (3E)
A2	1MIN. TIMER WAS 30SEC. TIMER (4E)
A3	RELAY 'EDR' WAS NOT ON (4F)
A4	NOTE WAS NOT ON (5D)

2005.3.2 D.Y. KIM

2005.3.2 D.Y. KIM

TOLERANCES—UNLESS OTHERWISE SPECIFIED						
WORK		TURN FINISH FROM HOLE STR.	MILDG. DIE CASTG. FROM CASTG. DRAW.	SLAMET WELD GAS CTG.	CASTG. FORG.	
SIZE						
OVER	TO INCL.					
1	4	± 0.1	± 0.2	± 0.3	± 0.5	
4	16	± 0.2	± 0.3	± 0.5	± 0.7	
16	63	± 0.3	± 0.4	± 0.7	± 0.9	
63	250	± 0.4	± 0.6	± 1.2	± 1.3	
250	500	± 0.6	± 0.8	± 1.5	± 1.8	
500	1000	± 0.8	± 1.0	± 2.0	± 2.5	
1000	2000	± 1.2	± 1.5	± 2.5	± 3.3	
ANGLE		± .25°	± .5°	± 1.0°	± 2.0°	



HYUNDAI
ELEVATOR CO., LTD.

표	DRWN BY	DSND BY	CHKD BY	APPD BY
준	제	도	검	승
임				인
시				
보	김	민		
류	영			
	2003.9.4			

UNIT 단위	MM. INCH
SCALE 척도	
3RD ANGLE 3 각 법	
REF. NO 참고도면	
HEC1719	

APPAR.	HELD-2000 (ST-VF1)
TITLE 제목	ELEM.W. DIAGRAM
DWG. NO 도면번호	HEC1497