



VER NO.

1.0

TITLE

TK-50G (FLAT)

SCHEMATIC DIAGRAMS

Page	TITLE		TITLE		TITLE		TITLE		TITLE		TITLE	
1	FRONT COVER				40	CAR CONNECTOR & T-CABLE		65	HALL CALL REAR WIRING		100	INTERPHONE CIRCUITS
2	LIST OF COMPONENTS 1			(DUB&A) (IS&AL)	41	CAR DUCT CONNECTION					101	SUPERVISORY PANEL
3	LIST OF COMPONENTS 2			(P&BEL)	42	FAN, LIGHT, BAT, LOAD CIRCUITS						
4	SYMBOLS				43	CAR I/O CIRCUITS						
					44	OB SWITCH CIRCUIT						
					45	PHOTO CELL & DOOR BUTTON		70	POWER SUPPLY FOR DC DOOR			
8	POWER SOURCE (0) - ARD OPTION				46	AUTO ANNOUNCER, LOAD WEIGHING DEVICE		71				
9	POWER SOURCE CIRCUIT (1)							72				
10	CAR LIGHT & FAN							73				
					26	ROPE BRAKE		74	DOOR CONTROL CIRCUITS(DSL)			
11					27	INSPECTION & EMG SIGNAL		75	DOOR CONTROL CIRCUITS (WITTUR)		118	LIMIT SWITCH DIAGRAM
12	POWER SUPPLY-220VAC, 24VDC				51	CAR CALL CIRCUITS (CN-1A, 1-16 STOP)		76	DOOR CONTROL CIRCUITS (FERMATO)			
13	BR&AN & ACTA				52	CAR CALL CIRCUITS (CN2A PCB 17-32 STOP)		77	DOOR CONTROL CIRCUITS (S8/K8, F9)			
14	W-TERMINAL BLOCK & TEMP. CONN.				53	CAR CALL CIRCUITS (CN3A PCB 33-48 STOP)						
15	P24,P24C,P24G REVIEW				30							
					54	CAR CALL CIRCUITS(HANDICAPPER)						
					31	GROUP CONNECTION(2CAR,GROUP)		80	GROUP CONNECTION (BLOCKS)			
					32	CAN TO CAN REPEATER(Multiplex) & CPI						
18	CPIK & CPIK CONNECTION				33	2-CAR CONNECTION WITH UTP						
19	GOV ENC.& CLW, CONTACT MONITOR											
20	SAFETY CIRCUIT 1 (KS)											
					35	OPTION (CAR DISP, SABBATH)		60	HOISTWAY WIRING			
21	SAFETY CIRCUIT 2 (KS)				36	OPTION(SEISMIC, SMOKE, VIP		61	HOISTWAY WIRING - P24G			
					37	2-STEP SPEED & NTSR		62	HALL CALL CIRCUITS(HPI)(AMB) TYPE			
					38	FIRE OPERATION		63	HALL CALL CIRCUITS(HN-2A)			
22	MONITORING & CONTACTORS (KS)				64	HALL CALL (LED & LCD DISP)					125	REAR COVER

TK-50G / TK-55G / TK-50Px (KS)

APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	FRONT COVER
공관석 2008.5.14		정무택 2008.5.14	정무택 2008.5.14	7KFEA016-001
REGISTERED				REL. MARK

CAD No. :

LIST OF COMPONENTS

RAIL MOUNT RELAY, CONTACTORS

NAME	DESCRIPTION	LOCATION	
	PCBs		
CPUA	MAIN CONTROL BOARD		
IOC	INPUT OUTPUT BOARD		
CTCR	CAN TO CAN REPEATER		
CTCM	CAN TO CAN MULTIPLEXER		
BCHB	BRAKE CONTROLLER		
RGPS	ROPE GRIPPER POWER SUPPLY		
MEMP	MEMORY BACK-UP POWER		
CPPI	CONTROL PANEL POSITION IND.		
CN	CAR NODE PCB		
NH	HALL NODE PCB		
CLW	CAR LOAD WEIGHER		
	IOC RELAYS		
MCC	MOTOR CONTACTOR CONTROL		
BRKC	BRAKE CONTROL		
SAFC	SAFETY CONTROL BY SOFTWARE		
SAFETSX	SAFETY CONTROL BY ETSD		
DZ1	DOOR ZONE 1		
DZ2	DOOR ZONE 2		
ZER	KOREA 2ND FIRE OPERATION RELAY		
CDCF	CAR DOOR CONTACT FRONT		
HDIF	HOISTWAY DOOR INTERLOCK FRONT		
CDCR	CAR DOOR CONTACT REAR		
HDIR	HOISTWAY DOOR INTERLOCK REAR		
	NO FUSE CIRCUIT BRAKERS		
NFB	BUILDING SIDE (3P)	8	-
JS	CONTROLLER SIDE (3P, 4P)	9	-
CB1	CONTROL POWER (2P)	12	6A
CB2	ROPE GRIPPER POWER (2P)	19	6A
CB3			
CB4	CAR LIGHT (2P)	9	6A
CB5	WELL LIGHT (2P)	11	6A
CB6	SAFETY CIRCUIT (1P)	13	1A
CB7	AC/BUILD.DLB.DOOR CIRCUIT (1P)	13	1A

DEVICES

[illegible][illegible]

[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	COMPONENTS LIST 1
윤권환 2008. 5. 18	장부택 2008. 5. 18	
REGISTERED		

7KFEA016-02

REV. MARK
①

CAD No.:

REV. MAR

LIST OF COMPONENTS

SWITCHES

NAME	DESCRIPTION	LOCATION
SLS	GOVERNOR SWITCH	MACHINE ROOM
MSTP	EMERGENCY STOP SW	MACHINE ROOM(MOTOR)
TKS	SAFETY SWITCH IN PIT	PIT
CP31,2,3	LIMIT SWITCH TO DETECT ROPE STRENGTH	PIT
BUF SW.	BUFFER SWITCH (CAR, COUNTER)	PIT
1LS	FINAL LIMIT SWITCH FOR UPPER SIDE	HOISTWAY
2LS	FINAL LIMIT SWITCH FOR LOWER SIDE	HOISTWAY
SOLS	GOVERNOR SW IN SAFETY GEAR	CAR
RSTP	EMERGENCY STOP SWITCH	CAR TOP
MLS	SWITCH FOR EMERGENCY EXIT	CAR TOP
CSTP	EMERGENCY STOP SWITCH	COP
INS	CAR TOP INSPECTION SWITCH	CAR TOP
EMR	EMERGENCY SWITCH	CONTROL PANEL
GLS	CAR GATE LIMIT SWITCH (FRONT)	CAR DOOR
RGLS	CAR GATE LIMIT SWITCH (REAR)	CAR DOOR
BSLM	BRAKE SWITCH MAIN	BRAKE
BSLE	BRAKE SWITCH EMERGENCY	BRAKE
LVU	LEVEL UP	LANDING SENSOR
LVD	LEVEL DOWN	LANDING SENSOR
DZ1	DOOR ZONE #1	LANDING SENSOR
DZ2	DOOR ZONE #2	LANDING SENSOR
ECNT	ETSD SENSOR COUNT	ETSD SENSOR
EDET	ETSD SENSOR DETECT	ETSD SENSOR
SDT	SLOW DOWN TOP	HOISTWAY
SDB	SLOW DOWN BOTTOM	HOISTWAY
DLT	DIRECTION LIMIT TOP	HOISTWAY
DLB	DIRECTION LIMIT BOTTOM	HOISTWAY
IRTL	INSPECTION RESCUE TOP LIMIT	HOISTWAY
SEIS	SEISMIC DETECT	MACHINE ROOM
FSM	FIRE SERVICE SENSOR - MAIN	BUILDING
FSX	FIRE SERVICE SENSOR - AUX	BUILDING
CBx	VIP OPERATION - (FLOOR)	HOISTWAY
TSDS	TOP SIDE DISTANCE SENSOR1/2-STEP	HOISTWAY
BSDS	BOTTOM SIDE DISTANCE SENSOR	HOISTWAY
FSH1	FIRE SERVICE - HALL - MAIN	HOISTWAY
FSCT	FIRE SERVICE - ON CAR	CAR
FSCTK	FIRE SERVICE - 2ND (KOREA)	CAR

[illegible][illegible]

[TK-50G][FLAT]

LIST OF COMPONENTS 2

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNER
공관청 2009. 5. 18	정무태 2009. 5. 18
REGISTERED	

7KFEA016-03

REV. MAR

CAD No.:

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

LIST OF COMPONENTS

SWITCHES

NAME	DESCRIPTION	LOCATION
SLS	GOVERNOR SWITCH	MACHINE ROOM
MSTP	EMERGENCY STOP SW	MACHINE ROOM(MOTOR)
TKS	SAFETY SWITCH IN PIT	PIT
CP31,2,3	LIMIT SWITCH TO DETECT ROPE STRENGTH	PIT
BUF SW.	BUFFER SWITCH (CAR, COUNTER)	PIT
1LS	FINAL LIMIT SWITCH FOR UPPER SIDE	HOISTWAY
2LS	FINAL LIMIT SWITCH FOR LOWER SIDE	HOISTWAY
SOLS	GOVERNOR SW IN SAFETY GEAR	CAR
RSTP	EMERGENCY STOP SWITCH	CAR TOP
MLS	SWITCH FOR EMERGENCY EXIT	CAR TOP
CSTP	EMERGENCY STOP SWITCH	COP
INS	CAR TOP INSPECTION SWITCH	CAR TOP
EMR	EMERGENCY SWITCH	CONTROL PANEL
GLS	CAR GATE LIMIT SWITCH (FRONT)	CAR DOOR
RGLS	CAR GATE LIMIT SWITCH (REAR)	CAR DOOR
BSLM	BRAKE SWITCH MAIN	BRAKE
BSLE	BRAKE SWITCH EMERGENCY	BRAKE
LVU	LEVEL UP	LANDING SENSOR
LVD	LEVEL DOWN	LANDING SENSOR
DZ1	DOOR ZONE #1	LANDING SENSOR
DZ2	DOOR ZONE #2	LANDING SENSOR
ECNT	ETSD SENSOR COUNT	ETSD SENSOR
EDET	ETSD SENSOR DETECT	ETSD SENSOR
SDT	SLOW DOWN TOP	HOISTWAY
SDB	SLOW DOWN BOTTOM	HOISTWAY
DLT	DIRECTION LIMIT TOP	HOISTWAY
DLB	DIRECTION LIMIT BOTTOM	HOISTWAY
IRTL	INSPECTION RESCUE TOP LIMIT	HOISTWAY
SEIS	SEISMIC DETECT	MACHINE ROOM
FSM	FIRE SERVICE SENSOR - MAIN	BUILDING
FSX	FIRE SERVICE SENSOR - AUX	BUILDING
CBx	VIP OPERATION - (FLOOR)	HOISTWAY
TSDS	TOP SIDE DISTANCE SENSOR1/2-STEP	HOISTWAY
BSDS	BOTTOM SIDE DISTANCE SENSOR	HOISTWAY
FSH1	FIRE SERVICE - HALL - MAIN	HOISTWAY
FSF1	FIRE SERVICE - ON CAR	CAR
FSF2K	FIRE SERVICE - 2ND (KOREA)	CAR

[illegible][illegible]

[TK-50G][FLAT]

LIST OF COMPONENTS 2

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNER
공관청 2009. 5. 18	정무태 2009. 5. 18
REGISTERED	

7KFEA016-03

REV. MAR

CAD No.:

= A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

TAC-50K SYSTEM WIRING DIAGRAM & NOTES

SYMBOLS

SYMBOL	DESCRIPTION	SAME SYMBOL
	RELAY/CONTACTOR CONTACT NORMALLY OPEN (A)	
	RELAY/CONTACTOR CONTACT NORMALLY CLOSED (B)	
	MECHANICAL ON/OFF SWITCH	
	MECHANICAL ON/OFF SWITCH	
	SAFETY SWITCH NORMAL OPEN	
	SAFETY SWITCH NORMAL CLOSED	
	NO FUSE CIRCUIT BREAKER	
	PUSH SWITCH NORMAL OPEN	
	PUSH SWITCH NORMAL CLOSED	
	GOVERNOR SWITCH NORMAL CLOSED	

SYMBOLS


SYMBOL	DESCRIPTION	SAME SYMBOL
	FUSE	
	LIGHT (LAMP)	
	INDICATOR LED OR INCANDESCENT	
	RELAY/CONTACTOR COIL	
	MAGNETIC/OPTICAL SENSOR	
	TRANSCIENT SUPPRESSOR	
	TRAVELING CABLE WIRE	
	HOISTWAY CABLE WIRE	
	LED	
	DIODE	
	MOTOR PTC TEMPERATURE SENSOR	

NAME	DESCRIPTION	SAME SYMBOL
	AC INPUT OPTOCOUPLER	
	DC INPUT ACTIVE LOW	

[TK-50G][FLAT]

△	
△	
△	

A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

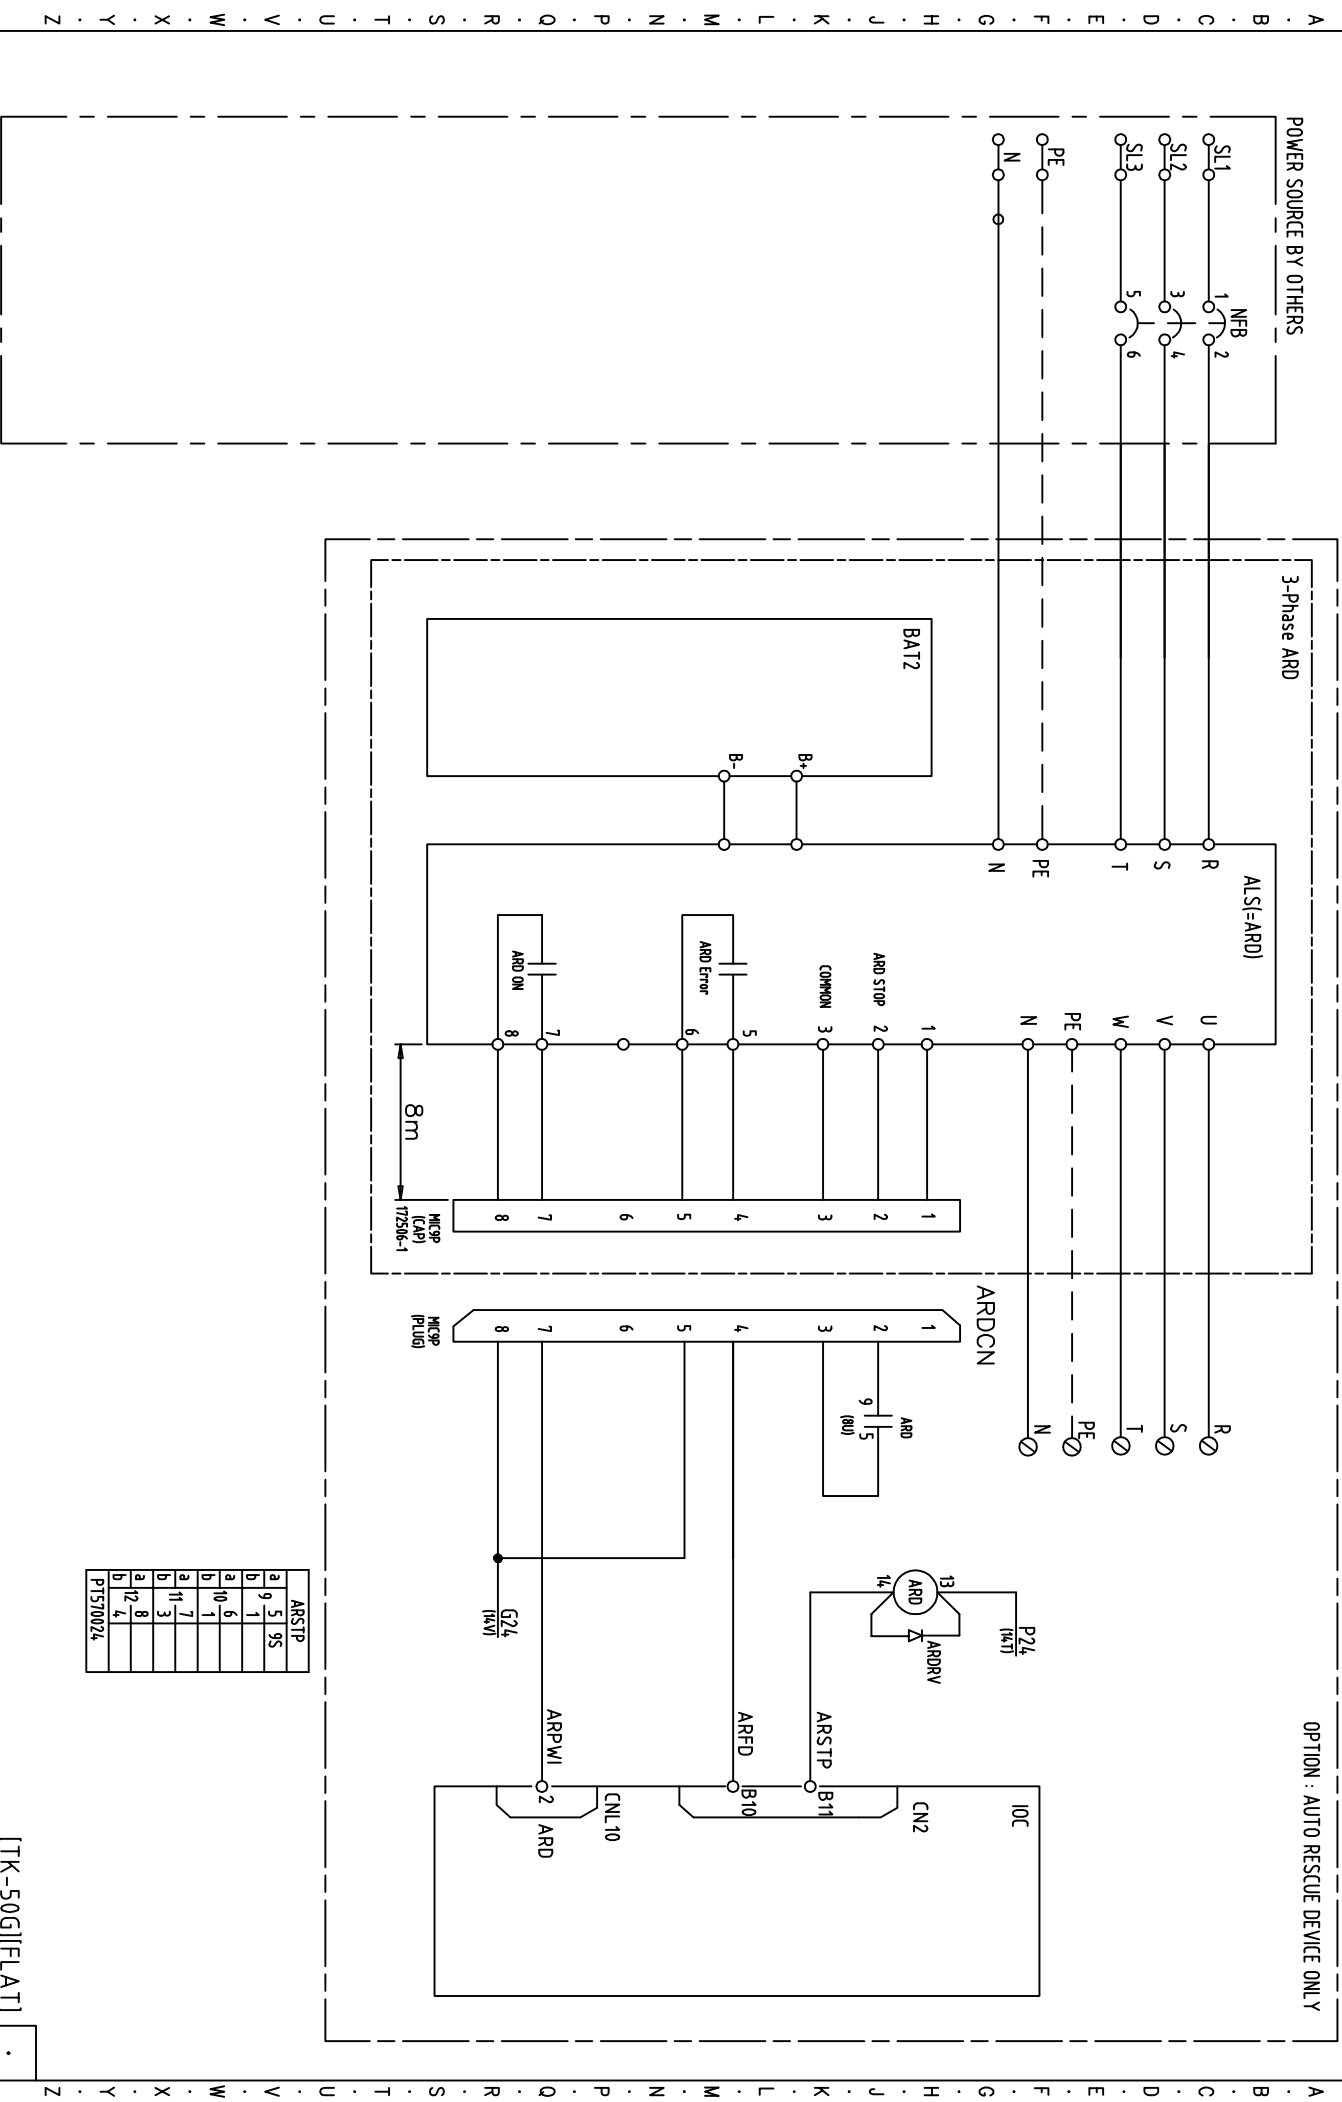

[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)



ARSTP		
a	5	95
b	1	
a	6	
b	1	
a	7	
b	3	
a	8	
b	4	

PT570024



OPTION : AUTO RESCUE DEVICE ONLY

POWER SOURCE (0)-ARD OPTION

7KF EA016-08

REV. MARK

CAD No.:

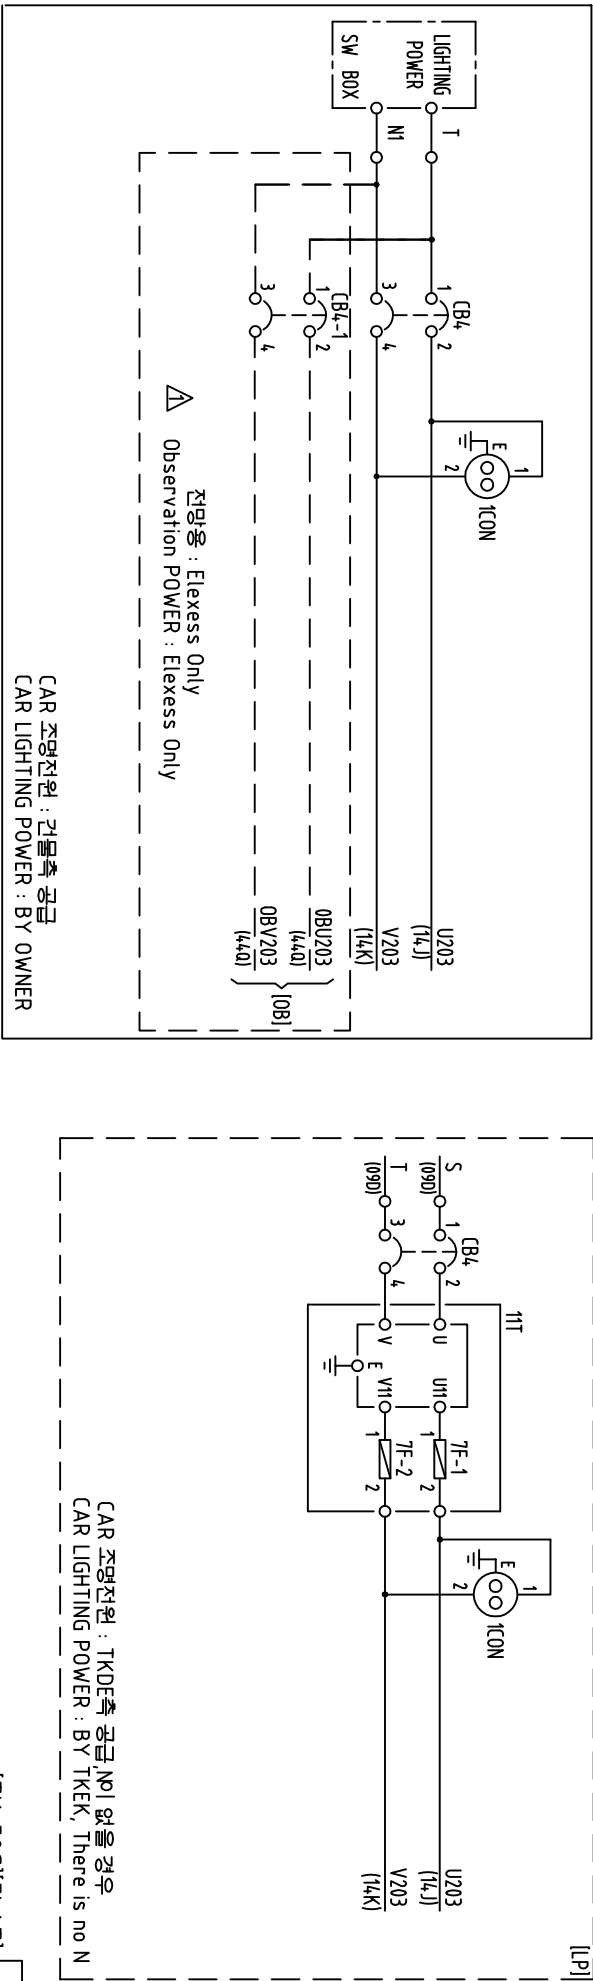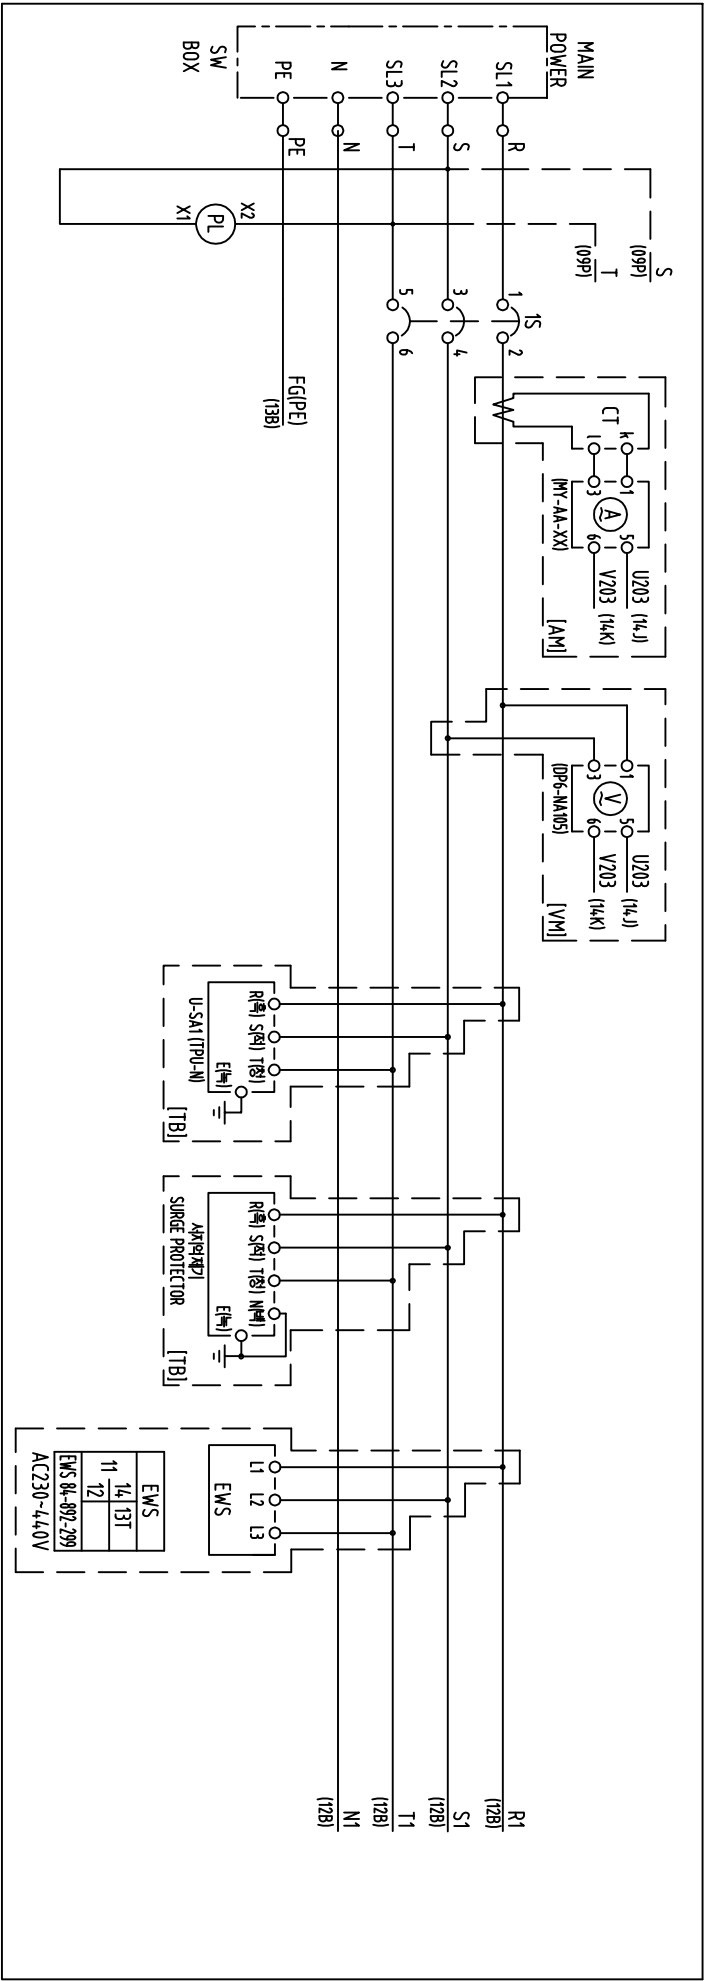

△	.	
△	1	Observation POWER circuit added; 30, Jun 09 MT, Chung

CAD No. :

ThyssenKrupp Elevator (Korea)




CHECKED BY	DESIGNED BY	POWER SOURCE CIRCUITS(1)
공관철	장무택	
2009.6.30	2009.6.30	
REGISTERED		7KFEA016-09
		REV. MARK
		①

[TK-50G][FLAT]

CAR 조명전원 : TKDE측 공급 N이 없을 경우
CAR LIGHTING POWER : BY TKEK, There is no N

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

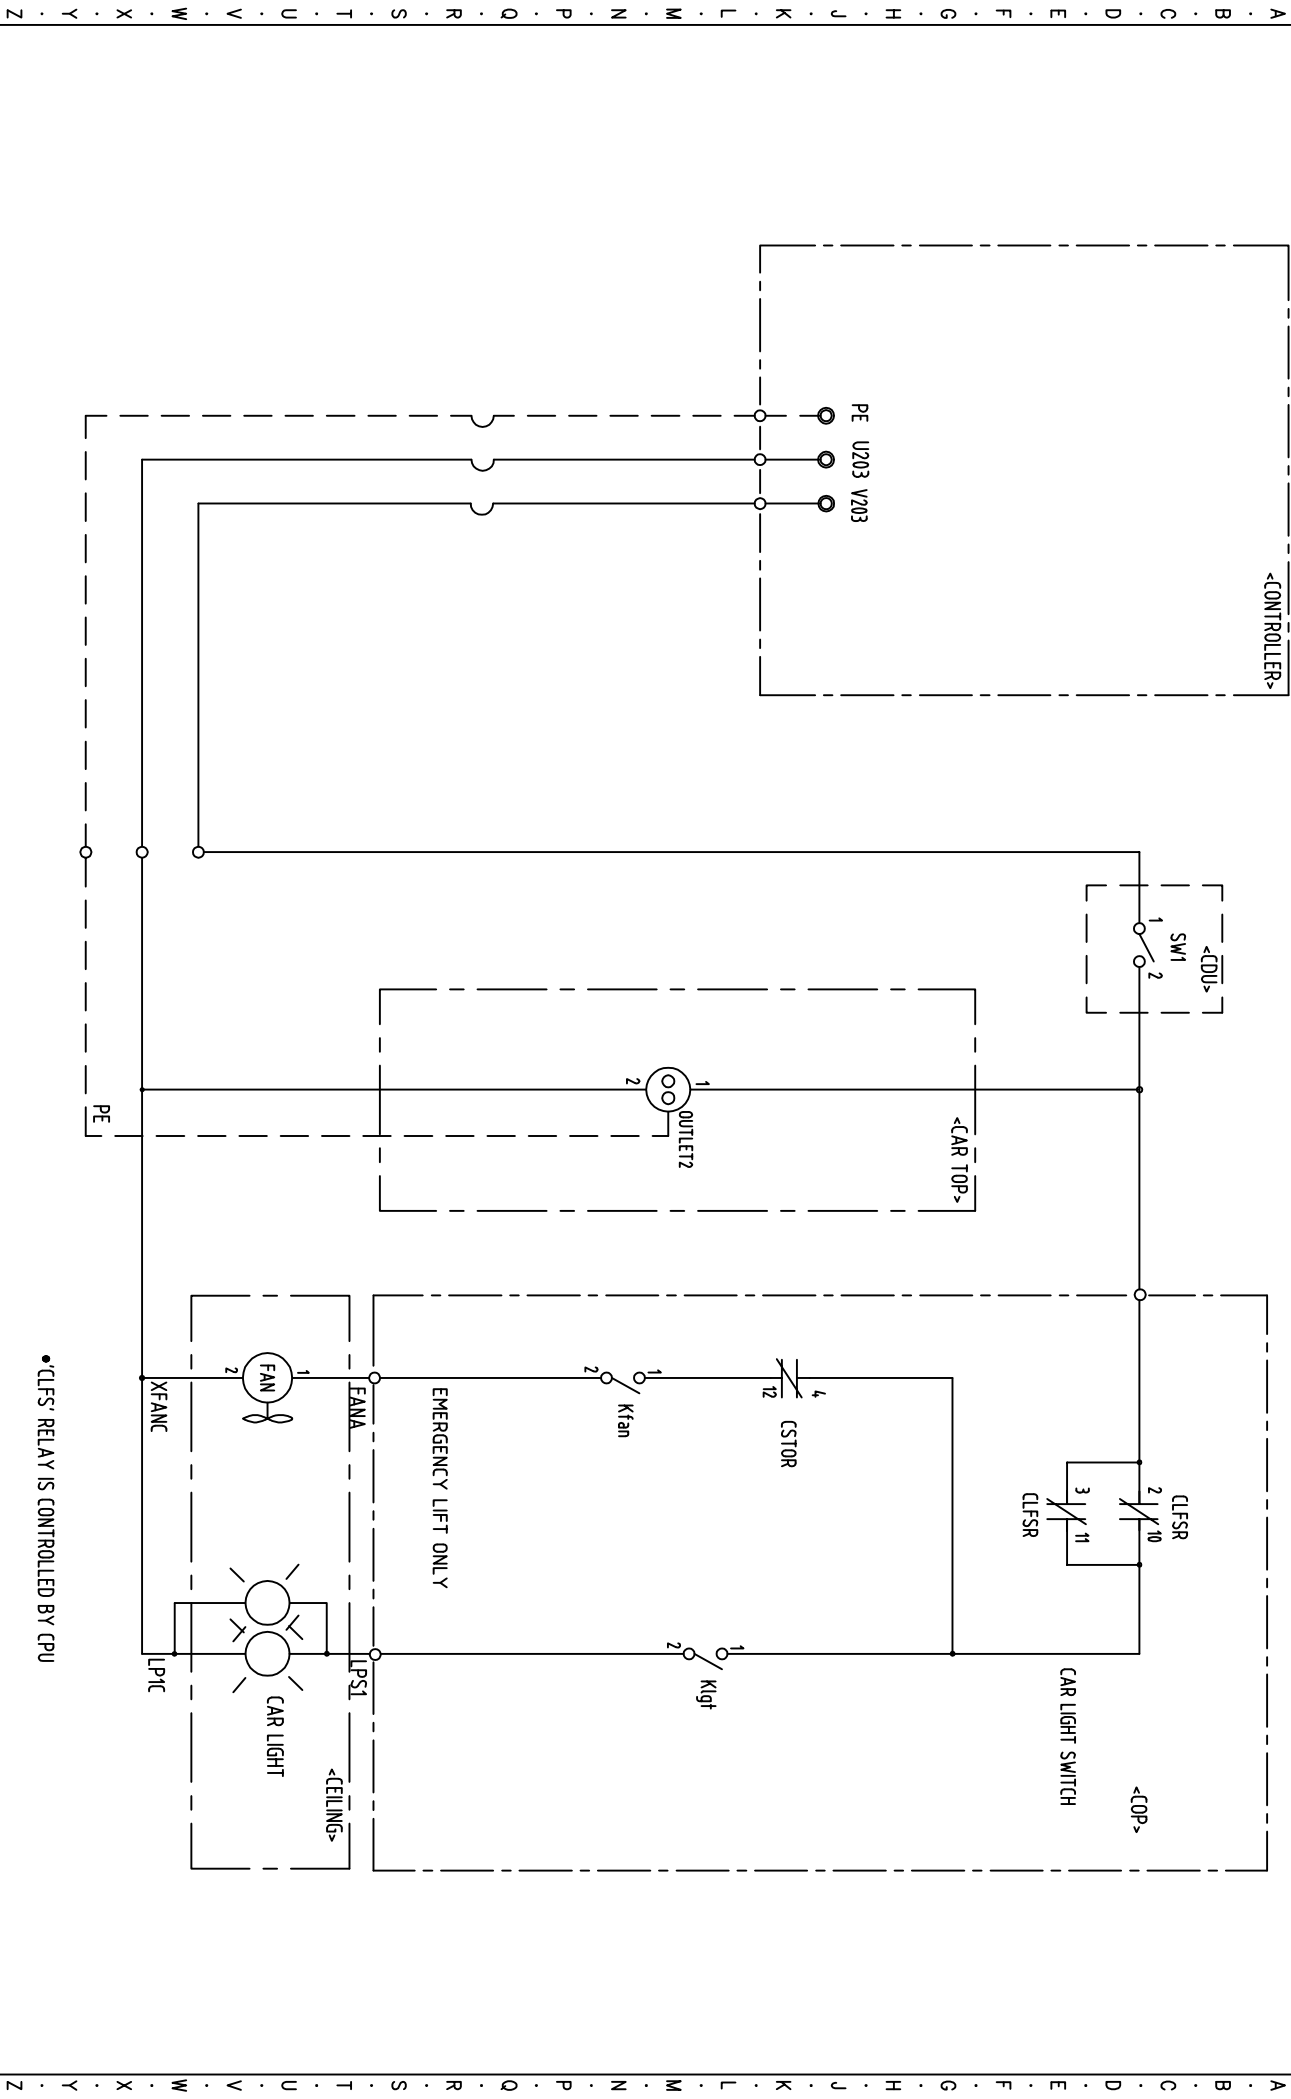

[TK-50G][FLAT]

△	
△	
△	
△	



CHECKED BY	DESIGNED BY	POWER & LIGHT FOR CAR
공민철	장두택	
2008.5.10	2008.5.10	
REGISTERED		

7KFEA016-10

REV. MARK



= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

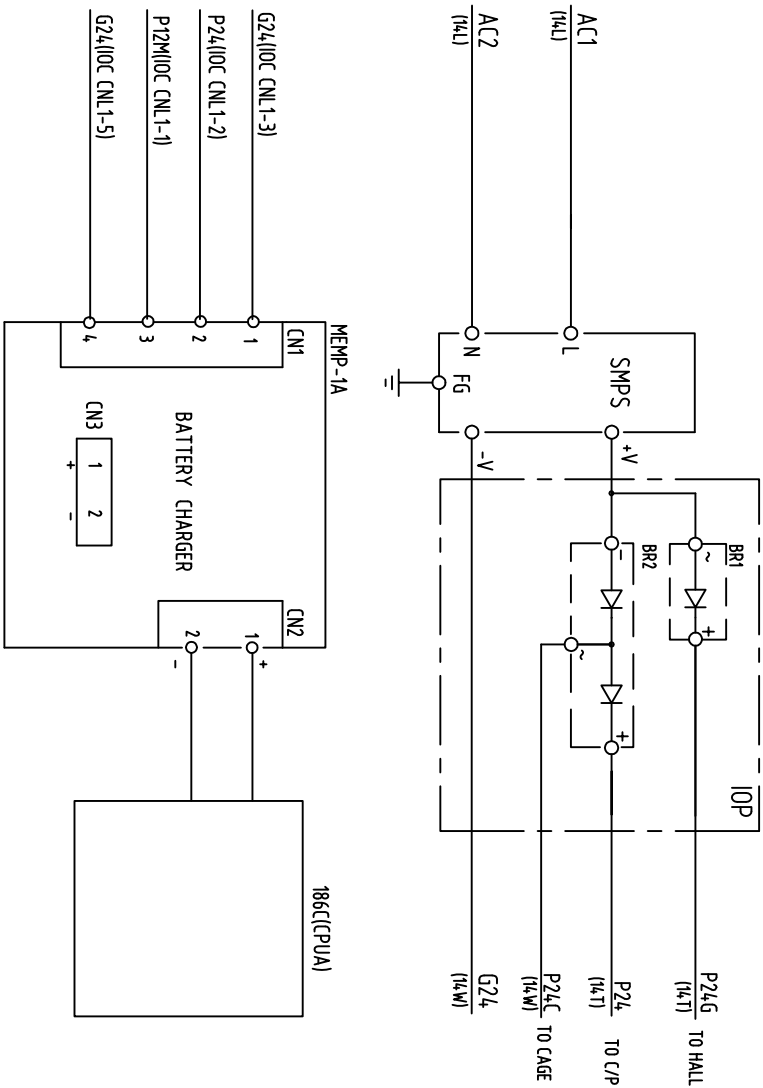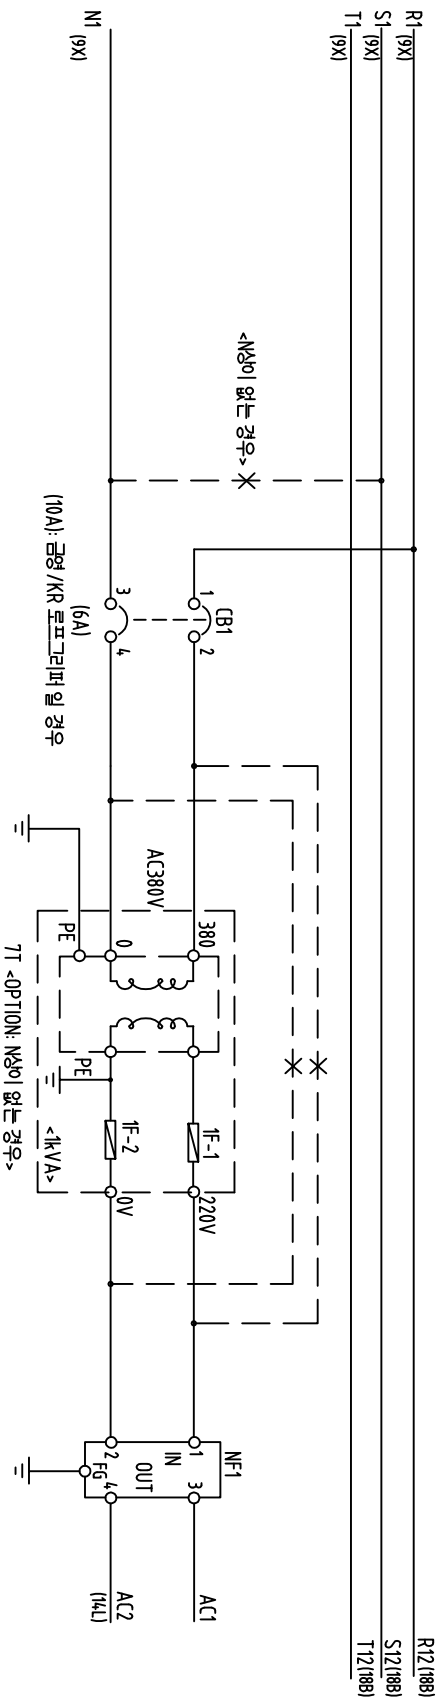

[TK-50G][FLAT]


ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	POWER SUPPLY - 220VAC, 24VDC
공관철	장무택	7KFEA016-12
2008.5.10	2008.5.10	REV. MARK
REGISTERED		

CAD No. :

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

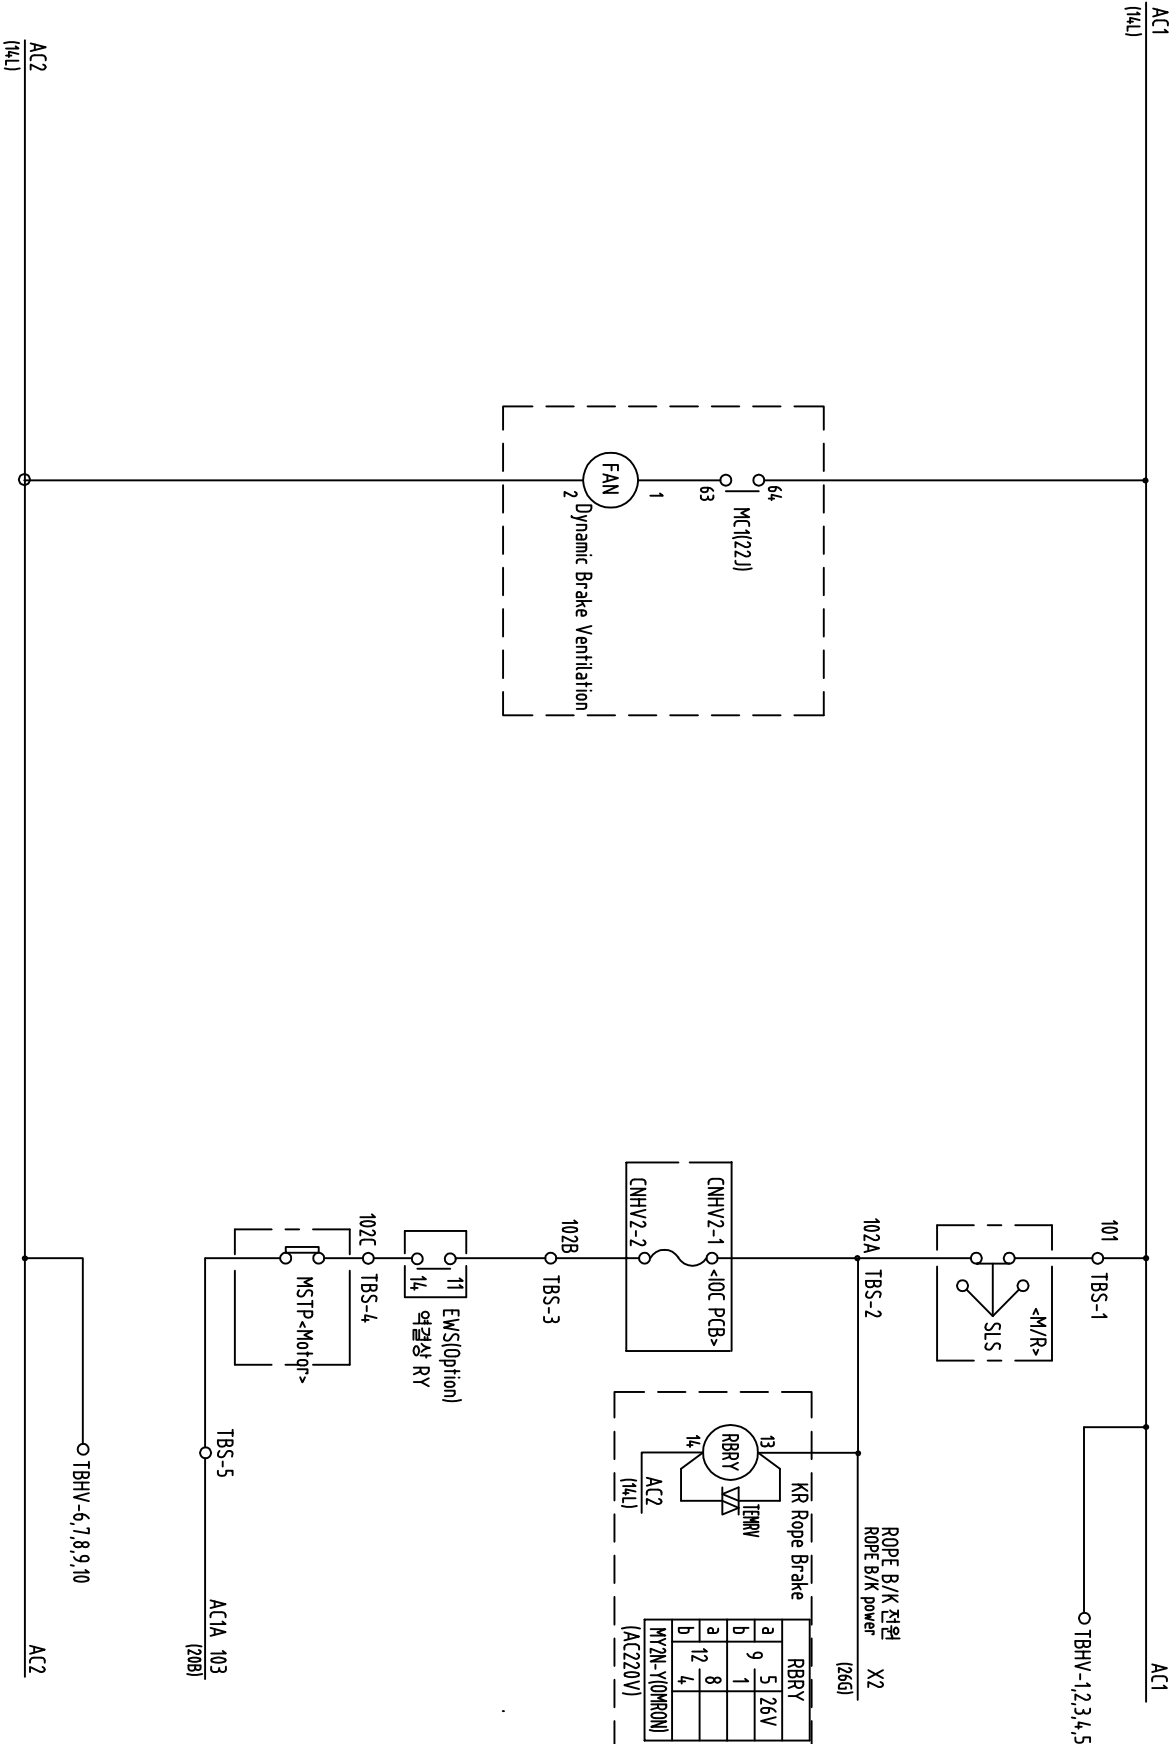

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

CAD No. :

ThyssenKrupp Elevator (Korea)



[TK-50G][FLAT]

CHECKED BY	DESIGNED BY	BRFAN & AC1A	REV. MARK
공관성	장무택		
2008. 8. 18	2008. 8. 18		
REGISTERED		7KFEA016-13	


TBS
101 1
102A 2
102B 3
102C 4
103 5
106 6
109 7
111 8
120 9
121 10
201 11
202 12

TBHV
AC1 1
AC1 2
AC1 3
AC1 4
AC1 5
AC2 6
AC2 7
AC2 8
AC2 9
AC2 10
U203 11
V203 12

TB4
BM1(+)-1
BM2- 2
3
4
AC1B 5
215 6
ACTB 7
225 8
204 9
BSLM10
BSLE 11
G24 12

TB3
BGM2 1
BGM4 2
P12X 3
P12 4
G12 5
1 6
2 7
K5 8
FSM 9
FALL 10
G24 11
G24 12

TBLV
P24G 1
P24G 2
P24C 3
P24C 4
P24 5
P24 6
G24 7
G24 8
G24 9
G24 10

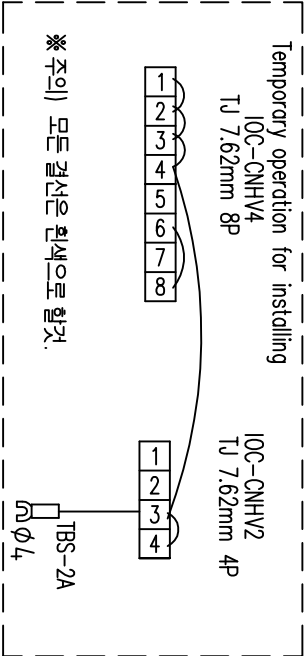

1
1


[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	W-Terminal Block(KS) & Temp conn. 7KFEA016-14
공관철	장무택	
2008.5.18	2008.5.18	
REGISTERED		REV. MARK

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

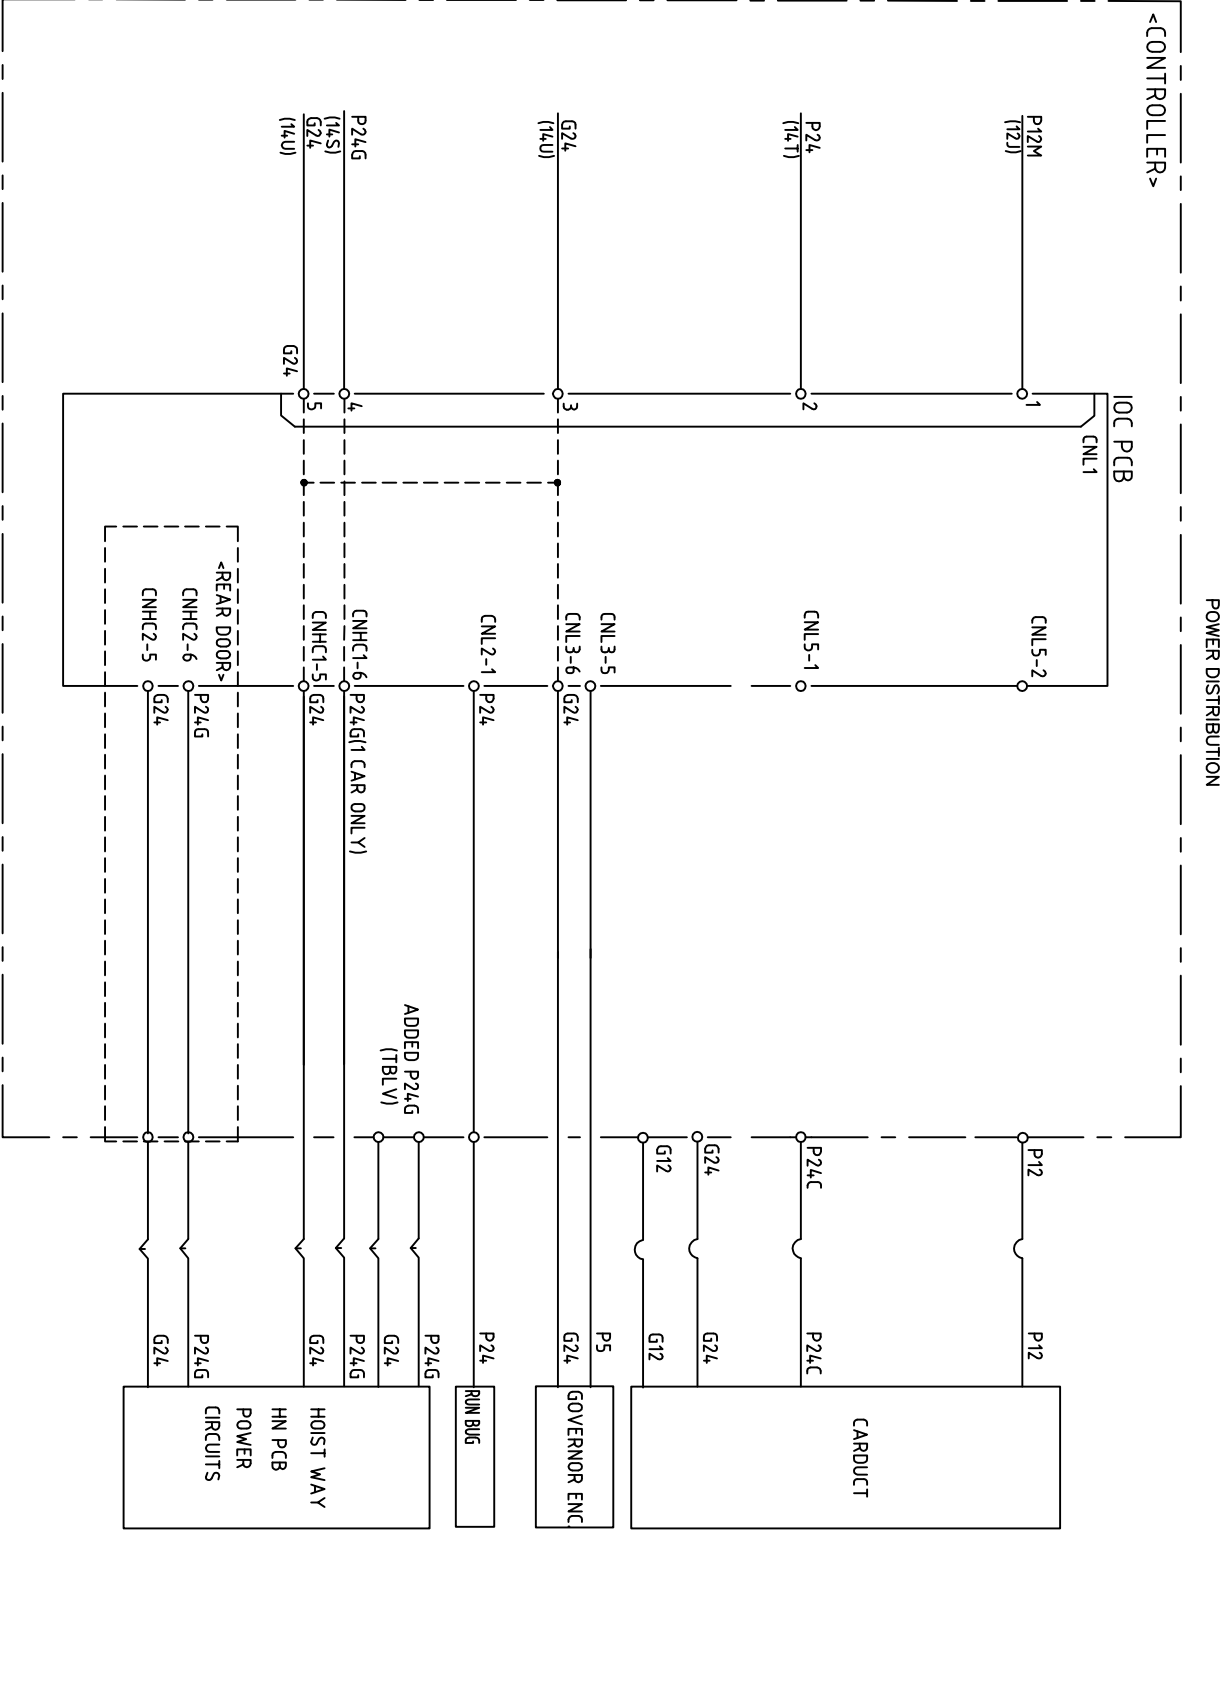


[NOTE] BRIDGE BETWEEN DC GND AND PE.
DC GND 와 PE가 연결할 것.

[TK-50G][FLAT]

CHECKED BY	DESIGEND BY	P24,P24C,P24G REVIEW	REV. MARK
공관철 2008.5.10	장무택 2008.5.10		
REGISTERED		7KFEA016-15	



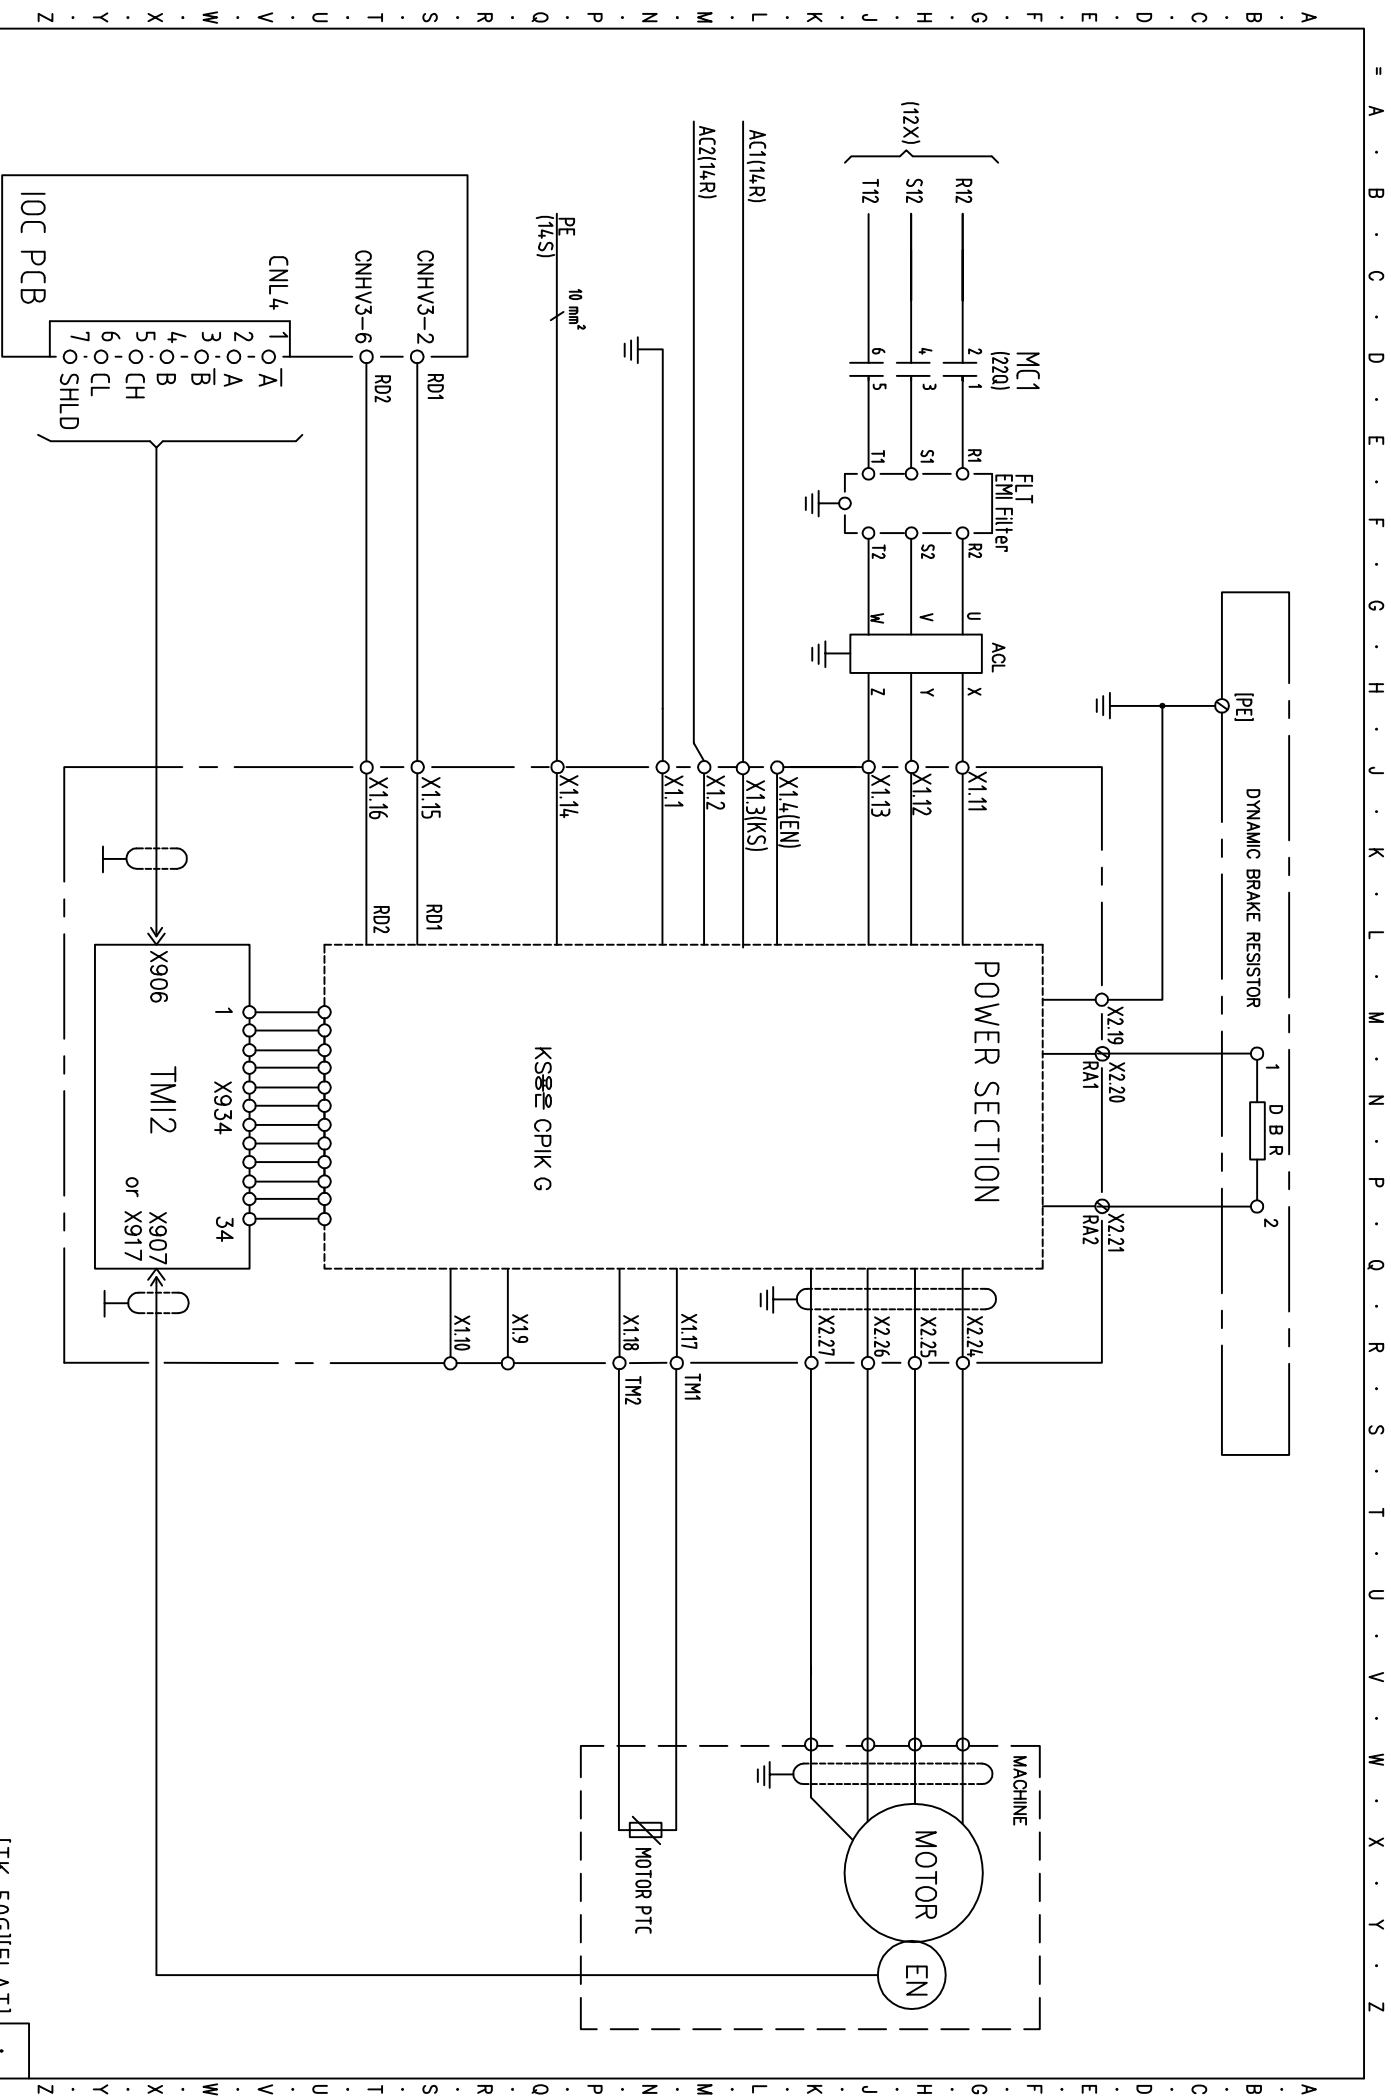

[TK-50G][FLAT]



ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	CPK & CPK Connection	7KFEA016-18	REV MARK
윤관철 2008. 5. 18	정무택 2008. 5. 18			

CAD No.:

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

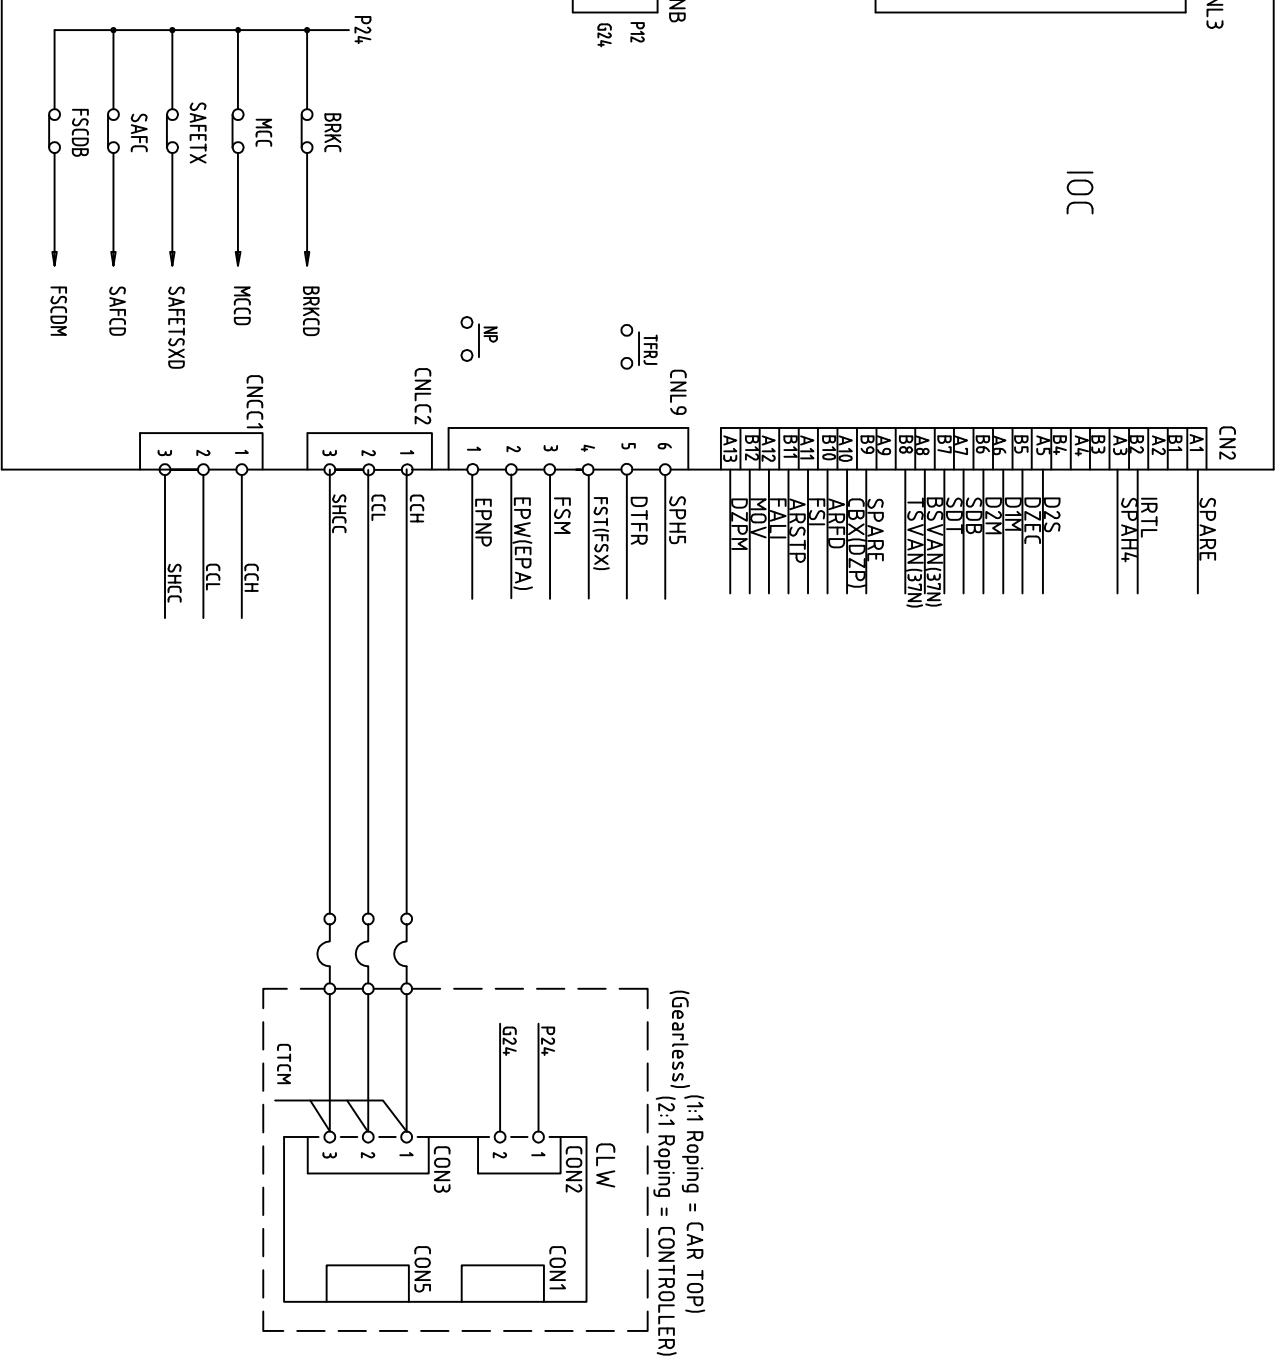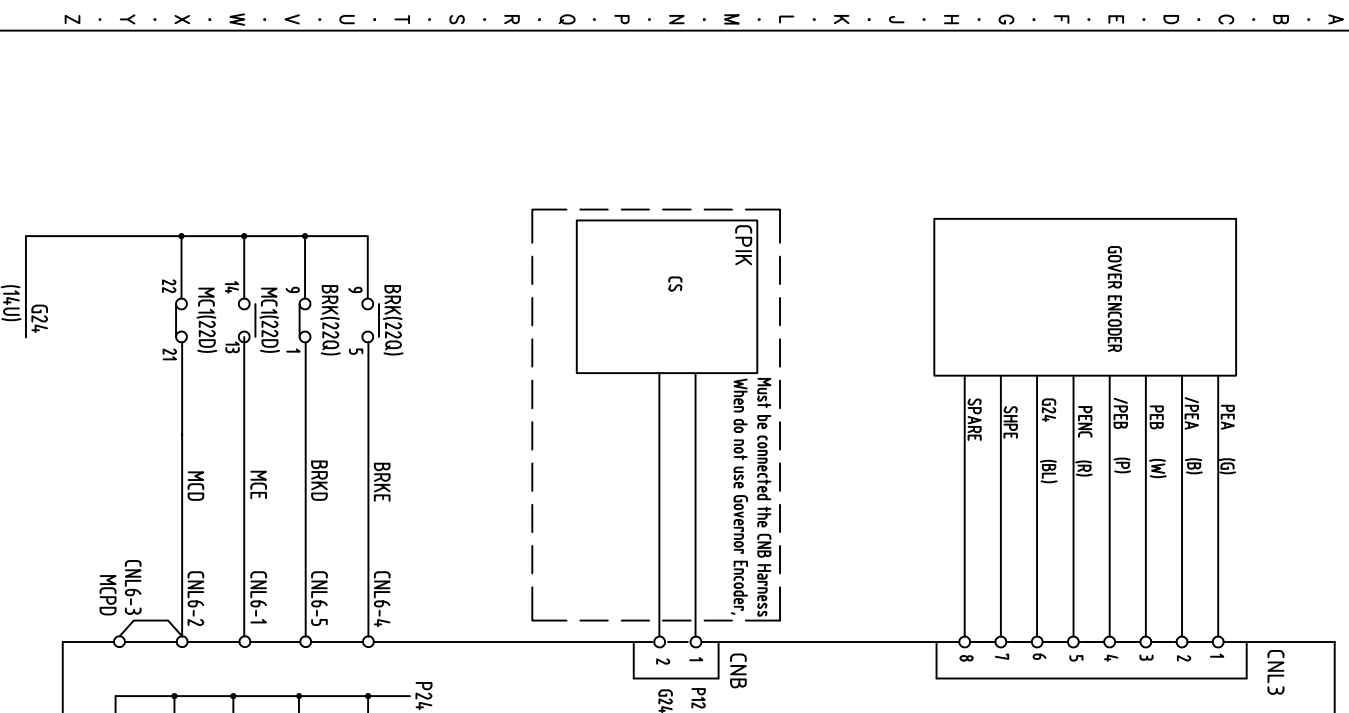


[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	GOV. ENG. & CLW, CONTACT MONITOR
윤관철 2008. 5. 18	장무택 2008. 5. 18	
REGISTERED	7KFEA016-19	
	RECEIVED	

CAD No.:

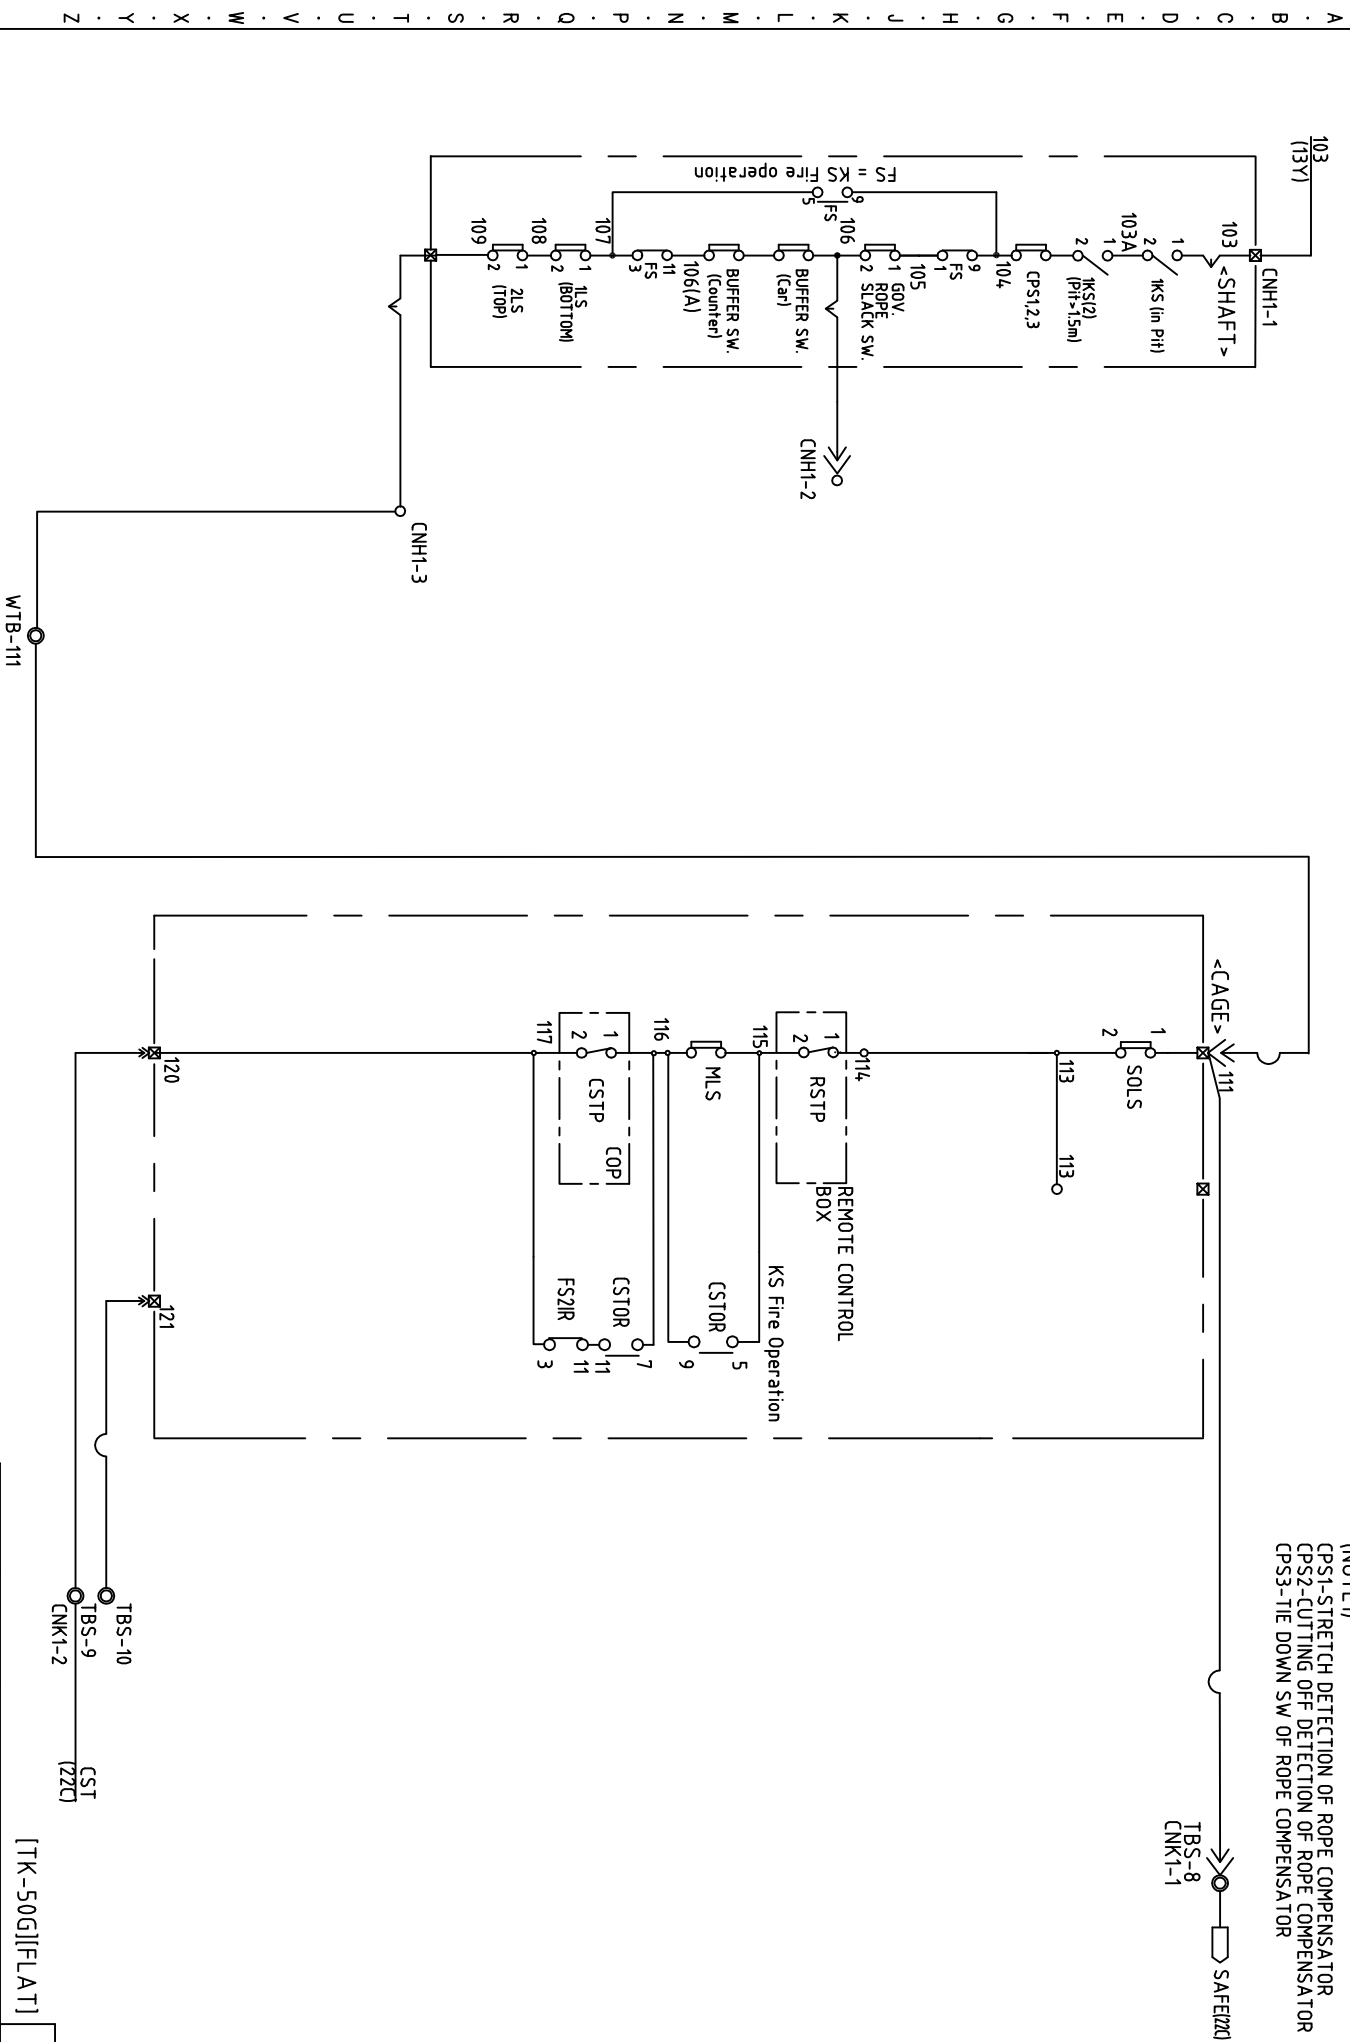

(NOTE1)
CPS1-STRETCH DETECTION OF ROPE COMPENSATOR
CPS2-CUTTING OFF DETECTION OF ROPE COMPENSATOR
CPS3-TIE DOWN SW OF ROPE COMPENSATOR

[TK-50G][FLAT]


CHECKED BY	DESIGNED BY	SAFETY CIRCUIT(1) KS
윤관철 2000. 5. 10	정무택 2000. 5. 10	
REGISTERED	7KFEA016-20	
	REL. MARK	

ThyssenKrupp Elevator (Korea)



CAD No.:

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

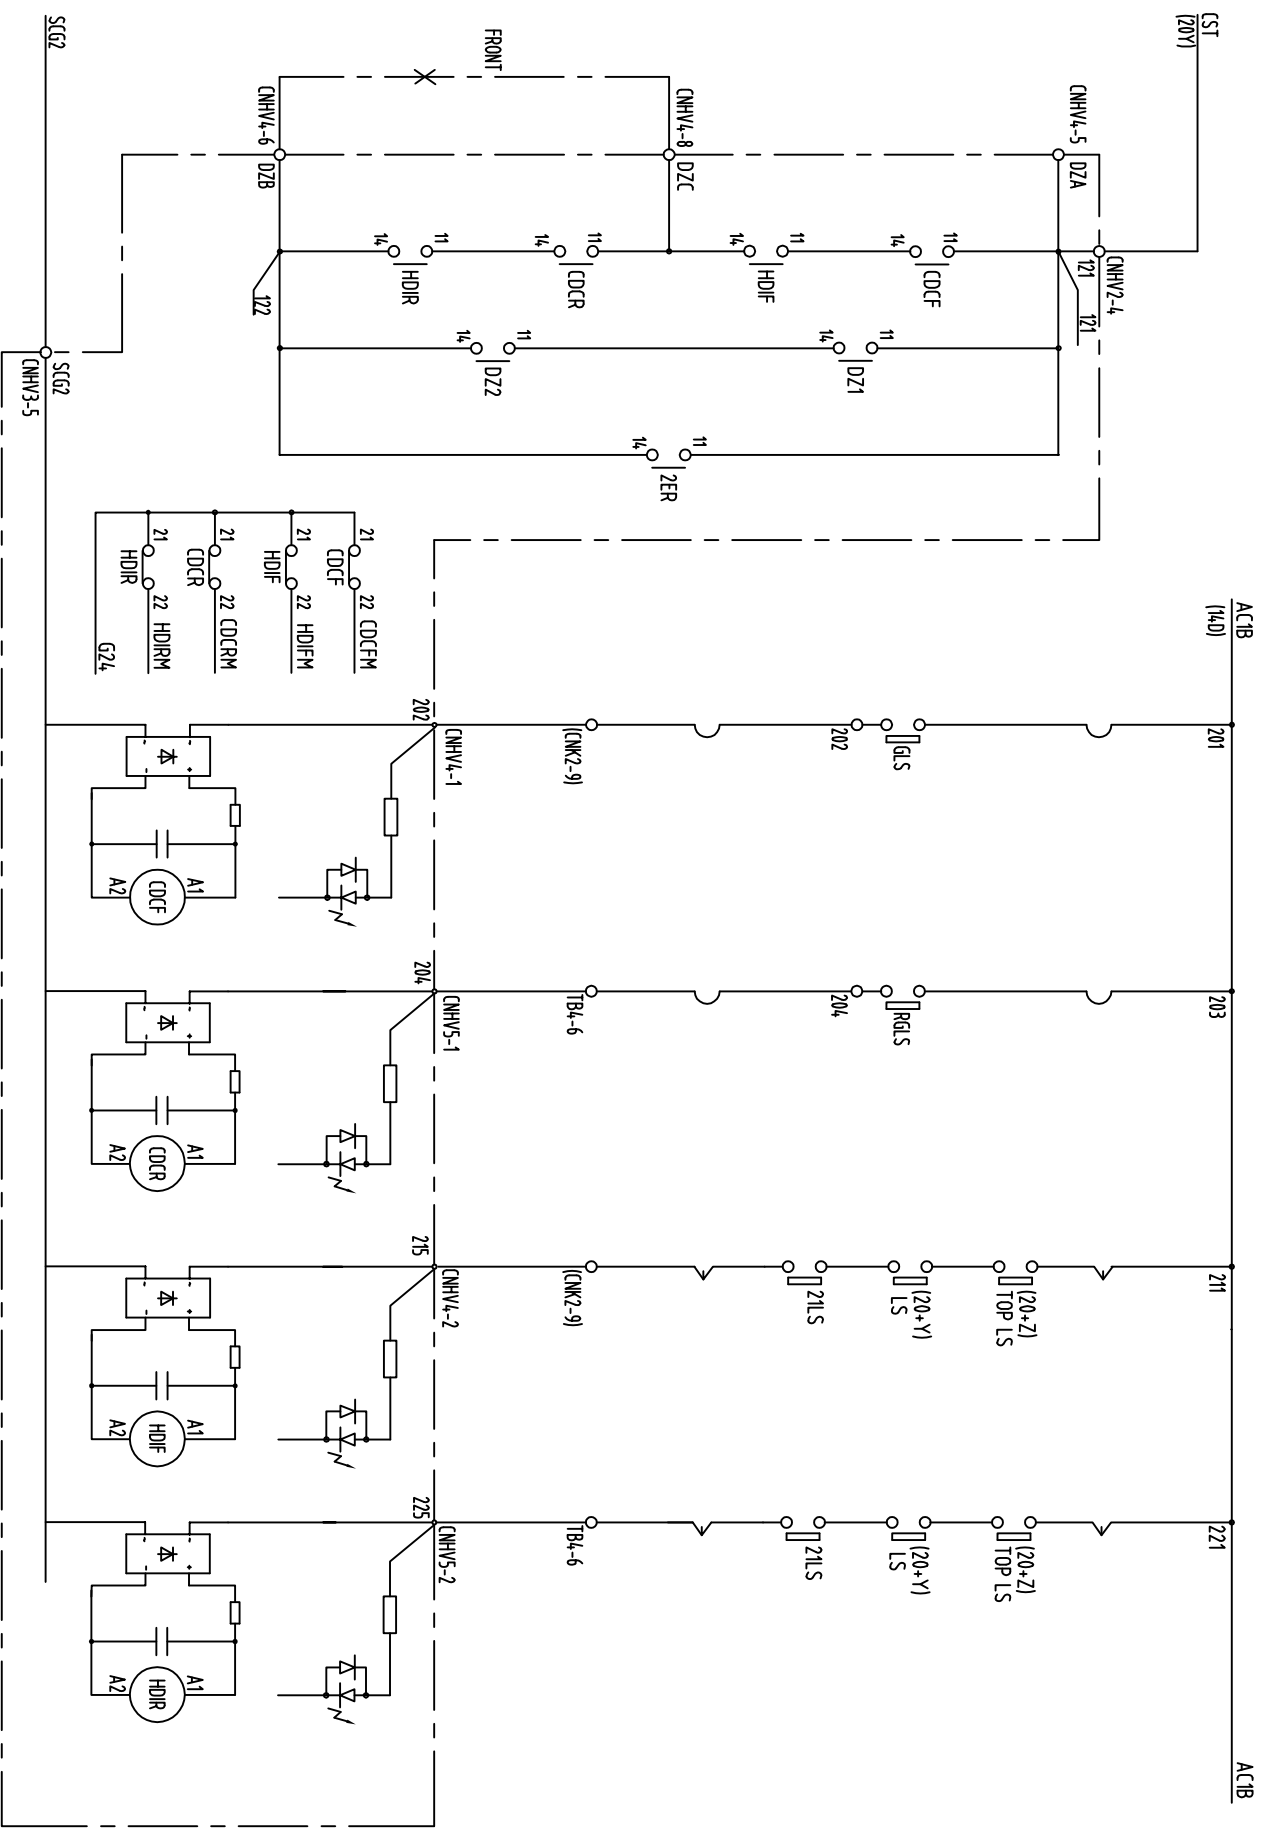

[TK-50G][FLAT]


ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	SAFETY CIRCUIT 2 (KS)
공관철	정두택	
2008.5.10	2008.5.10	
REGISTERED		
		7KFEA016-21
		REV. MARK

CAD No. :

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

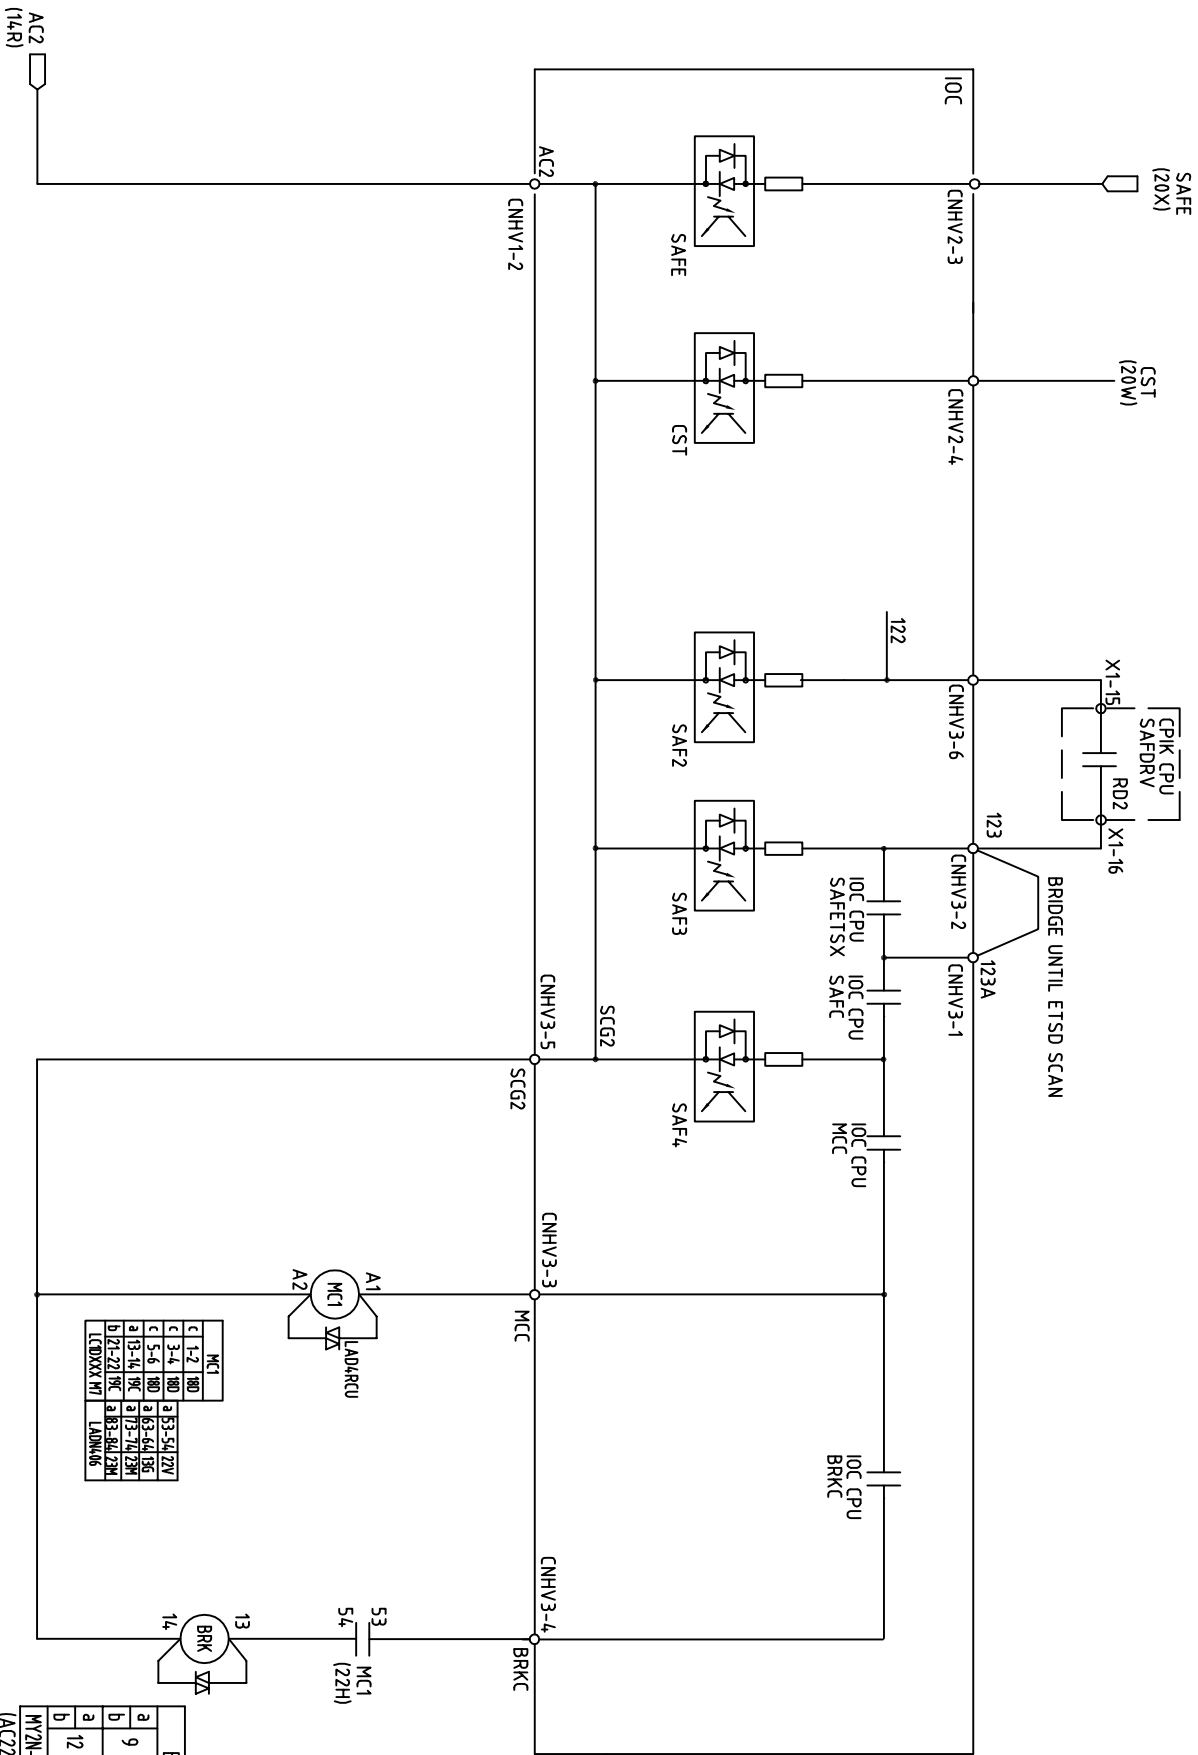

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

✓	
✓	
✓	
✓	

CAD No. :

ThyssenKrupp Elevator (Korea)



[TK-50G][FLAT]

A

CHECKED BY	DESIGNED BY
윤관철	장무택
2008.5.10	2008.5.10
REGISTERED	

MONITORING & CONTACTORS (KS)	7KFEA016-22	REV. MARK
------------------------------	-------------	-----------

T/M SERIES	B/K CONT.	I/O SPEC.	WIRING	Mechanical BK Contact
TM 40E	BCHB/BS1T	INPUT VOL. : AC110V OUTPUT VOL. : DC52V	SINGLE COIL	X
TW SERIES	BCHB	INPUT VOL. : AC220V OUTPUT VOL. : DC110V	SERIES	X
BW SERIES	BCHB/BS1T	INPUT VOL. : AC115V OUTPUT VOL. : DC52V	PARALLEL	X
NINGB0 Y SERIES	BCHB	INPUT VOL. : AC220V OUTPUT VOL. : DC110V	PARALLEL	0
HS SERIES	BCHB	INPUT VOL. : AC220V OUTPUT VOL. : DC110V	SERIES	X
WTF 250(SOP,SSL)	BCHB	INPUT VOL. : AC220V OUTPUT VOL. : DC110V	PARALLEL	0
PKS280(SOP3)	BCHB	INPUT VOL. : AC220V OUTPUT VOL. : DC110V	SERIES	0
DANANingbo Xinda	BCHB	INPUT VOL. : AC220V OUTPUT VOL. : DC110V	PARALLEL	0
MRIhaivoitec	BCHB	INPUT VOL. : AC220V OUTPUT VOL. : DC110V	SERIES	0

NOTE1) Out put voltage is holding voltage.

NOTE2) If there is Mechanical Brake Contact, then don't use Electrical signal.


Only use Mechanical contact for BSLM, BSLE

기계적 브레이크 점접이 있다면, 그신호를 BSLM, BSLE에 연결하고,
BRC에 의한 전기적 신호는 이용하지 않는다.

NOTE3) Apply BS1T with BCHB for DC50V grade Single Brake

Input : AC 115V

Output: DC 52V

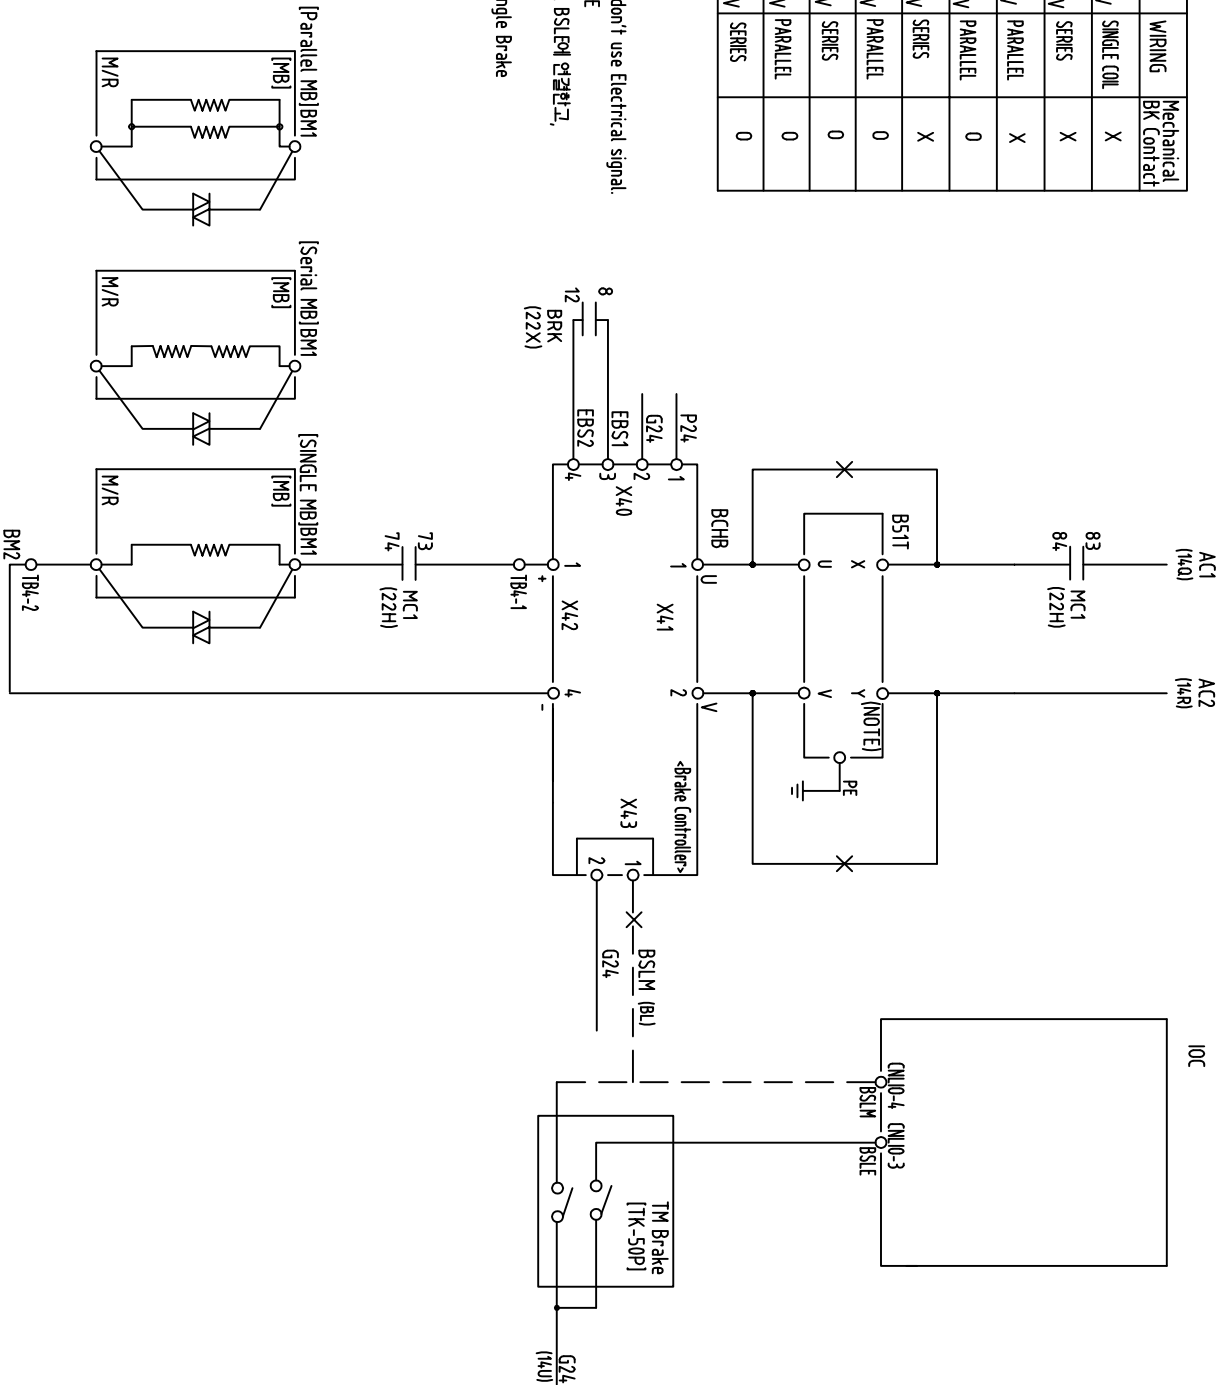

[TK-50G][FLAT]




ThyssenKrupp Elevator (Korea)

CHECKED BY	DESIGNED BY	BRAKE CONTROL CIRCUIT
윤관철	장무택	
2008.5.10	2008.5.10	
REGISTERED		

7KFEA016-23

REV. MARK

CAD No. :

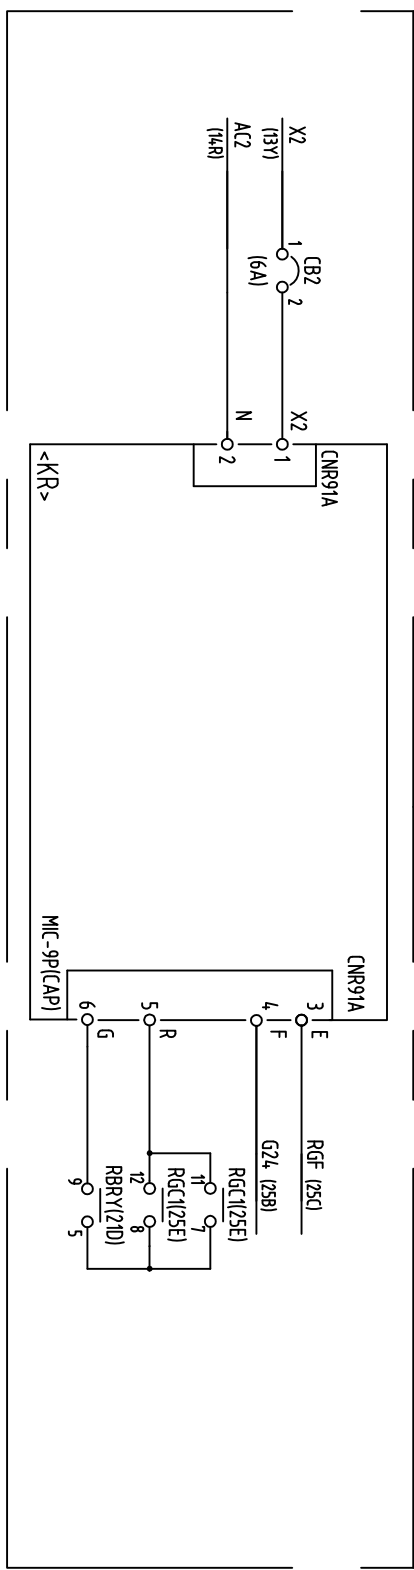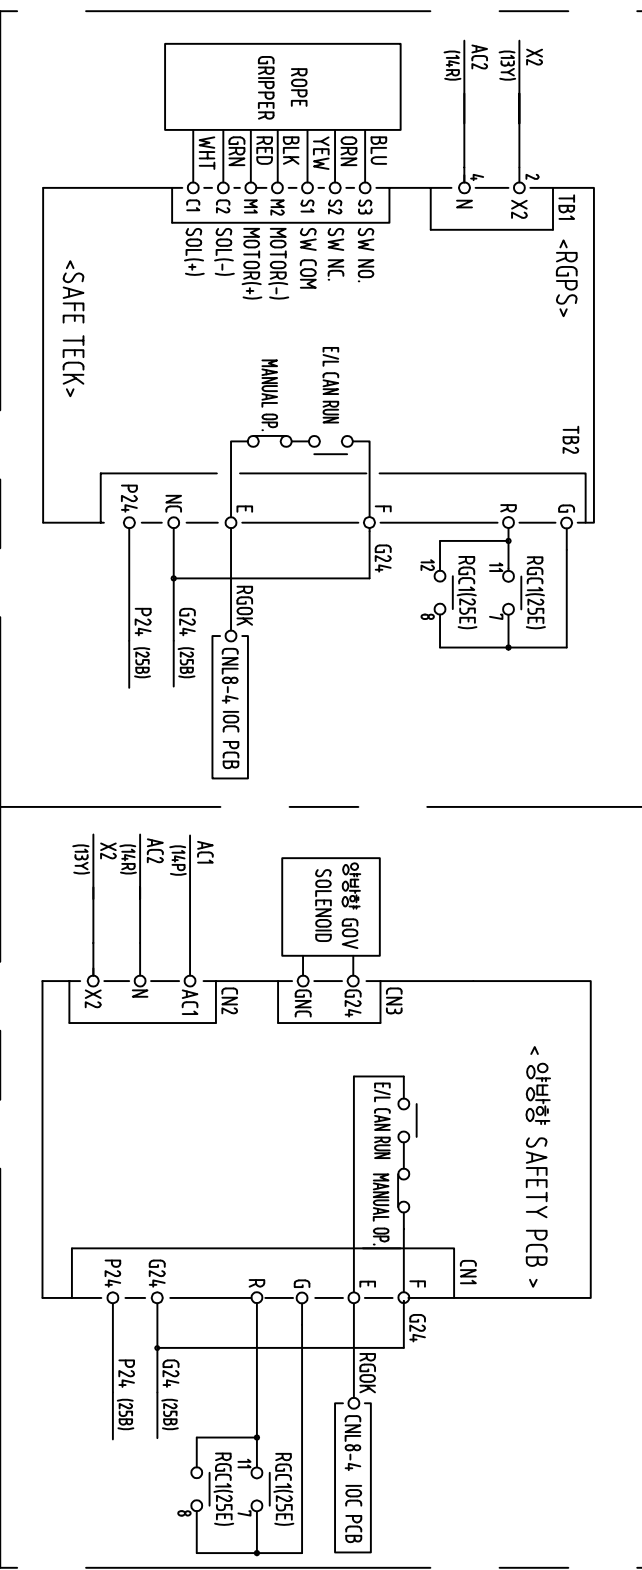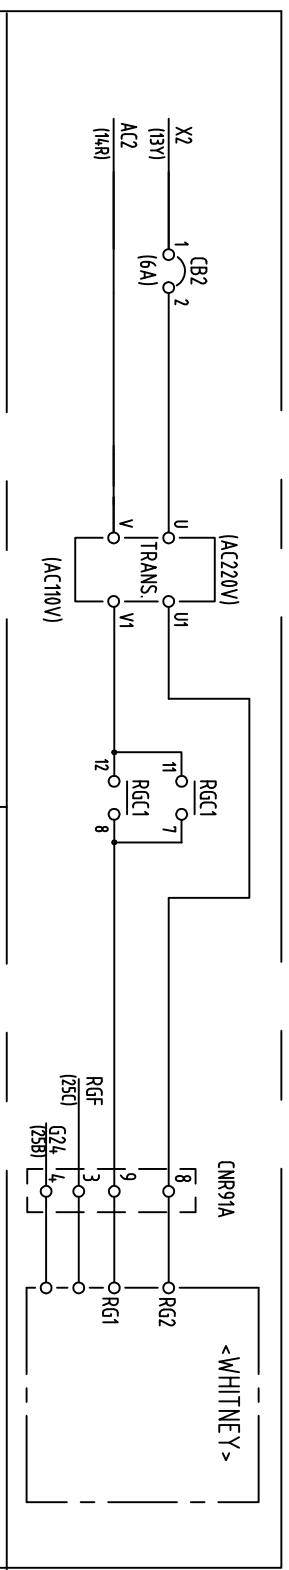

PZL
(t,t)
IOT CNL8 RGM
GZL
(t,u)
DC24V
RGT1
a 9
b 1 25C
a —
b —
a 11
b 7 25Q,U
a 8 25Q,U
b 12
PTJ0024

(NN-91A-3)

3. 서명인사

DC24V

RG2	
a	9
b	1
a	—
b	—
a	7 25D
b	11
a	8
b	12

PT570024

X2	(B2)
(13Y)	1
AC2	(6A)
(14R)	

A blank coordinate plane with a horizontal x-axis and a vertical y-axis intersecting at the origin. The axes are represented by thin black lines.

5 # 단, Elxss-|| & Elxjet-|| 기종에는 적용안함 #

ThyssenKrupp Elevator (Korea)



[TK-50G][FLAT] | A

A

ROPE BRAKE CIRCUIT

CHECKED BY	DESIGEND BY
------------	-------------

DESIGEND BY

2009.5.18	2009.5.18
REGISTERED	




2009.5.18

7KFEA016-26

REV. MARTIN

CAD No.:

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

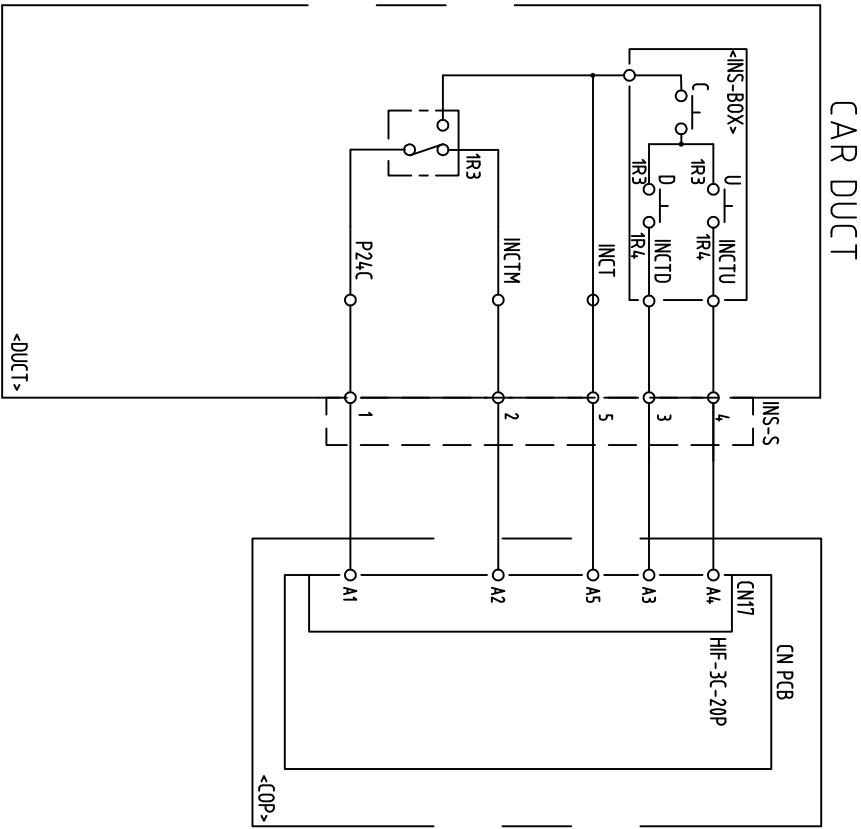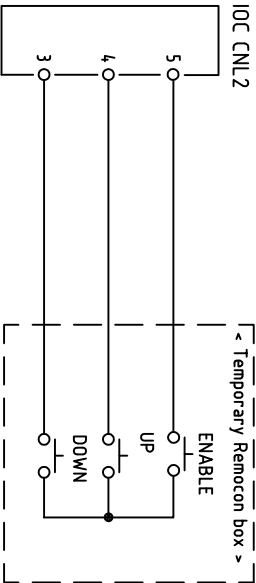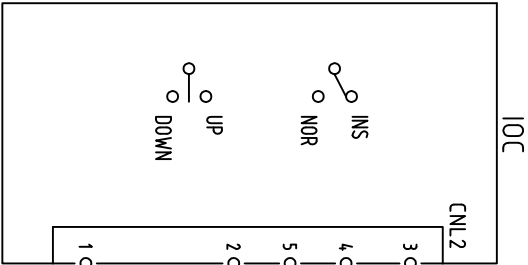

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

△	△
△	△
△	△
△	△

CHECKED BY	DESIGNED BY	INSPECTION & EMG SIGNAL
문관철	장무택	
2008.5.10	2008.5.10	
REGISTERED		


[TK-50G][FLAT]

7KFEA016-27

REV. MARK


CAD No. :

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

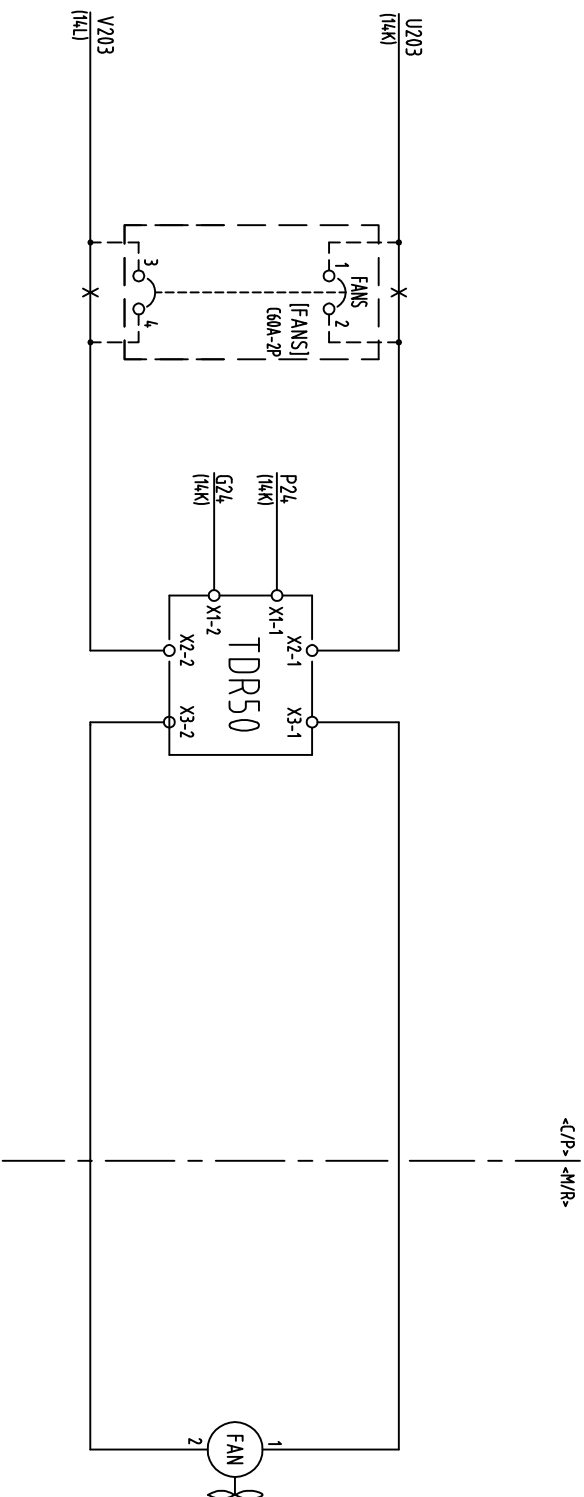

<C/P> <M/R>

NOTE) 온도 감지기 (Detector of temperature) : RTL-50



• 전원 투입되면 (COM, FAN) 끊어지고; LED ON

(If power input, COM is break off FAN (LED ON))

설정온도에 도달하면 (COM, FAN) 연결된다; LED OFF
(If set temperature is reached, COM is connected FAN (LED OFF))


ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	MACHINE ROOM FAN CONTROL	
공관철	장무택	7KFEA016-28	
2008.5.10	2008.5.10	REV. MARK	
REGISTERED			

[TK-50G][FLAT]

CAD No. :

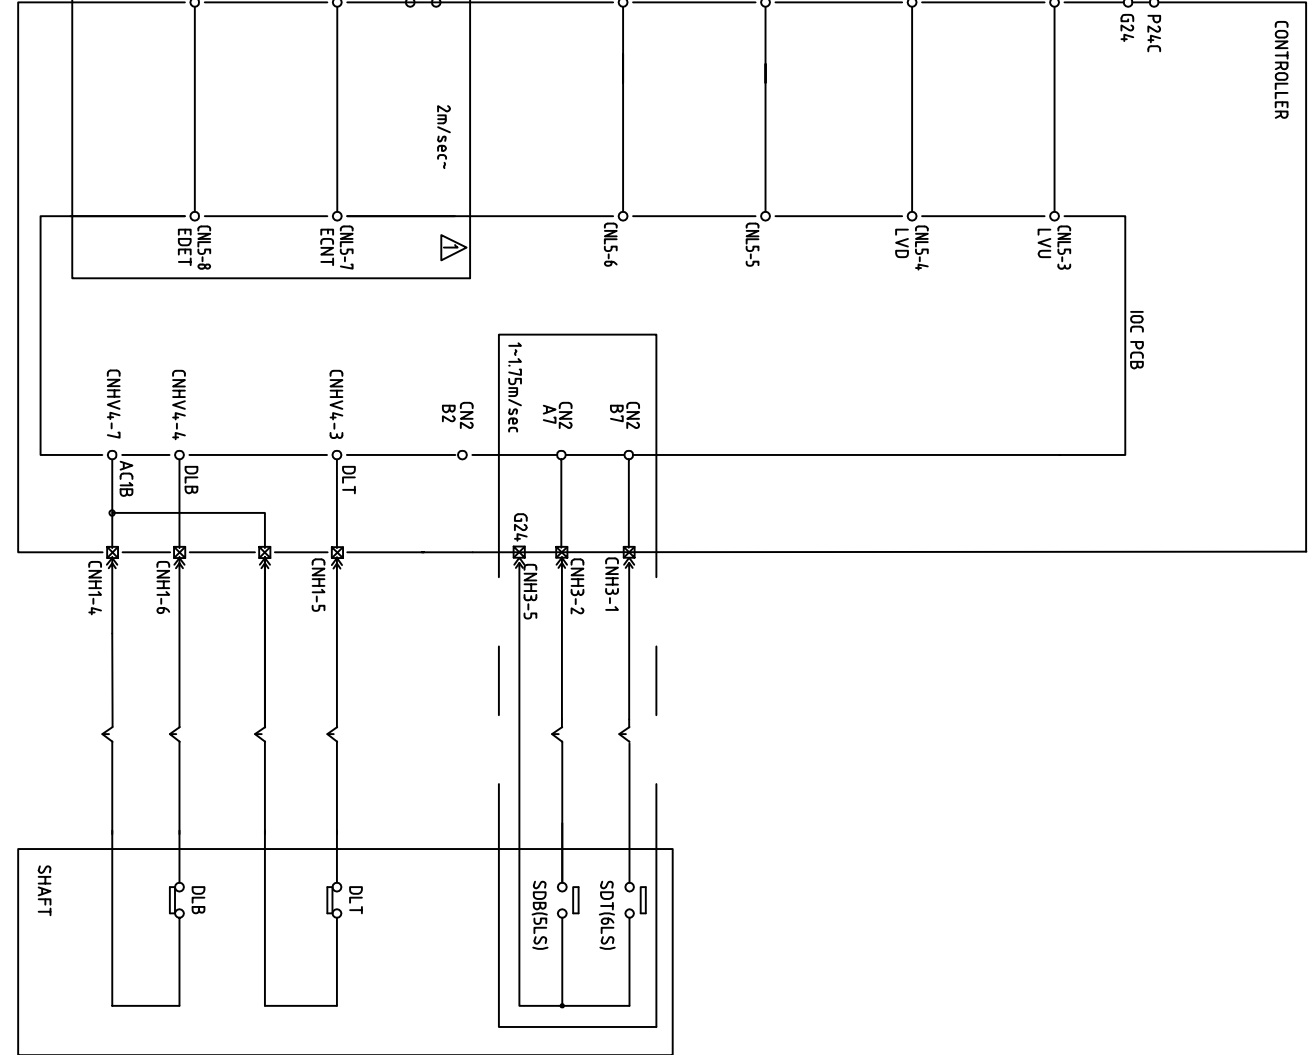

[TK-50G][FLAT]

✓	
✓	
✓	
✓	1 ECNT/EDET circuit added: 01 July 09 MT. Chung


CAD No.:

CHECKED BY	DESIGNED BY	LANDING, ETSD, SHAFT SENSOR SIGNAL
윤건환	정부택	
2008. 7. 04	2008. 7. 04	
REGISTERED	7KFEA016-30	
		REMARK ①

7KFEA016-30

REV. MARK
①

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

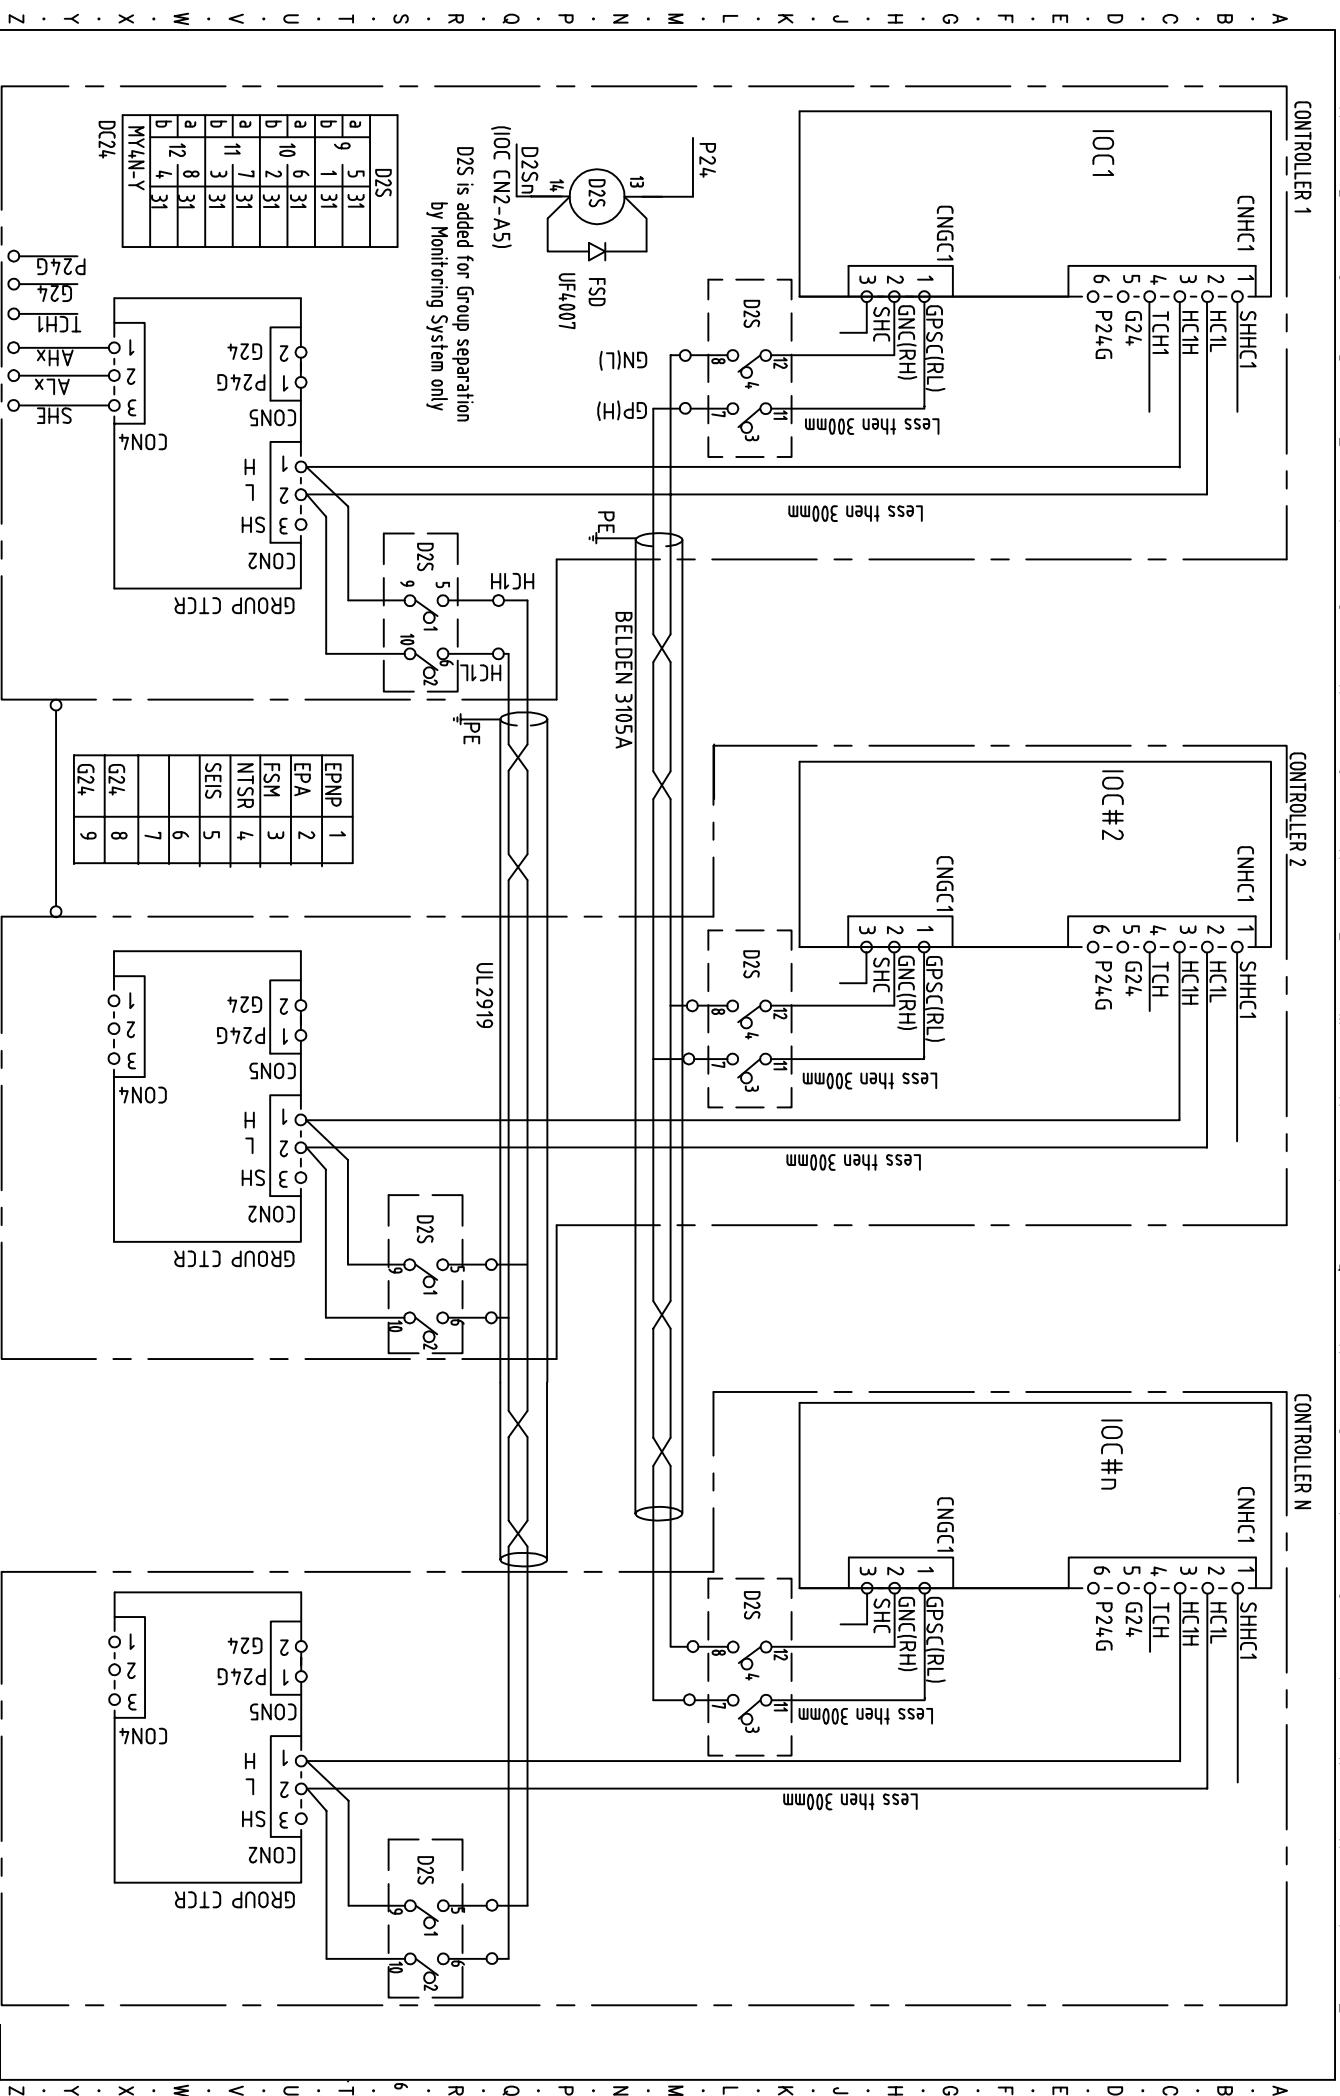

[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)




CHECKED BY	DESIGNED BY	GROUP CONNECTION
공관철	공무택	[주]태공사2CAR, GROUP]
2008.5.10	2008.5.10	7KFEA016-31
REGISTERED		REL. MARK

CAD No. :

Position Indicator in Control Panel

CAN to CAN Repeater Multiplex

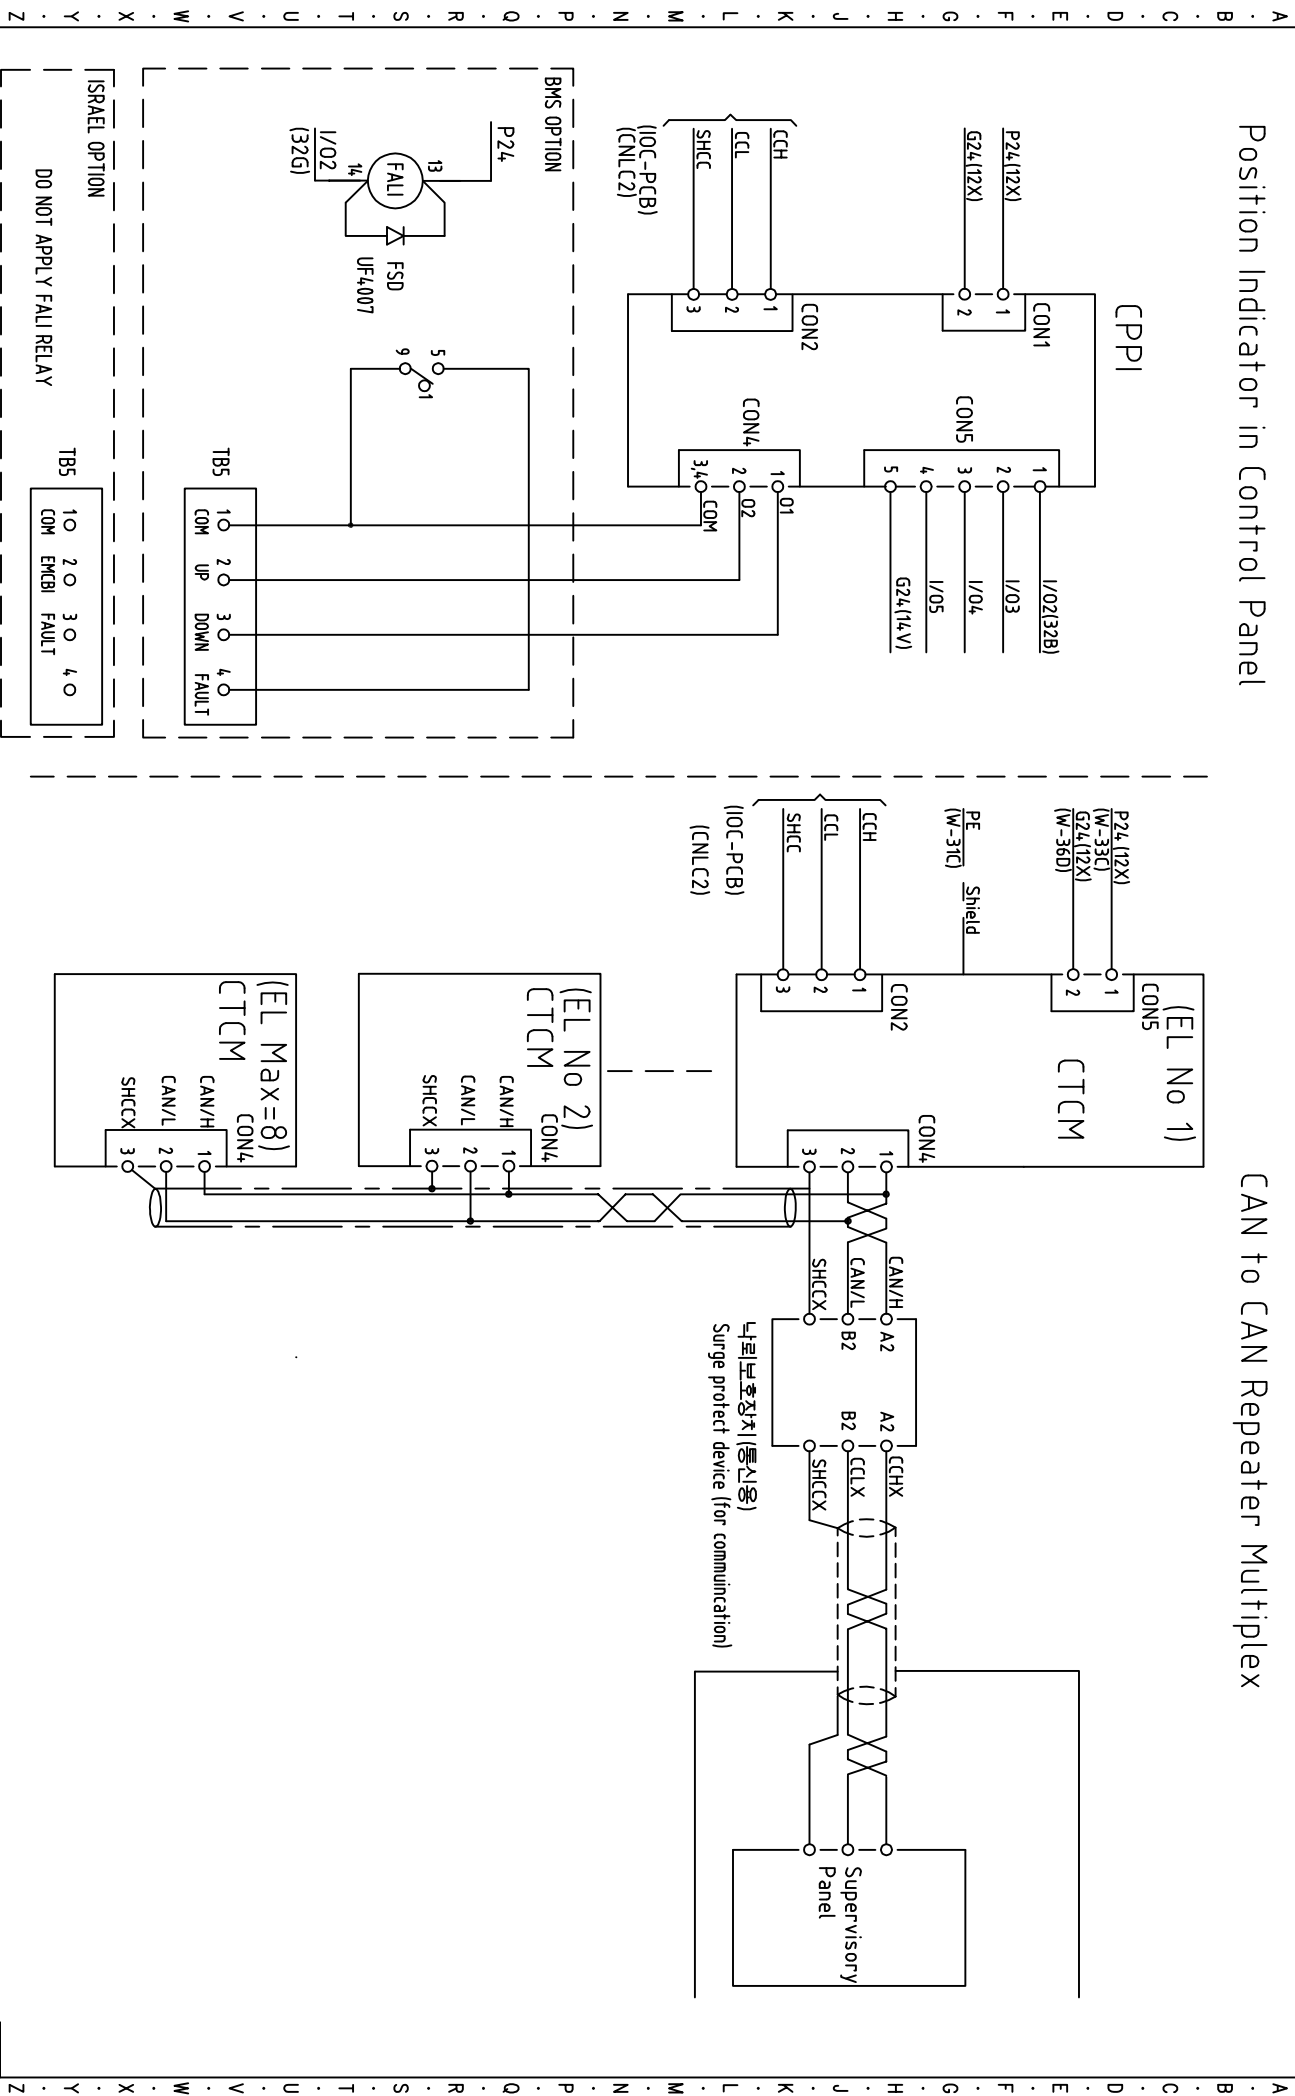


[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)




CHECKED BY	DESIGNED BY	CAN TO CAN REPEATER(Multiplex) & CPP1
윤관철	장무택	
2008. 5. 10	2008. 5. 10	
REGISTERED		7KFEA016-32
		REV. MARK

CAD No. :

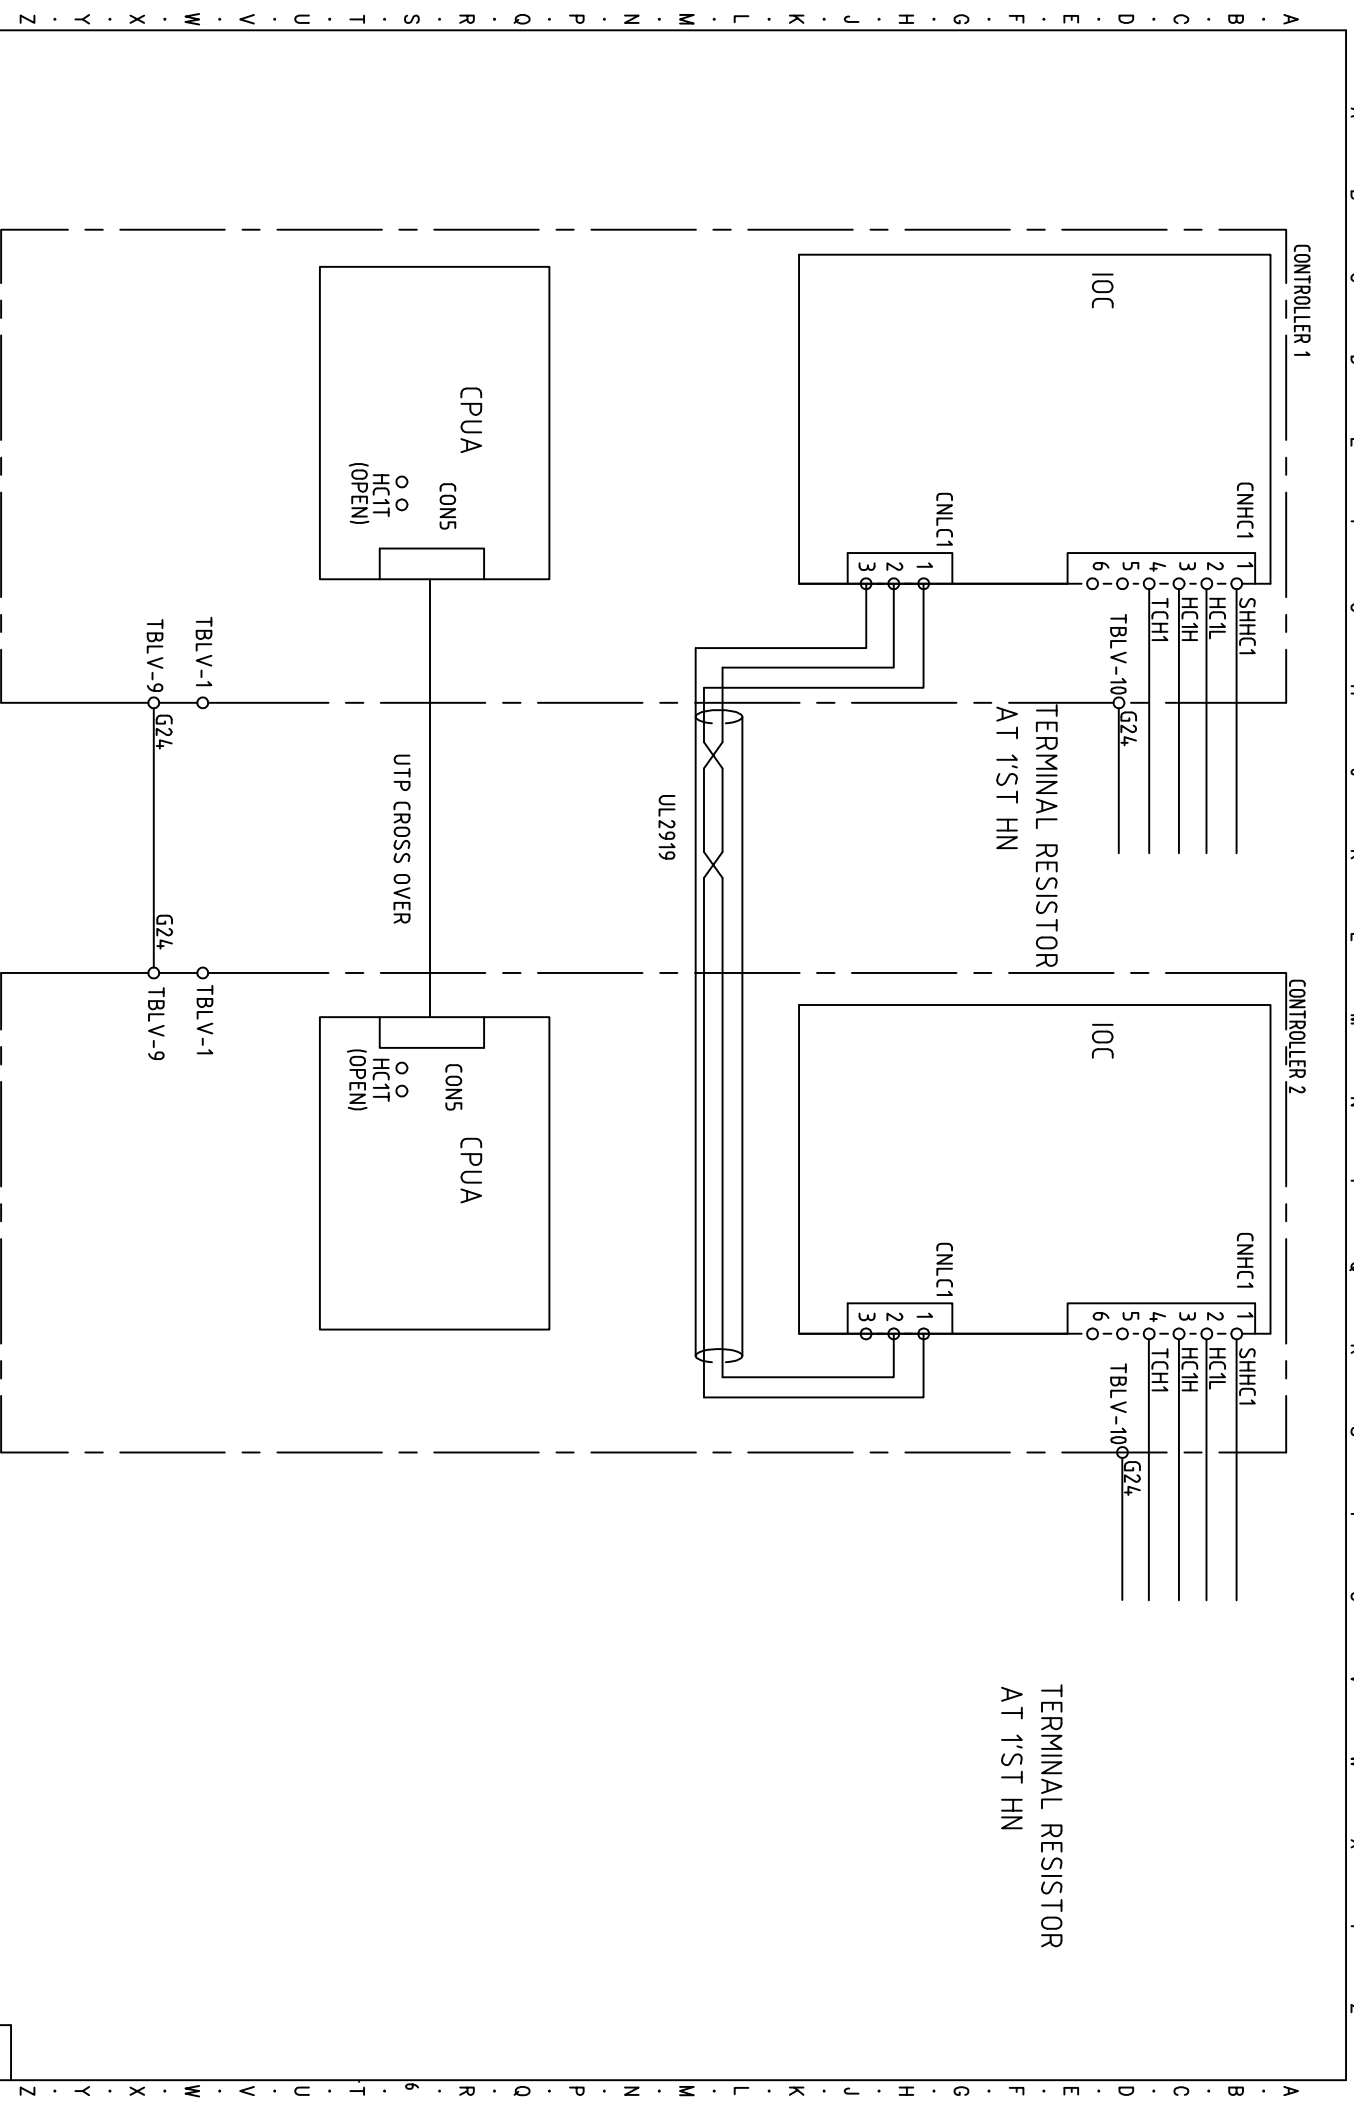

CHECKED BY	DESIGNED BY	2-CAR CONNECTION WITH UTP	REMARK
윤관철 2020.5.10	장무택 2020.5.10		
REGISTERED	7KFEA016-33		①

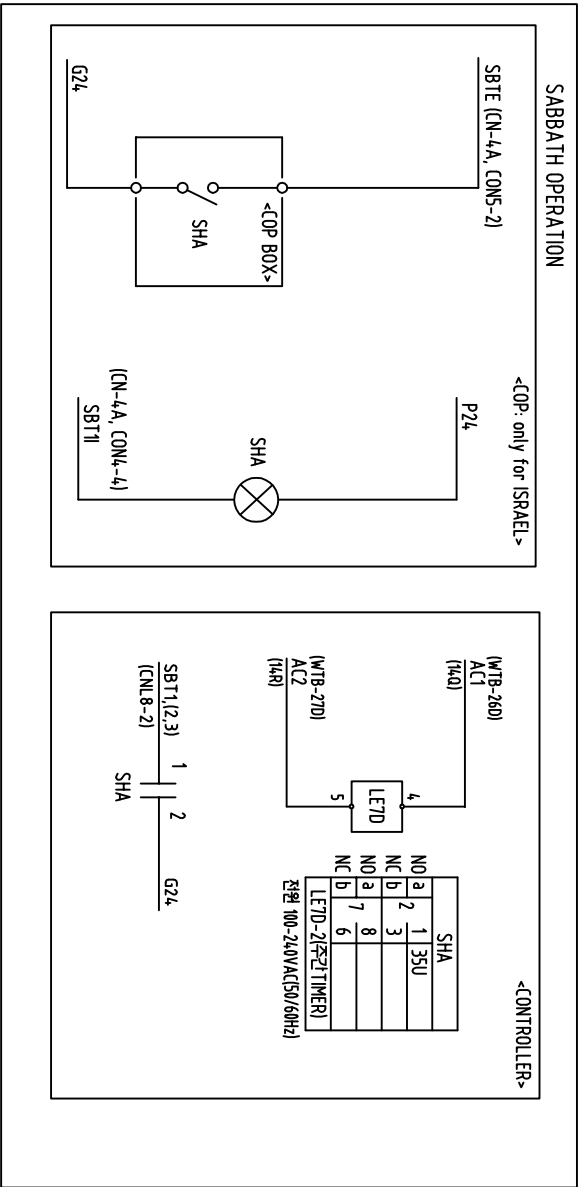

A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

✓	
✓	
✓	
✓	

CAD No. :




CHECKED BY	DESIGNED BY	OPTION (SABBATH)	REV. MAX
공관형 2008.5.10	장두택 2008.5.10	7KFEA016-35	
REGISTERED			

[TK-50G][FLAT]

Z

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

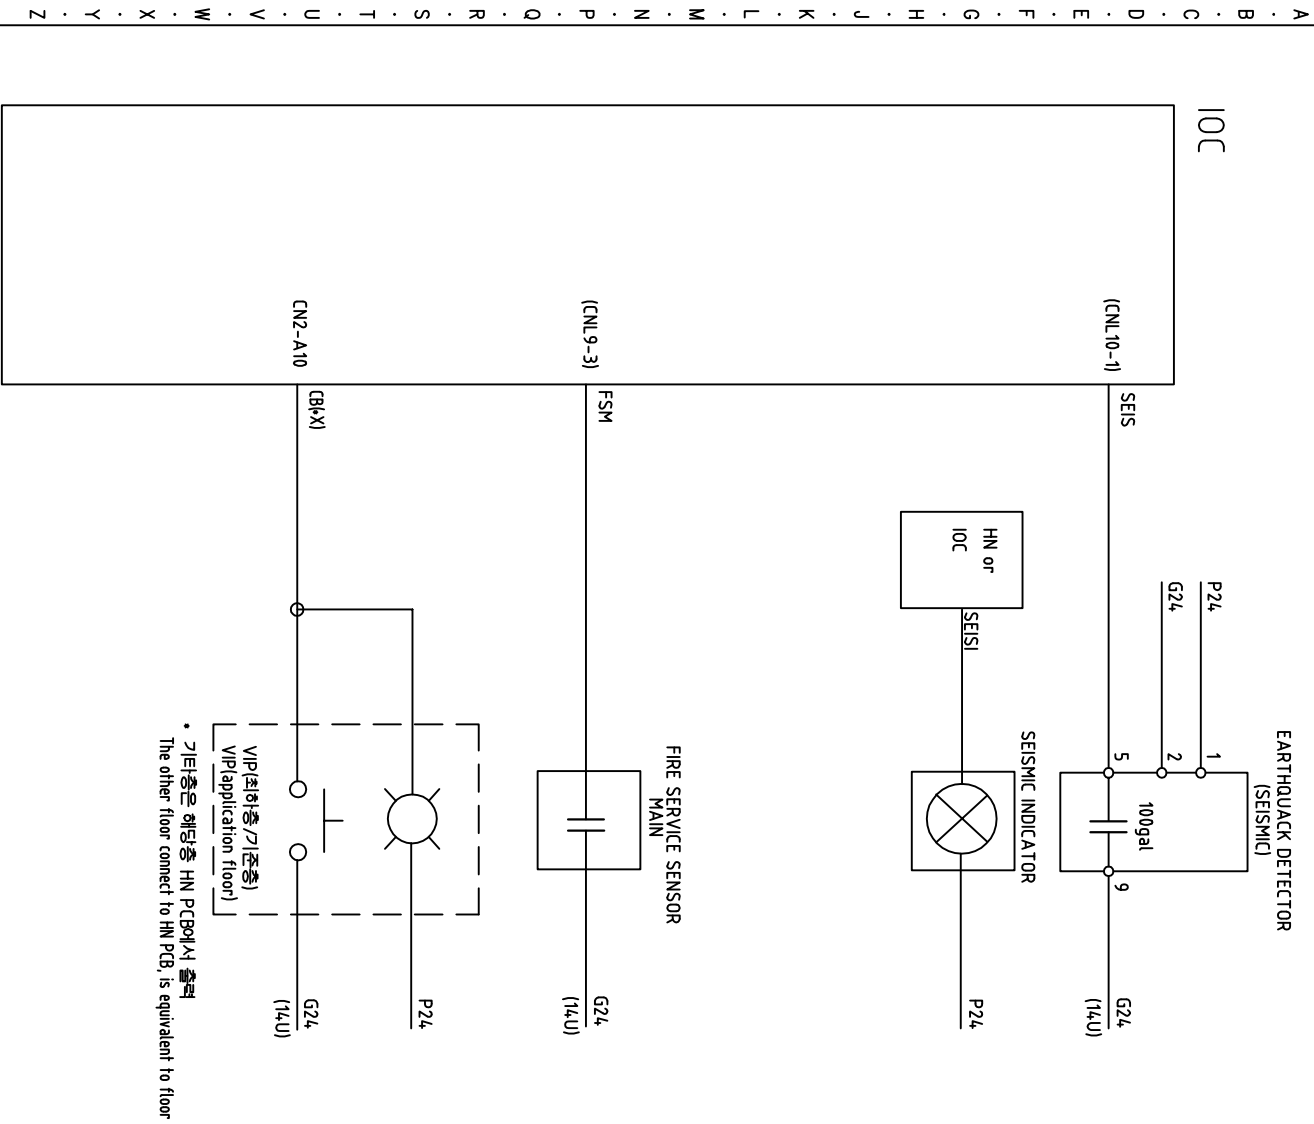

Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	OPTION(SEISMIC, SMOKE, VIP
공관철	장무택	7KFEA016-36
2008.5.10	2008.5.10	REV. MARK
REGISTERED		

CAD No. :

= A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z


A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

이단속도제어
2 STEP SPEED CONTROL

HOIST WAY

CONTROLLER

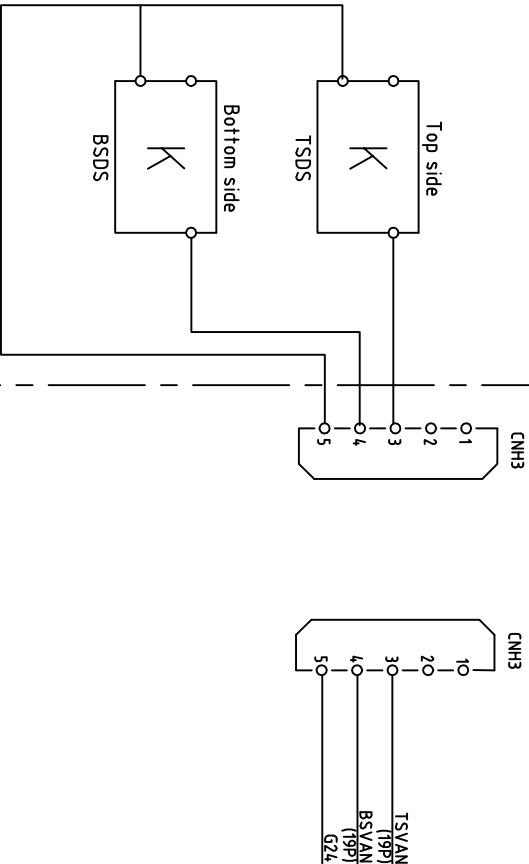

CAD No. :

ThyssenKrupp Elevator (Korea)








CHECKED BY	DESIGNED BY
공관형 2008.5.10	장두택 2008.5.10
REGISTERED	

2-STEP SPEED & NTSR

7KFEA016-37

REL/ANK

[TK-50G][FLAT]

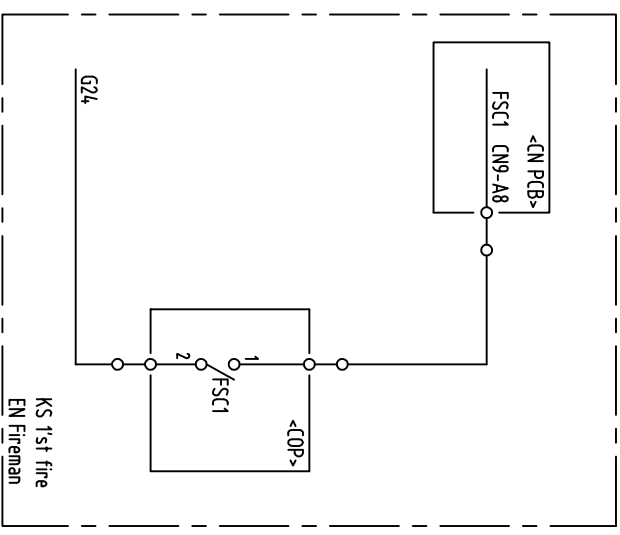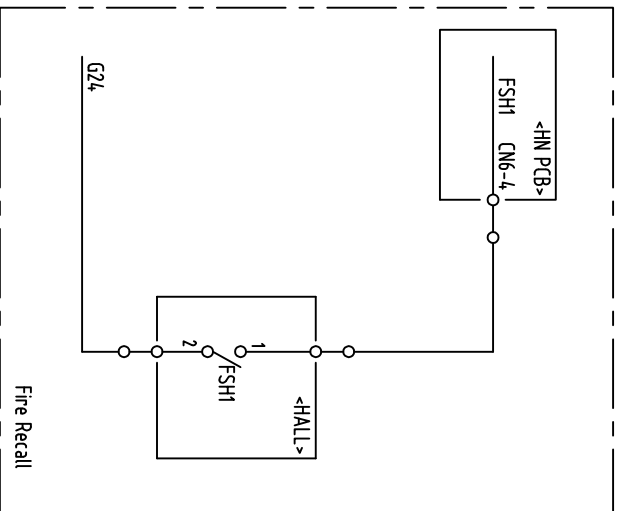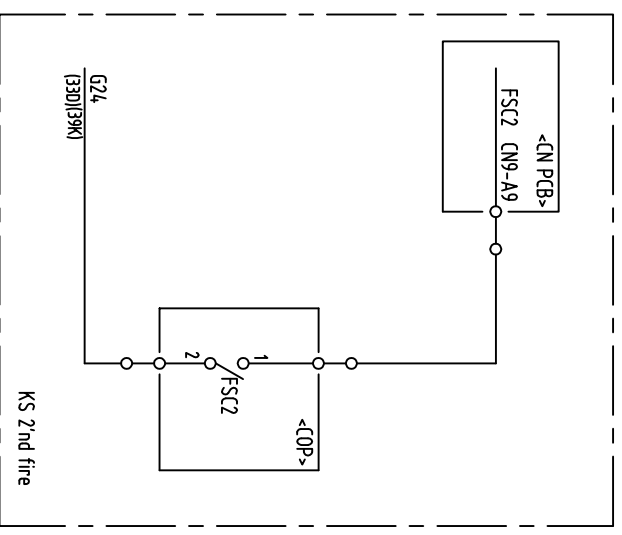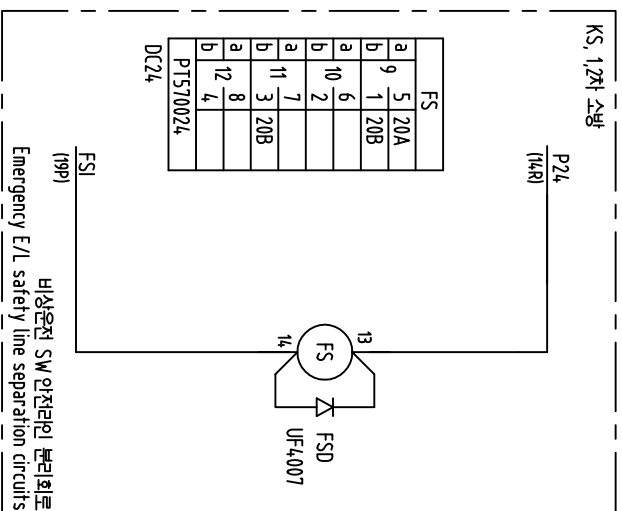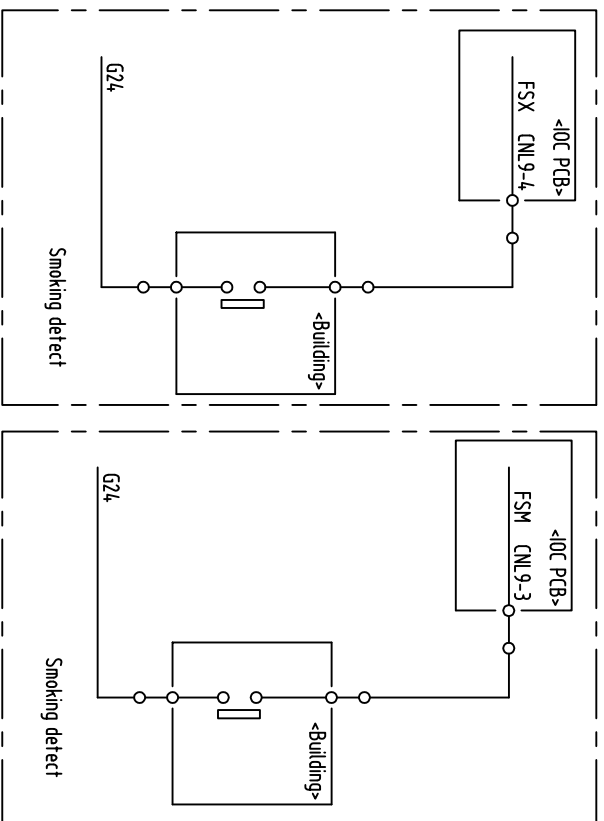

[TK-50G][FLAT]


[illegible]

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	FIRE OPERATION	7KFEA016-38	REMARK
윤관현	정무택			
2000.5.10	2000.5.10			
REGISTERED				

CN	CNK1	MCT3P	PLUG
NO.	Name		T.C. NO.
1	111		TC1-1
2	120		TC1-2
3	U203		TC1-3
4	V203		TC1-4
5	215		TC1-5
6	AC1		TC1-6
7	AC1		TC1-7
8	AC2		TC1-8
9	AC2		TC1-9
10	201(AC1B)		TC1-10
11	202		TC1-11
12	204		TC1-12
13			



CNK2		M1C17P		PLUG	
CN NO.	Name	T.C	NO.		
1	G24	TCl-16			
2	G24	TCl-17			
3	G24	TCl-18			
4	P24C	TCl-19			
5	P24C	TCl-20			
6	P24C	TCl-21			
7	LVU	TCl-22			
8	LYD	TCl-23			
9	D21	TCl-24			
10	D22	TCl-25			
11	BGM2	TCl-28			
12	BGM4	TCl-29			
13					
14	P12	TCl-30			
15	G12	TCl-31			
16	1	TCl-32			
17	2	TCl-33			

CNK5		MIC5P PLUG	
CN NO.	Name	T.C NO.	
1	P24C	TC1-34	
2	G24	TC1-35	
3	ECNT	TC1-26	
4	EDET	TC1-27	
5			

OPTION;

Apply when over 120m/min

CNCC	TJ 5.08mm 3P
CN NO.	Name T.C NO.
1	CCH S1
2	CCL S2
3	SHCC SH1

CNK6 MilCP PLUG		
CN NO.	Name	T.C NO.
1	OBV203	TC1-45
2		
3	OBV203	TC1-46
4		
5	OBV203	TC1-47
6		
7	OBV203	TC1-48
8		
9		

OPTION;

Apply for Observation option

CNK7		MICSP	PLUG
CN NO.	Name	T.C NO.	
1	PC1	TC1-43	
2	NC	TC1-44	
3			
4			
5			

OPTION:

Apply for DC door option

RED COLOR


T.C NO.	연장 NO.
1	111
2	112
3	U203
4	V203
5	215
6	AC1
7	AC1
8	AC2
9	AC2
10	201
11	202
12	204
13	PE
14	PE
15	PE
16	G24
17	G24
18	G24
19	P24C
20	P24C
21	P24C
22	LVU
23	LVD
24	DZ1
25	DZ2
26	ECNT
27	EDET
28	BGM2
29	BGM4
30	P12
31	G12
32	1
33	2
34	P24C
35	G24
36	SPARE
43	PC1
44	NC
45	U203
46	U203
47	V203
48	V203
S1	CCH
S2	CCL
SH1	SHCC
S3	
S4	
SH2	

$$EVVF-H(36 \times 0.75 \text{ mm}^2 + 2P \times 0.5 \text{ mm})$$
$$EVVF-H(48 \times 0.75 \text{mm}^2 + 2P \times 0.5 \text{mm})$$

OPTION: Apply for DC door or observation option

<TAIL CORD>

CN	CNK1	MC3P	PLUG
NO.	환장 NO.		T.C NO.
1	111		Tc-1
2	120		Tc-2
3	U203		Tc-3
4	V203		Tc-4
5	215		Tc-5
6	AC1		Tc-6
7	AC1		Tc-7
8	AC2		Tc-8
9	AC2		Tc-9
10	201(AC1B)		Tc-10
11	202		Tc-11
12	204		Tc-12
13			



PE(EARTH BAR)

CNK2		MCT17P		PLUG	
CN NO.	현상 NO.	T.C	NO.		
1	G24		TC1-16		
2	G24		TC1-17		
3	G24		TC1-18		
4	P24C		TC1-19		
5	P24C		TC1-20		
6	P24C		TC1-21		
7	LVU		TC1-22		
8	LVU		TC1-23		
9	D21		TC1-24		
10	D22		TC1-25		
11	BGM2		TC1-28		
12	BGM4		TC1-29		
13					
14	P12		TC1-30		
15	G12		TC1-31		
16	1		TC1-32		
17	2		TC1-33		

CNK5 SLS5.08-4P/180B		
CN NO.	한자번호	T.C NO.
1	P24C	
2	G24	
3	ECNT	TC1-26
4	EDET	TC1-27

CNC TJ 5.08mm 3P		
CN NO.	현장 NO.	T.C NO.
1	CCH	S1
2	CCL	S2
3	SHC	SH1

CNK6 MIC9P PLUG		
CN NO.	Name	T.C NO.
1	OBV203	TC1-45
2		
3	OBV203	TC1-46
4		
5	OBV203	TC1-47
6		
7	OBV203	TC1-48
8		
9		

OPTION;

Apply for Observation option

CNK7 MIC5P PLUG		
CN NO.	Name	T.C NO.
1	PC1	TC1-43
2	NC	TC1-44
3		
4		
5		

OPTION 2:

Apply for DC door option

RED COLOR

	Added observation and DC door option, 01 July 09, MT Chung



ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	CAR CONNECTOR & T-CABLE
윤관철	정무택	
2000.5.10	2000.5.10	
REGISTERED	7KFEA016-40	
	REV. MARK	①



= A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

A . . . B . . . C . . . D . . . E . . . F . . . G . . . H . . . J . . . K . . . L . . . M . . . N . . . P . . . Q . . . R . . . S . . . T . . . U . . . V . . . W . . . X . . . Y . . . Z

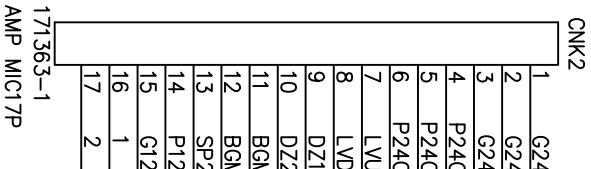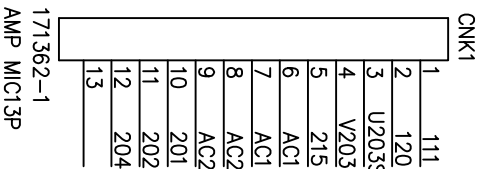


171362-1
AMP MIC13P

171363-1
AMP MIC17P




LW143-4



FW2360-3




FW2360-4



FW2360-2

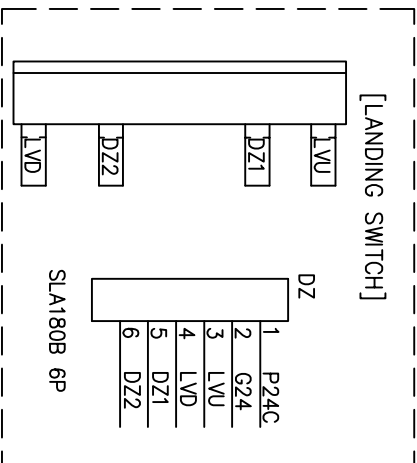



FW2360-2




FW2360-2




LW143-2



LW143-5




LW143-3

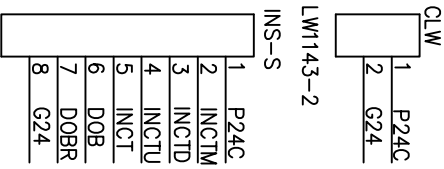


LW143-2

INS-S



LW143-8

INS-R




LW143-3


EST

FW2360-2

CN21

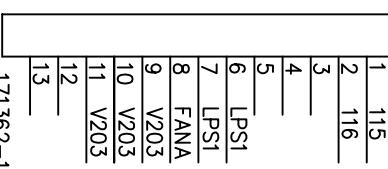


171362-1
AMP MIC13P




PA003-8


TB2




PA003-8




LW143-10




FW2360-3



LW143-4




LW143-5




FW2360-3

LW143-6
(1 PHOTO CELL)


LDS2



LW143-6
(2 PHOTO CELL)



LW143-4



LW143-6
(2 PHOTO CELL)

[TK-50G][FLAT1]

ThyssenKrupp Elevator (Korea)




CHECKED BY	DESIGNED BY
윤민석	정두택
2008.5.18	2008.5.18
REGISTERED	

CAR DUCT CONNECTION


7KFEA016-41

REV. MARK

CAD No. :

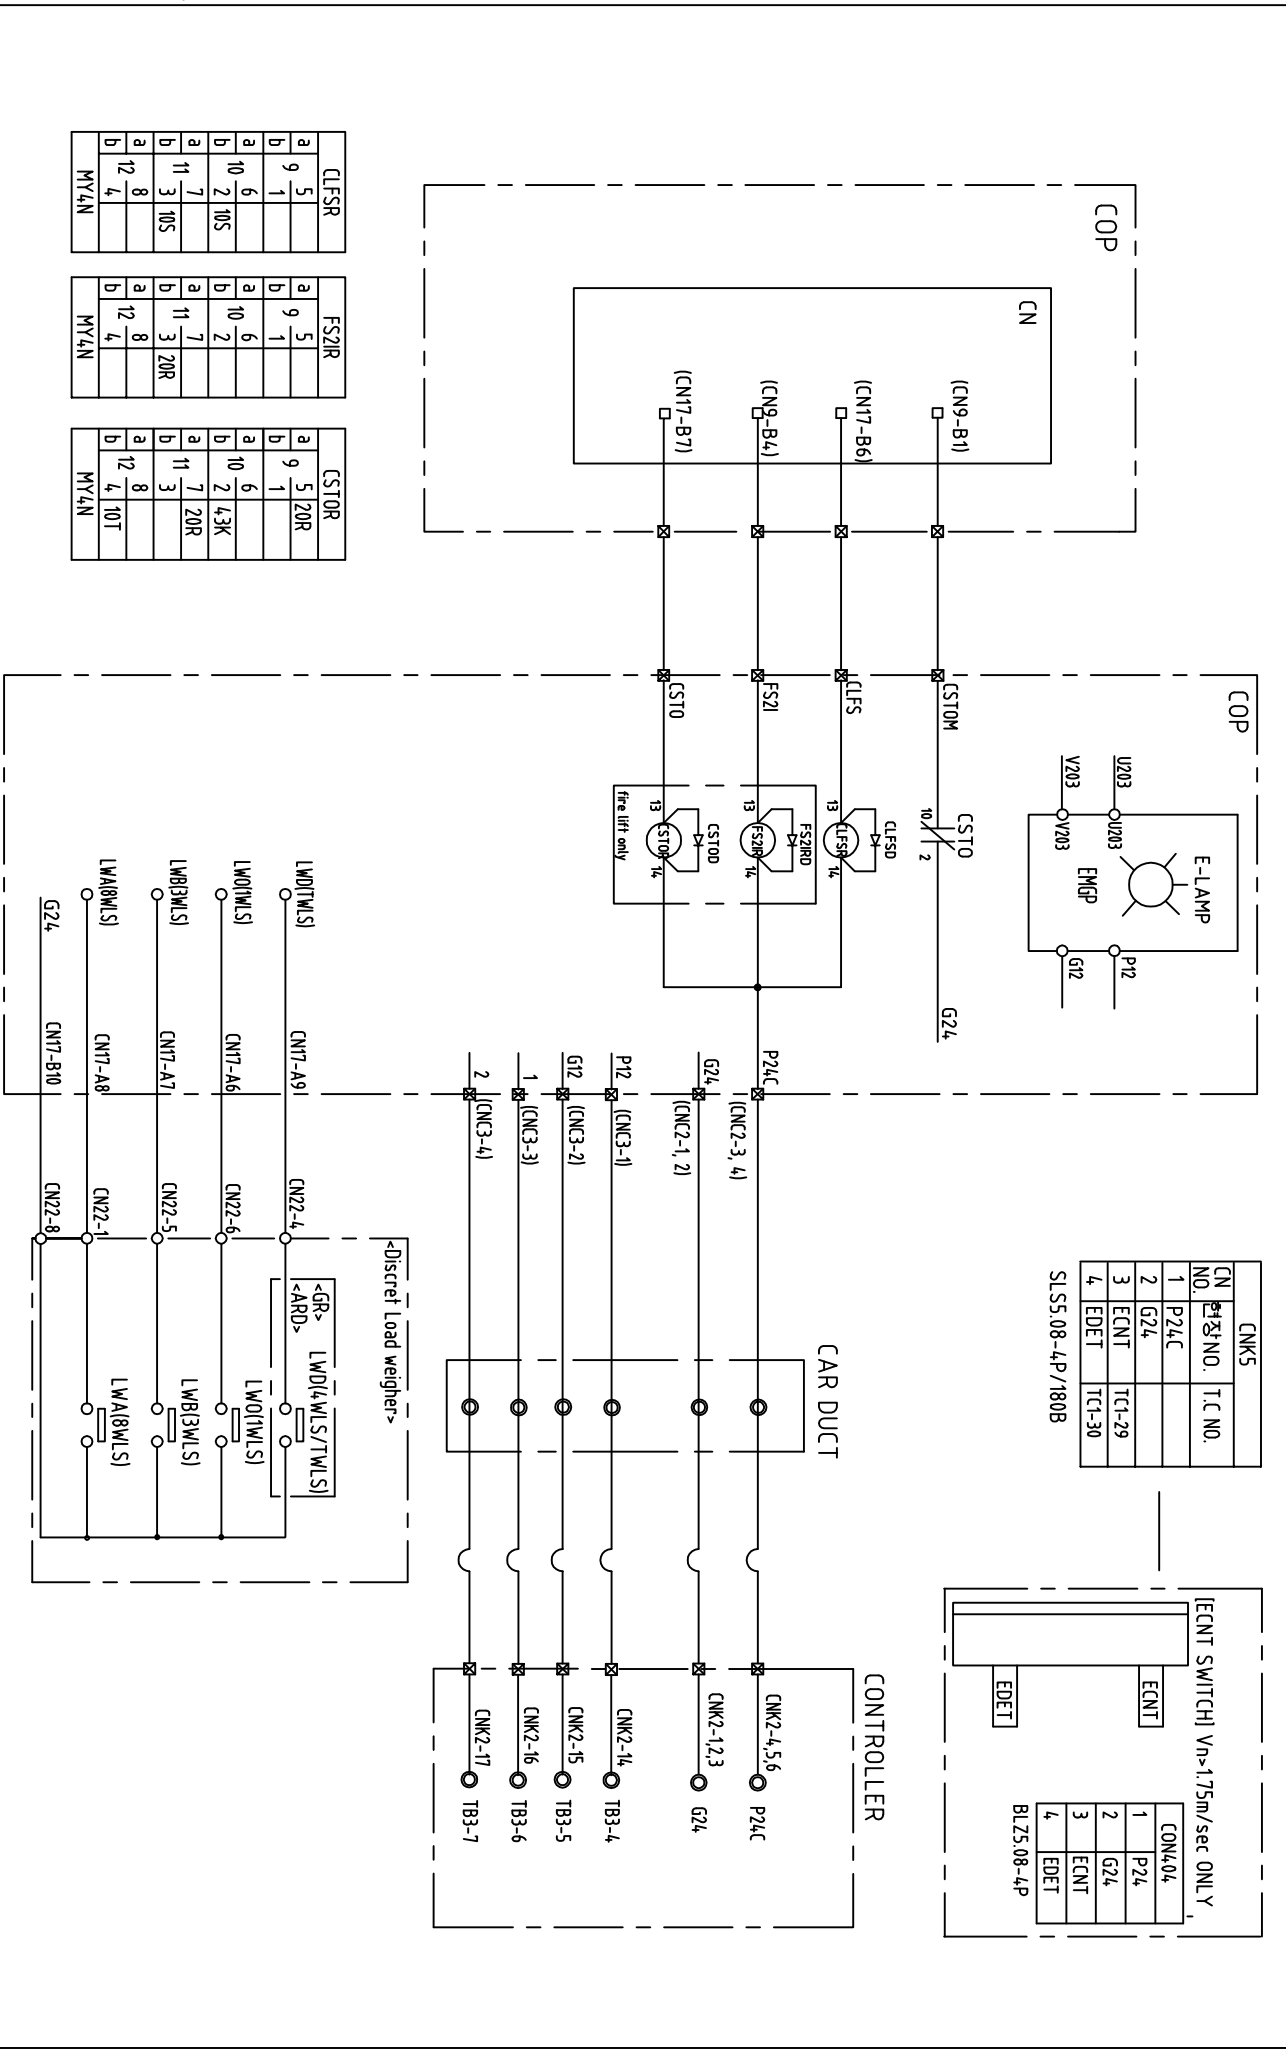

= A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

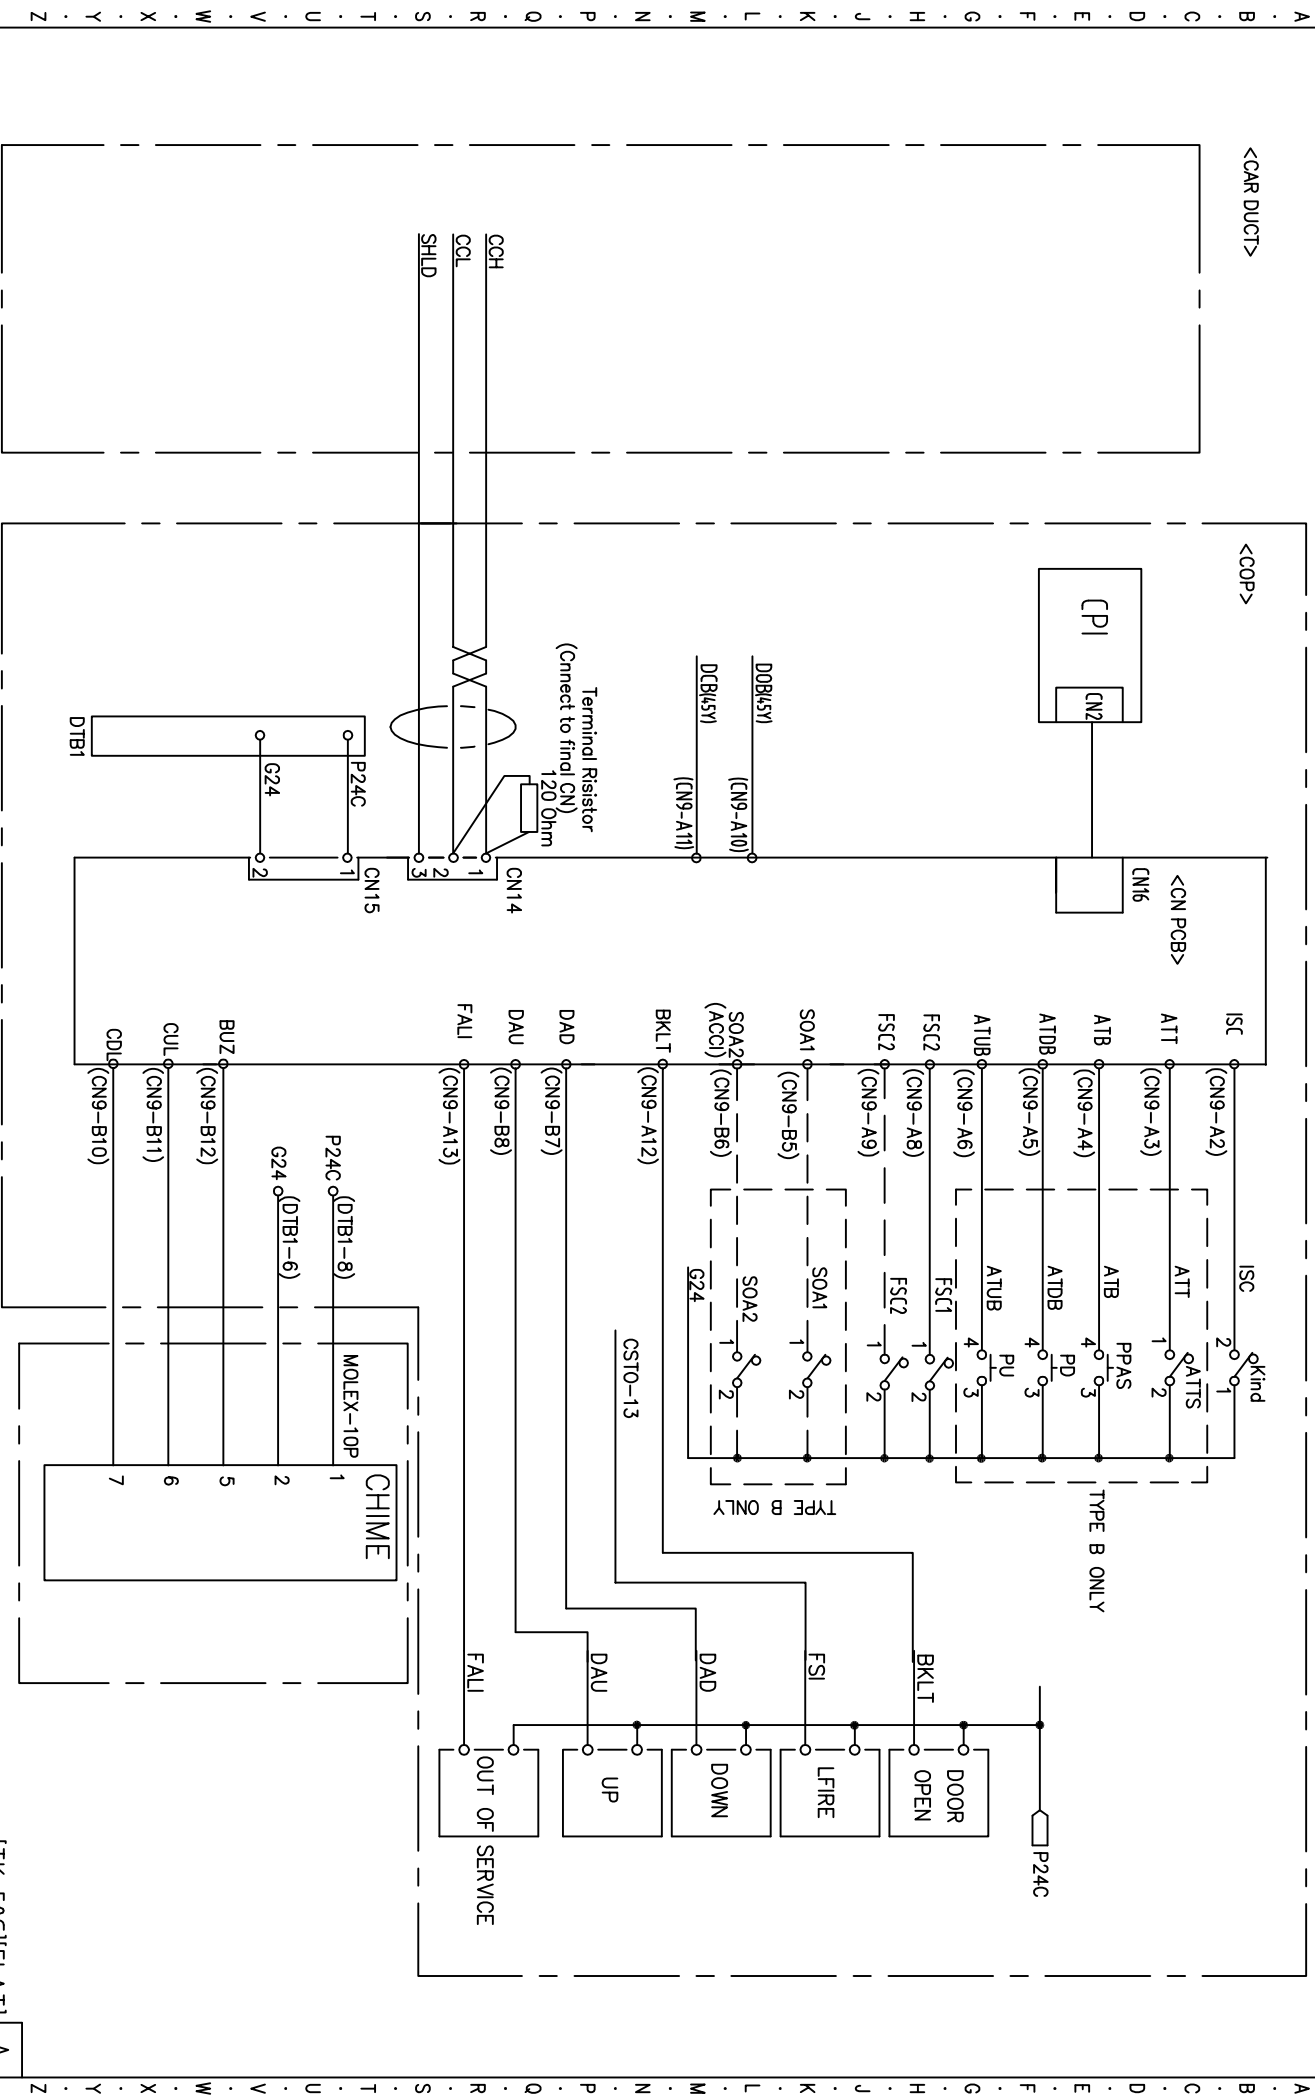

[TK-50G] (FLAT)

A


ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY
윤관철	장무택
2008.5.10	2008.5.10
REGISTERED	

CAR I/O CIRCUITS	7KFEA016-43
REV. MARK	

CAD No. :

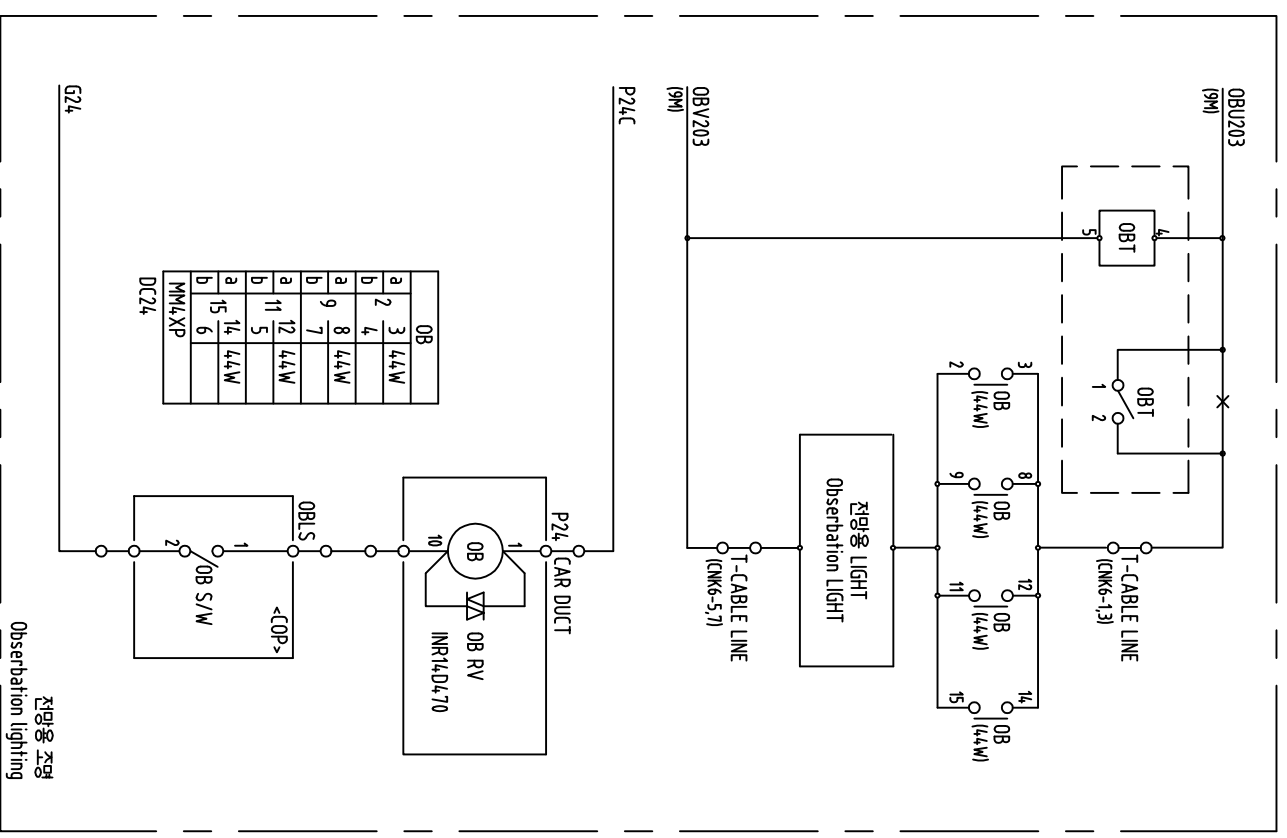

OB	
a	$\frac{3}{2}$ 44W
b	$\frac{4}{4}$
a	$\frac{8}{9}$ 44W
b	$\frac{7}{7}$
a	$\frac{12}{11}$ 44W
b	$\frac{5}{5}$
a	$\frac{14}{15}$ 44W
b	$\frac{6}{6}$
MM4XP	

DC24

저마음 조면
관상 lighting

[TK-50G][FLAT]




CHECKED BY	DESIGNED BY	OB SWITCH CIRCUIT	7KFEA016-44	REV MARK	○
공관철 2008.5.10	장무택 2008.5.10				
REGISTERED					

ThyssenKrupp Elevator (Korea)





A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

CAR PHOTO CELL DOOR SAFETY(LIGHT ON)-CAGE, FRONT CAGE
[CN2 ~ Harmonicar ~ RLDS1,2,3,4, TLDS1,2,3,4]

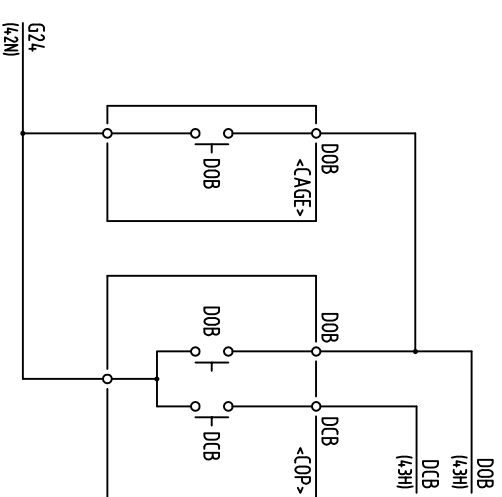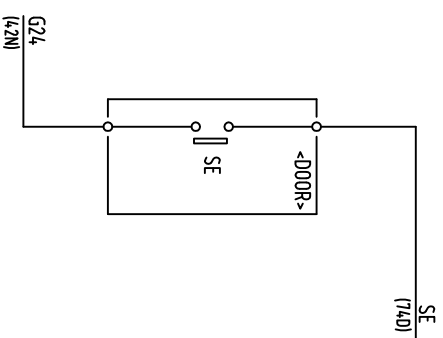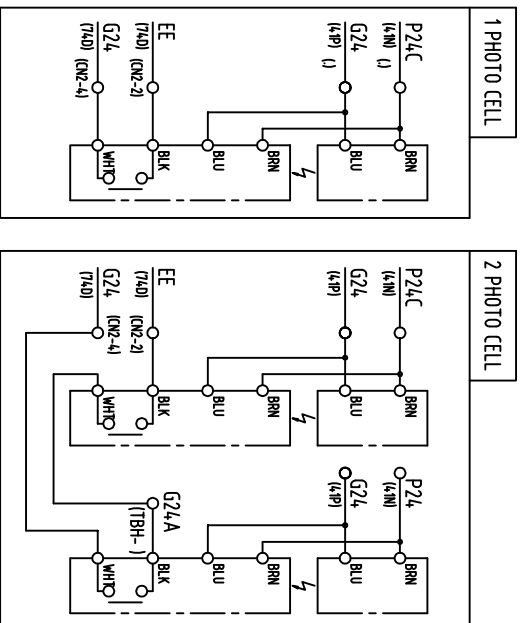

CAR PHOTO CELL DOOR SAFETY(LIGHT ON)-CAGE, REAR CAGE
[CN2 ~ Harmonicar ~ RLDS1,2,3,4, TLDS1,2,3,4]

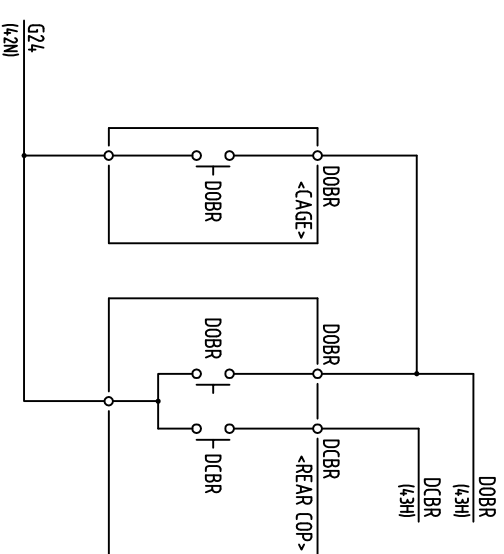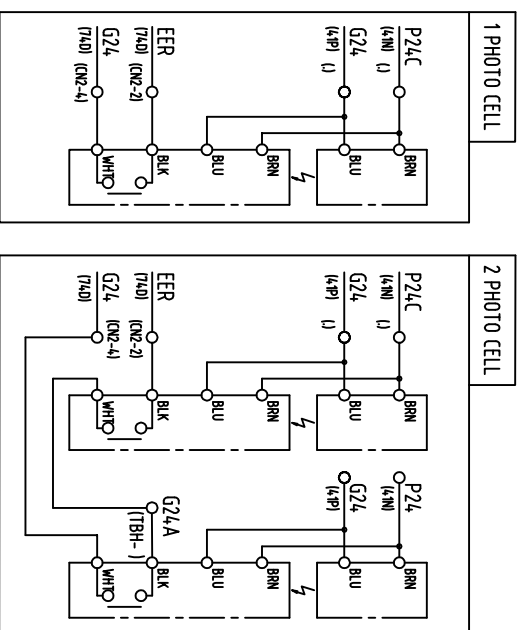

[TK-50G][FLAT]

[illegible]

CAD No.:

ThyssenKrupp Elevator (Korea)




CHECKED BY	DESIGNED BY	PHOTO CELL & DOOR BUTTON
공관철 2008. 5. 10	장무택 2008. 5. 10	
REGISTERED	7KFEA016-45	
	REMARK	

7KF EA016-45

REV. MAR

A · B · C · D · E · F · G · H · I · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

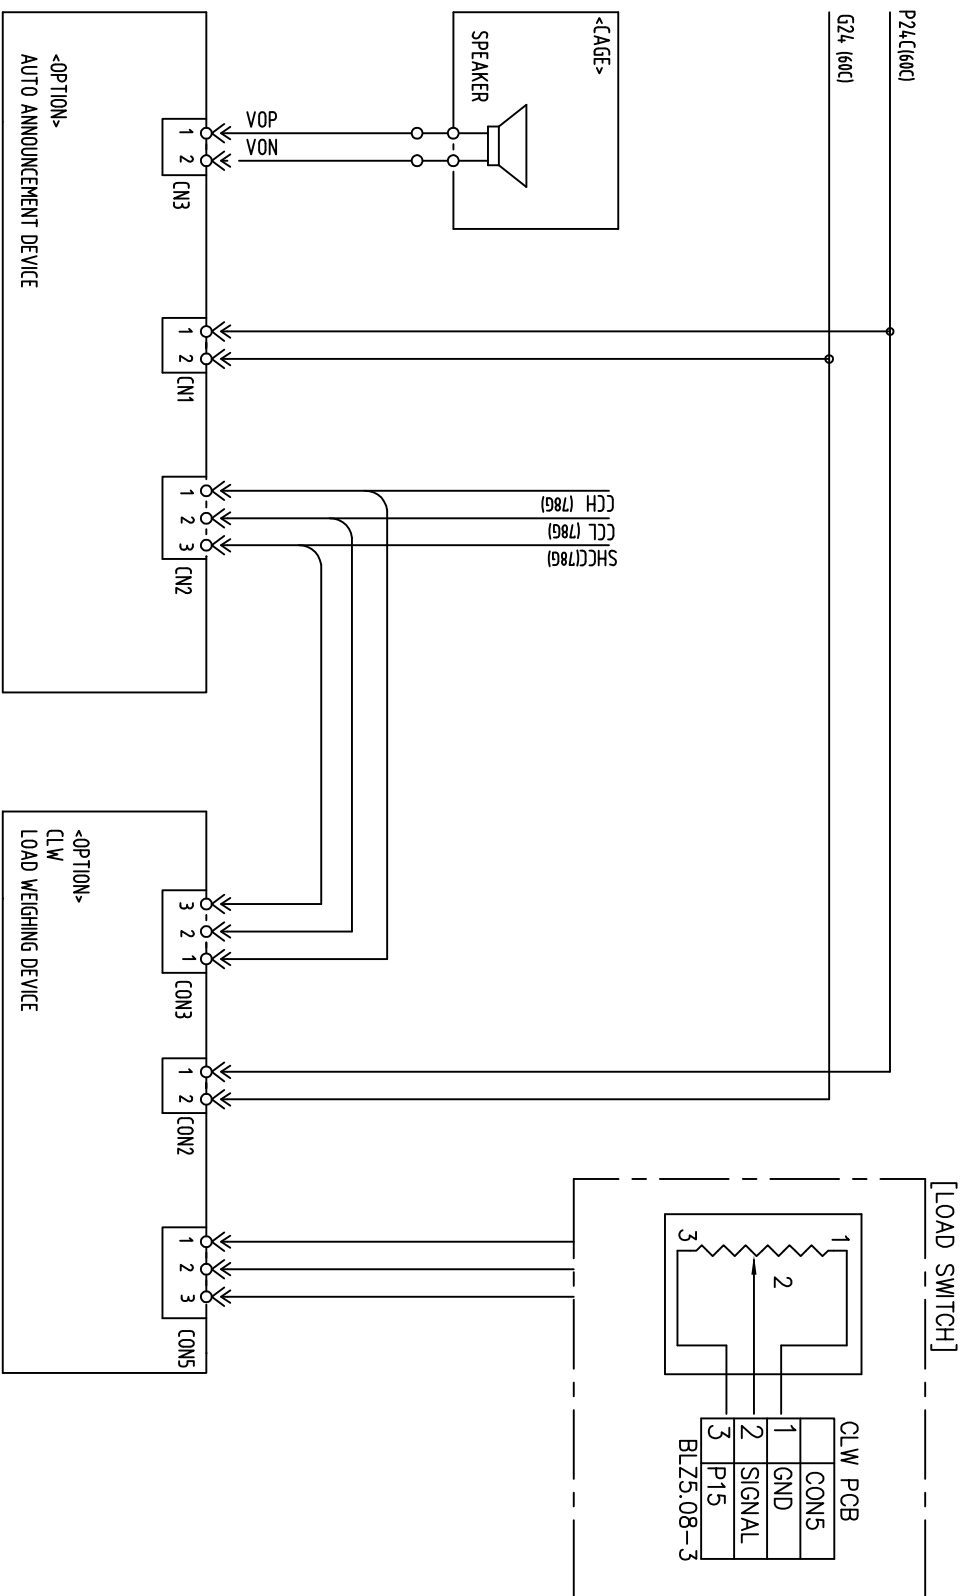

[TK-50G][FLAT]

[illegible]

CAD No.:

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	AUTO ANNOUNCER, LOAD WEIGHING DEVICE 7KFEA016-46
공관현 2008.5.18	장무택 2008.5.18	
REGISTERED		REI MARK 



7KFEA016-46

REV. MARK



= A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

CN-1A PCB


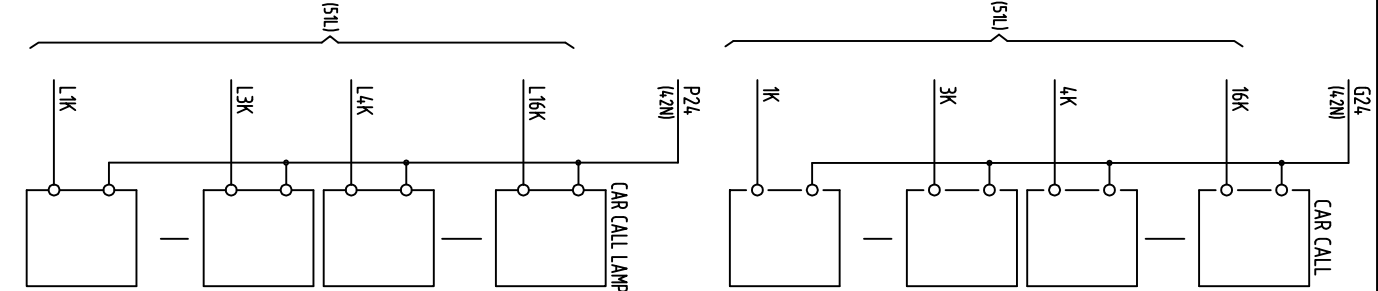
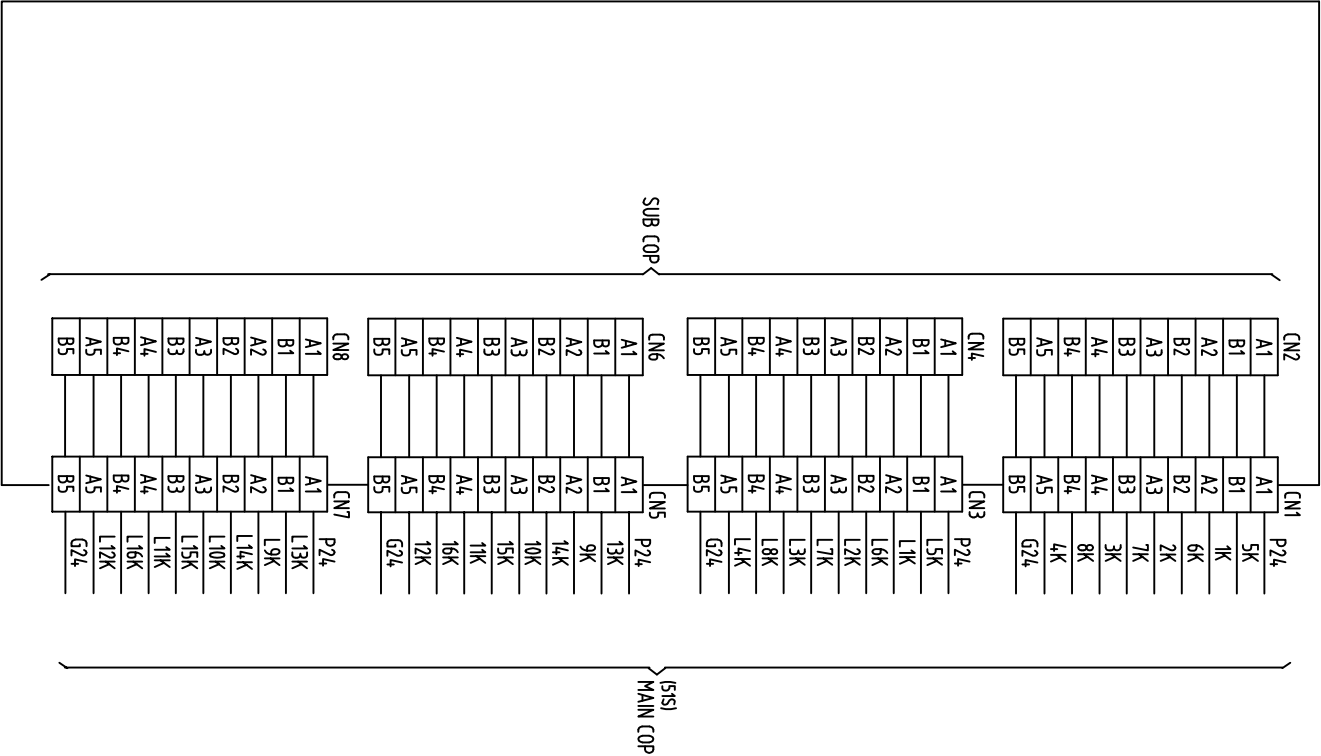


[TK-50G][FLAT]

CHECKED BY	DESIGNED BY	CAR CALL CIRCUITS (CN-1A, 1-16 STOP)	
윤관철	장무택		
2008.5.16	2008.5.16		
REGISTERED		7KFEA016-51	REL WORK

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

CN-2A PCB

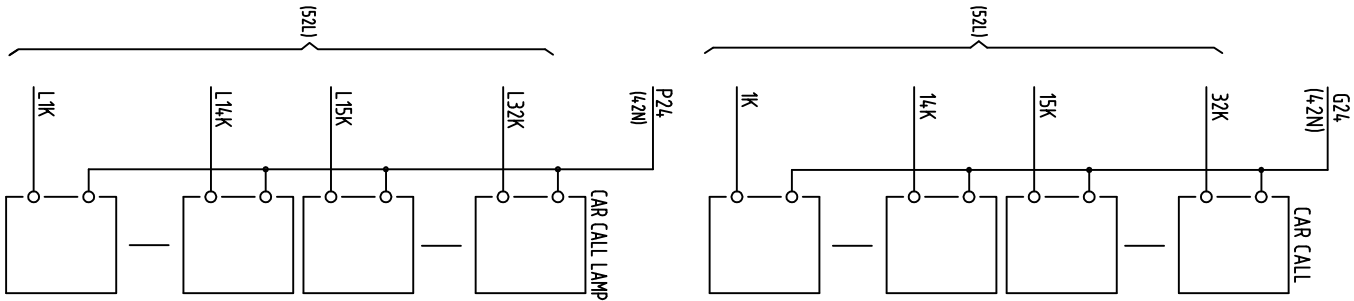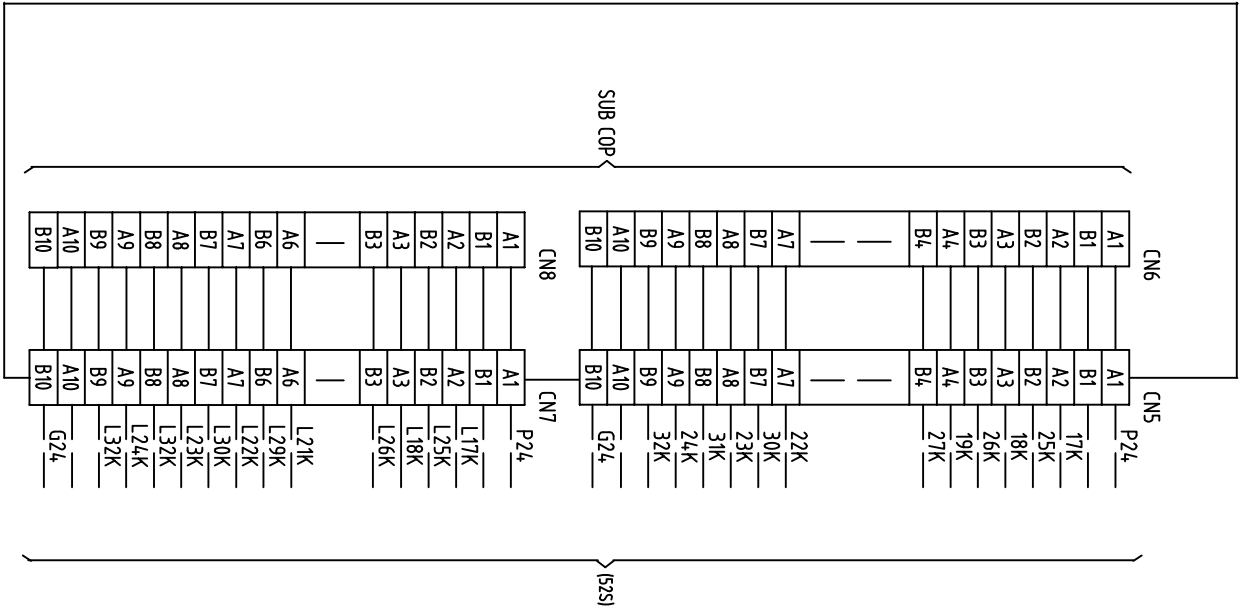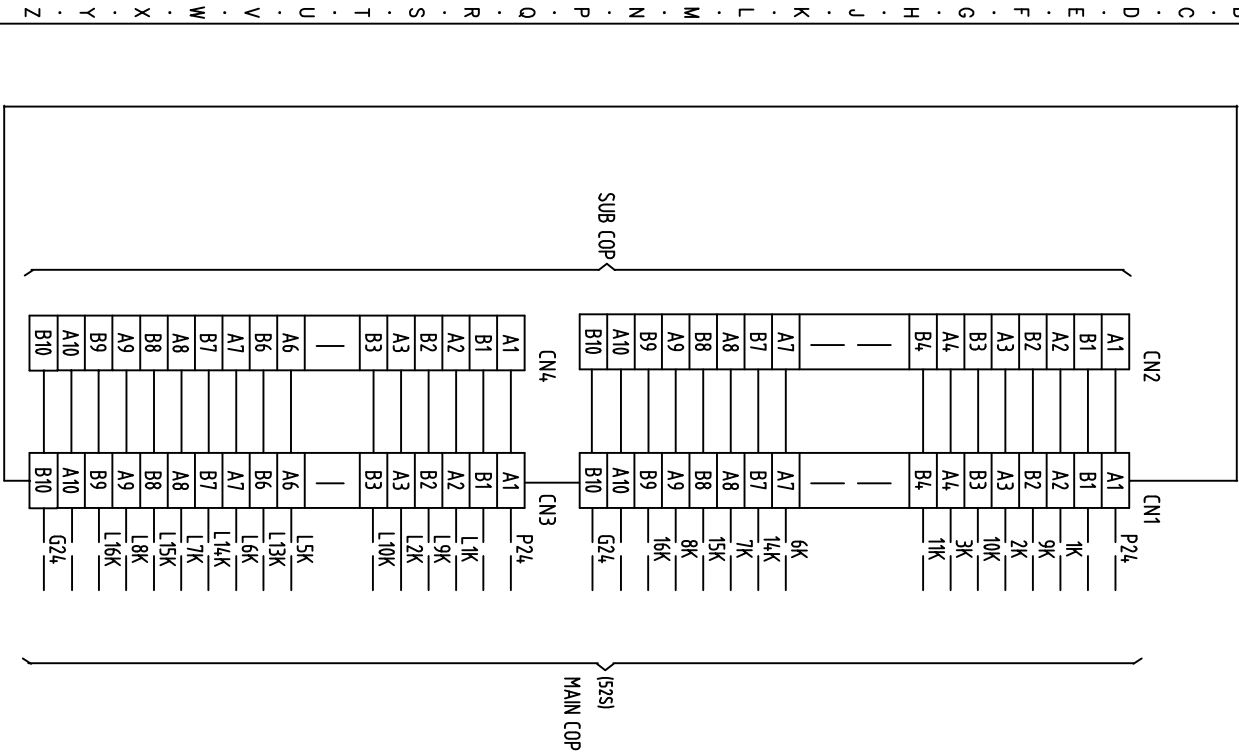


[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)







CHECKED BY	DESIGNED BY	CAR CALL CIRCUITS (CN2A PCB 17-32 STOP)
윤관철	정무택	
2008.5.16	2008.5.16	
REGISTERED		7KFEA016-52
		REL WORK

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

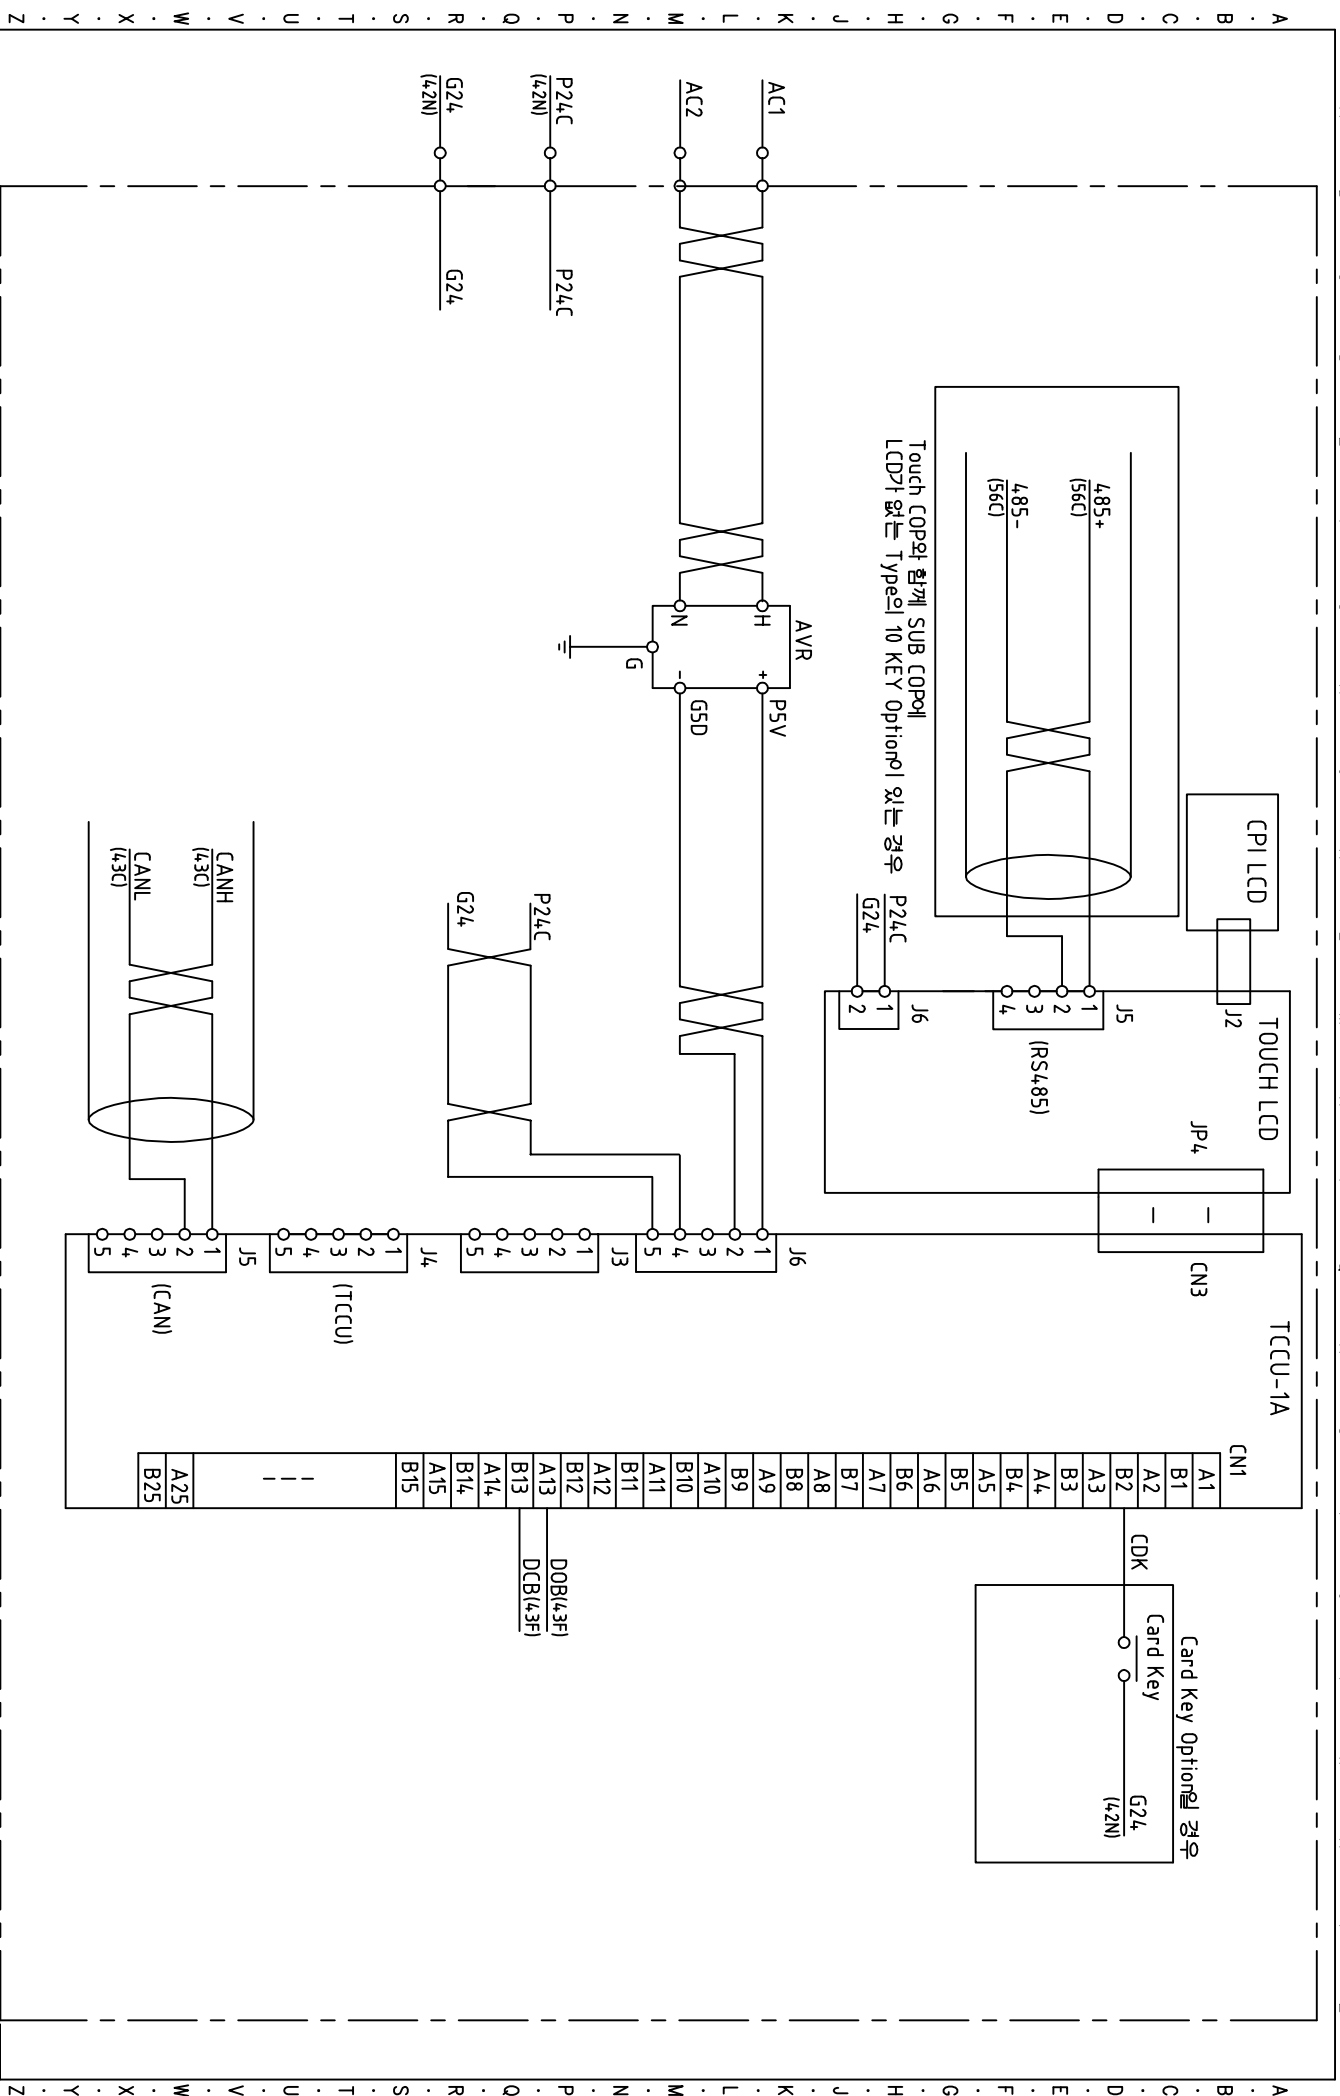


[TK-50G][FLAT]

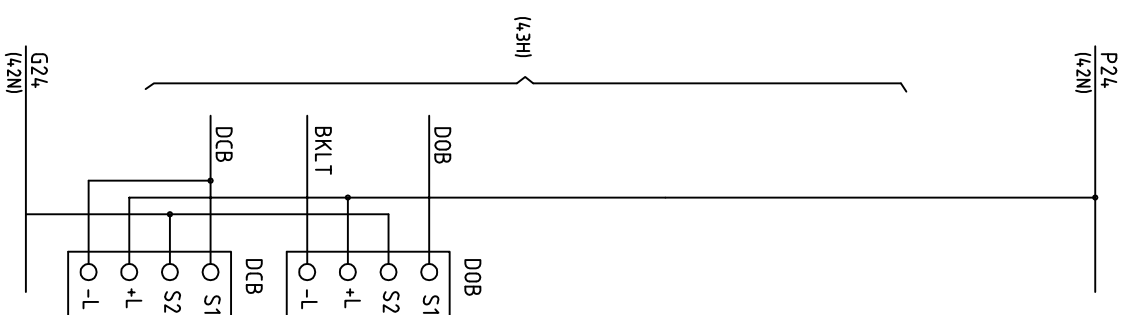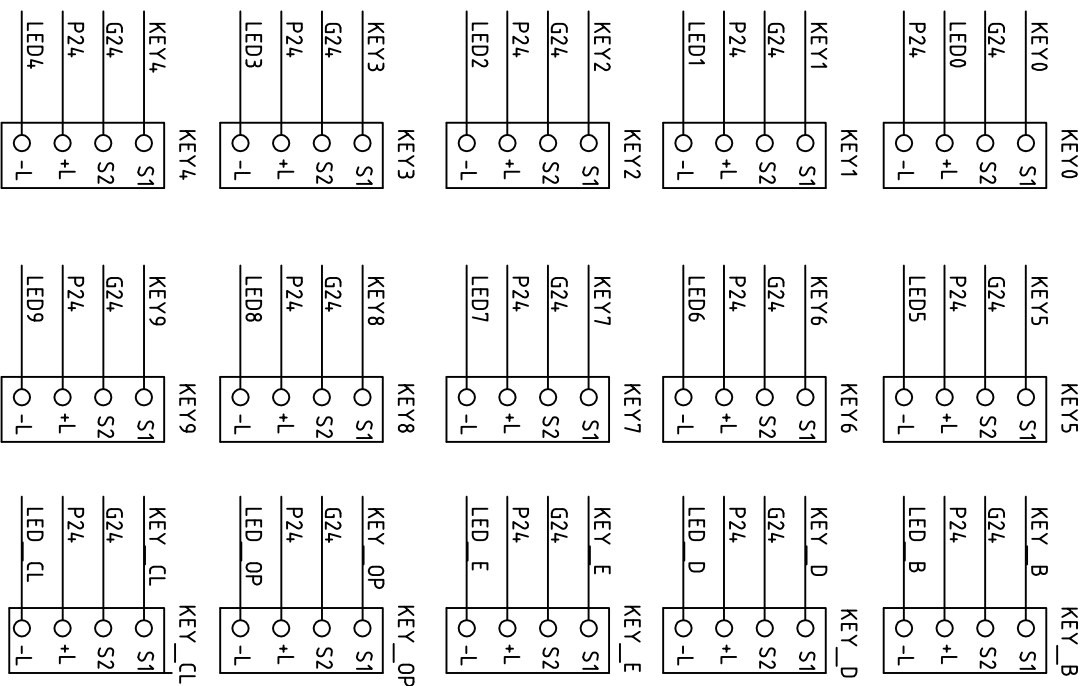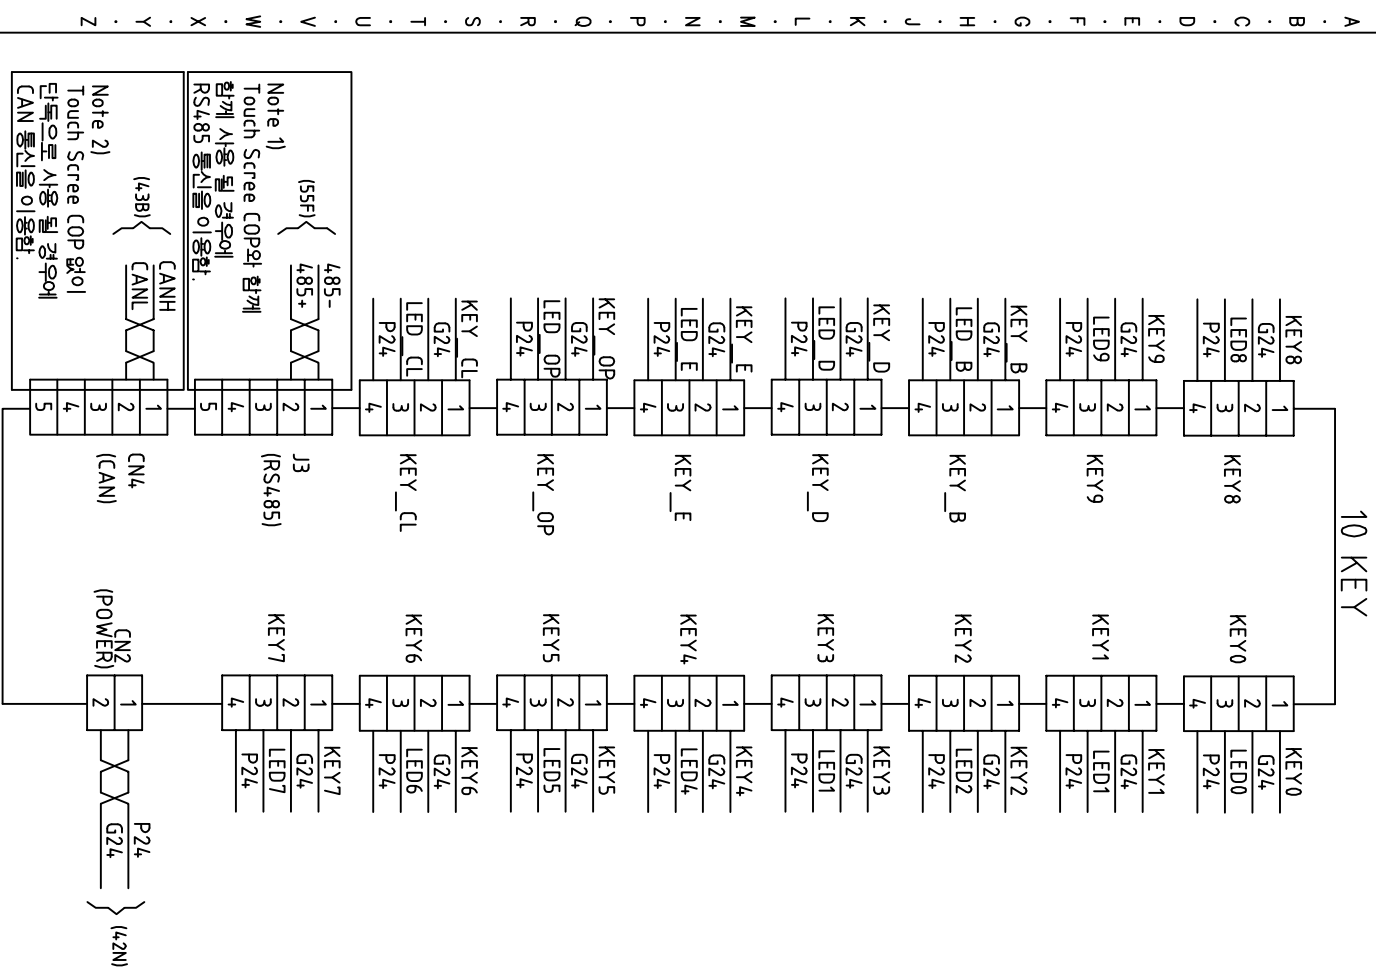


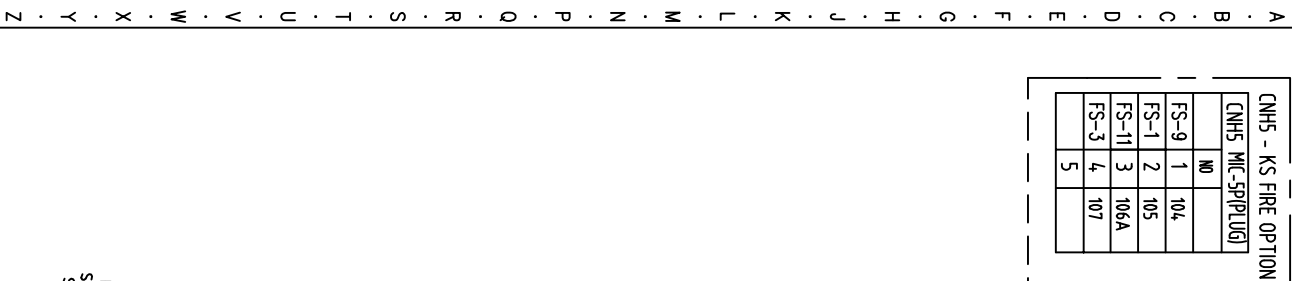

= A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

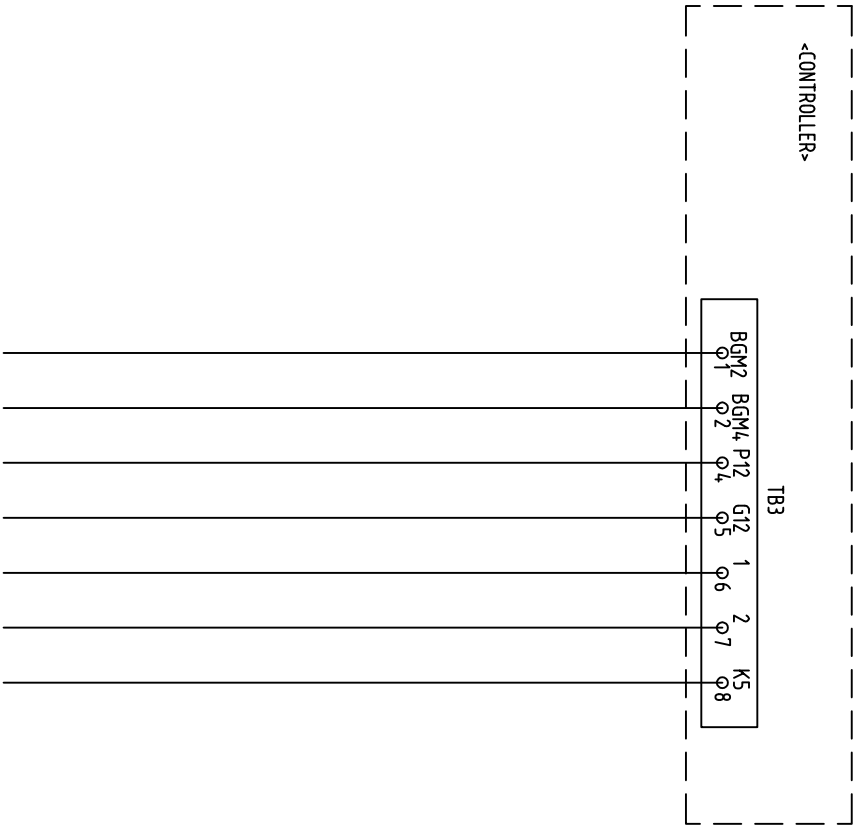

BACKGROUND MUSIC SOURCE - BGM2,BGM4)
INTERPHONE(INTERCOM)-P12,G12,1,2
EMERGENCY ALARM - P12, K5

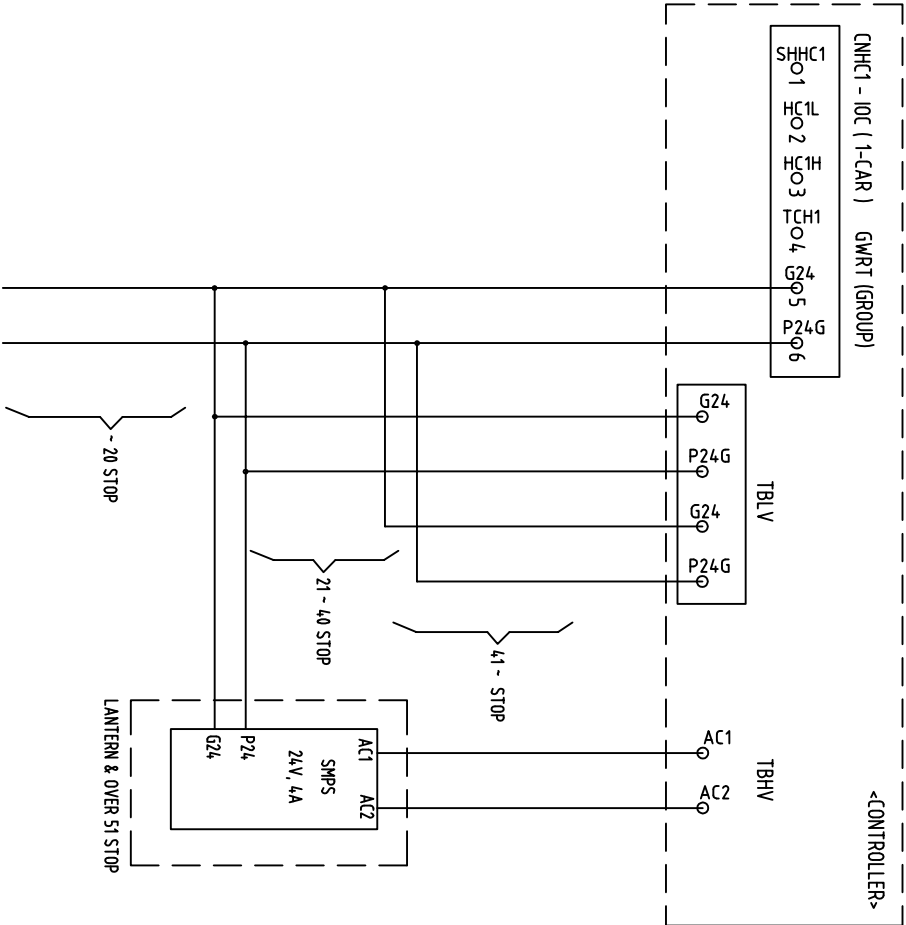

	물류센터 미 적용 시	물류센터 적용 시(HALL LANTERN)
~ 20STOP	① P01 VCTF 15mm ² 3C (P24,G24,TCH-TCH0)	⑤ P05 VCTF 25mm ² 3C (P24,G24,TCH-TCH0)
21 ~ 40STOP	② P02 VCTF 15mm ² 2C 추가 (P24,G24)	⑥ P06 VCTF 25mm ² 2C 추가 (P24,G24)
41STOP ~	③ P03 VCTF 25mm ² 2C (P24,G24)	⑦ P07 VCTF 25mm ² 2C 추가 (P24,G24)
300mm 간선	④ P04 통신용 간선(0.5mm-2C), 일반간선(0.4mm-4C) 수량 : 1SET/중	

[TK-50G][FLAT]


△	
△	
△	
△	



ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	HOISTWAY WIRING - P24G
공관철 2008.5.18	장무택 2008.5.18	
REGISTERED		7KFEA016-61
		REL. MARK

CAD No. :

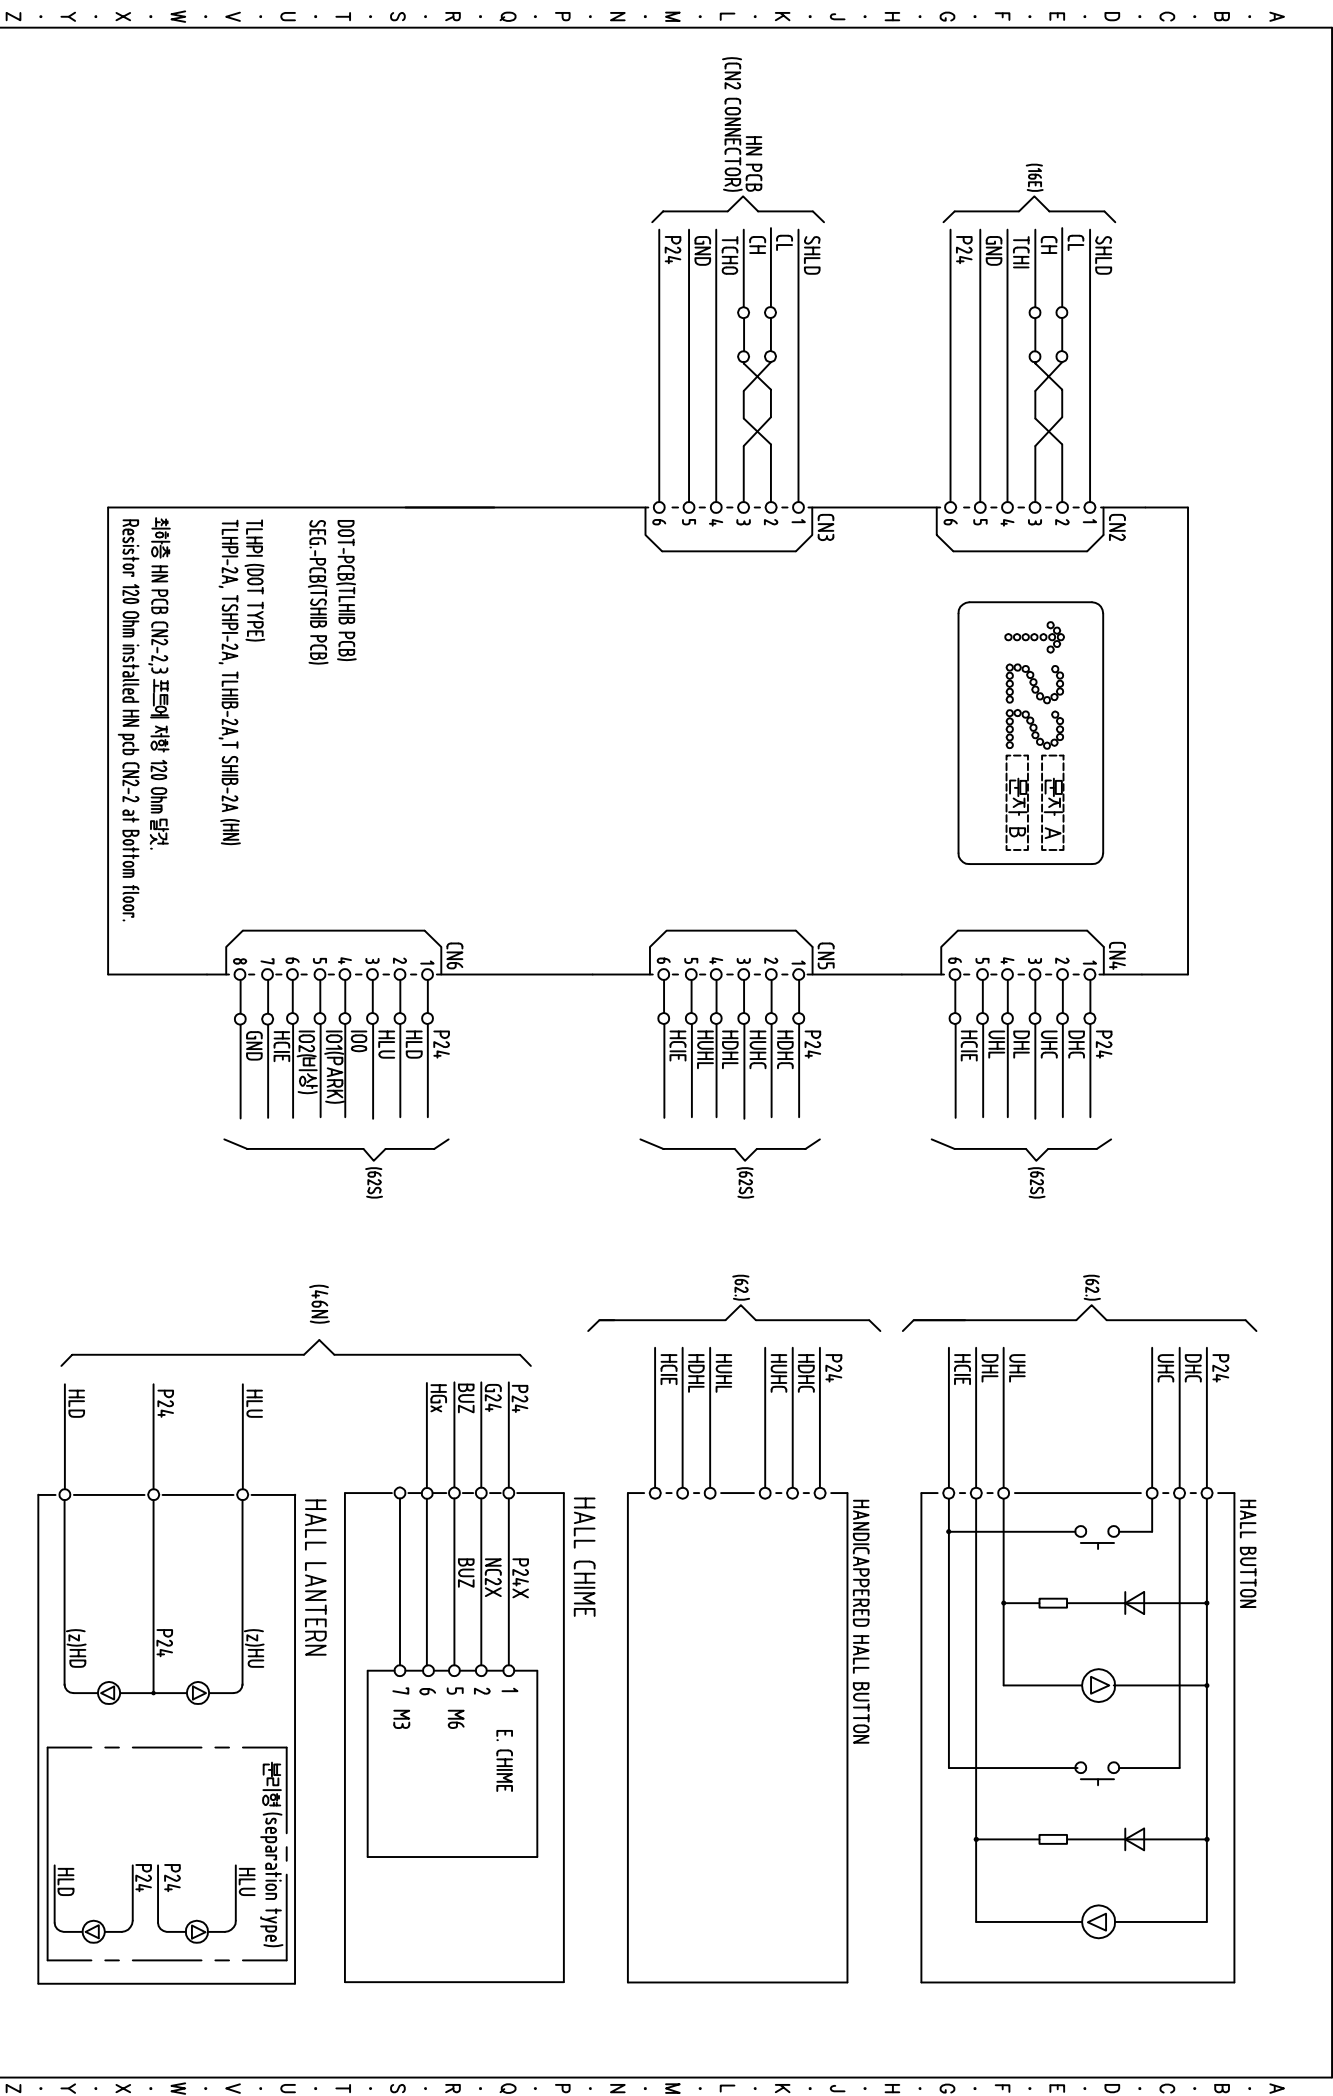

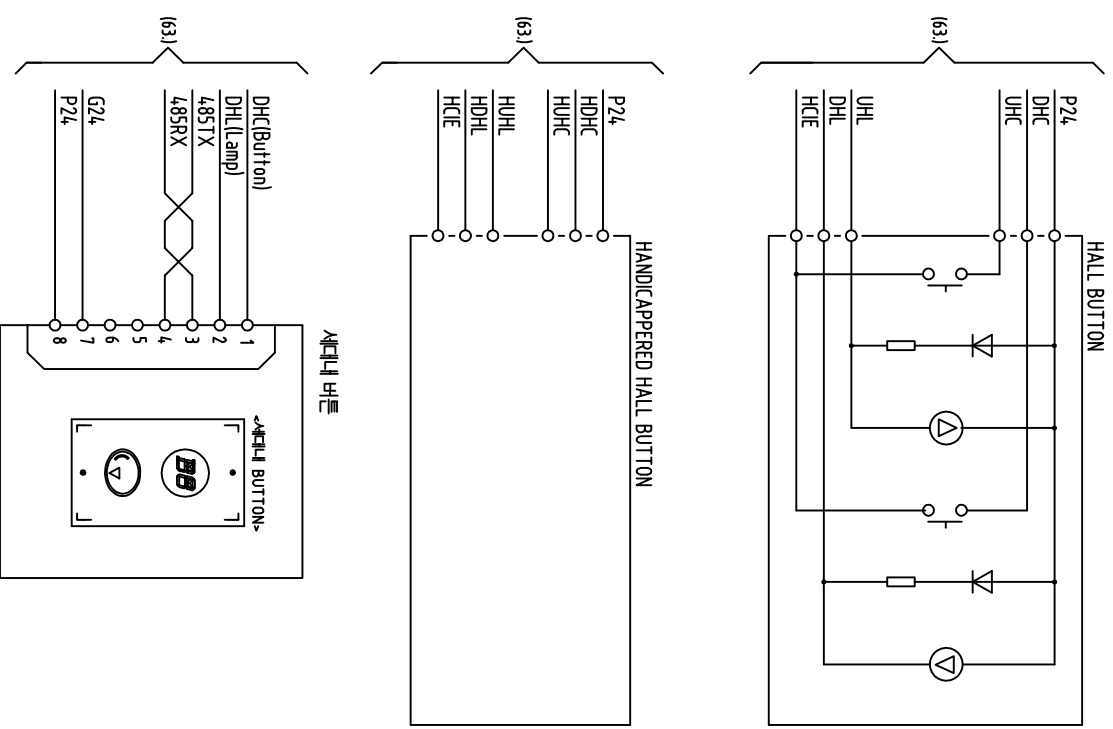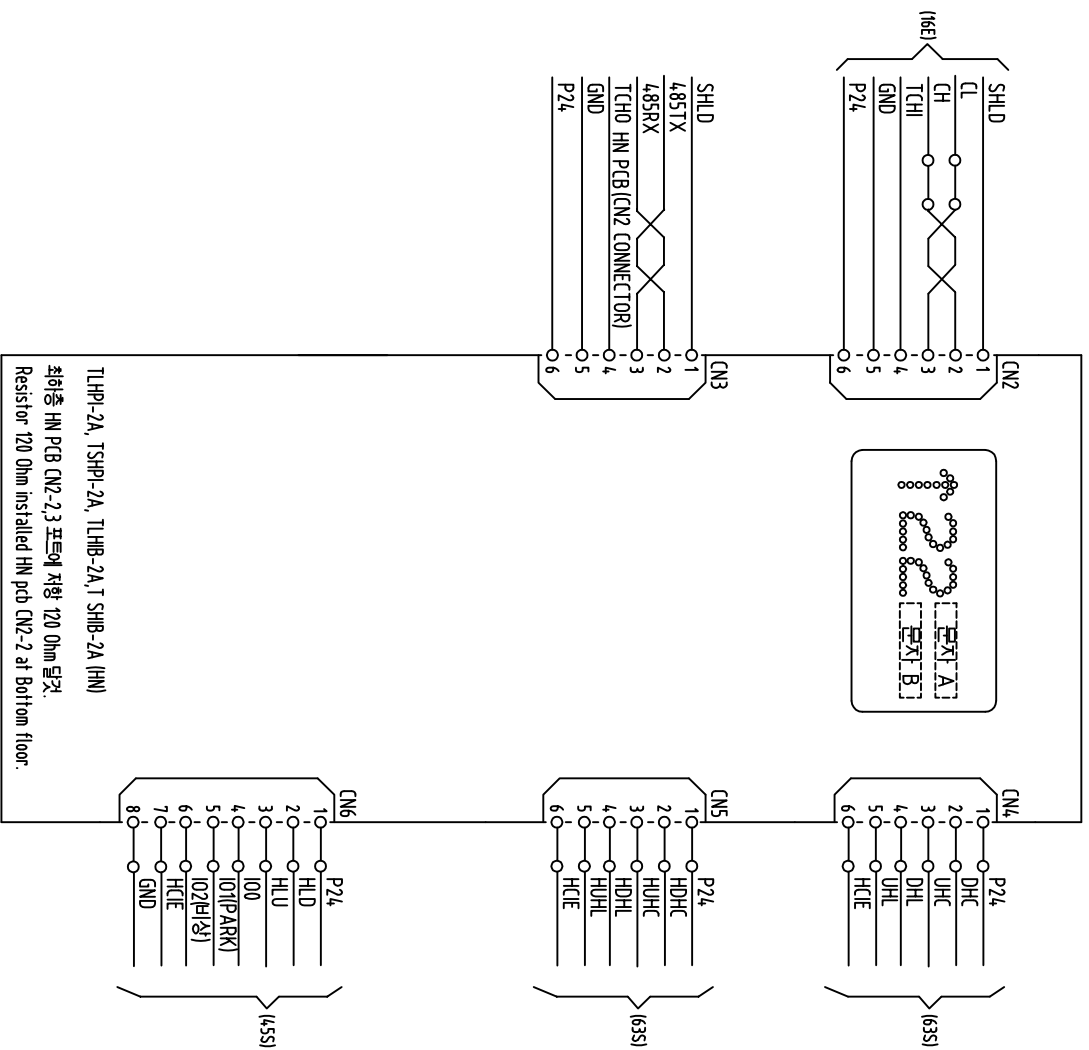

	.	
	↑	
	↑	
	↑	

CAD No.:

<세대내 버튼 사양> [TK-50G][FLAT]





CHECKED BY	DESIGNED BY	HALL CALL CIRCUITS(HN-2A) 7KFEA016-63	REJ MARK ○
윤관철	장무택		
2009. 5. 18	2009. 5. 18		
REGISTERED			

ThyssenKrupp Elevator (Korea)



7KFEA016-6.

KEY MARK

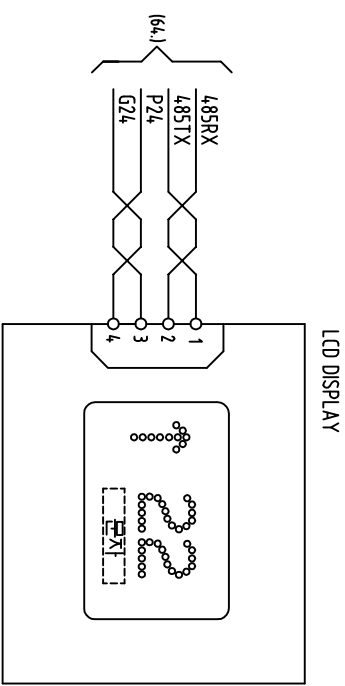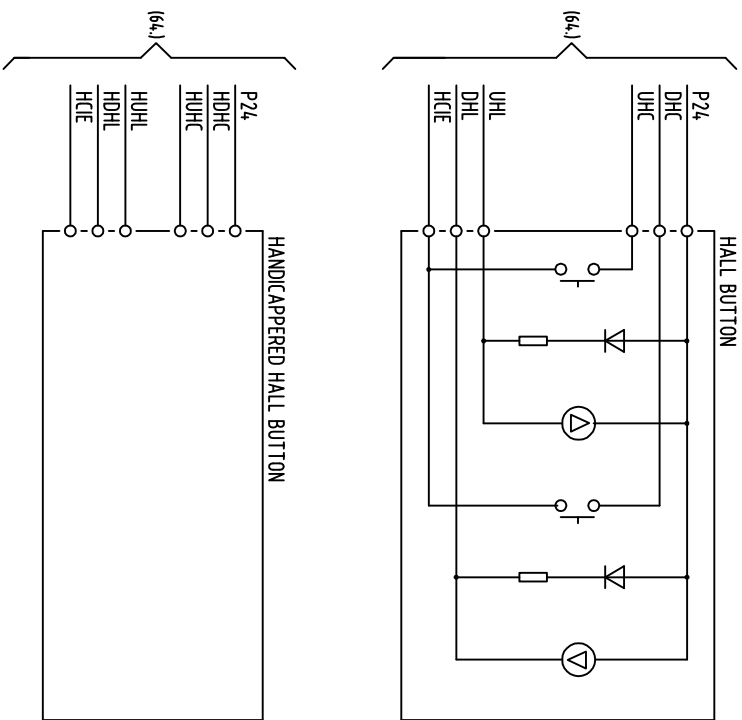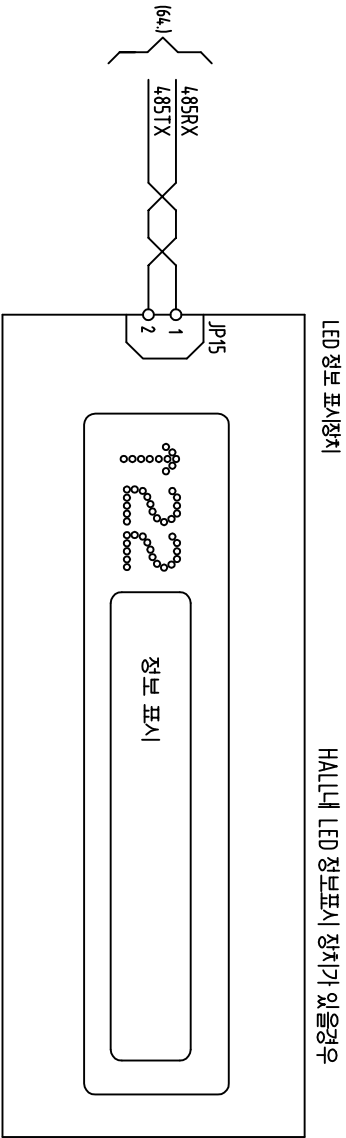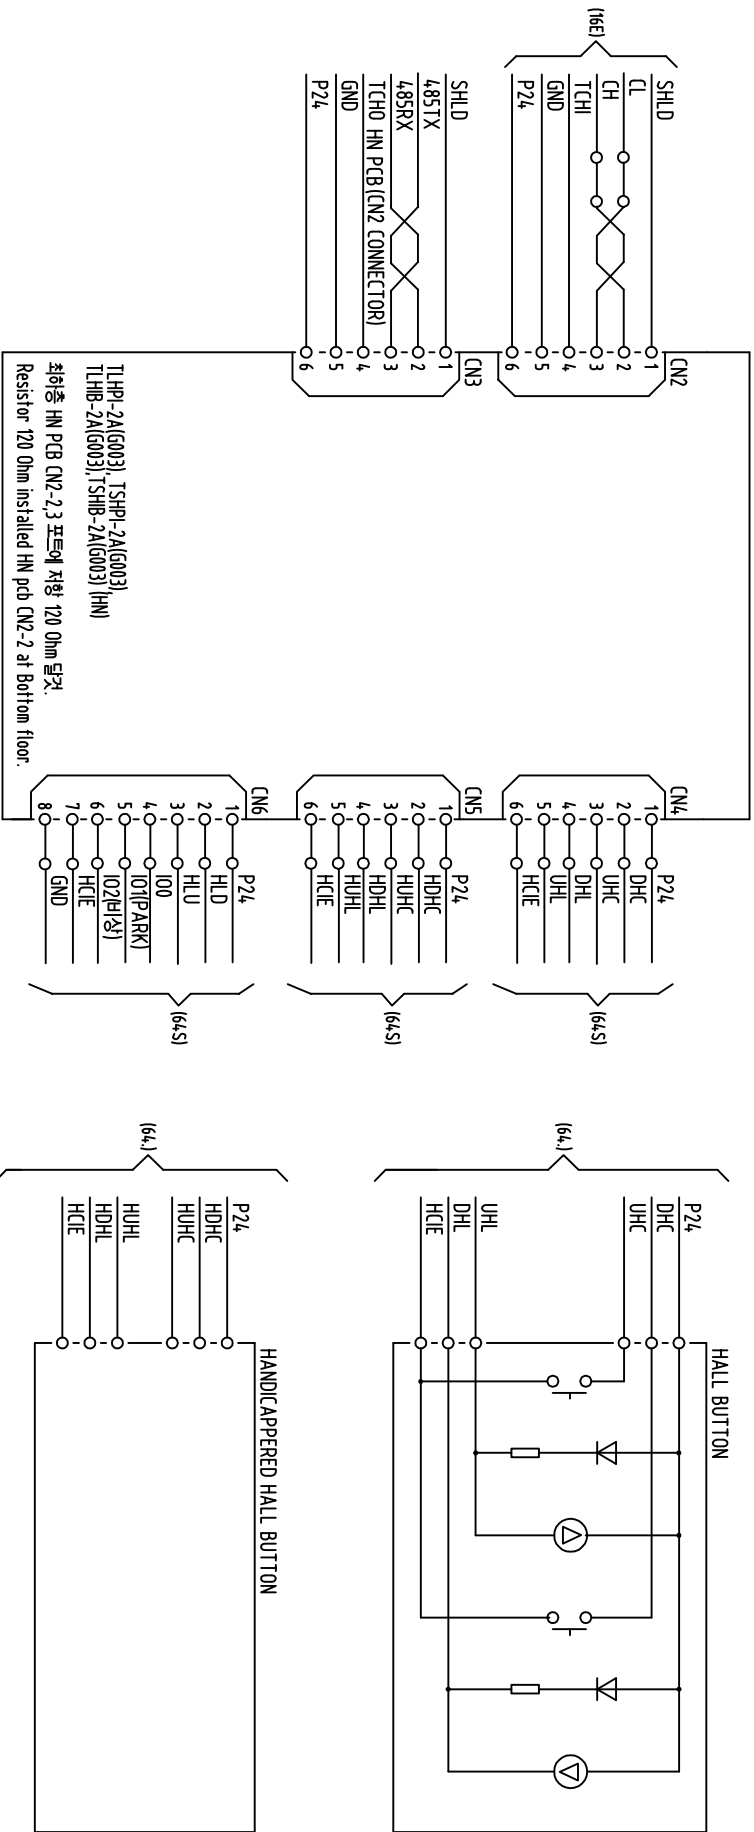

[TK-50G][FLAT]


△	△
△	△
△	△
△	△

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	HALL CALL(HN-2A G003, LED & LCD DISP)
윤관철	장무택	
2008.5.18	2008.5.18	
REGISTERED		
7KFEA016-64		REL WORK

= A . B . C . D . E . F . G . H . J . K . L . M . N . P . Q . R . S . T . U . V . W . X . Y . Z

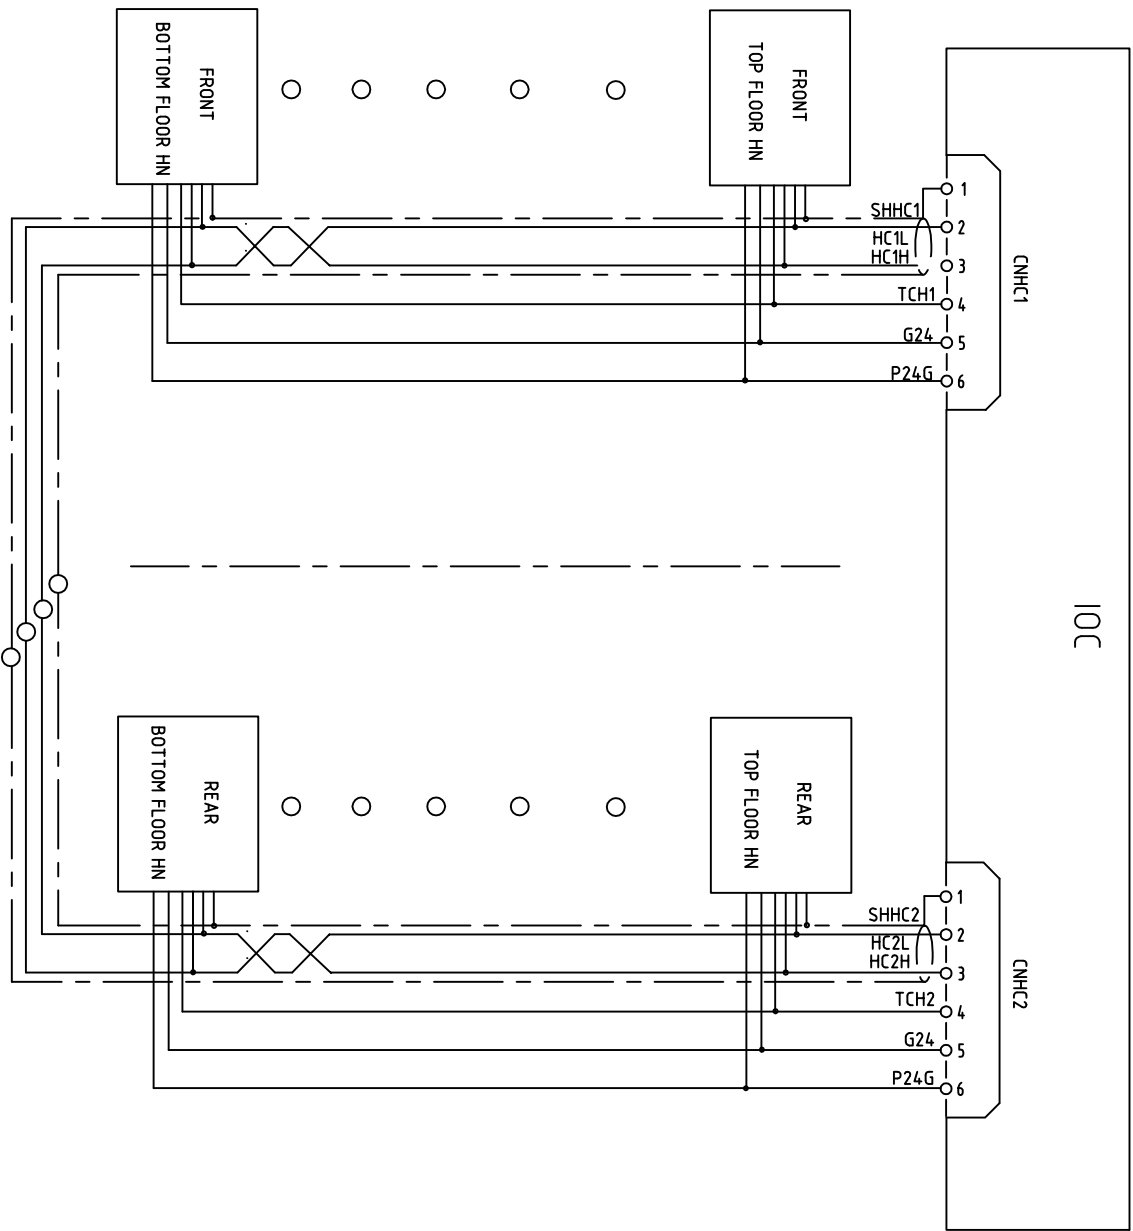

FRONT 와 REAR 통신선은 PIT에서 연결한다.(현장 작업)
Connect front serial line and rear serial line at pit(a field work)

[TK-50G][FLAT]

ThyssenKrupp Elevator (Korea)




CHECKED BY	DESIGNED BY	HALL CALL REAR WIRING
윤관성 2008.5.18	장무택 2008.5.18	
REGISTERED		7KFEA016-65

REL WORK

CAD No. :

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

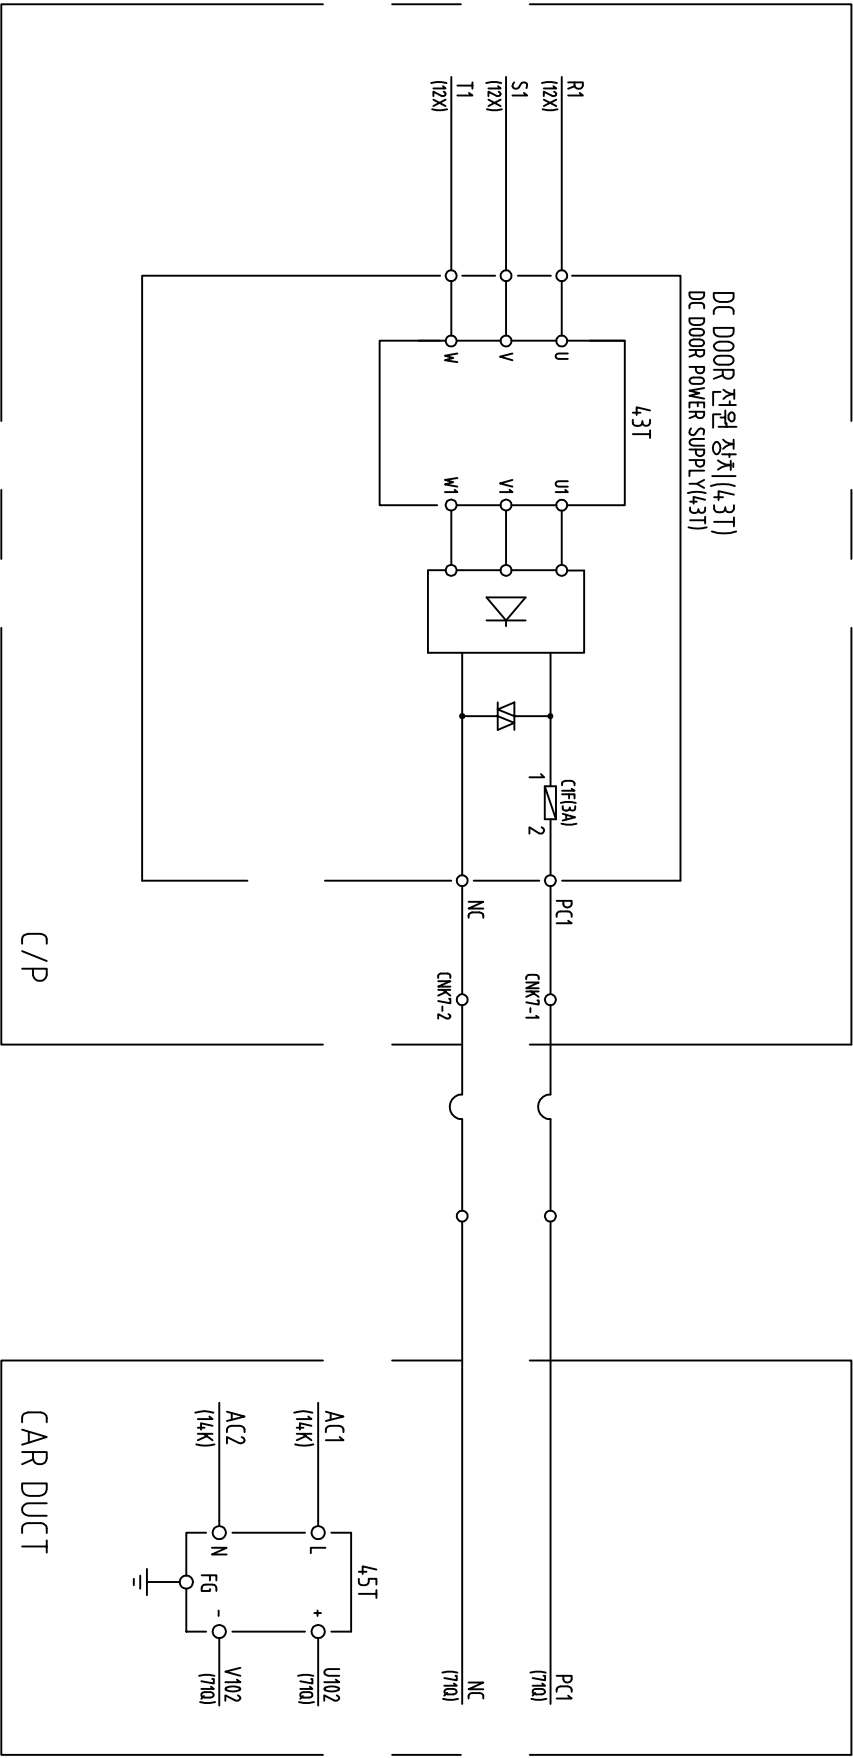


A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z




[TK-50G][FLAT]

CAR DUCT

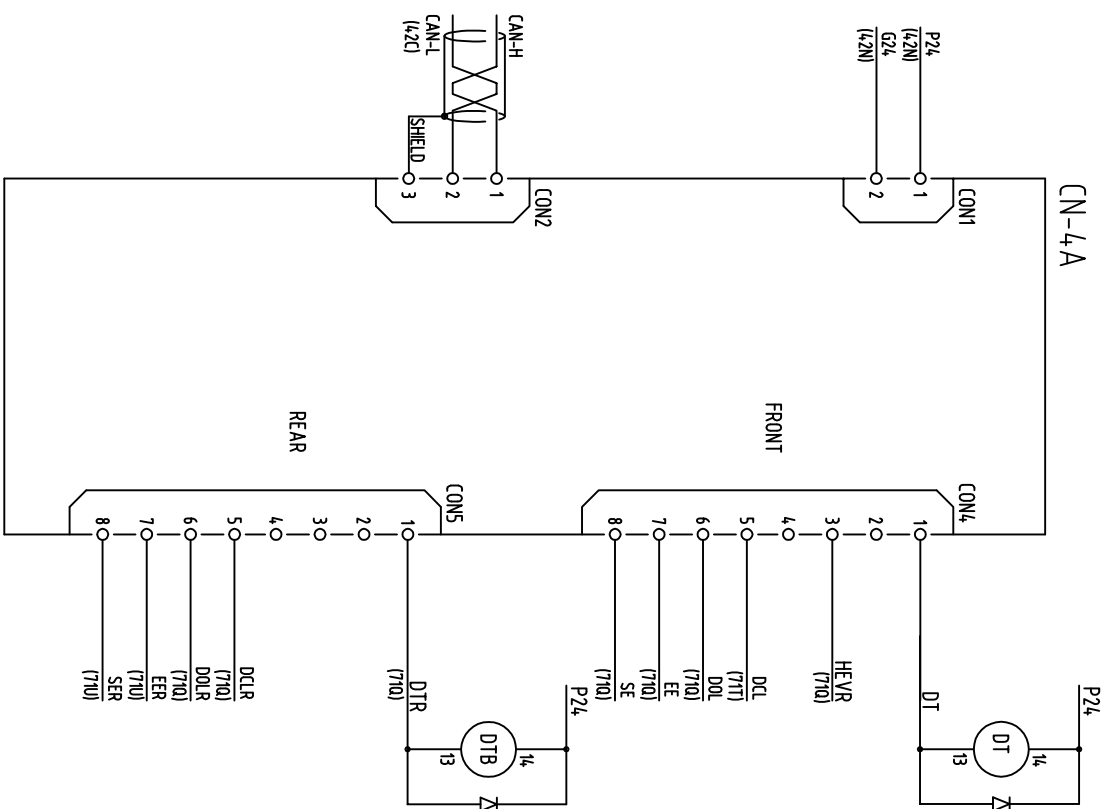

DTA		
a	5	77K
b	9	1
a	8	
b	12	4
MY-2N		

DTA		
a	9 5	77K
b	1	
a	12 8	
b	4	
MY-2N		

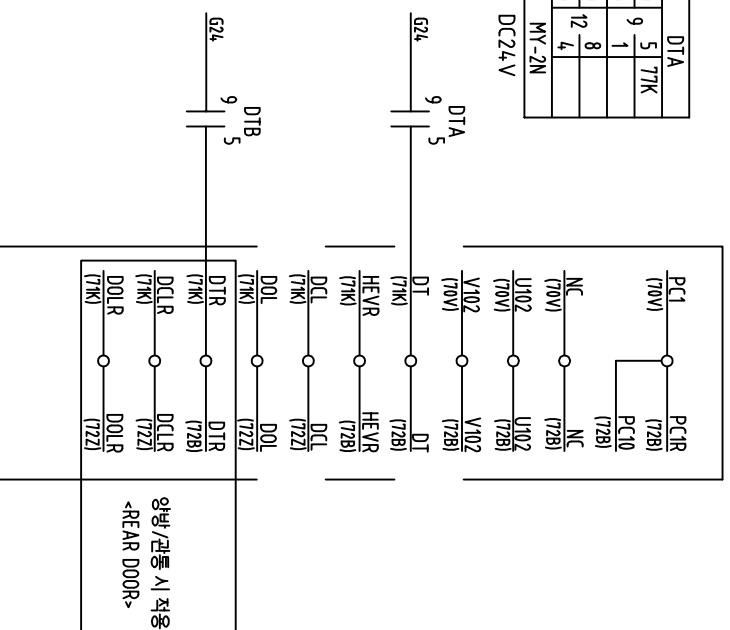

<DLL-2A 적용> [TK-50G][FLAT]
<DLL-2A application>

[TK-50G][FLAT]

[illegible]

CAD No.:

ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY	DOOR I/O CONTROL(ILL-2A)
윤관철 2008. 5. 18	장무택 2008. 5. 18	
REGISTERED		

7KFEA016-71

REVISION


○

7KF EAO16-71

REV. MAR

~~CAR DUCT~~

기계적 CAR DOOR LOCK장치가 없는 경우만 적용할 것
Do not use if there is mechanical door lock device(S8/K8)

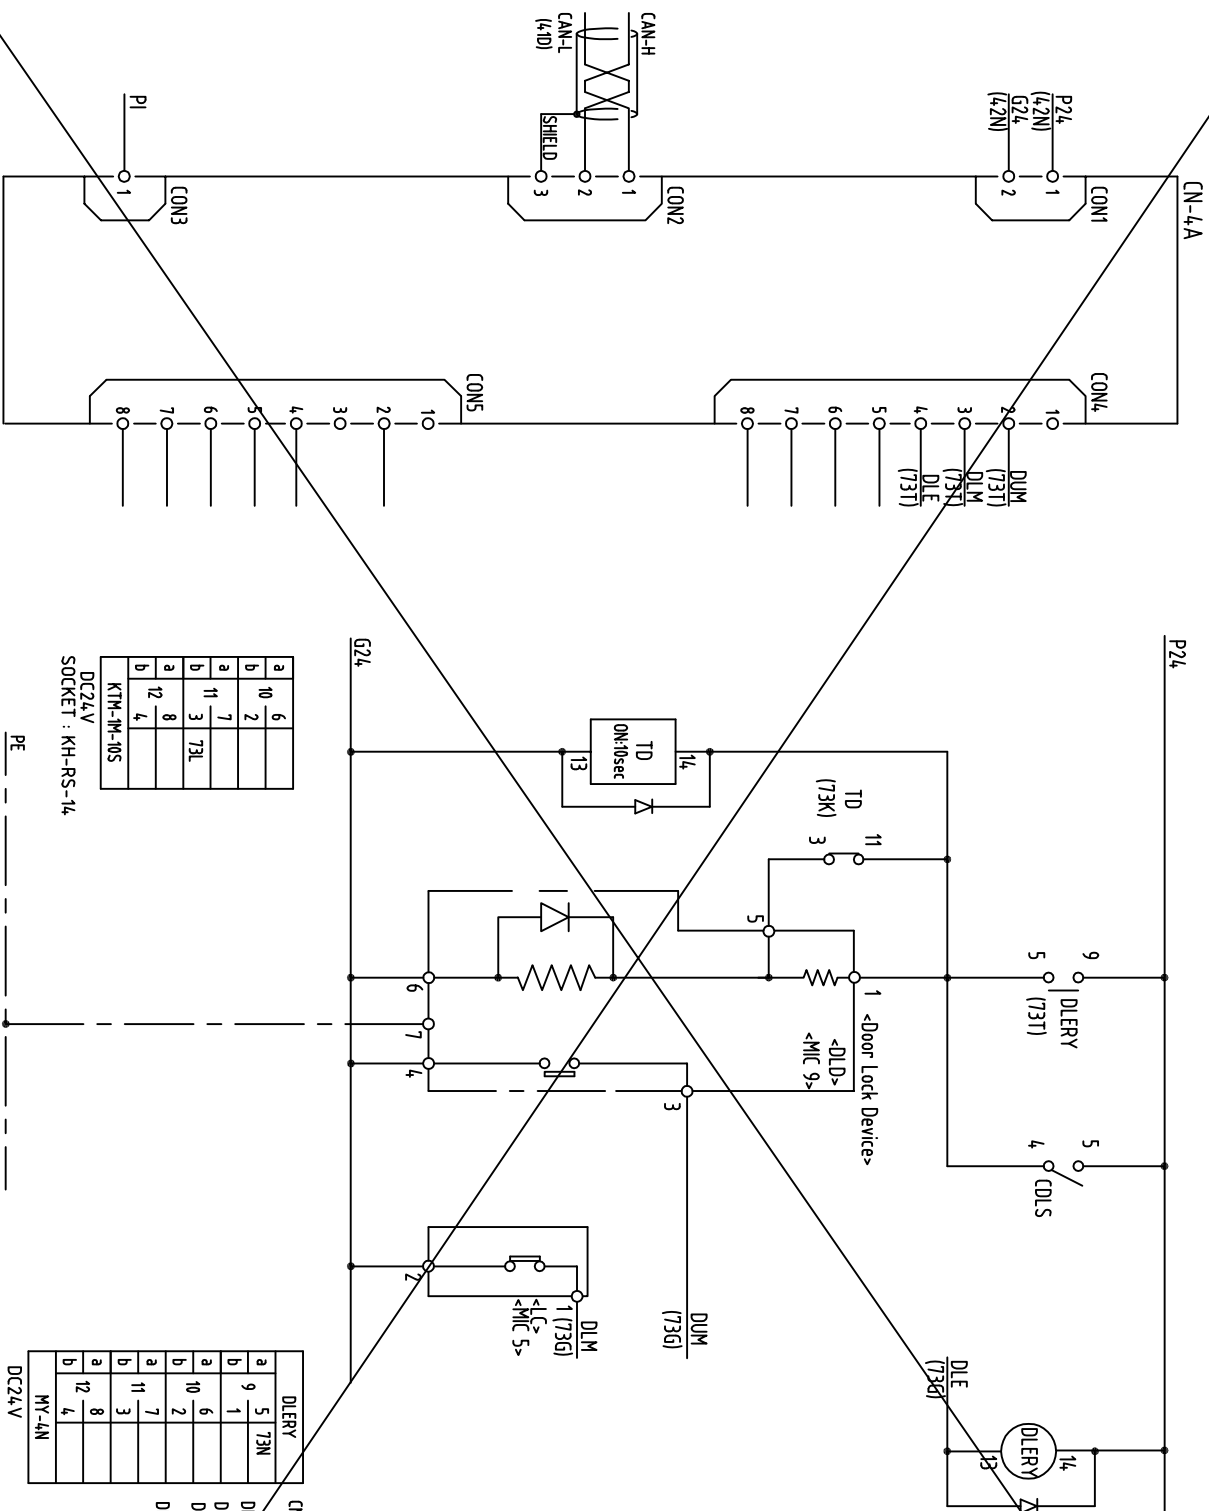

a	10	6	
b		2	
a	11	7	
b		3	73L
a		8	
12			
b		4	
KTM-1M-10S			

DLERY		
a	5	73N
b	9	
	1	
a	6	
b	10	
	2	
a	7	
b	11	
	3	
a	8	
b	12	
	4	
MY-4N		

~~CNA: Serial door controls (CNA가 있을 경우는 벨드 수해하지 말 것)
Parallel door controls (CNA가 있을 경우는 벨드 수해하지 말 것)
DLE: Enable at Door Zone while normal operation
DUM: Car door unlocked monitoring
DLM: Car door locked monitoring
DMODE = UF4.007~~

DC24V

PE

DC24V
SOCKET : KH-RS-14

기계적 CAR DOOR LOCK장치 가 없는 경우만 적용할 것

[TK-50G][FLAT]

CHECKED BY	DESIGEND BY
------------	-------------

--

CAR DOOR LOCK DEVICE

ThyssenKrupp Elevator (Korea)




유관청 공민콜	2009. 5. 18
정무택	2009. 5. 18

REGISTERED .

7KFEOA016-73

REV. MARK

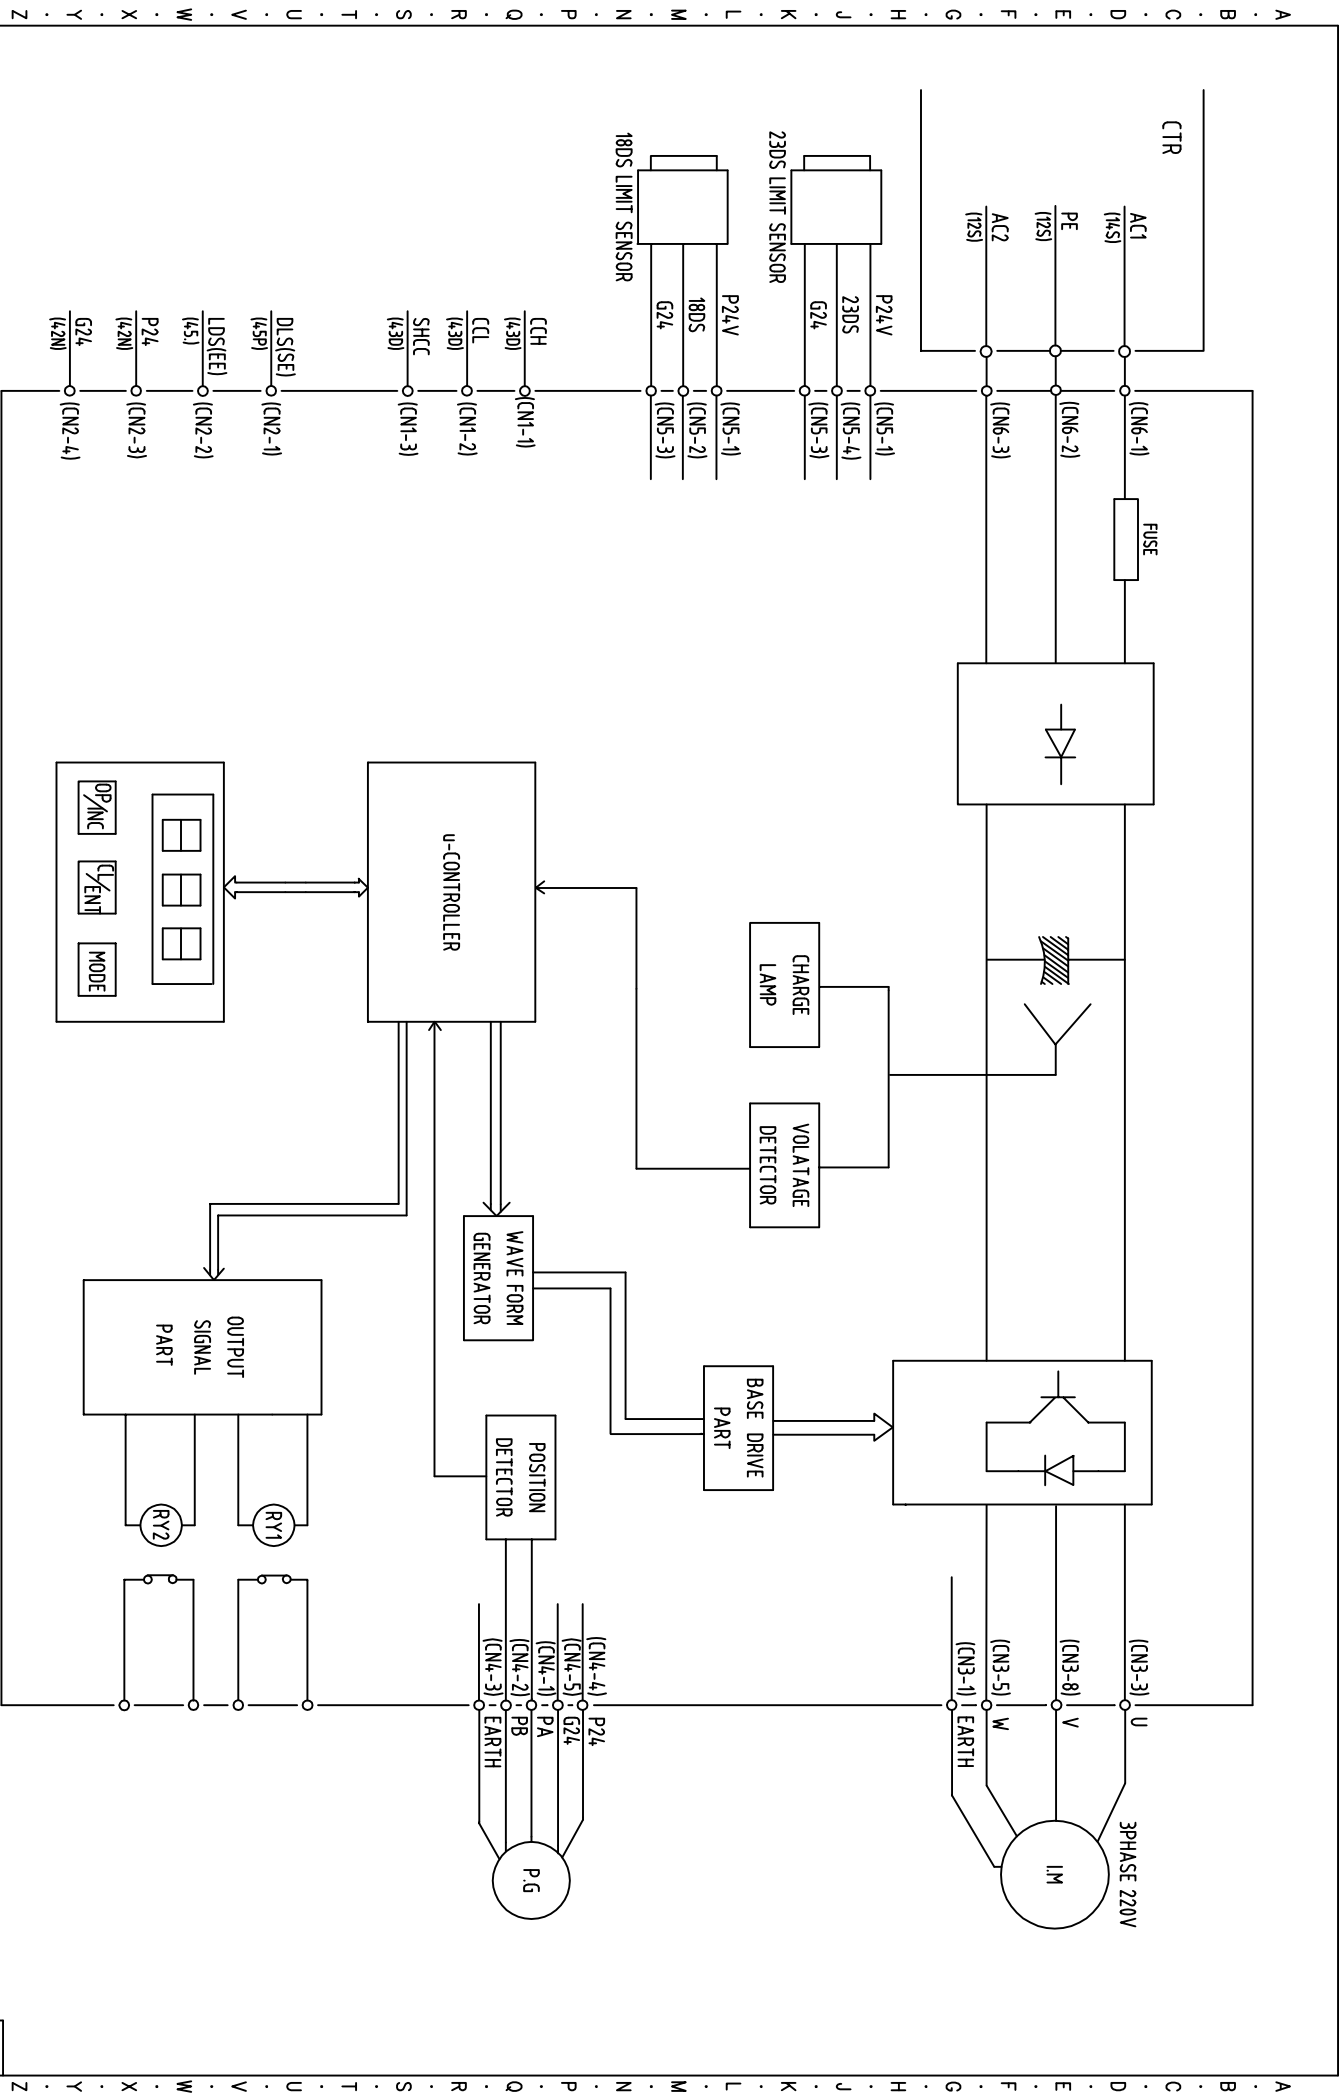

[TK-50G][FLAT]

✓	✓
✓	✓
✓	✓

ThyssenKrupp Elevator (Korea)


CHECKED BY	DESIGNED BY	DOOR CONTROL CIRCUITS(DSL)
윤관석	김두익	
2008.5.18	2008.5.18	
REGISTERED		

7KFEA016-74

REL WORK


= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z


ECO/MIDI
(WITTUR DOOR OPERATOR)

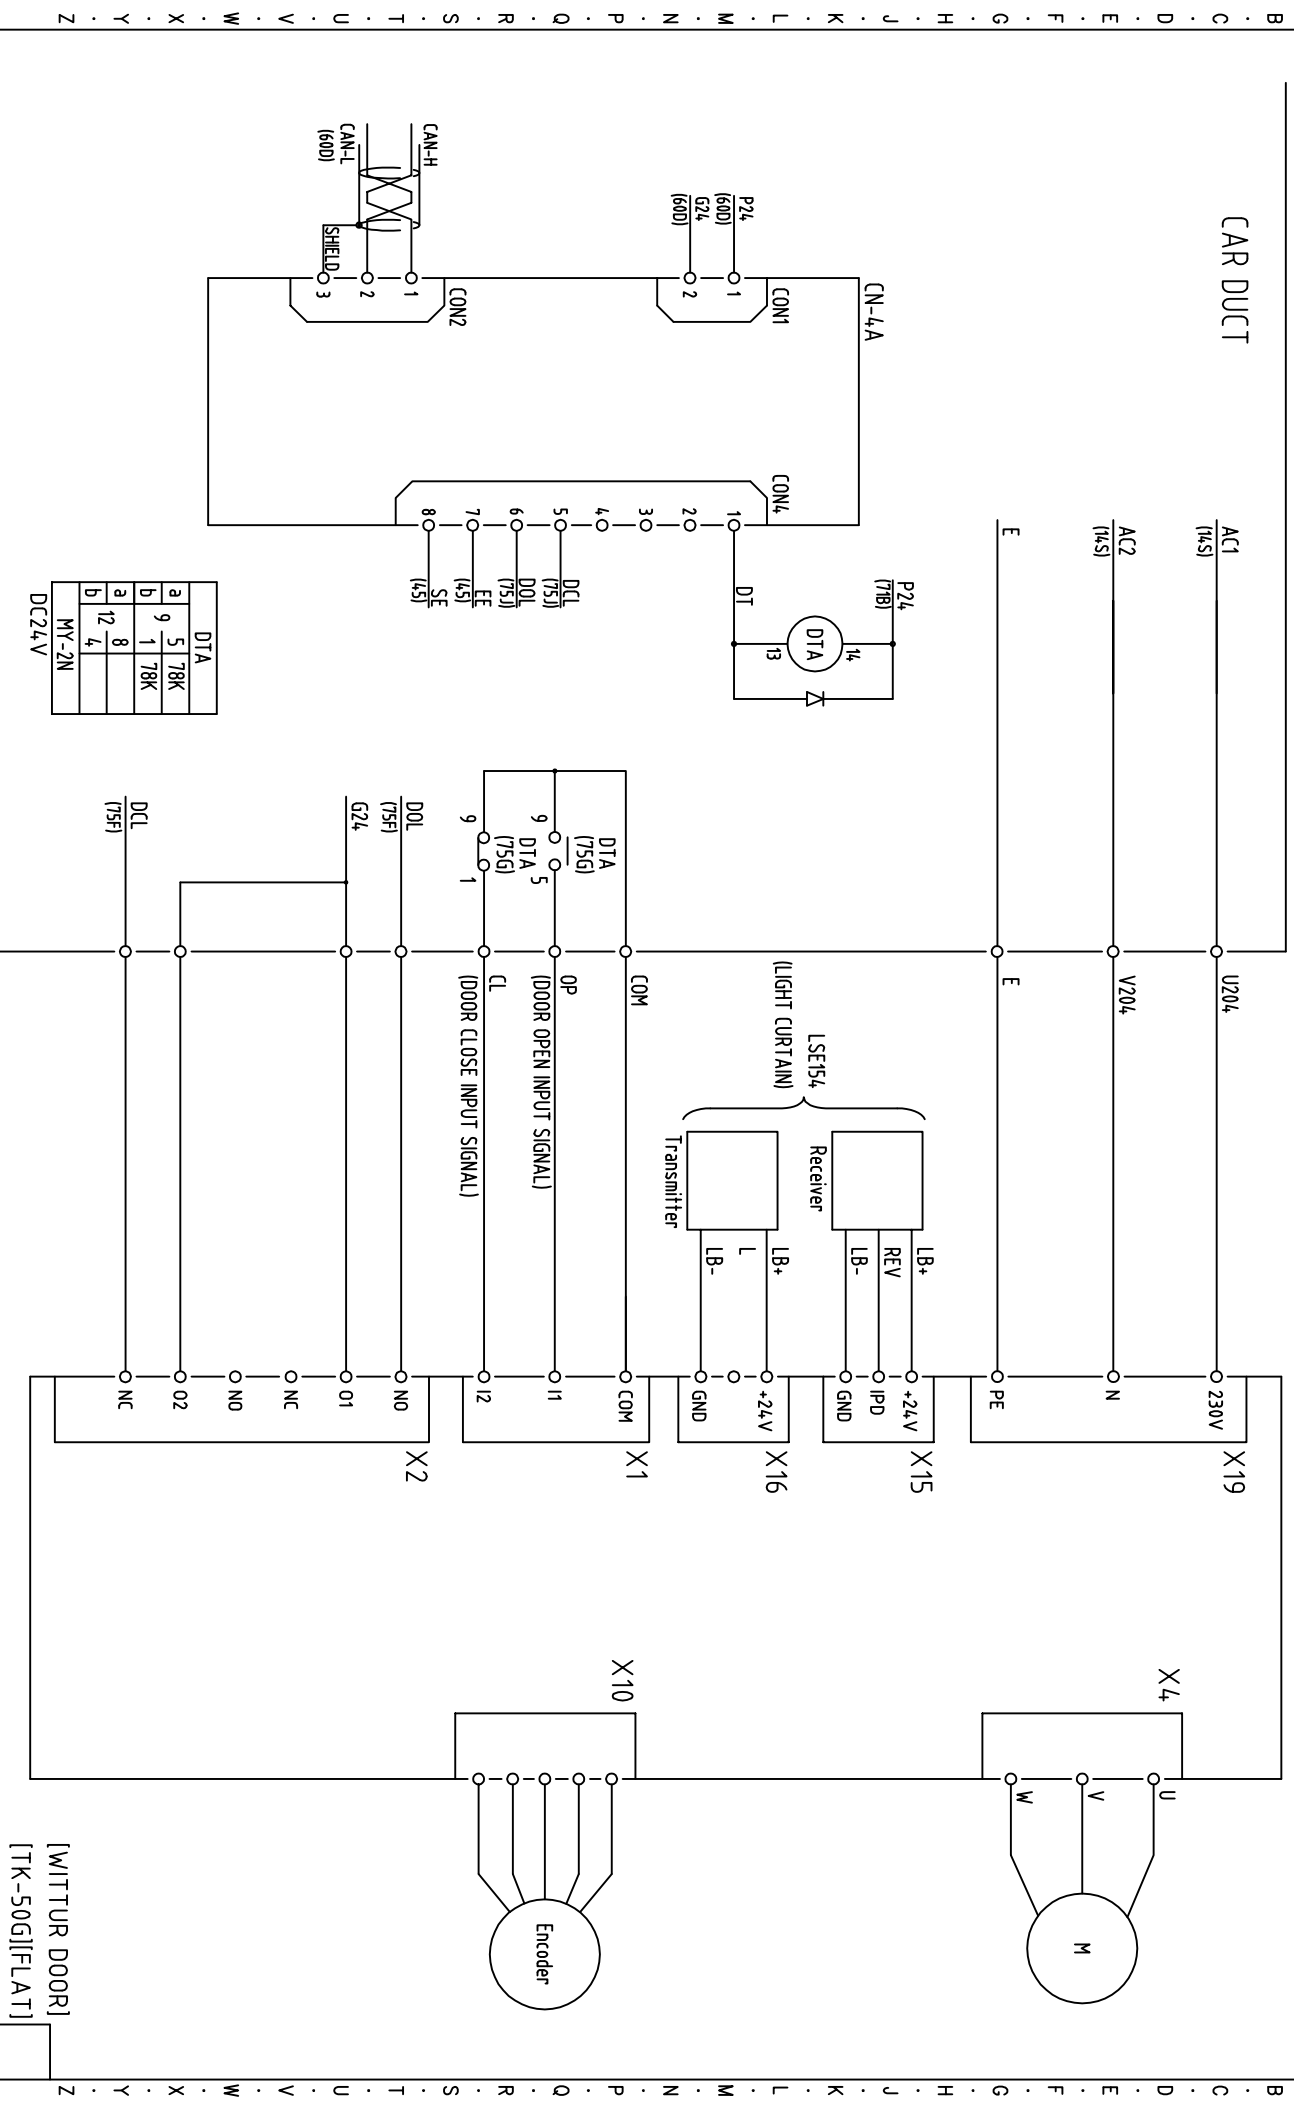

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

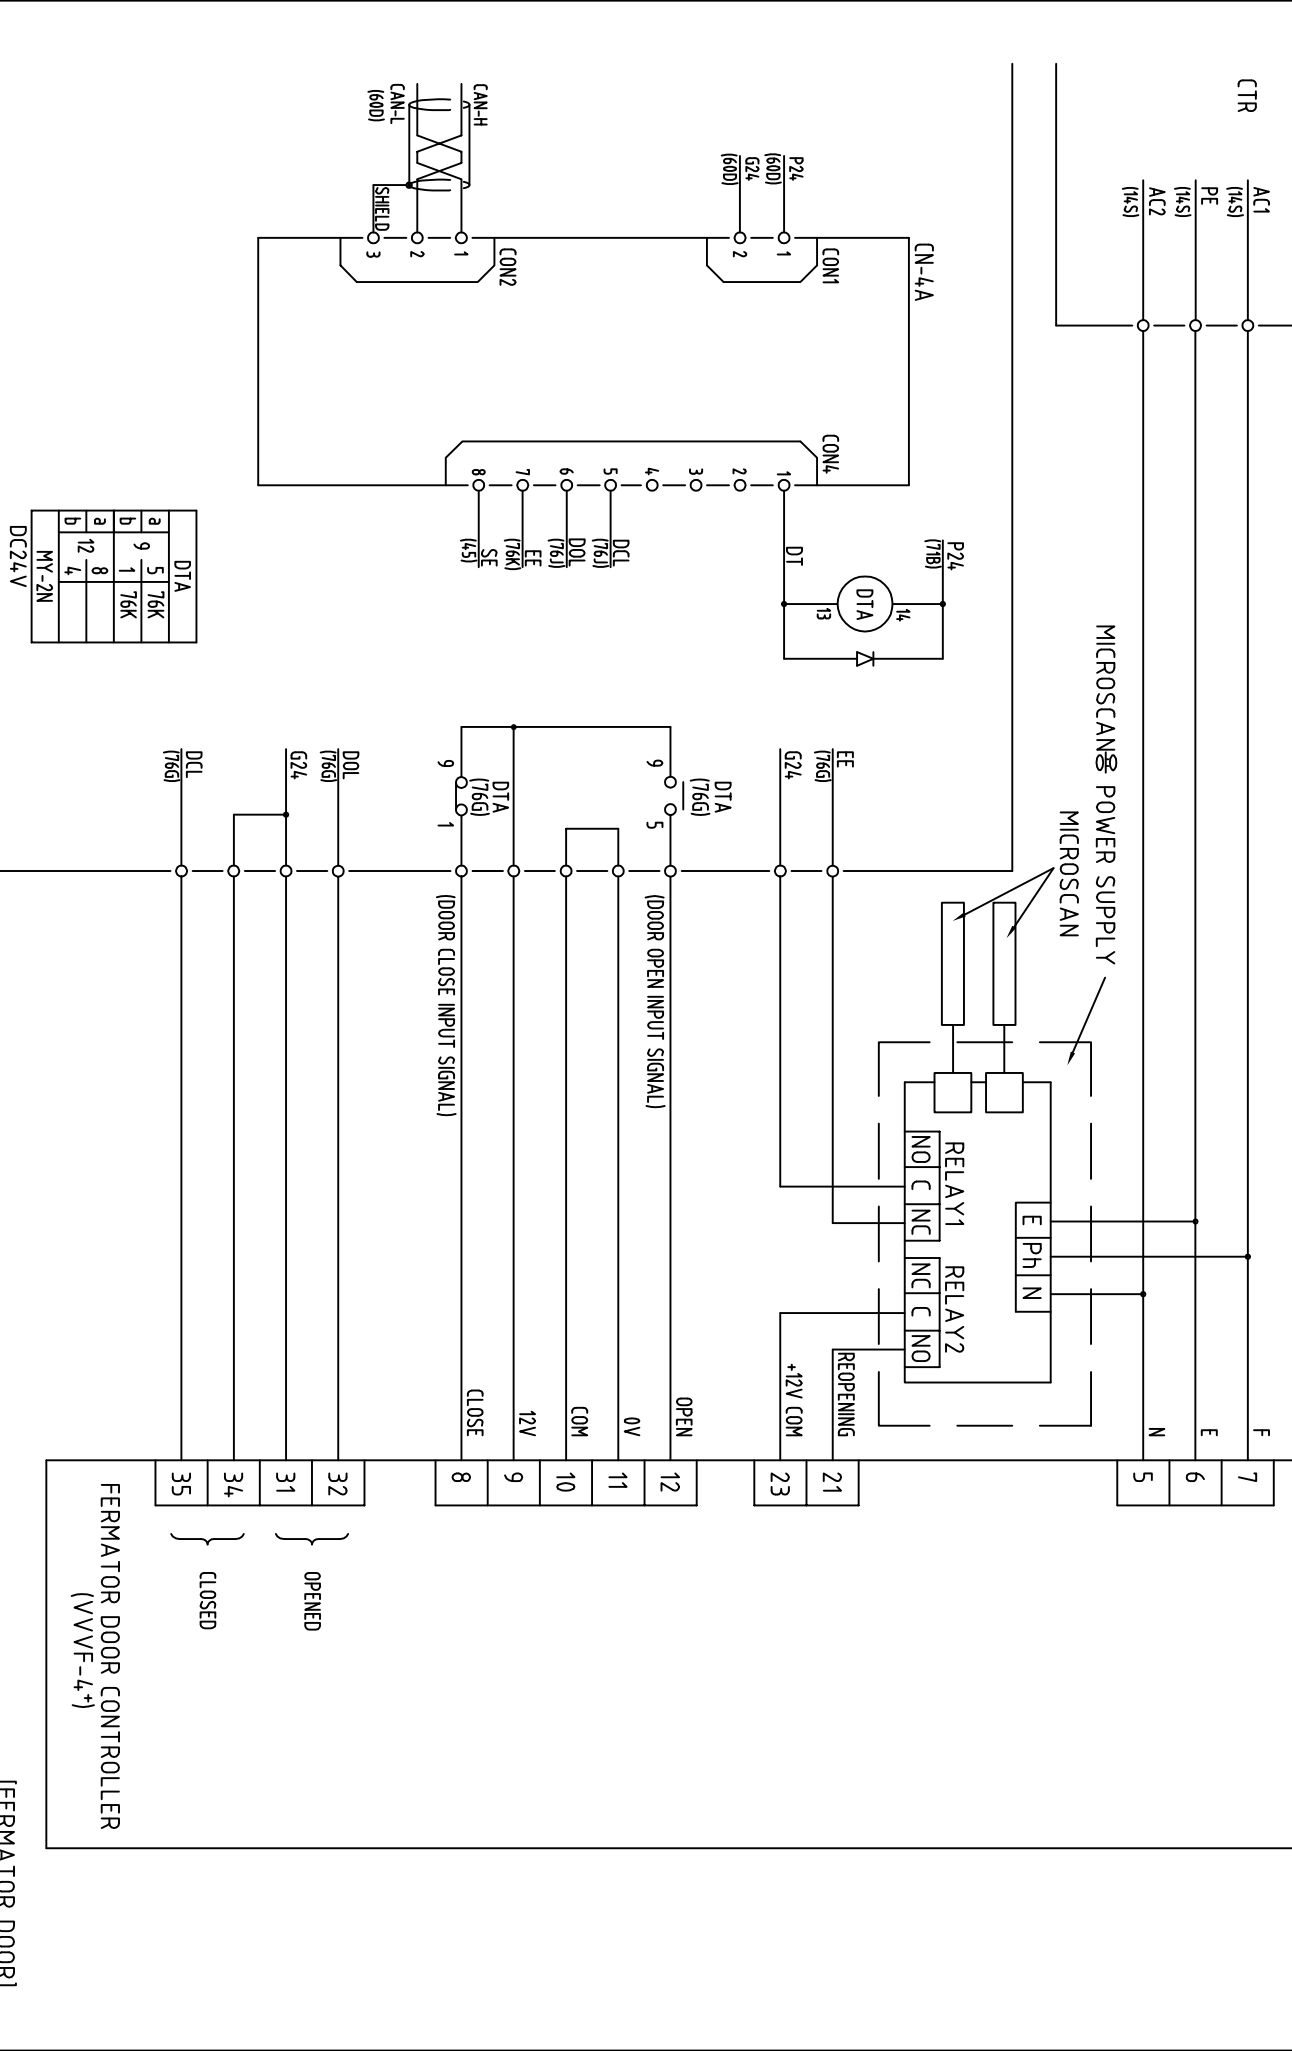



[58K8 DOOR]

[TK-50G][FLAT]

CHECKED BY	DESIGNED BY
------------	-------------

GOOD CONTROL CIRCULITS /CO /KQ FOR

DOOR CONTROL CIRCUITS (S8/K8, F9)

2009. 3. 18	2009. 3. 18
REGISTERED	


1/KT-EA016-//

REV. MARK


ThyssenKrupp Elevator (Korea)



CAD No.:

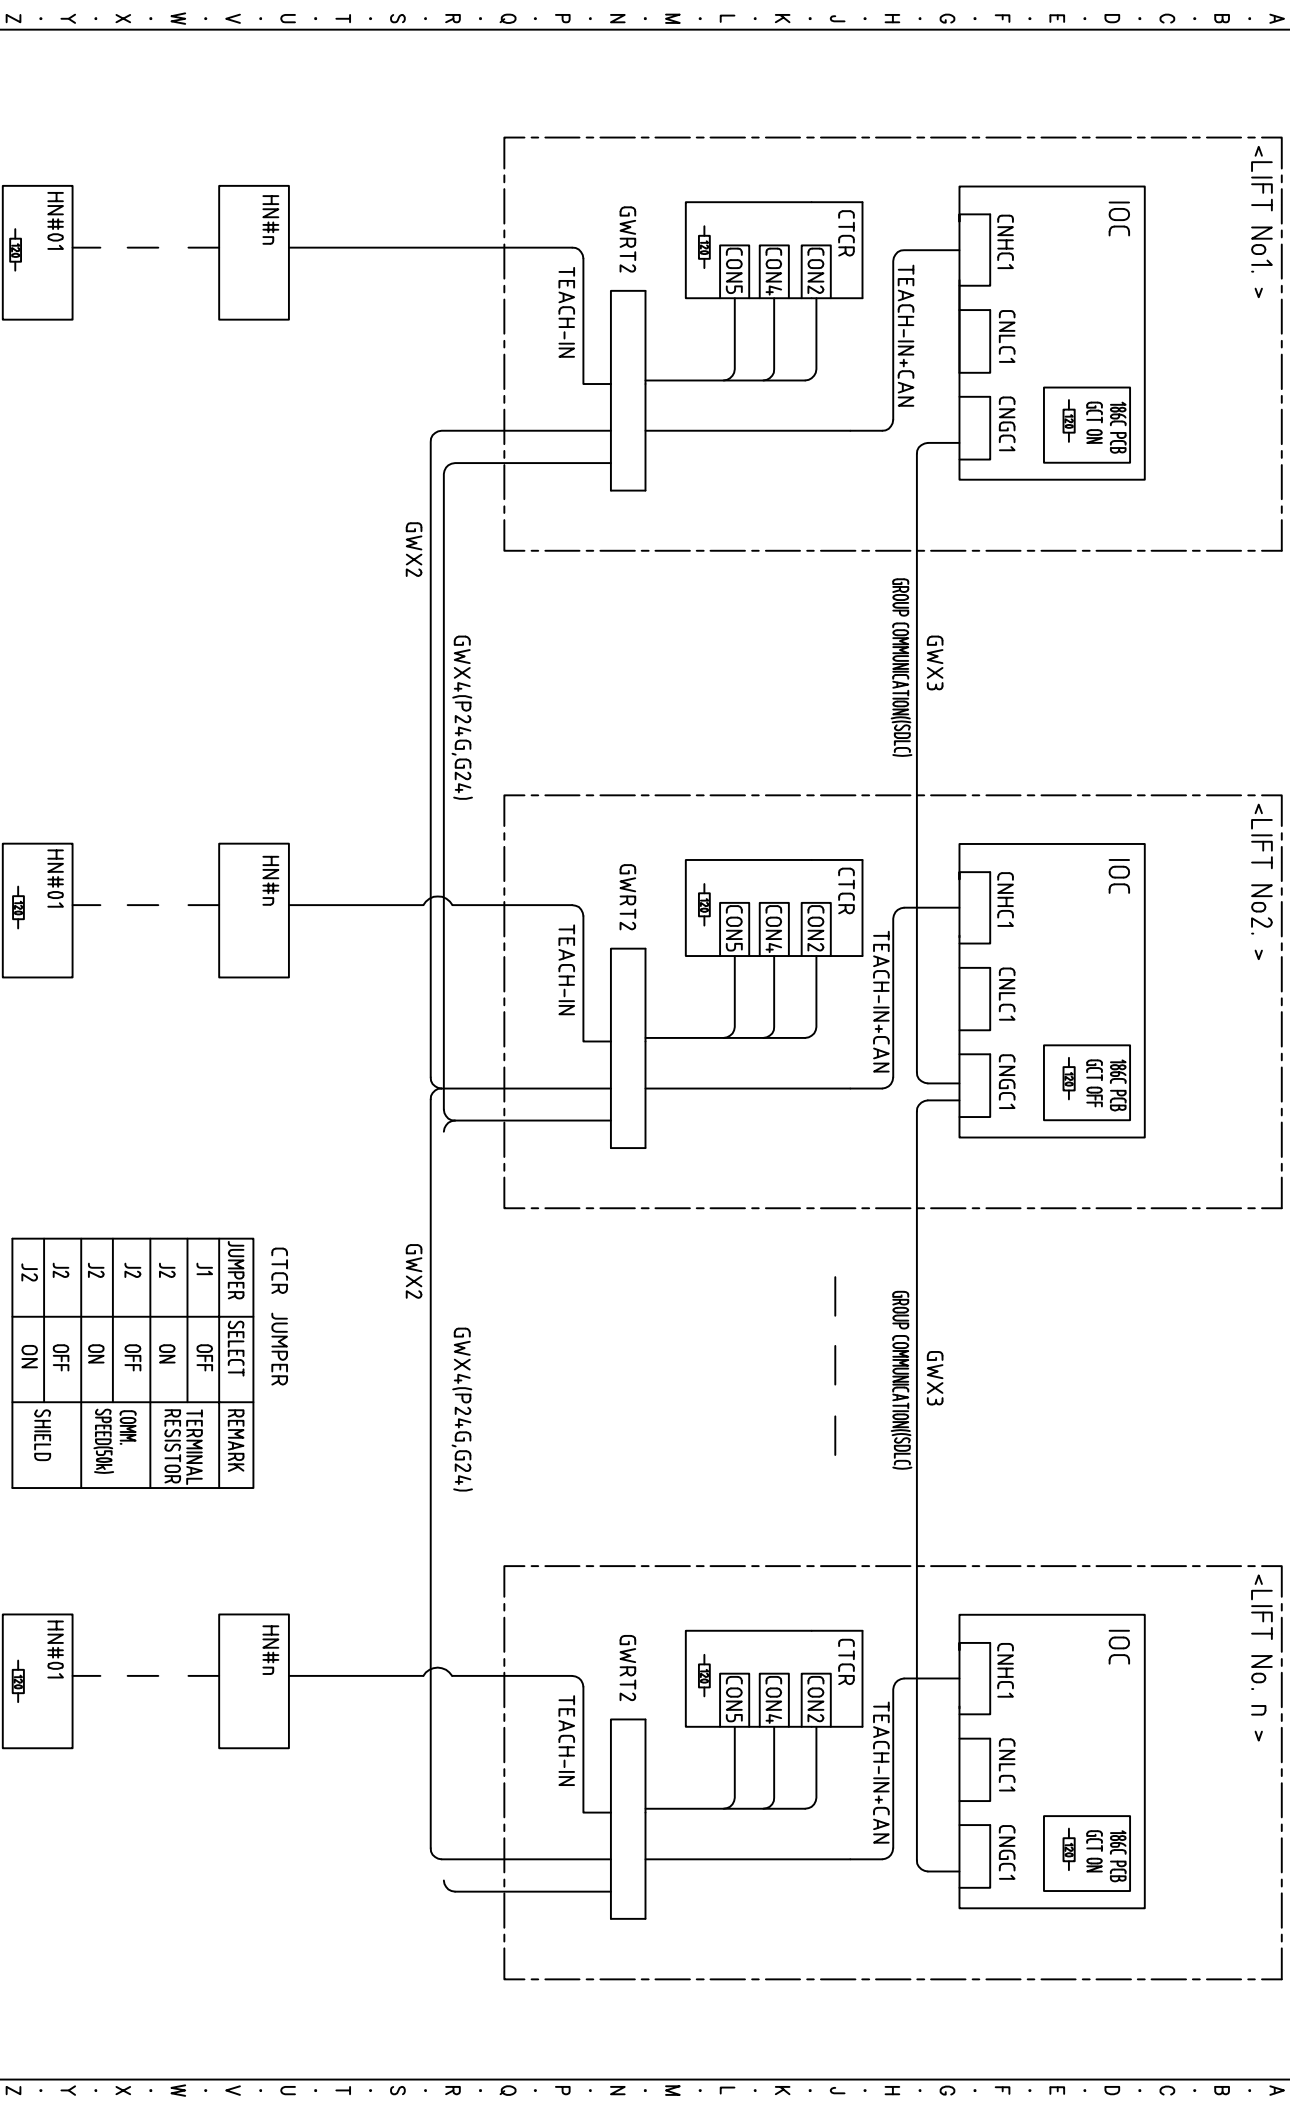


= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

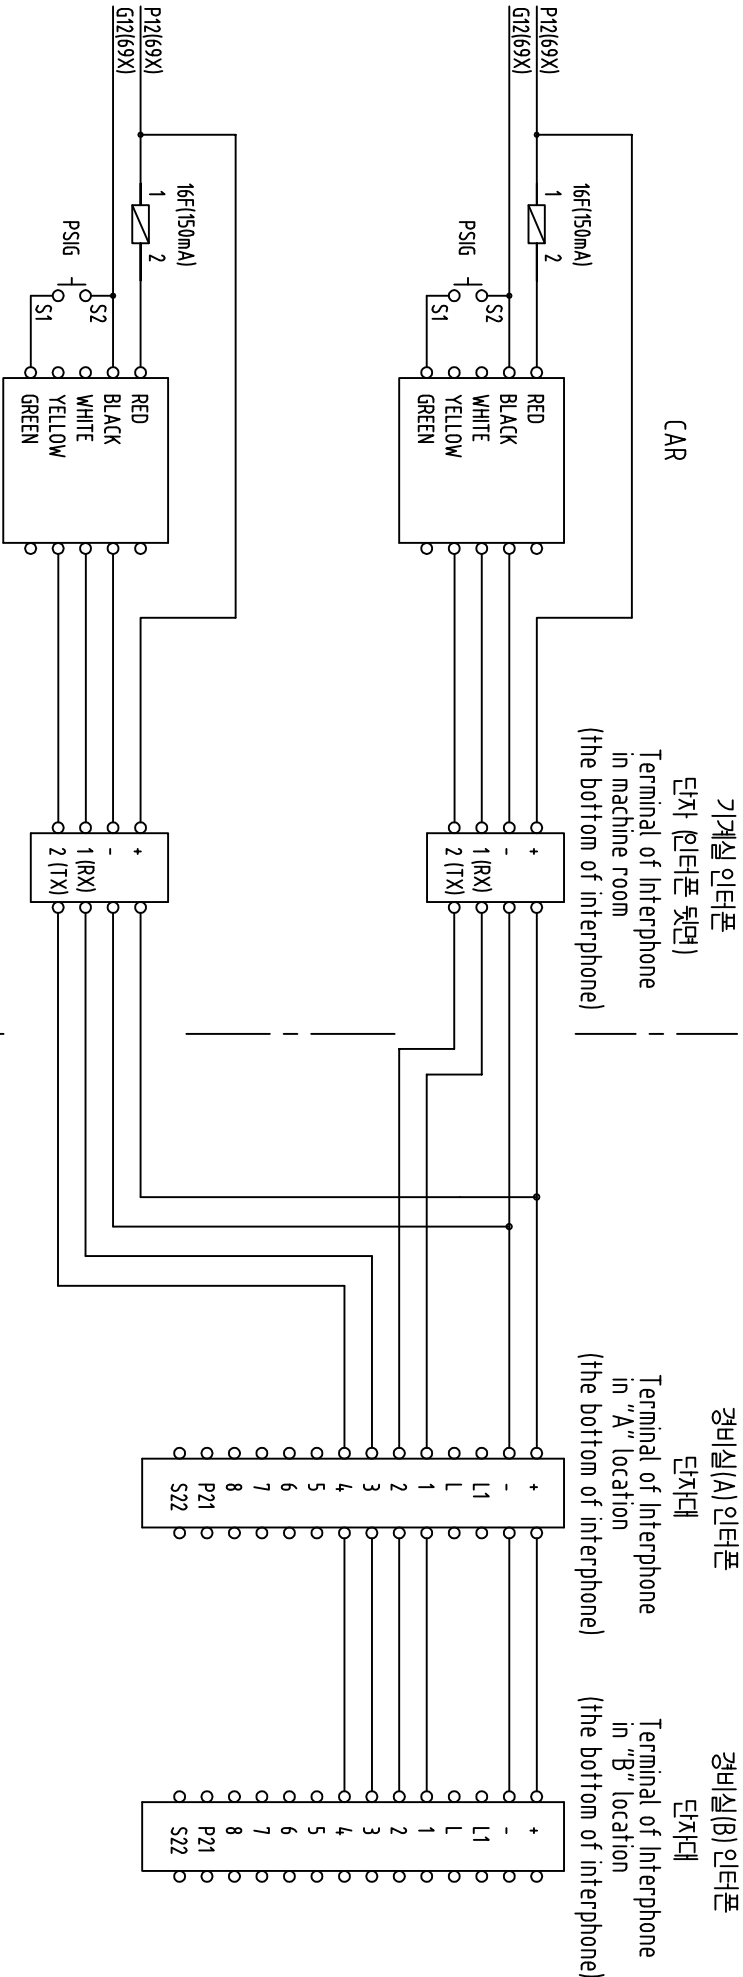

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

[TK-50G][FLAT]

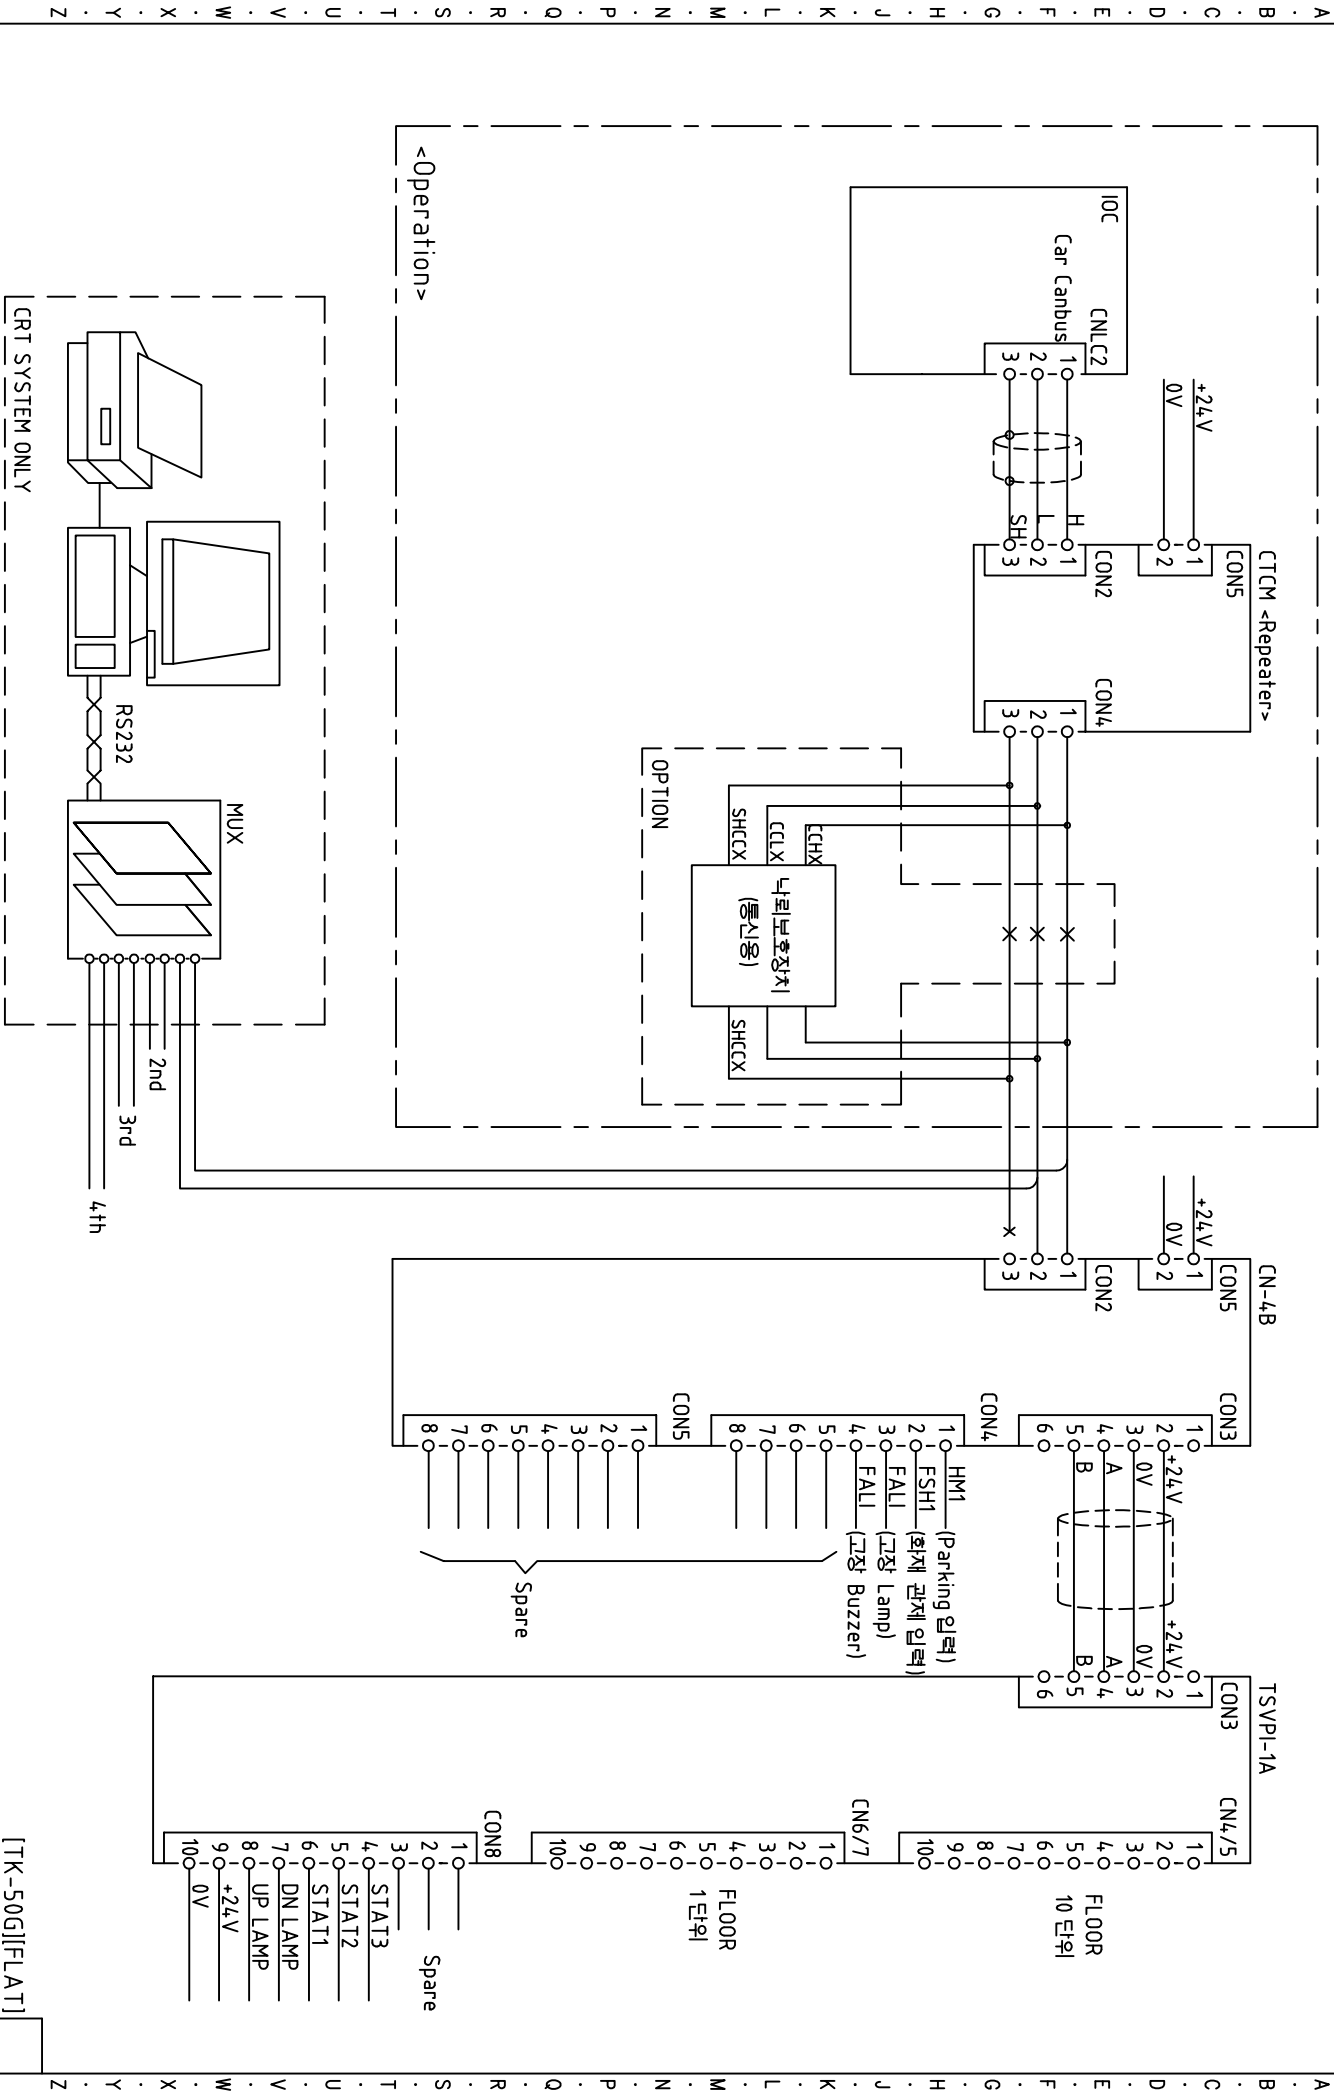

[TK-50G][FLAT]


ThyssenKrupp Elevator (Korea)



CHECKED BY	DESIGNED BY
윤관철	장무택
2008.5.14	2008.5.14
REGISTERED	

SUPERVISORY PANEL
7KFEA016-101
REL WORK

= A · B · C · D · E · F · G · H · J · K · L · M · N · P · Q · R · S · T · U · V · W · X · Y · Z

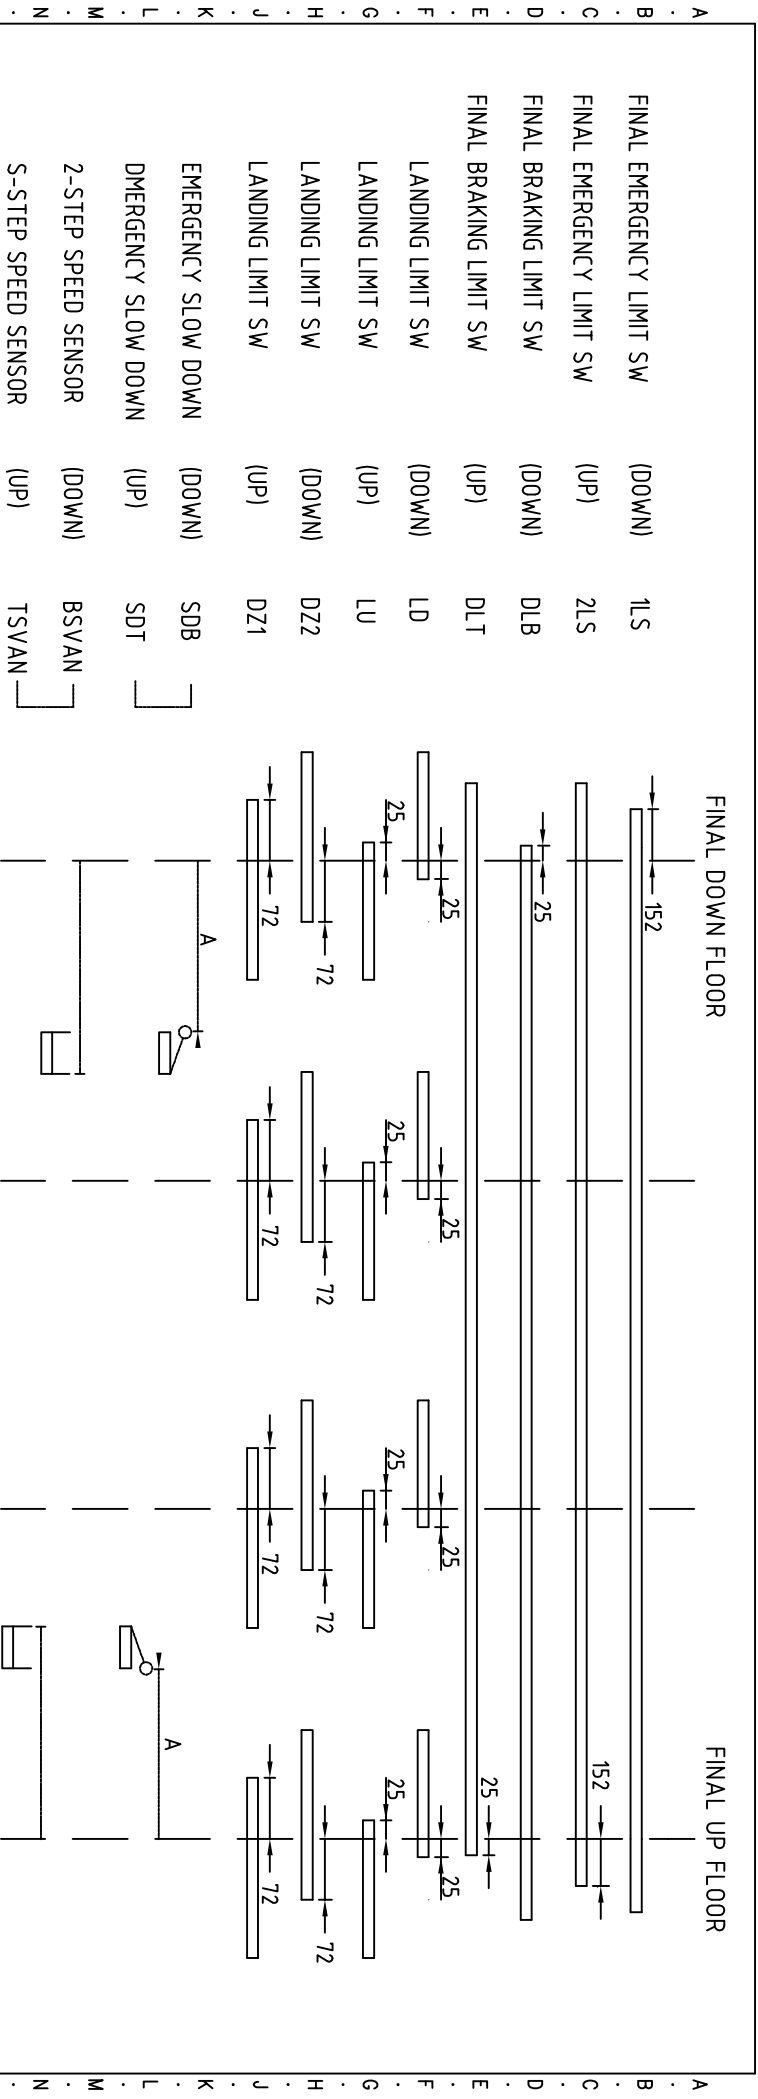

TWO SPEED TSVAN/BSVAN INSTALLATION TABLE

	2ND SPEED	1ST SPEED	360(m/min)	300	240	210	180	150	120	90
	300		38000							
	240			28000						
	210			27000						
	180				23000					
	150				22000	19000				
	120					18000				
	90						16000	15000	13000	10000
	60							12000	9000	6000

[TK-50G][FLAT]

--	--

