

BAIJAX®

# STONE SERIES

## WPC wall panel

WPC uses polyethylene, polypropylene, and polyvinyl chloride instead of commonly used resin adhesives to mix with more than 50% of waste plant fibers such as wood powder, rice husk, and straw to form new wood materials.

Then, it produces boards or profiles through plastic processing processes such as extrusion, molding, and injection molding.



Waterproof





Insect prevention

E0





Environmental protection

B1

Flame-retardant

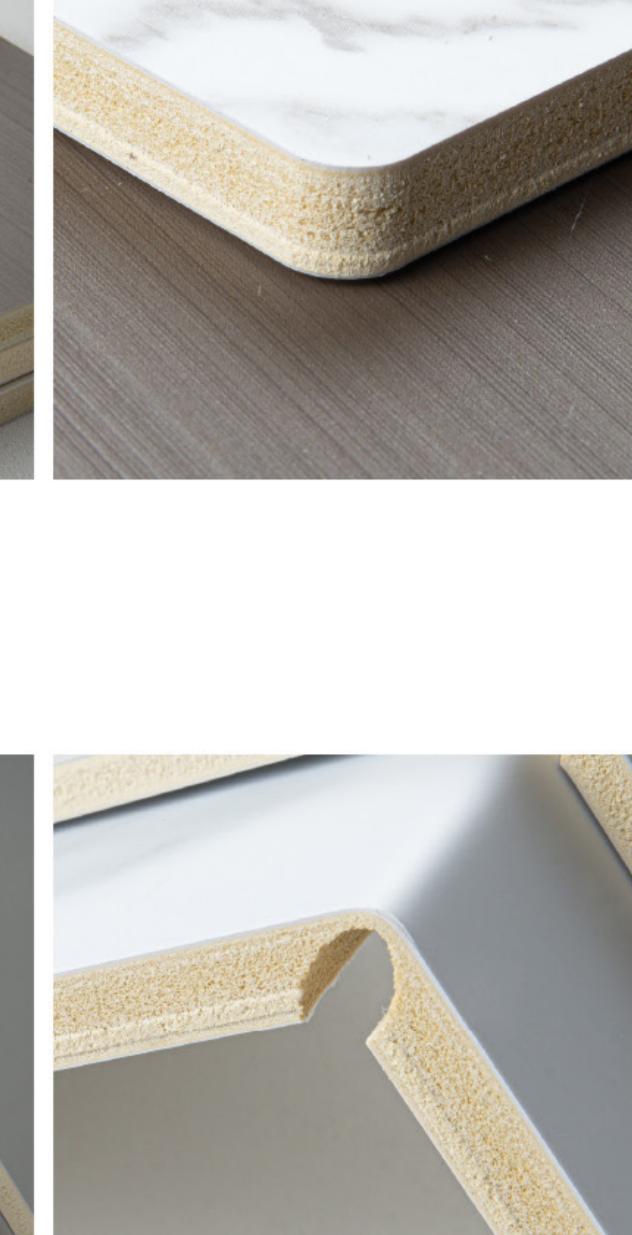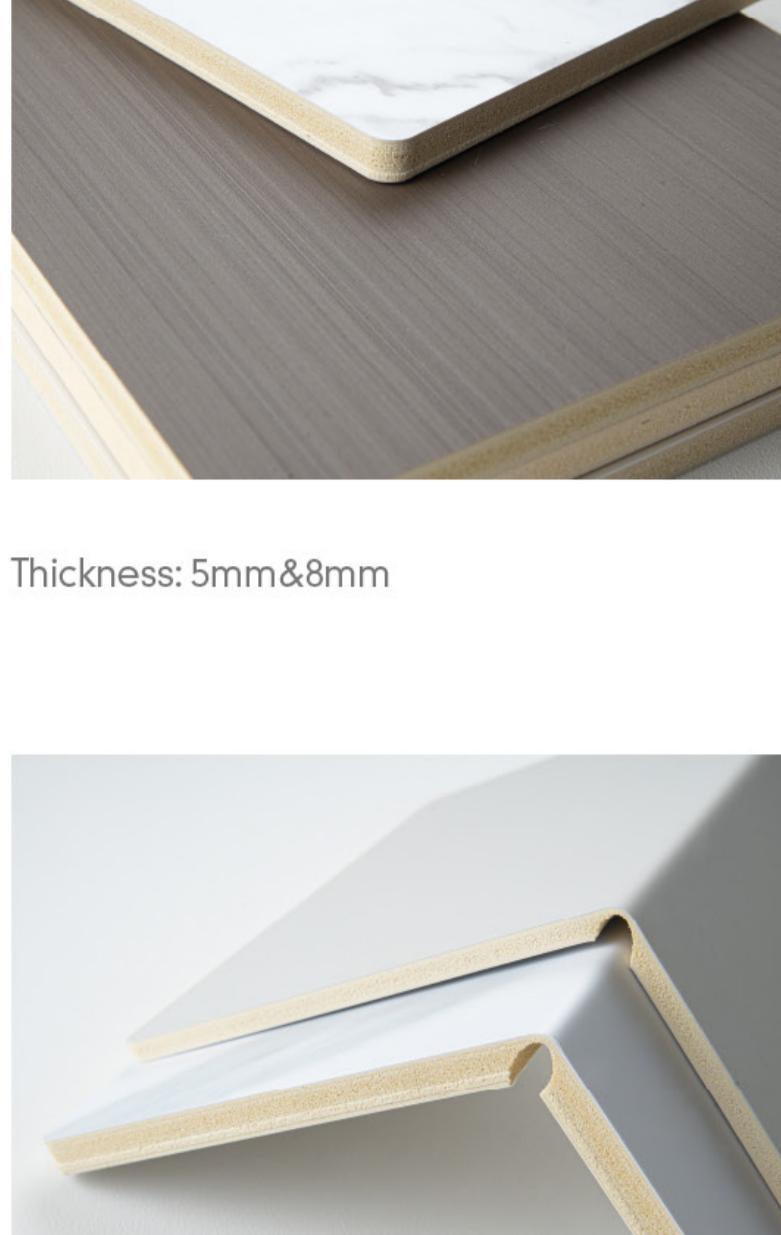

### Bending and shaping

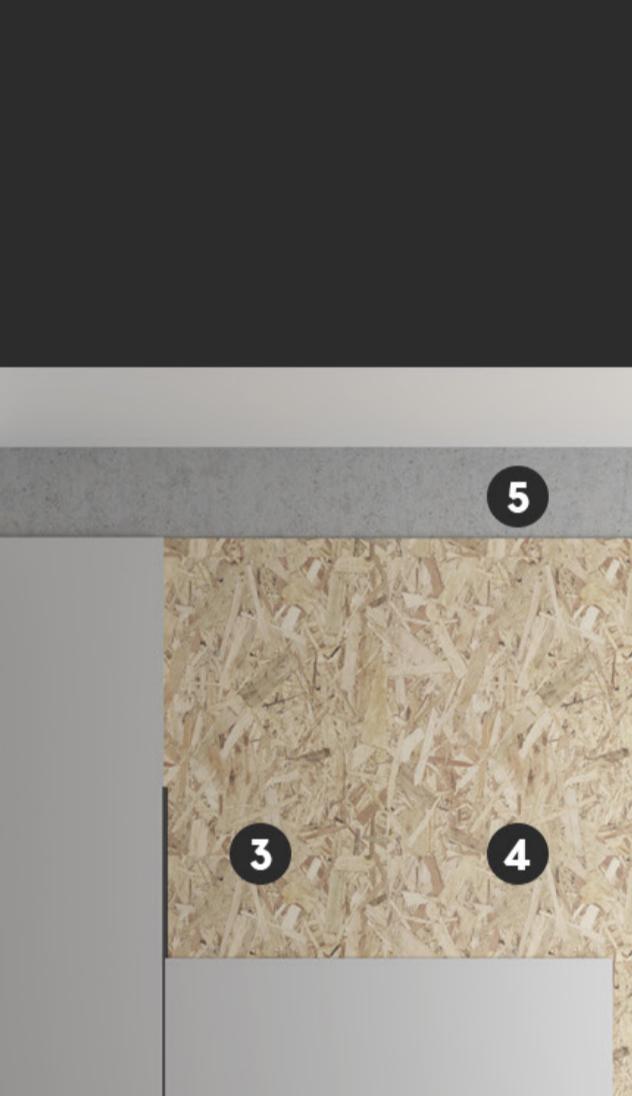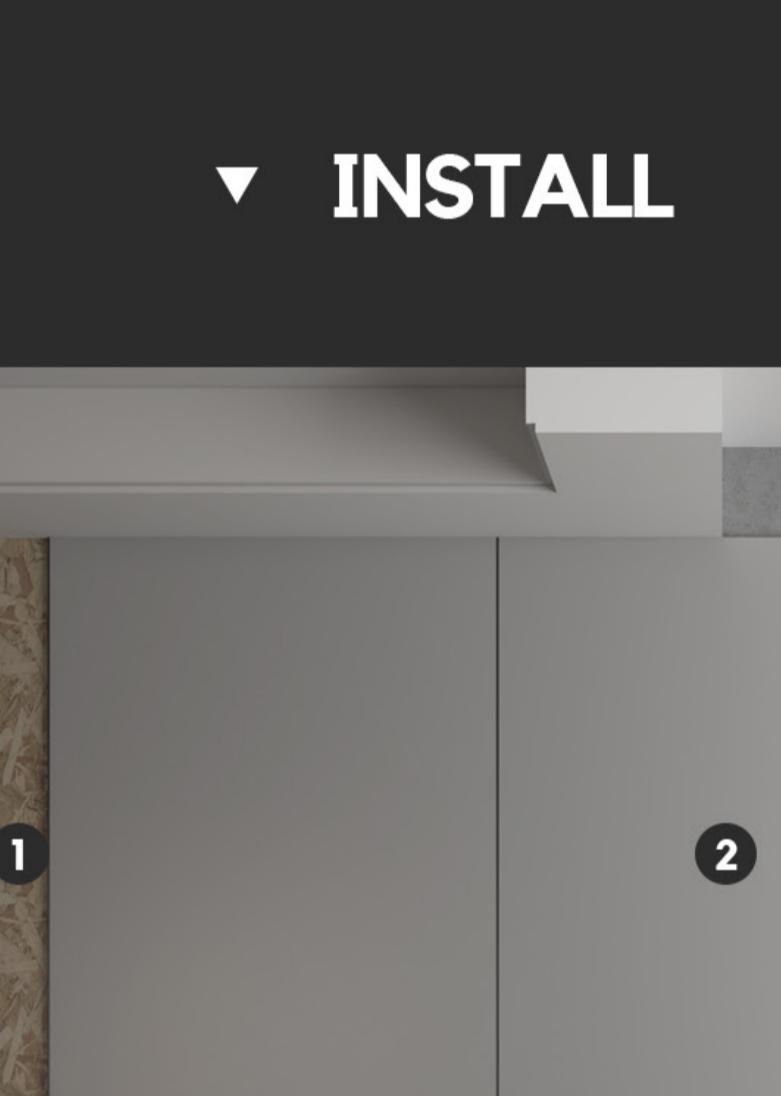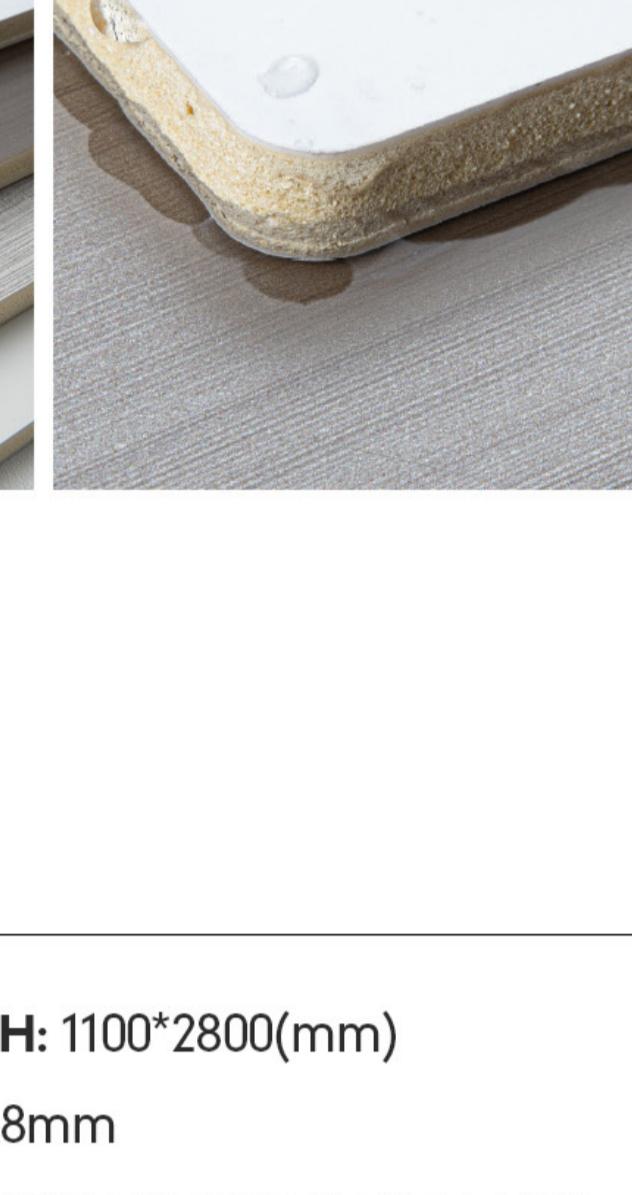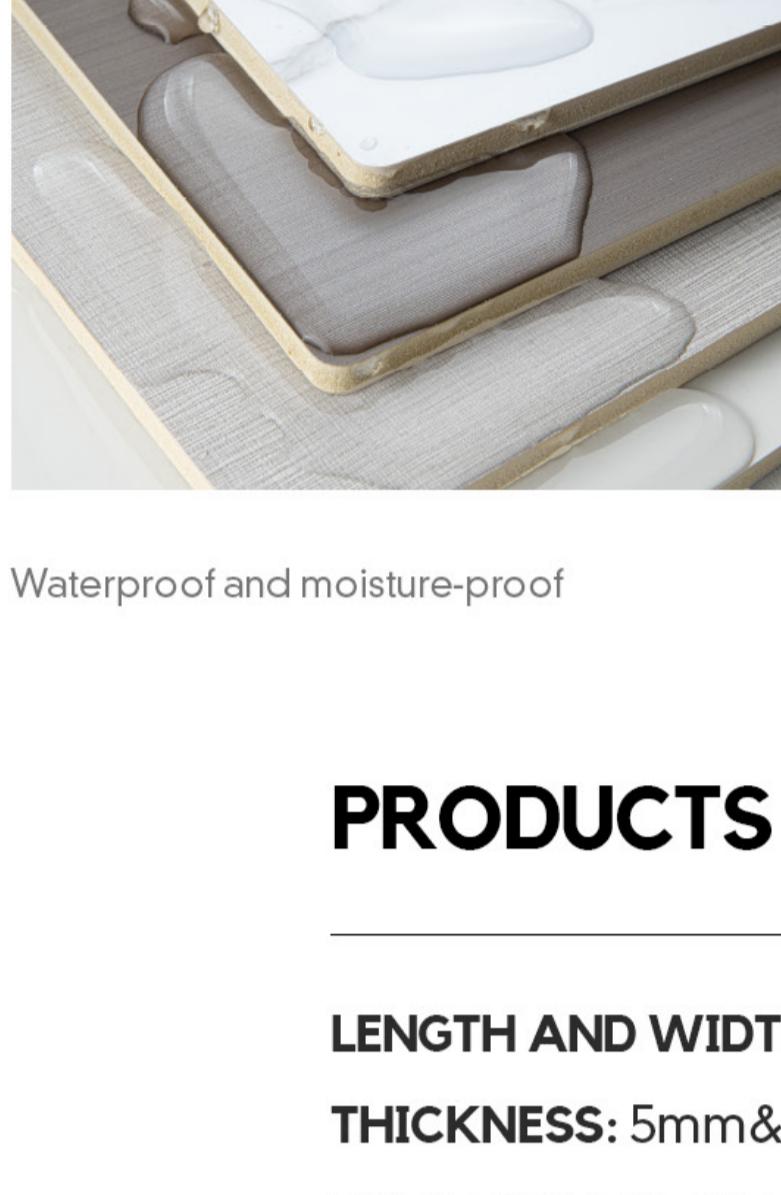


1000-10000 years ago, the last time the sea level was as high as it is today.

- 1&4. Puttying and levelling
2. Apply structural adhesive

3

1


A close-up view of a framed historical document or manuscript page. The page is aged, yellowish-tan paper with dark ink. The text is in two columns, though only the right column is clearly legible. The left margin shows the binding edge of the document. A thin gold-colored frame surrounds the document, which is set against a white background.

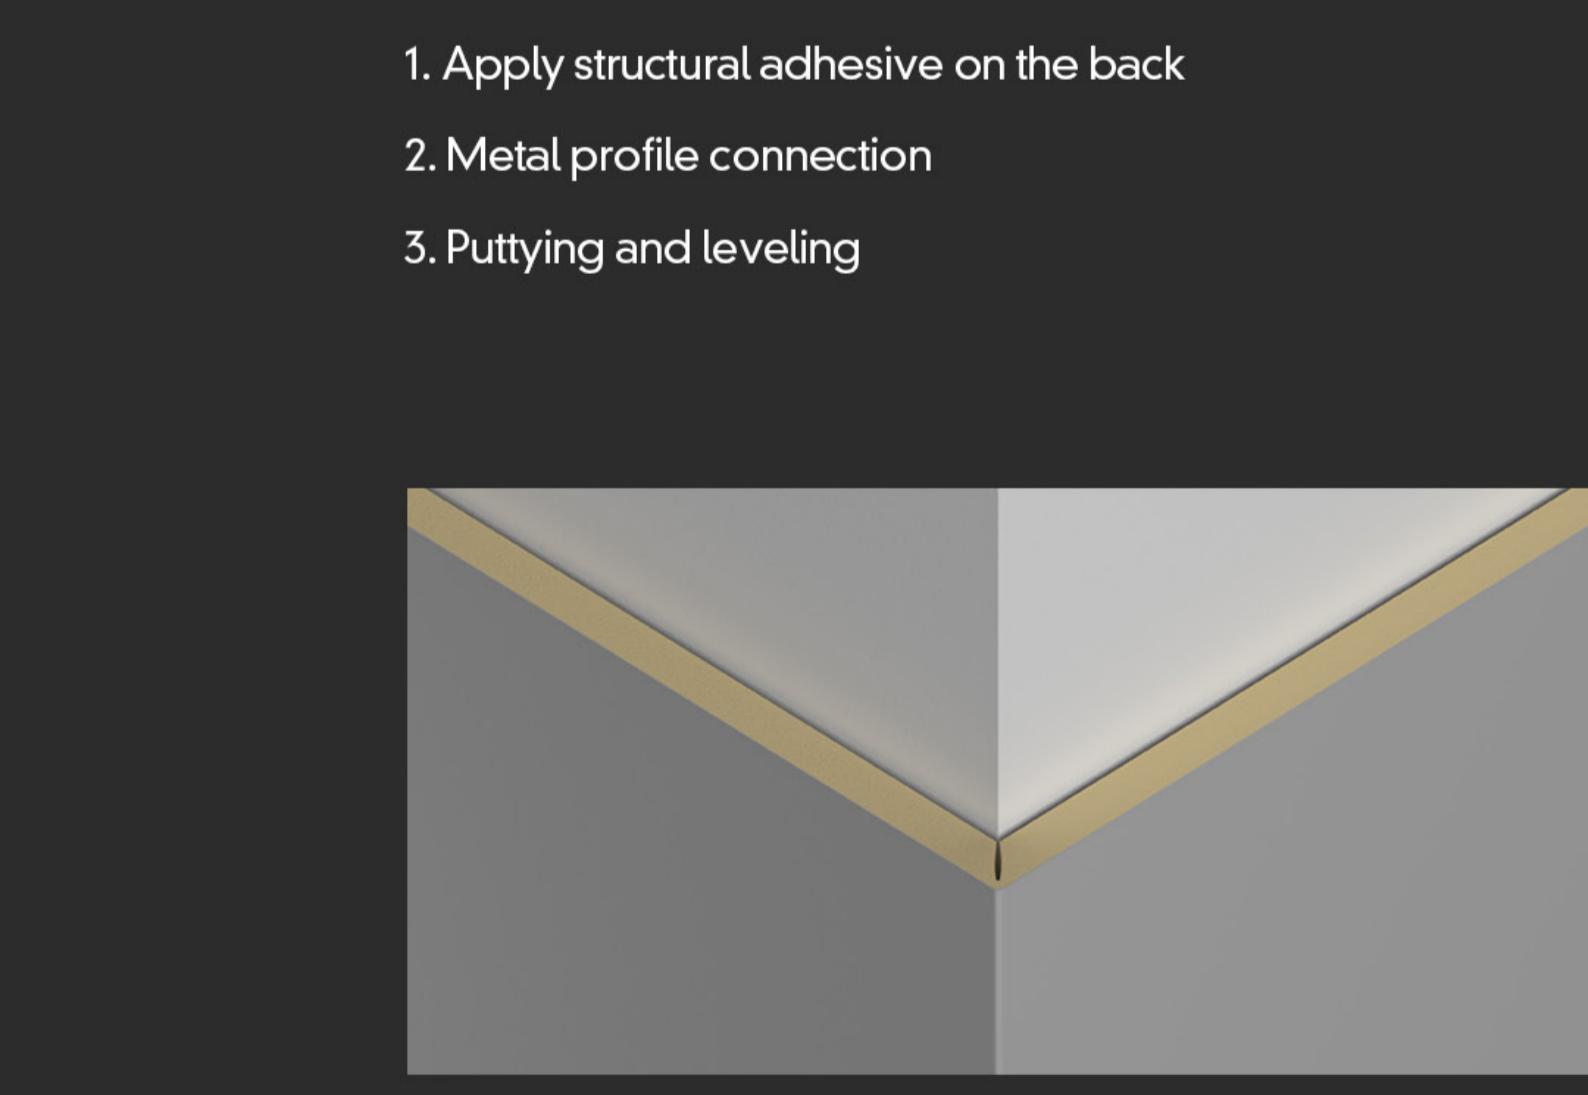

2. Hot air gun heating be
3. Apply structural adhe

[View all news](#) | [View all features](#) | [View all reviews](#)



10

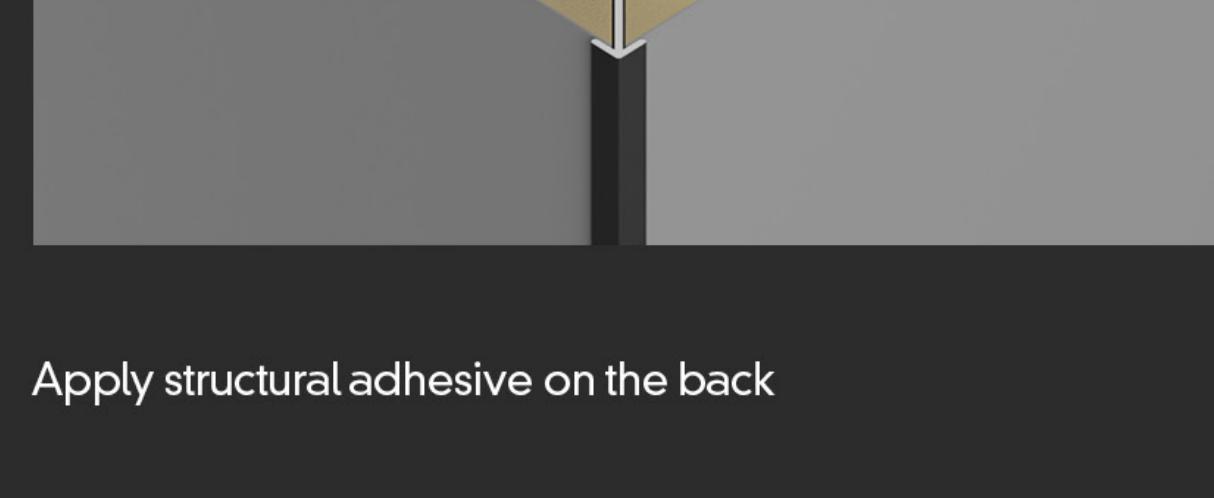

# ▼ PACKING METHOD


饰面板 / WPC WALL PANEL  
托 盘 / TRAY

<b>20' STD</b>	<b>Dimension</b>	<b>Cubic Capacity</b>	<b>Tare Weight</b>	<b>Payload</b>
L : 5.89 m 19'4"	33.2 m <sup>3</sup>	2,220 kg	21,850 kg	
W : 2.35m 7'9"	1,170 f <sup>3</sup>	4,894 lb	48,171 lb	
H : 2.39m 7'10"				

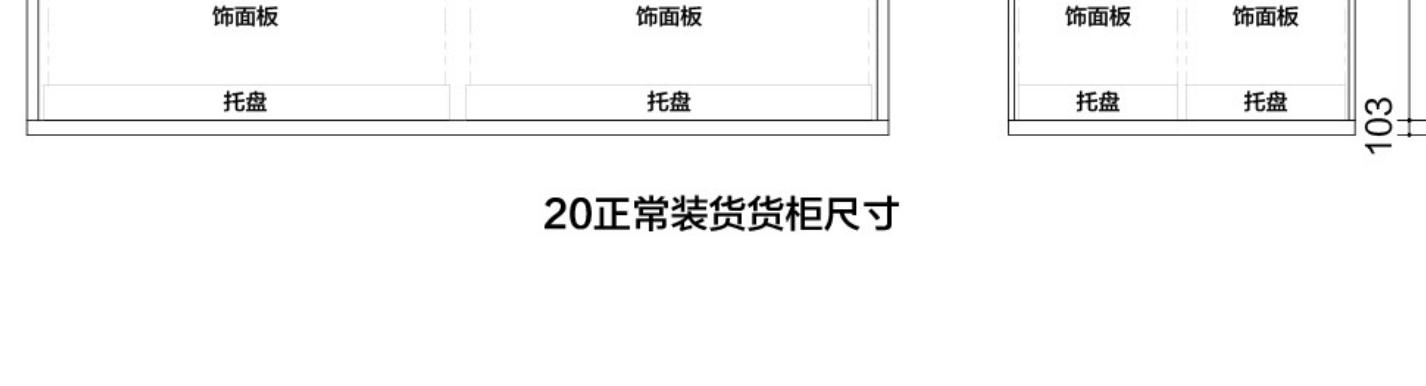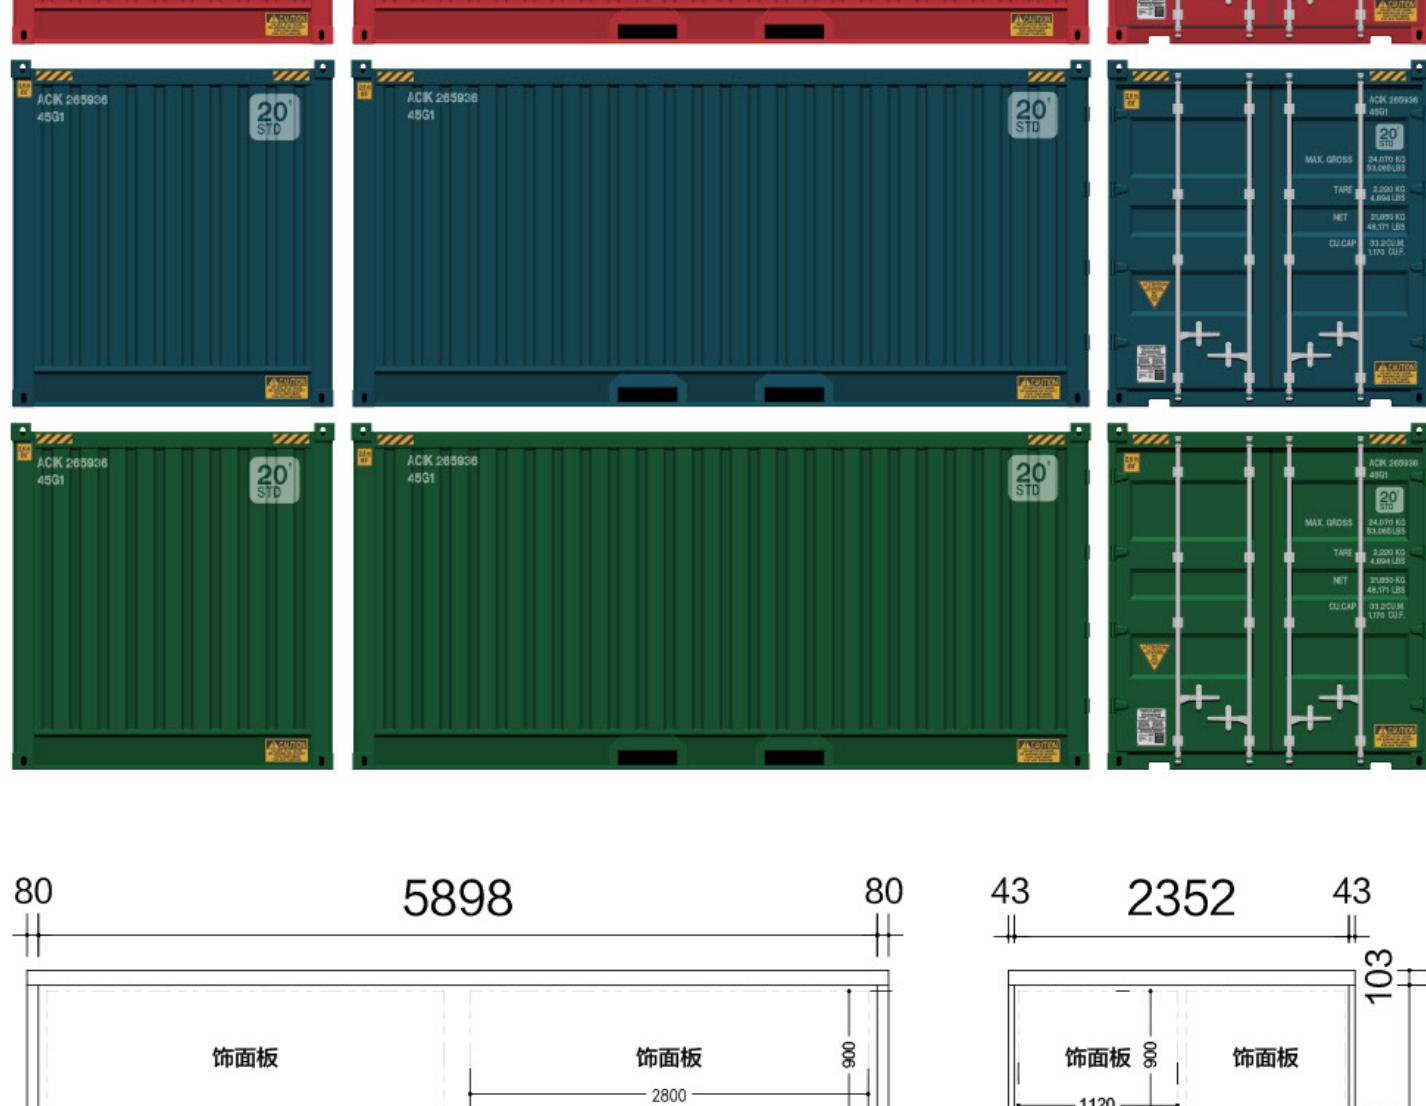

20正常装货柜尺寸

<b>40' STD</b>	<b>Dimension</b>	<b>Cubic Capacity</b>	<b>Tare Weight</b>	<b>Payload</b>
L : 12.03m 39'6"	67.7 m <sup>3</sup>	3,740 kg	26,760 kg	
W : 2.35m 7'9"	2,391 f <sup>3</sup>	8,245 lb	58,996 lb	
H : 2.39m 7'10"				

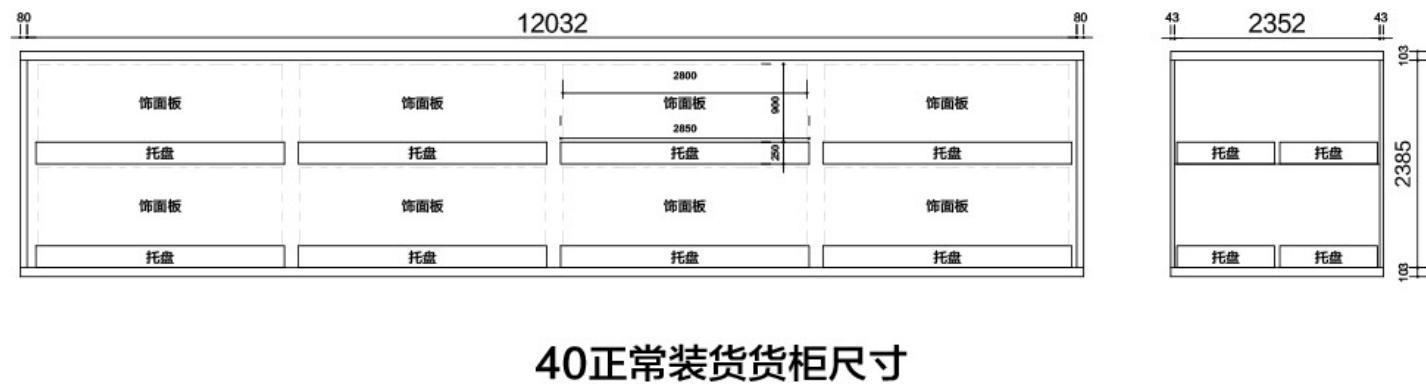


40正常装货柜尺寸

# STONE SERIES CASE ▼

#

STONE SERIES  
**51001**

WPC WALL PANEL

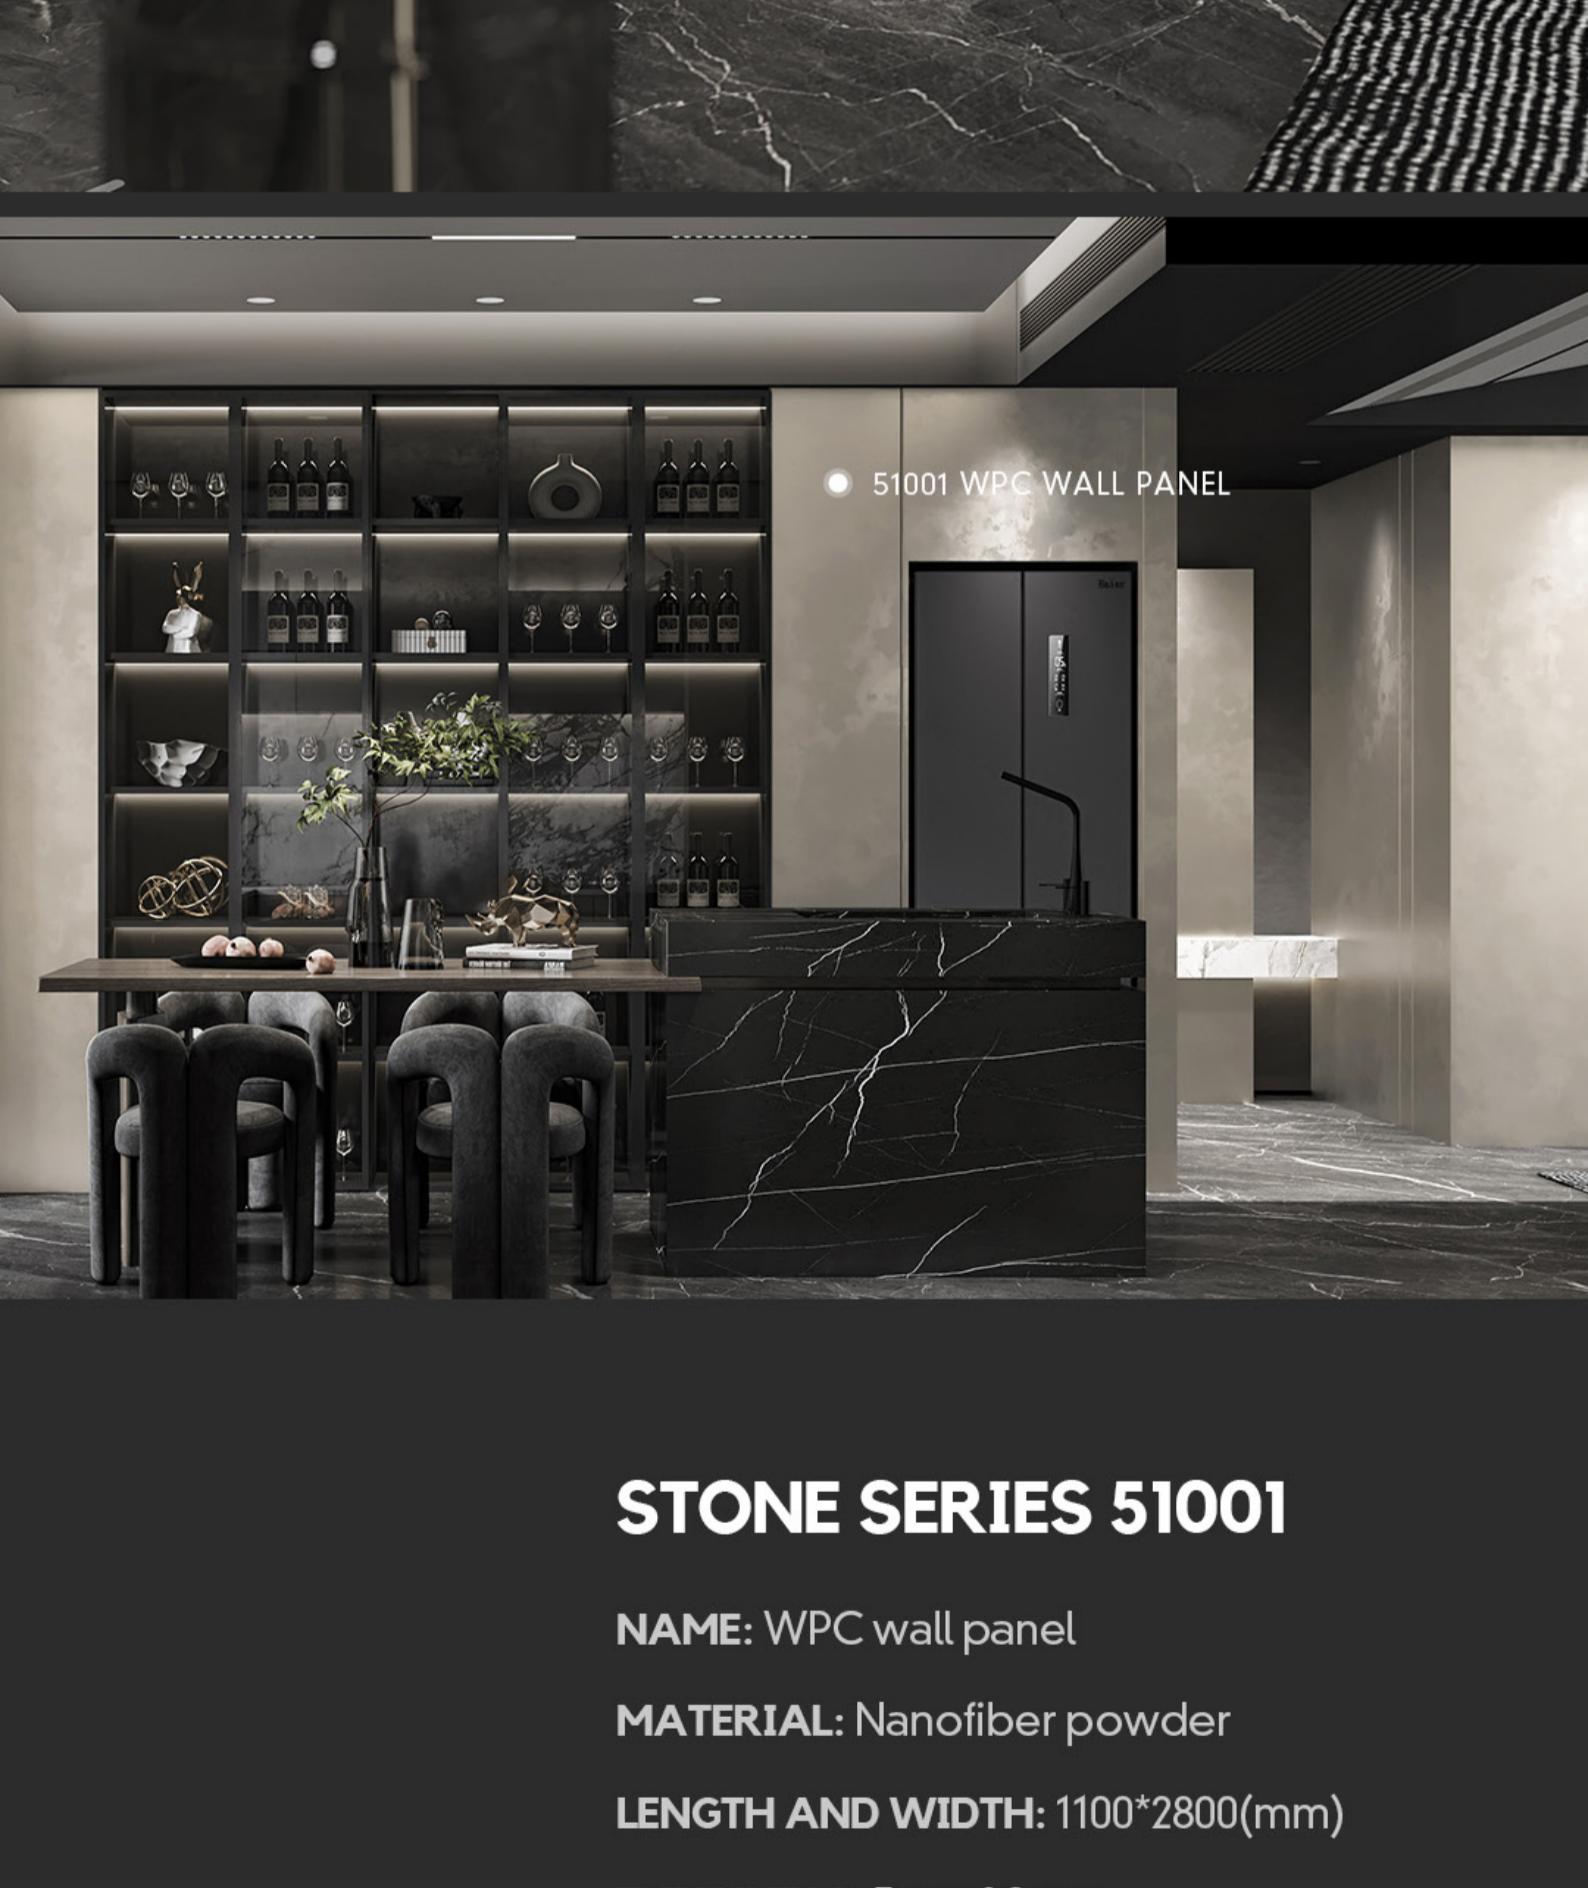

## STONE SERIES 51001

**NAME:** WPC wall panel

**MATERIAL:** Nanofiber powder

**LENGTH AND WIDTH:** 1100\*2800(mm)

**THICKNESS:** 5mm&8mm

**ENVIRONMENTAL PROTECTION GRADE:** ENF

**FIRE RATING:** B1


**PERFORMANCE:** waterproof&bendable

STONE SERIES


**51001**

WPC WALL PANEL


## ▼ COLOUR

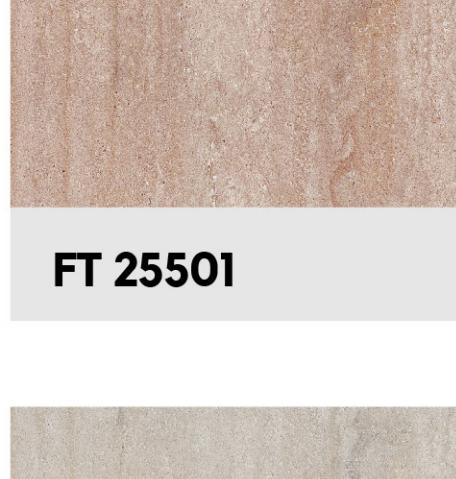


**FT 25501**

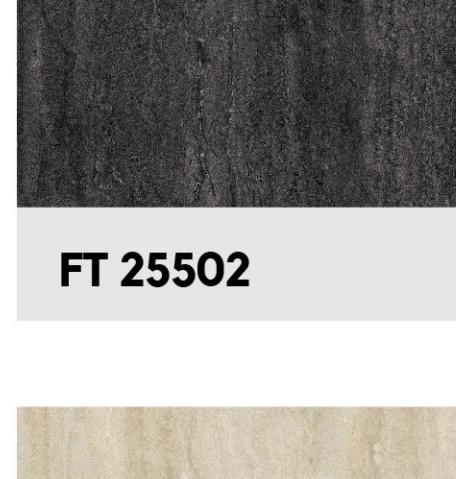


**FT 25502**

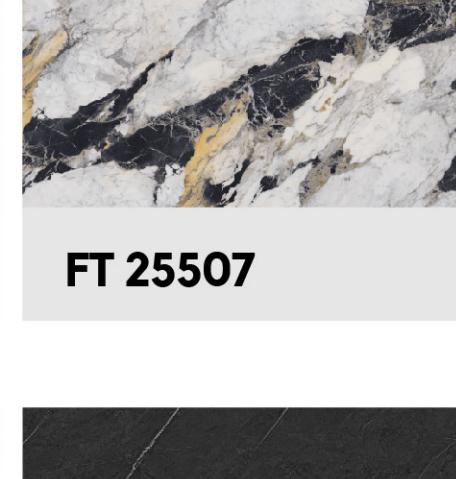


**FT 25507**

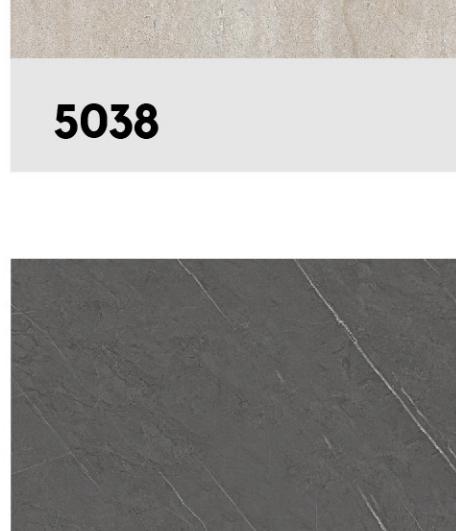

**5038**

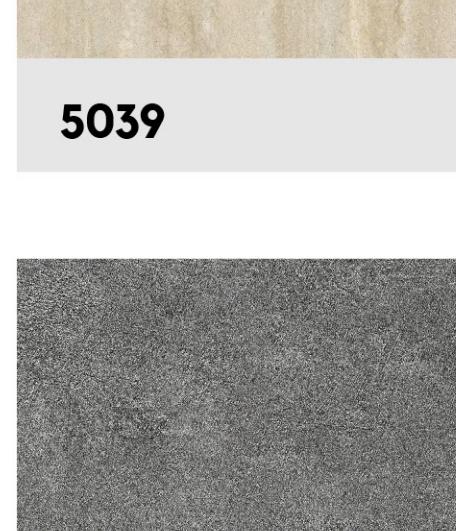


**5039**

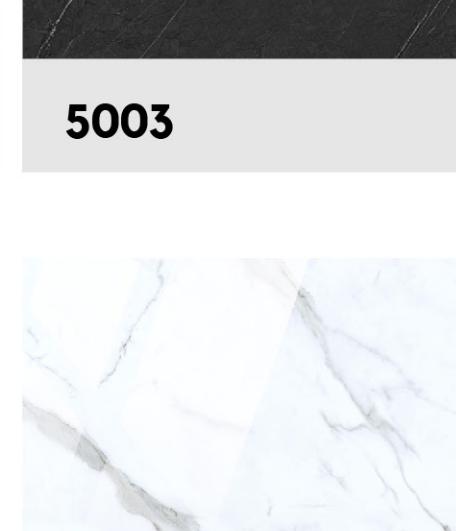

**5003**




**5004**

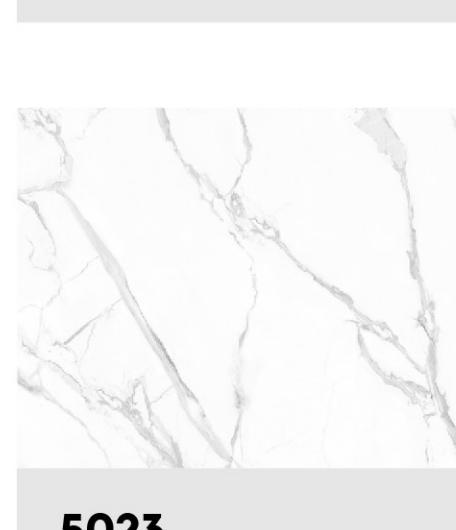

**5007**




**5009**

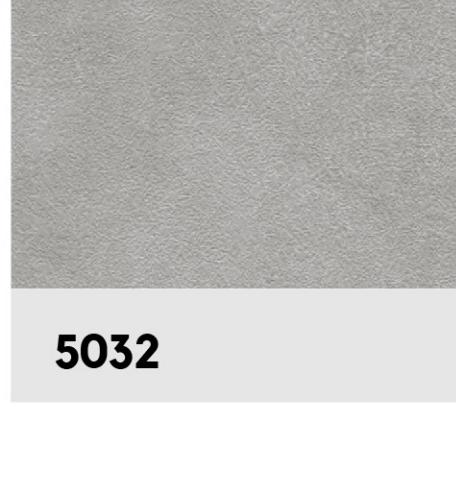


**5018**




**5023**

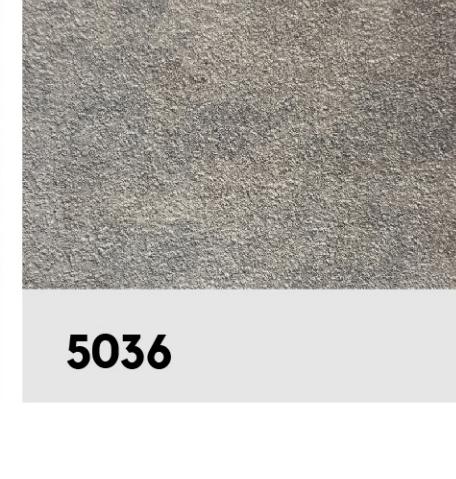


**5026**

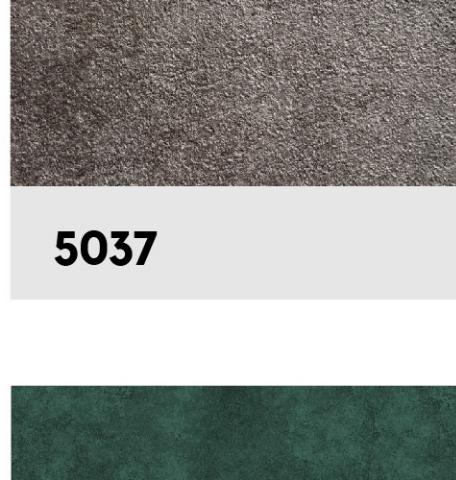


**5032**

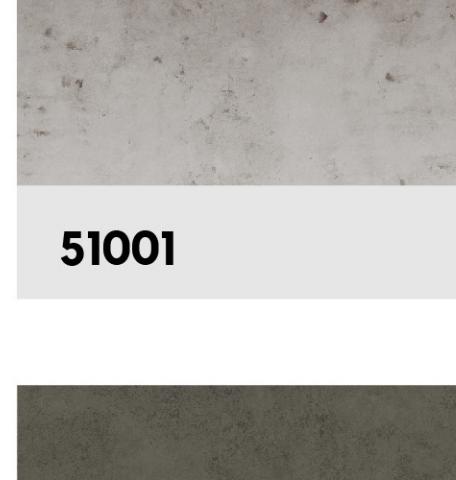


**5033**

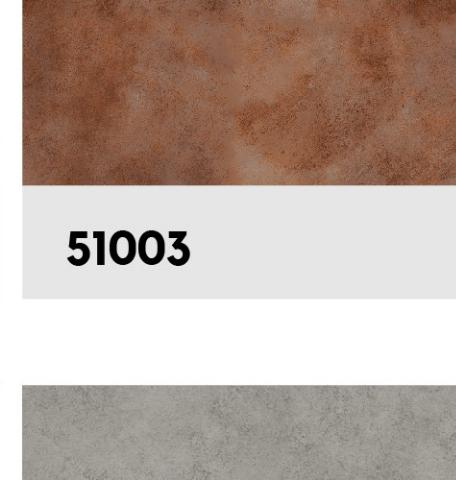


**5036**

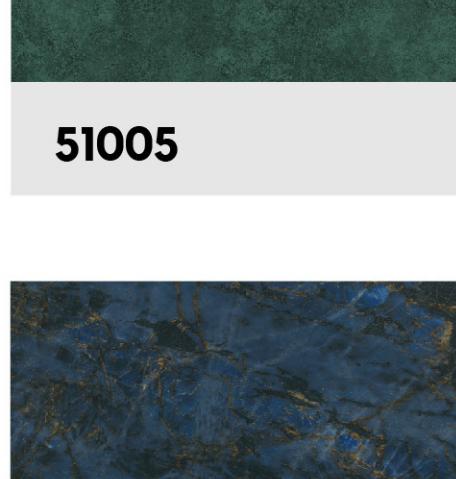


**5037**

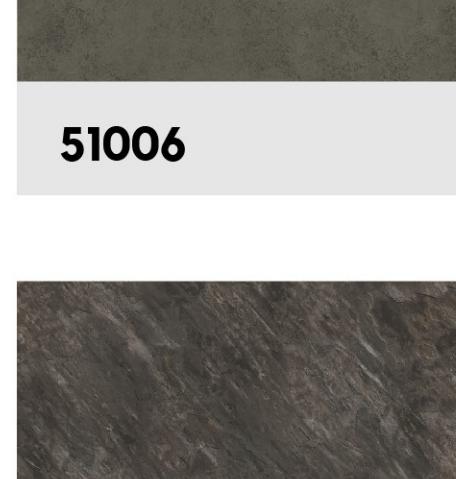

**51001**

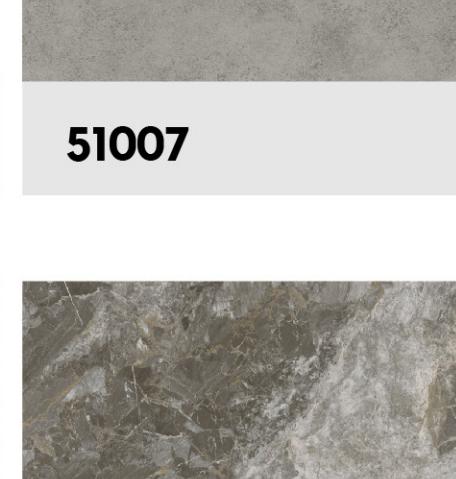


**51003**

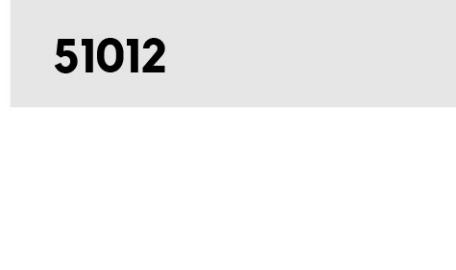

**51005**



**51006**

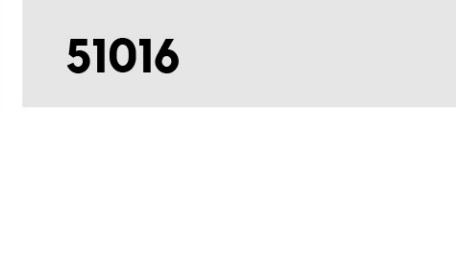

**51007**



**51012**




**51014**




**51016**

## ▼ BRAND FACTORY

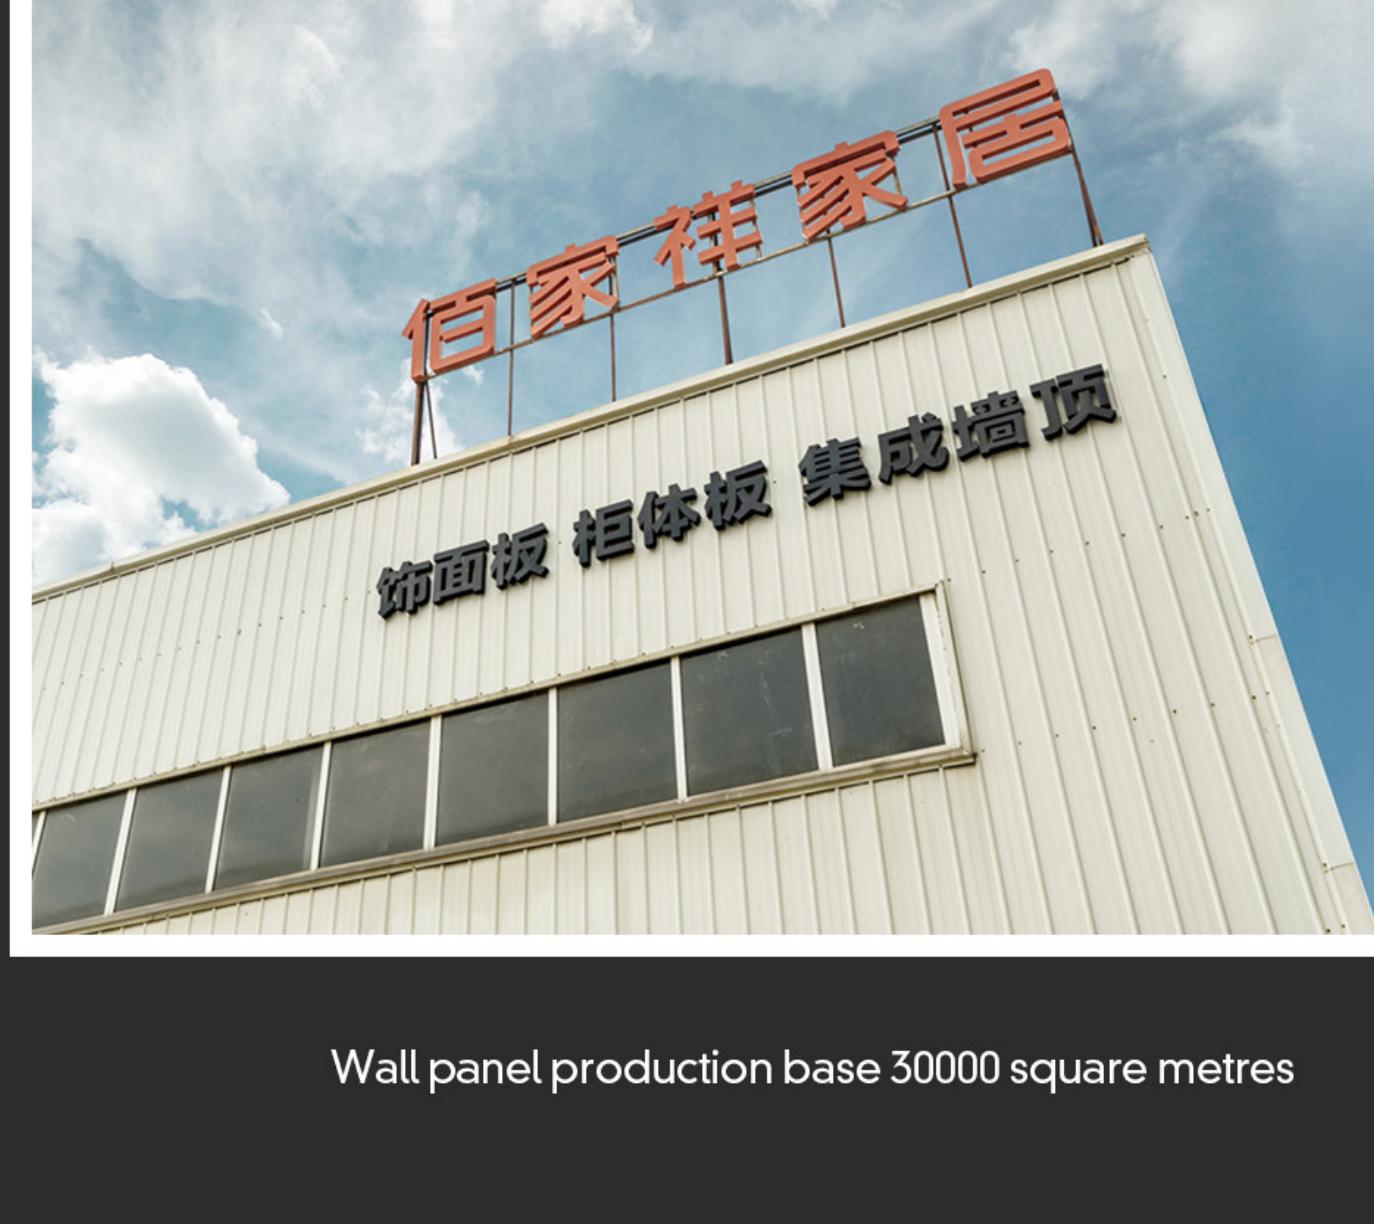

Wall panel production base 30000 square metres

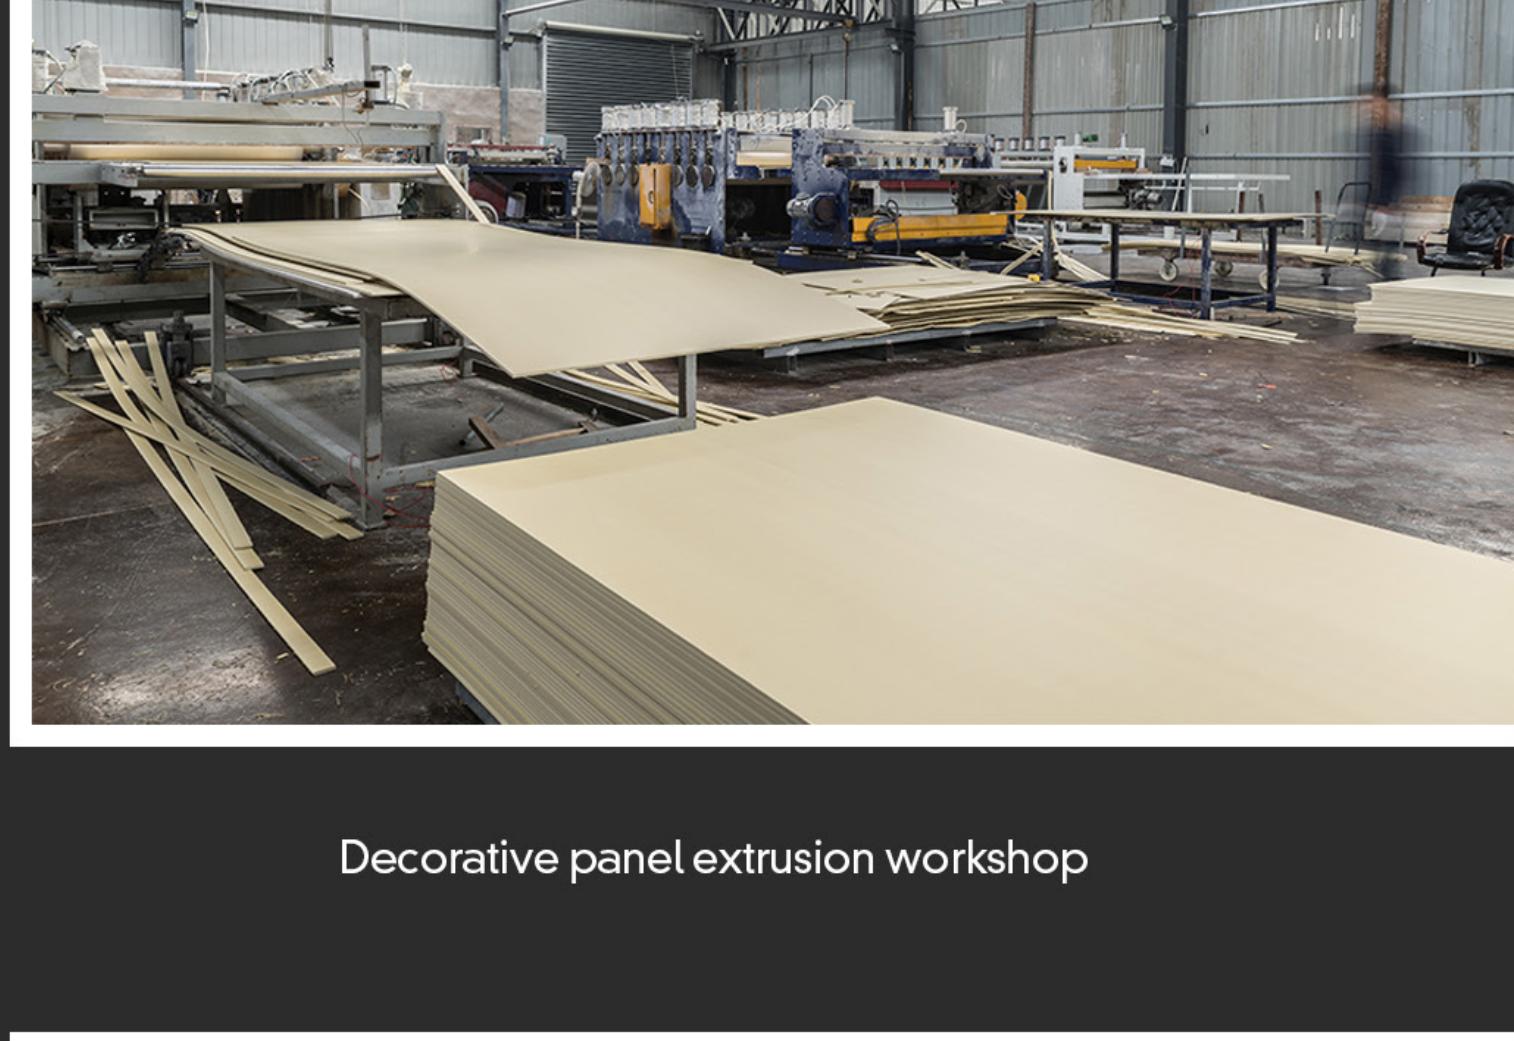

Decorative panel extrusion workshop



Bamboo charcoal fiber coating workshop

# ▼ BRAND PATENTS

