


- SOLID COLOR -

31009

COLOR NUMBER



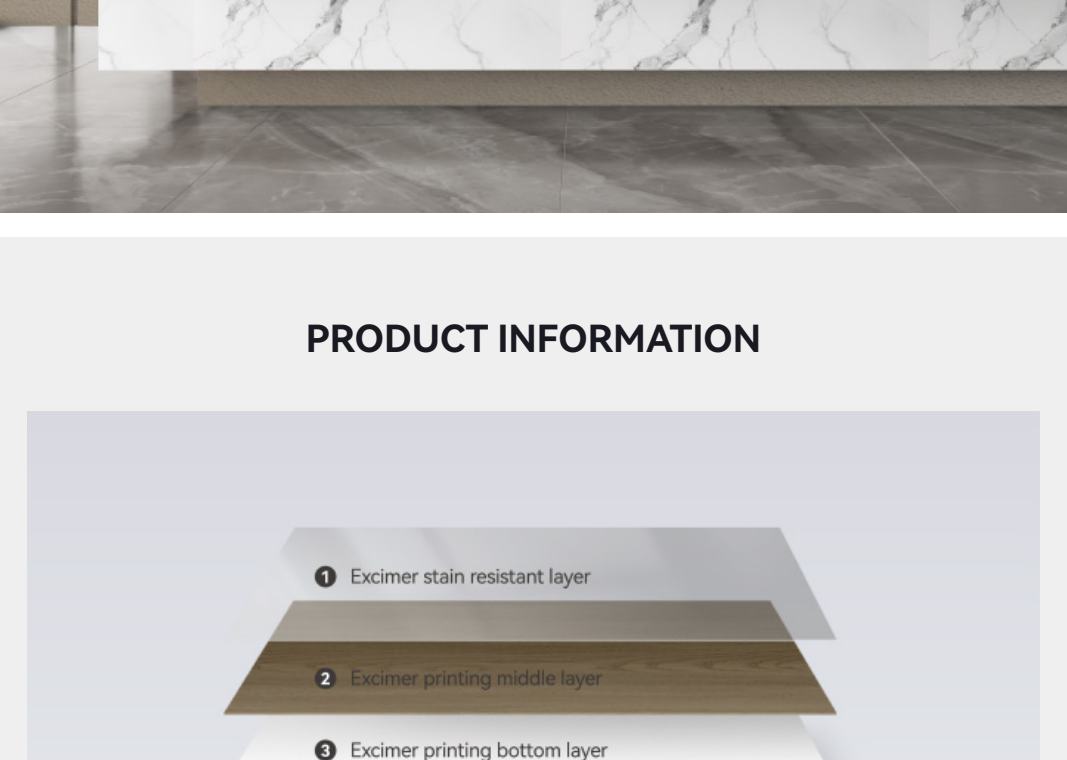


PRODUCT INFORMATION




Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


PRODUCT PERFORMANCE REAL SHOT

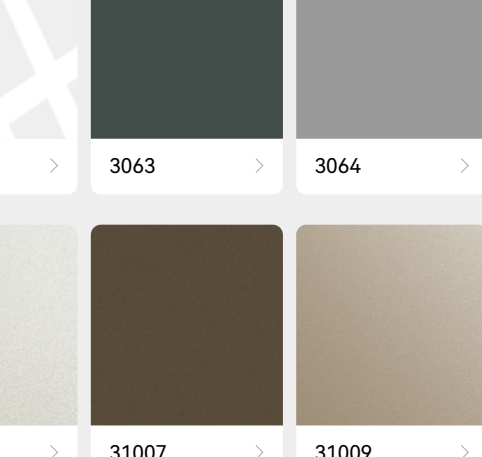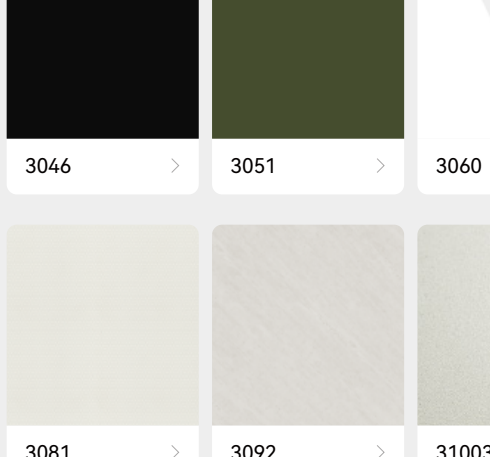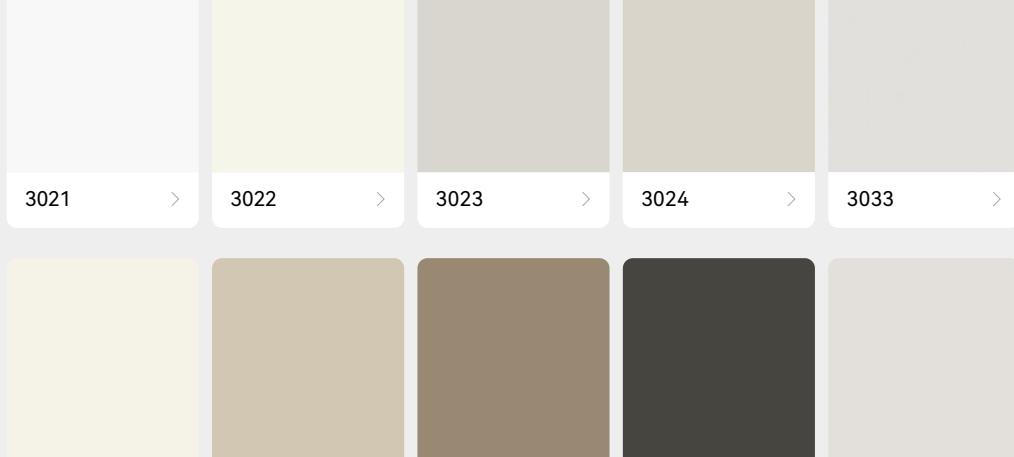


EP LEVEL



FIRE RATING



WATERPROOF





BENDABLE

MORE SOLID COLORS



INTERNATIONAL CERTIFICATION

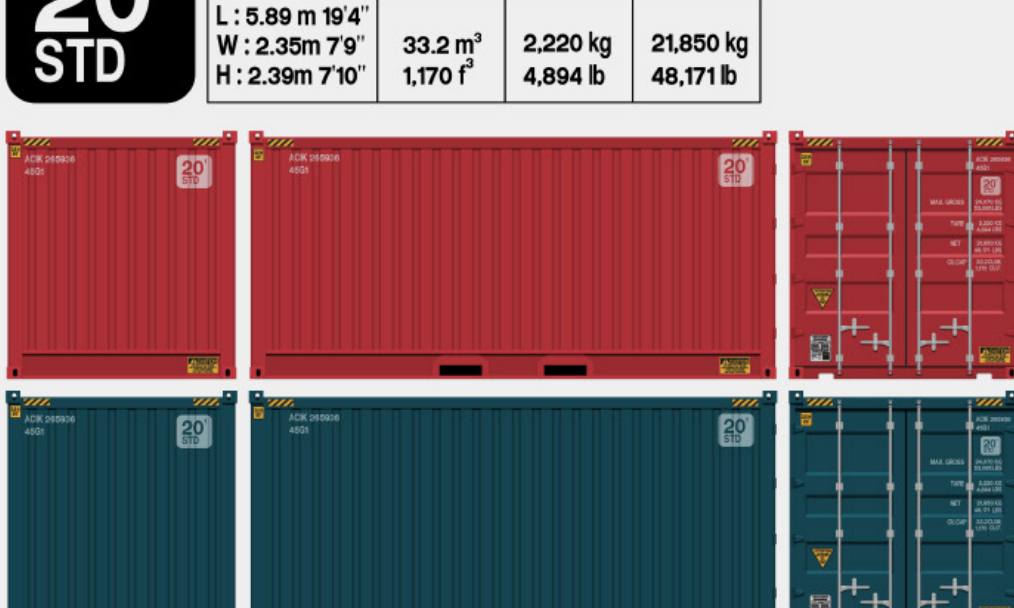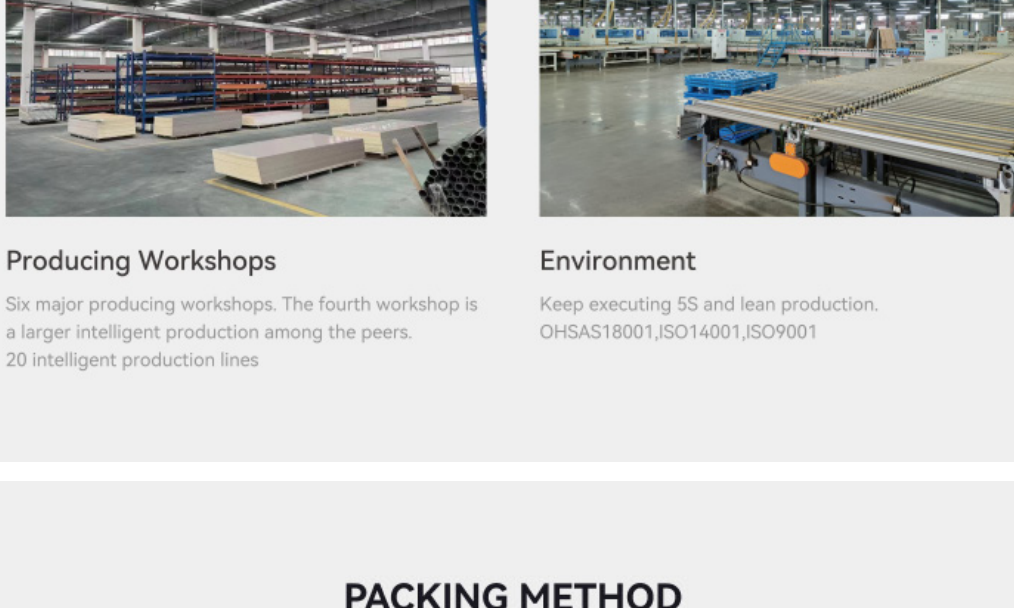

FACTORY STRENGTH




Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis



Equipment Operation

- 1.Famous brands,professional maintenance
- 2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring

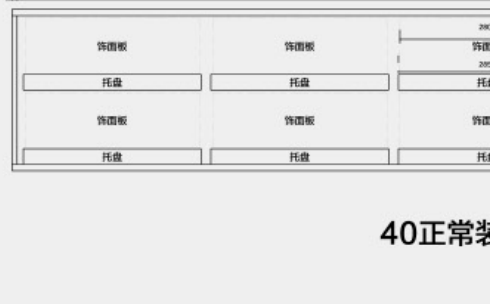

Producing Workshops


Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines



Environment

Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001

PACKING METHOD

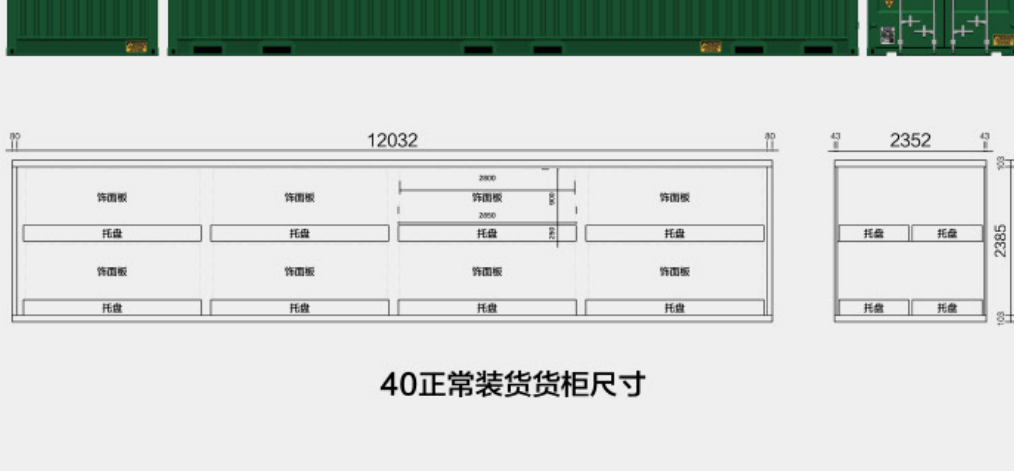

20正常装货货柜尺寸

40正常装货货柜尺寸