

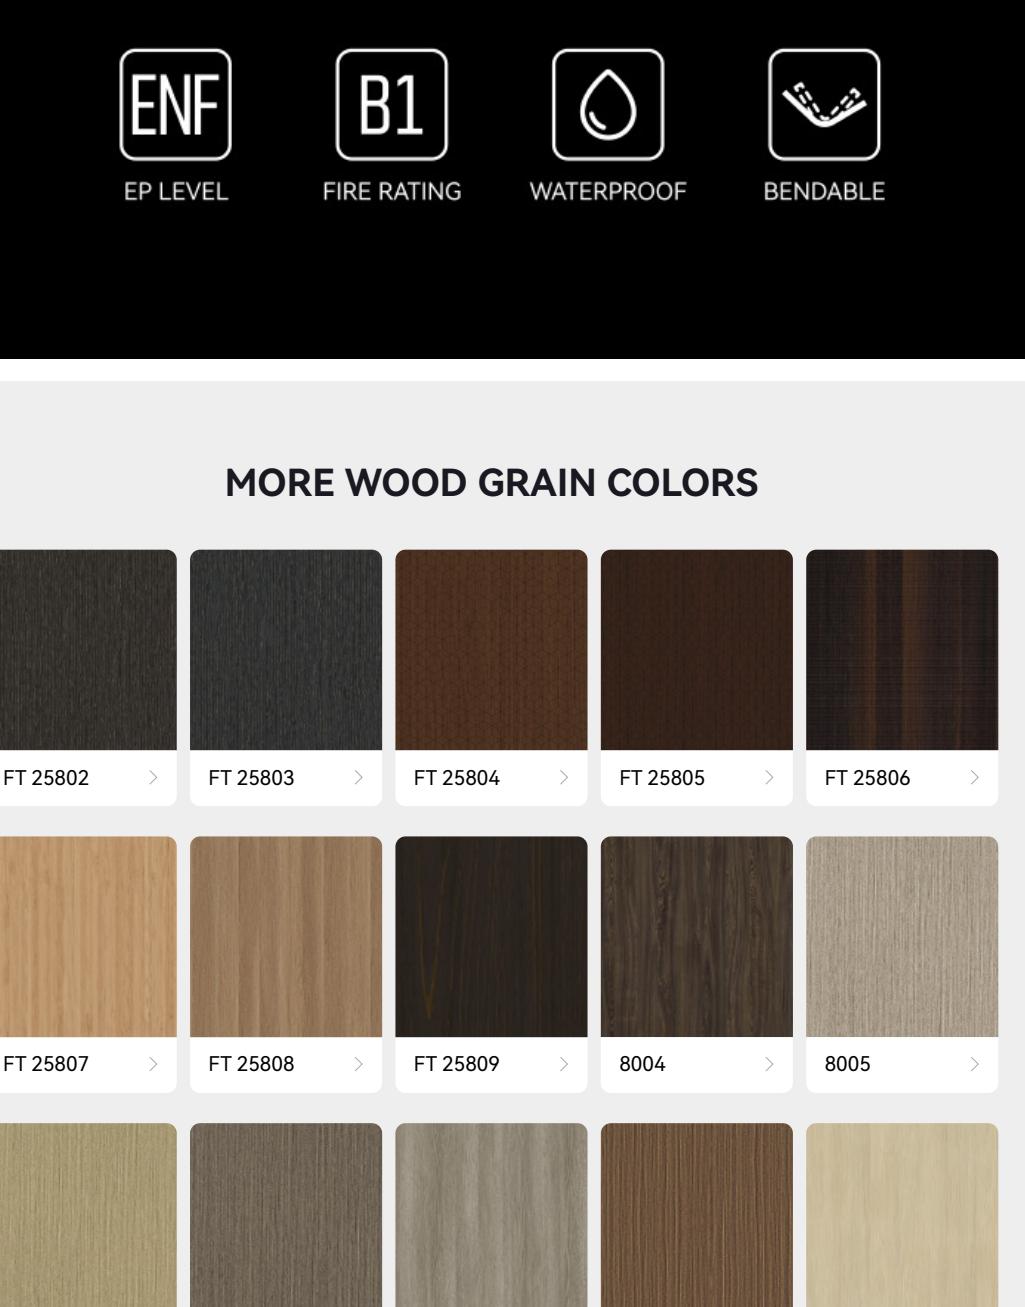


- WOOD GRAIN -

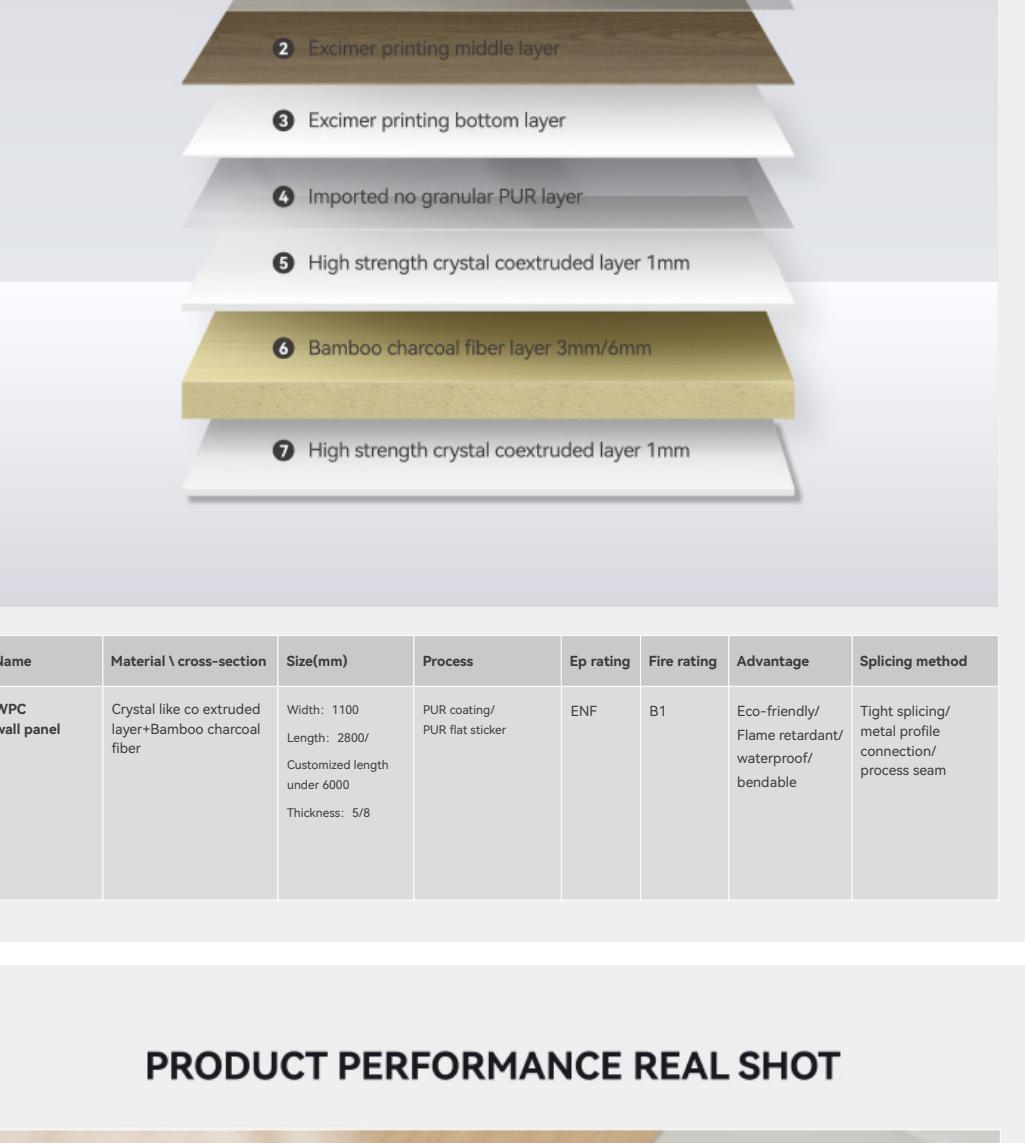


81028

COLOR NUMBER


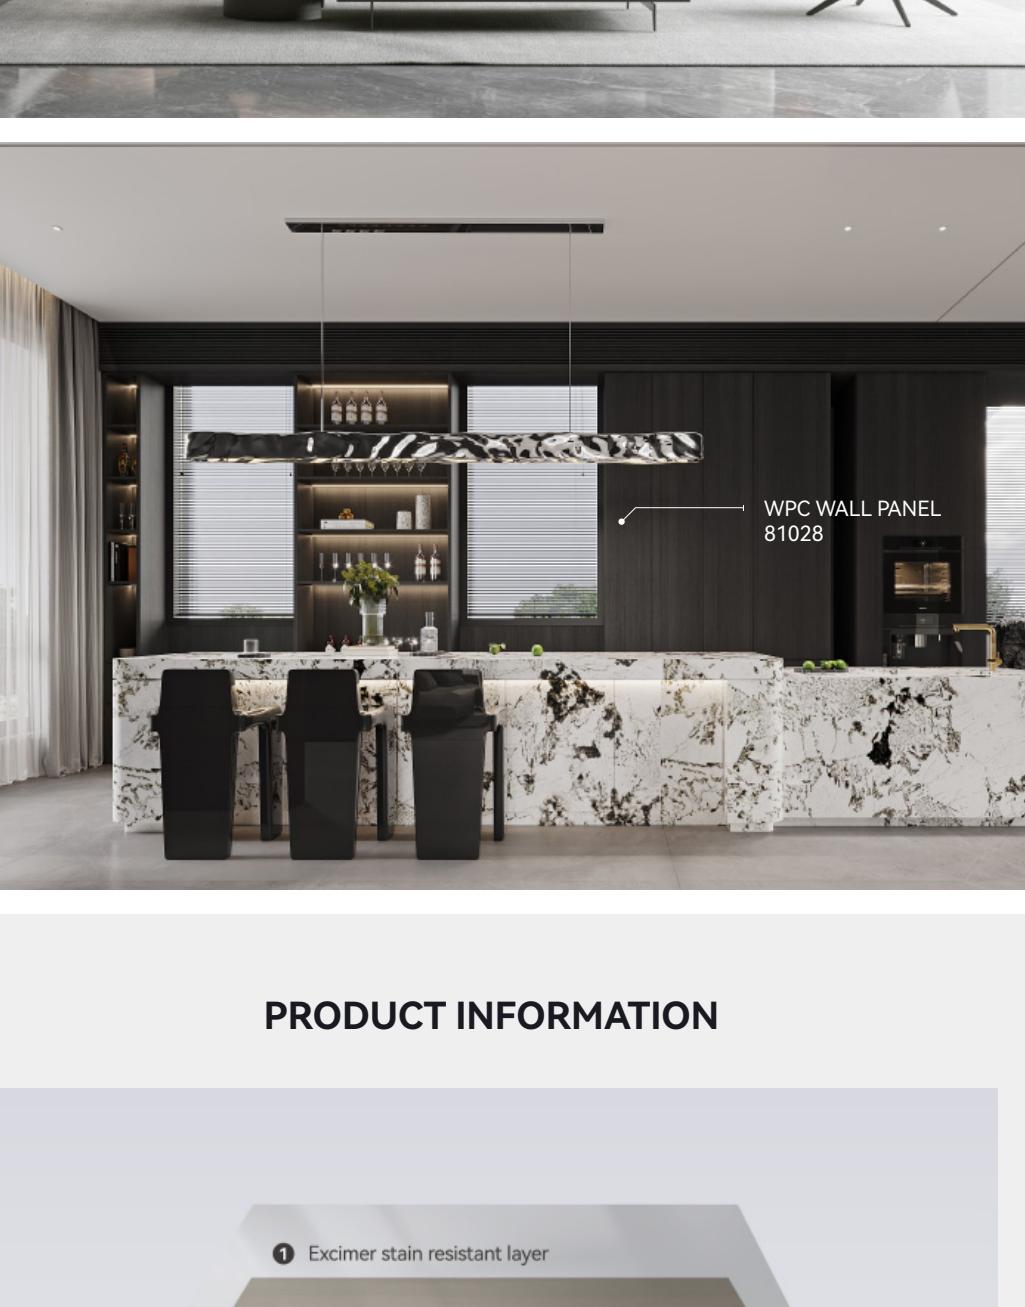


PRODUCT INFORMATION

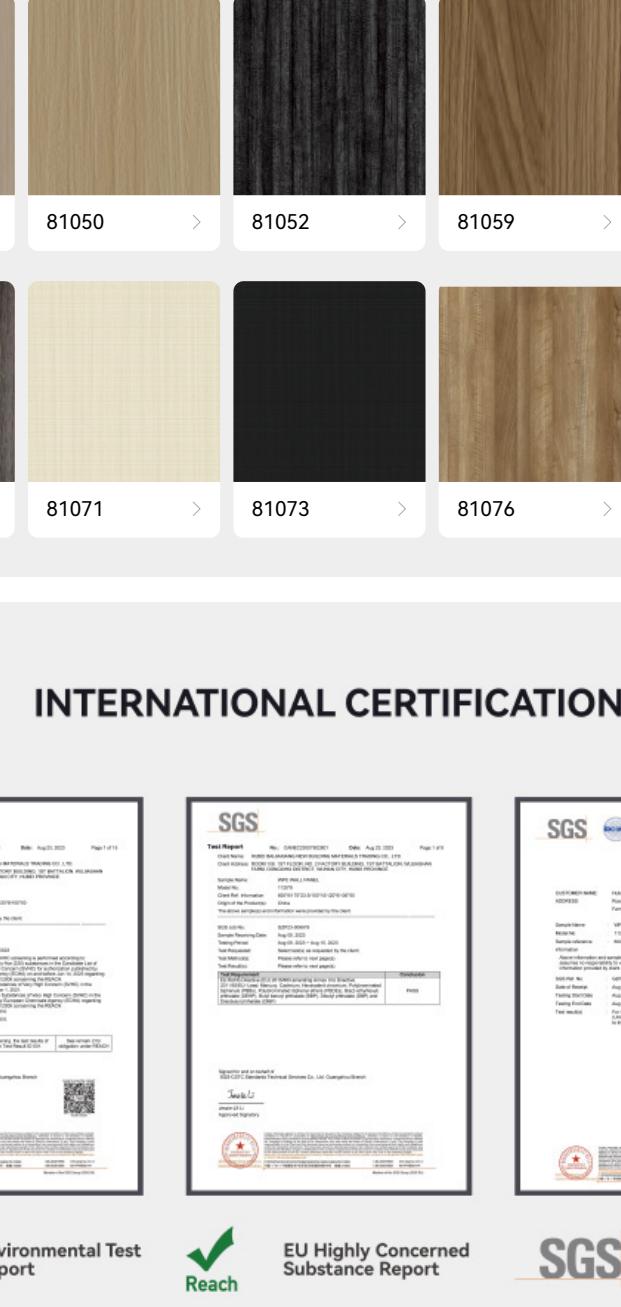

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

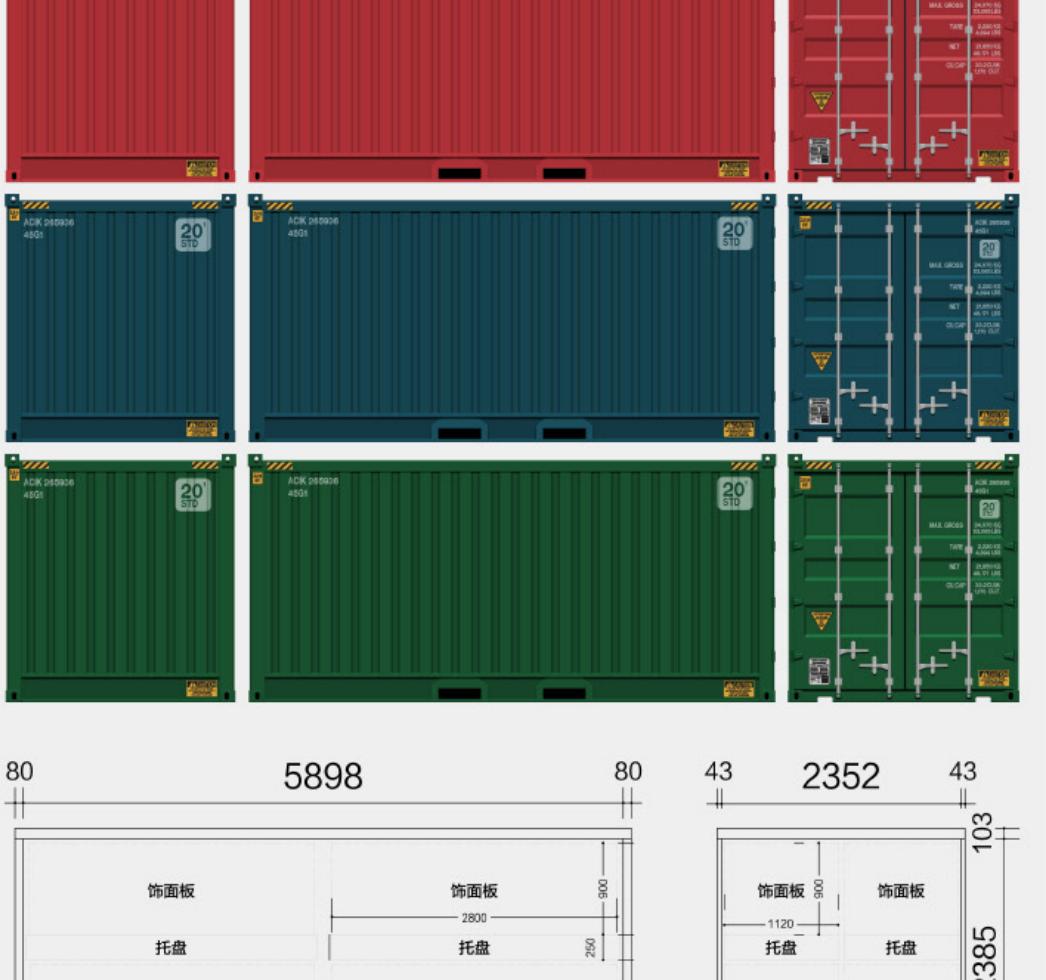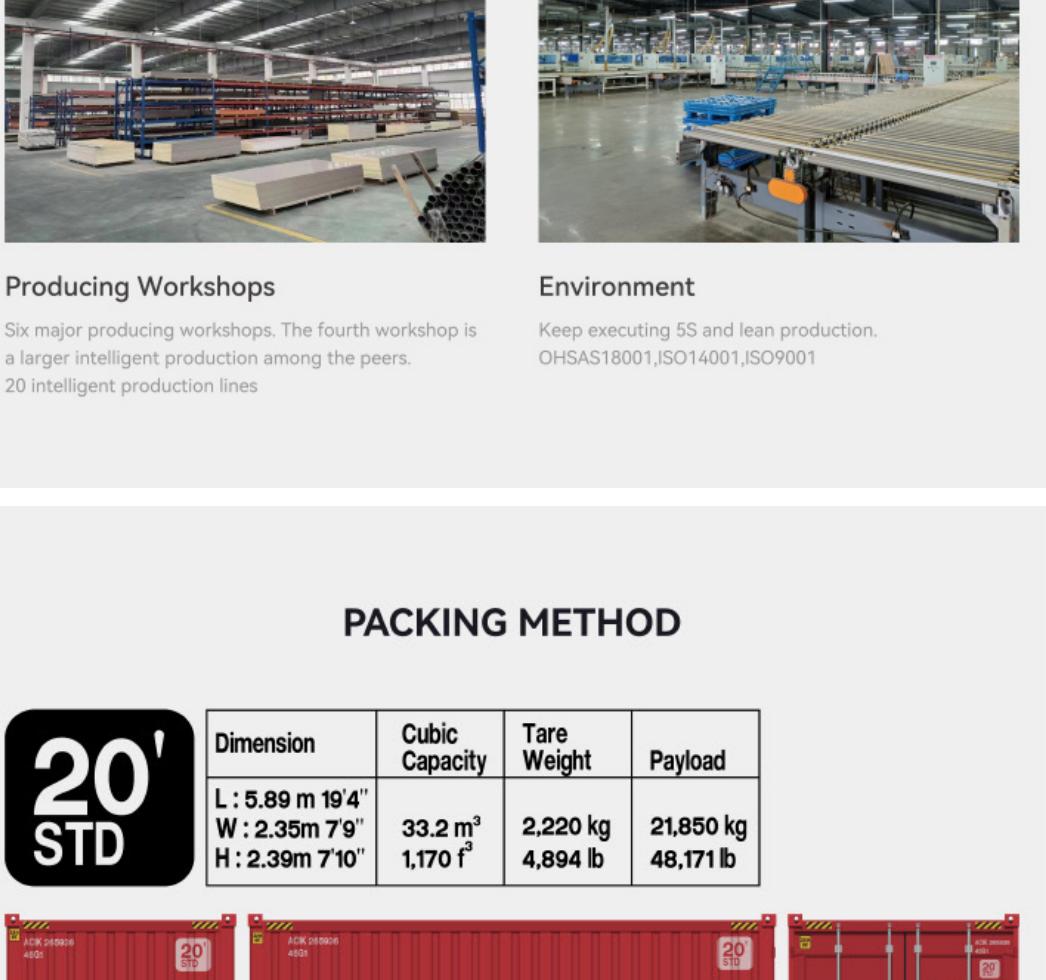

SGS

EP LEVEL

SGS

FIRE RATING

SGS

WATERPROOF

SGS

FLAME RETARDANT

REACH

EU Highly Concerned Substance Report





SGS

Formaldehyde Test Report

SGS

Eu Safety Certification

MORE WOOD GRAIN COLORS

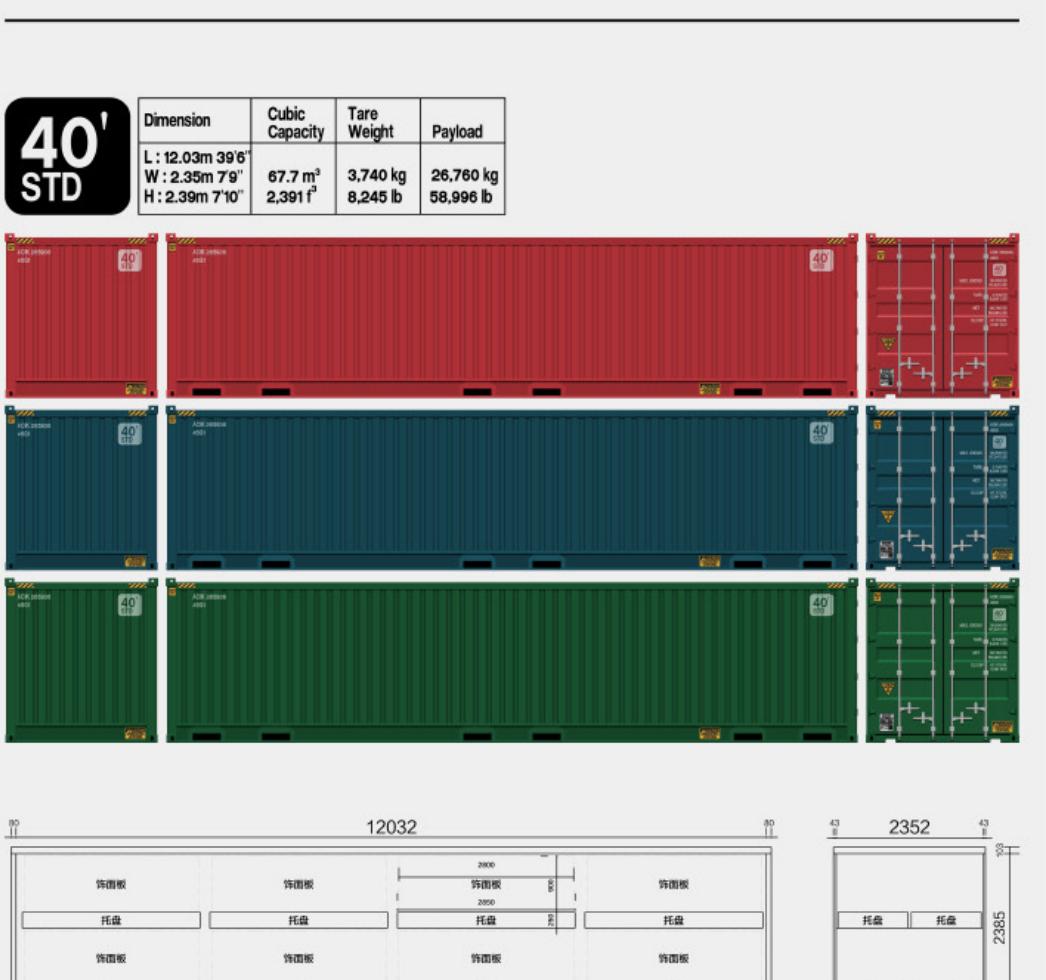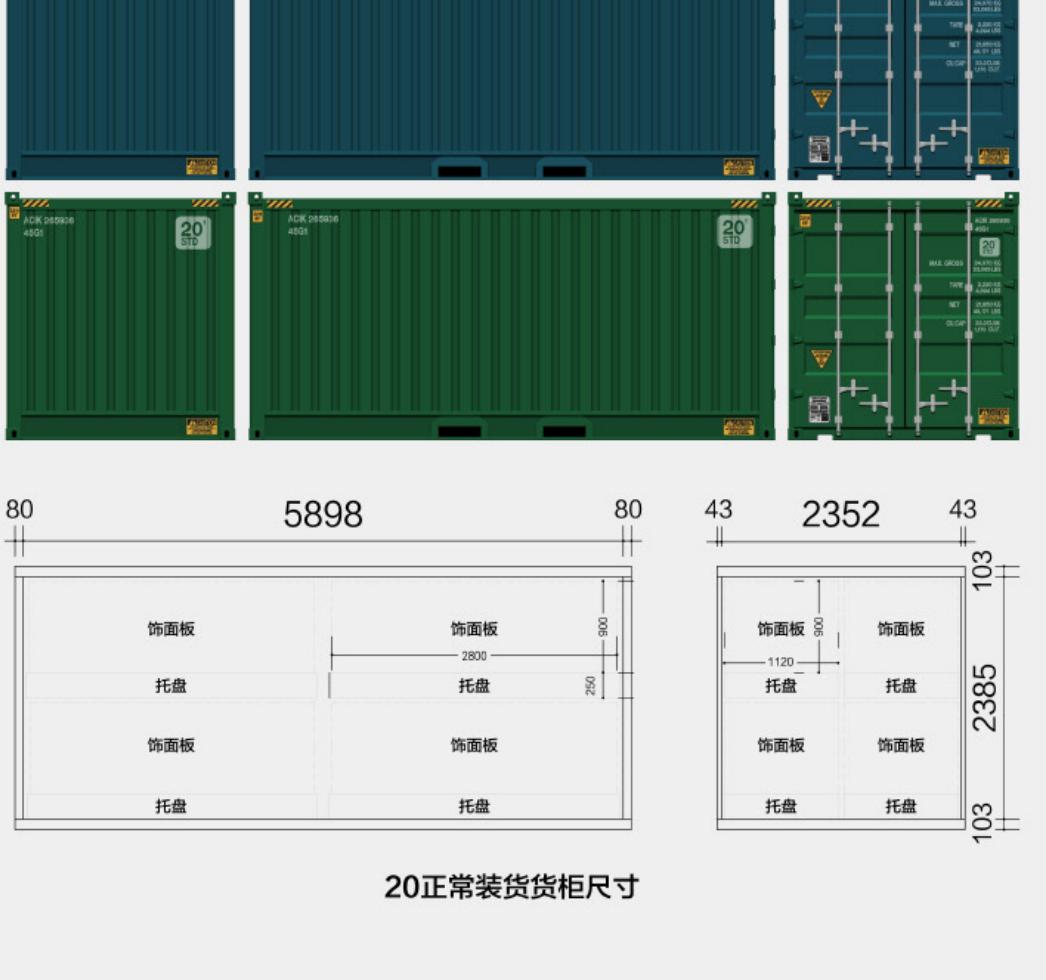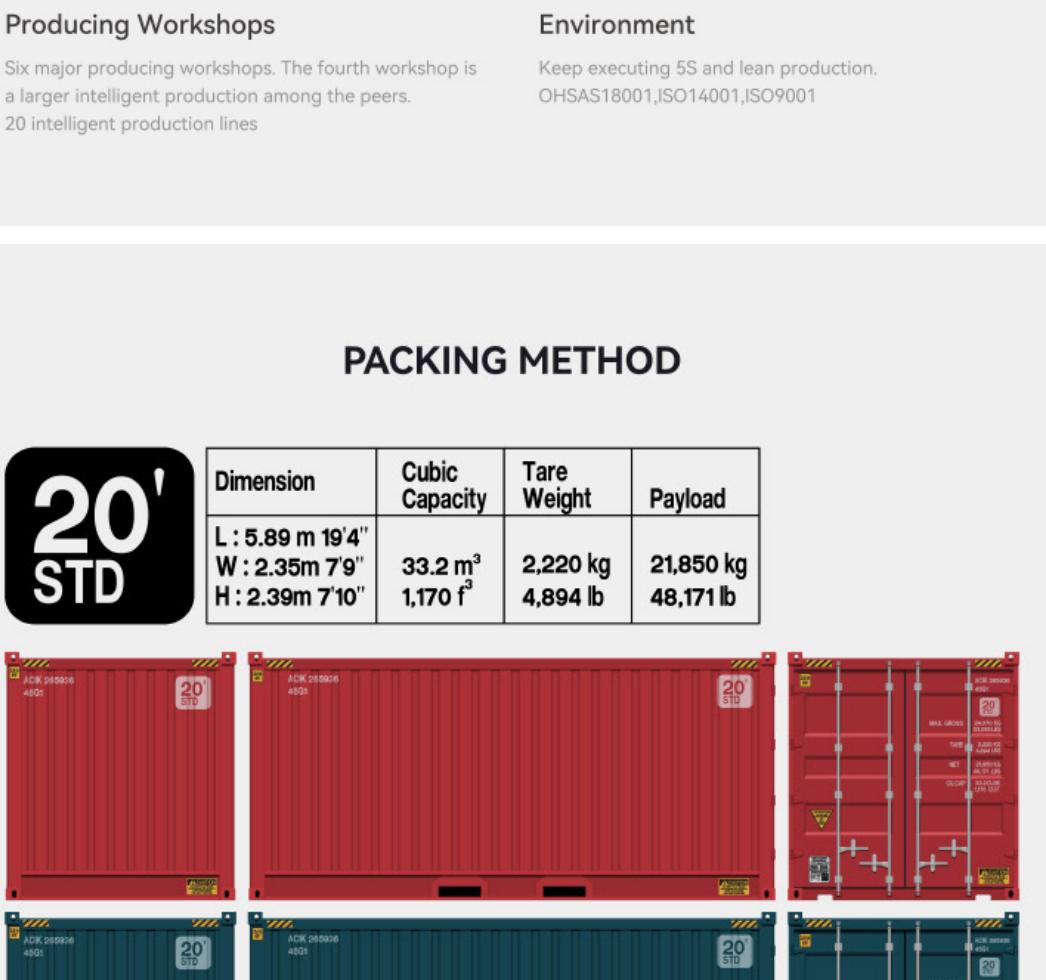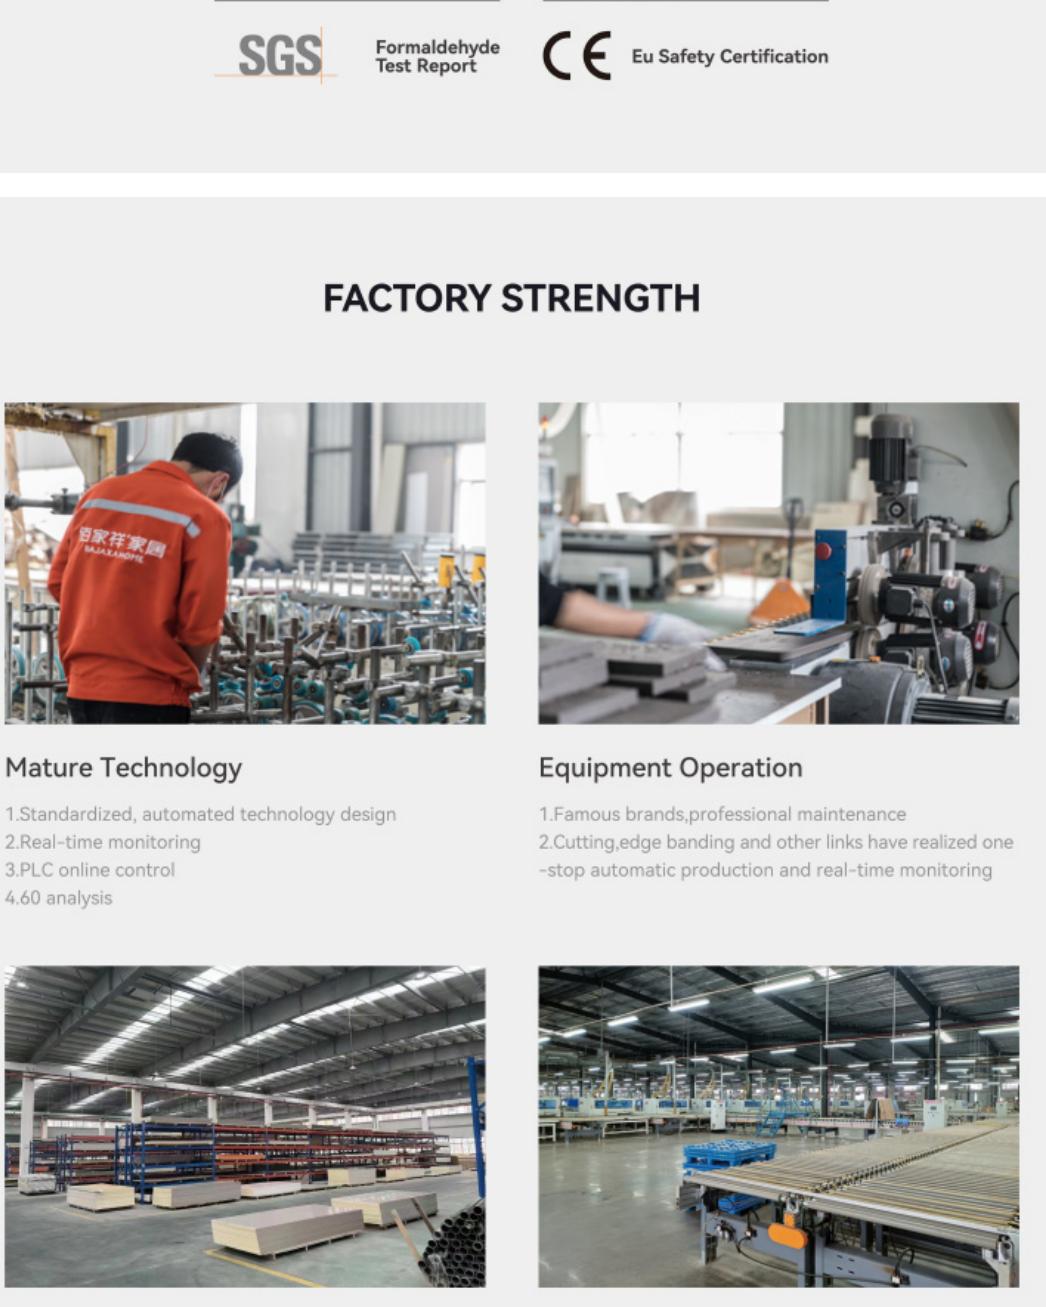

INTERNATIONAL CERTIFICATION

FACTORY STRENGTH

Mature Technology

1.Standardized, automated technology design
2.Real-time monitoring
3.PLC online control
4.60 analysis

Equipment Operation

1.Famous brands.professional maintenance
2.Cutting edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001

PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

20正常装货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L: 12.05m 39'0" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40正常装货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L: 12.05m 39'0" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40正常装货柜尺寸