

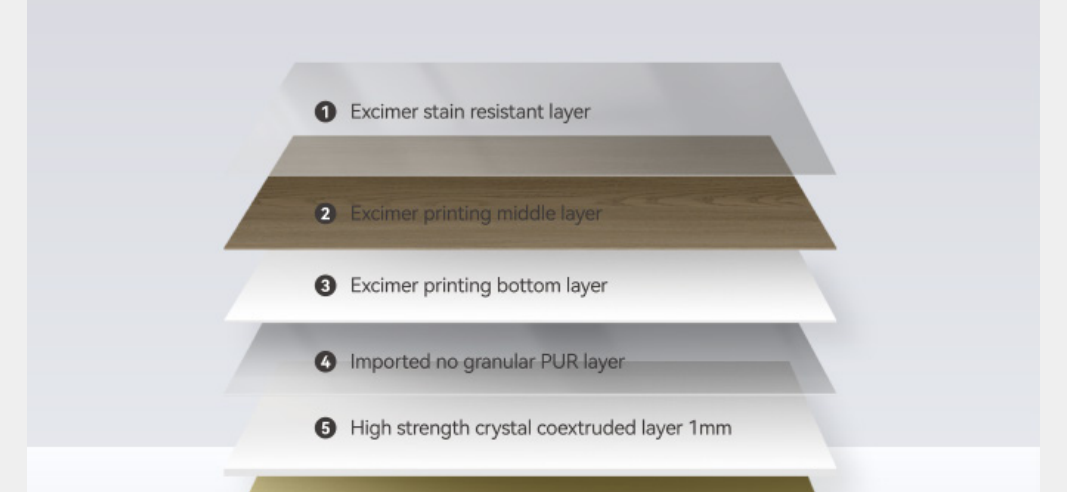
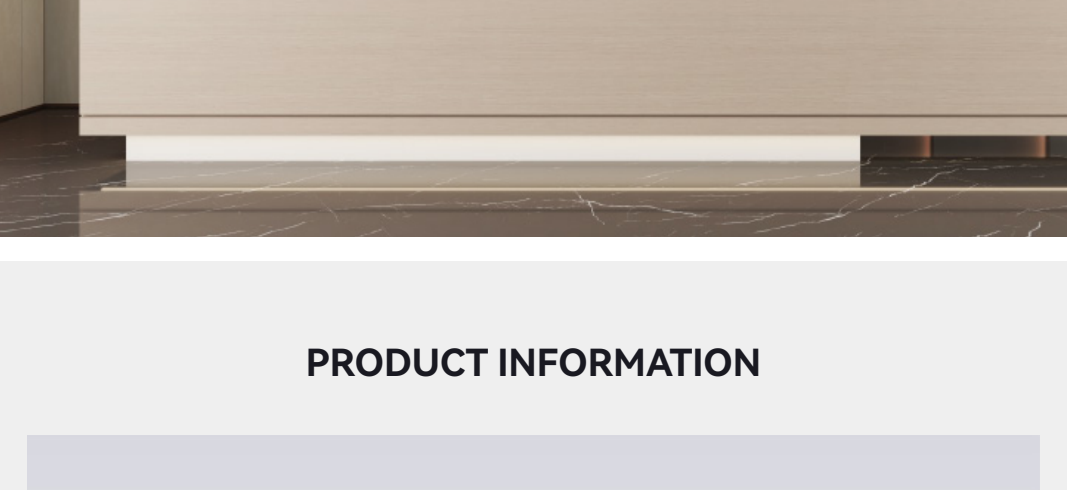


81029

COLOR NUMBER

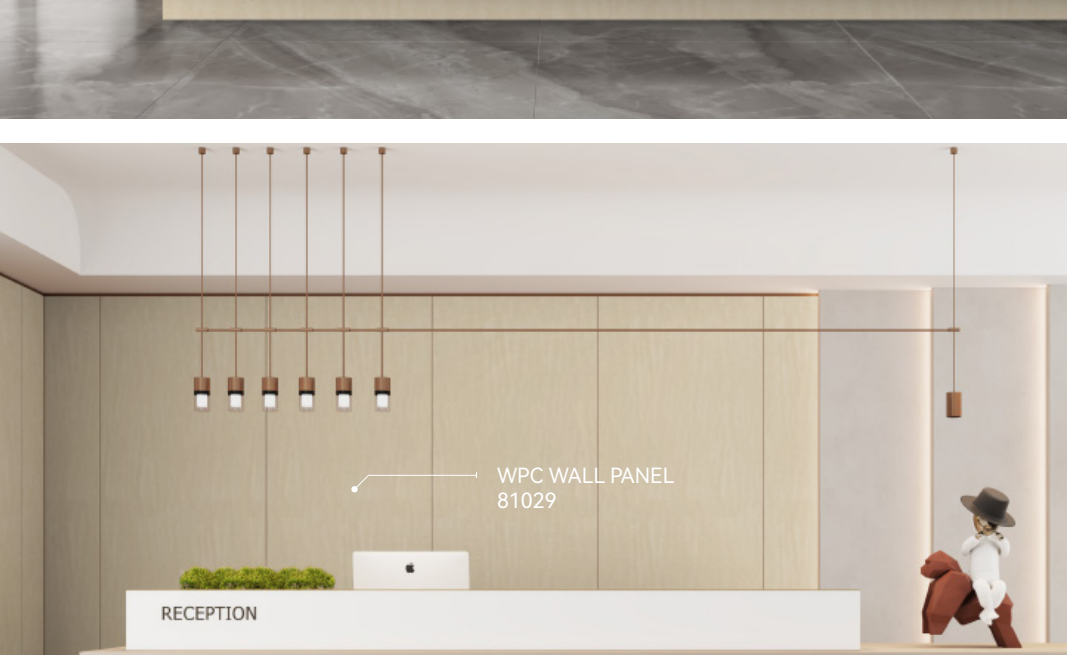


PRODUCT INFORMATION

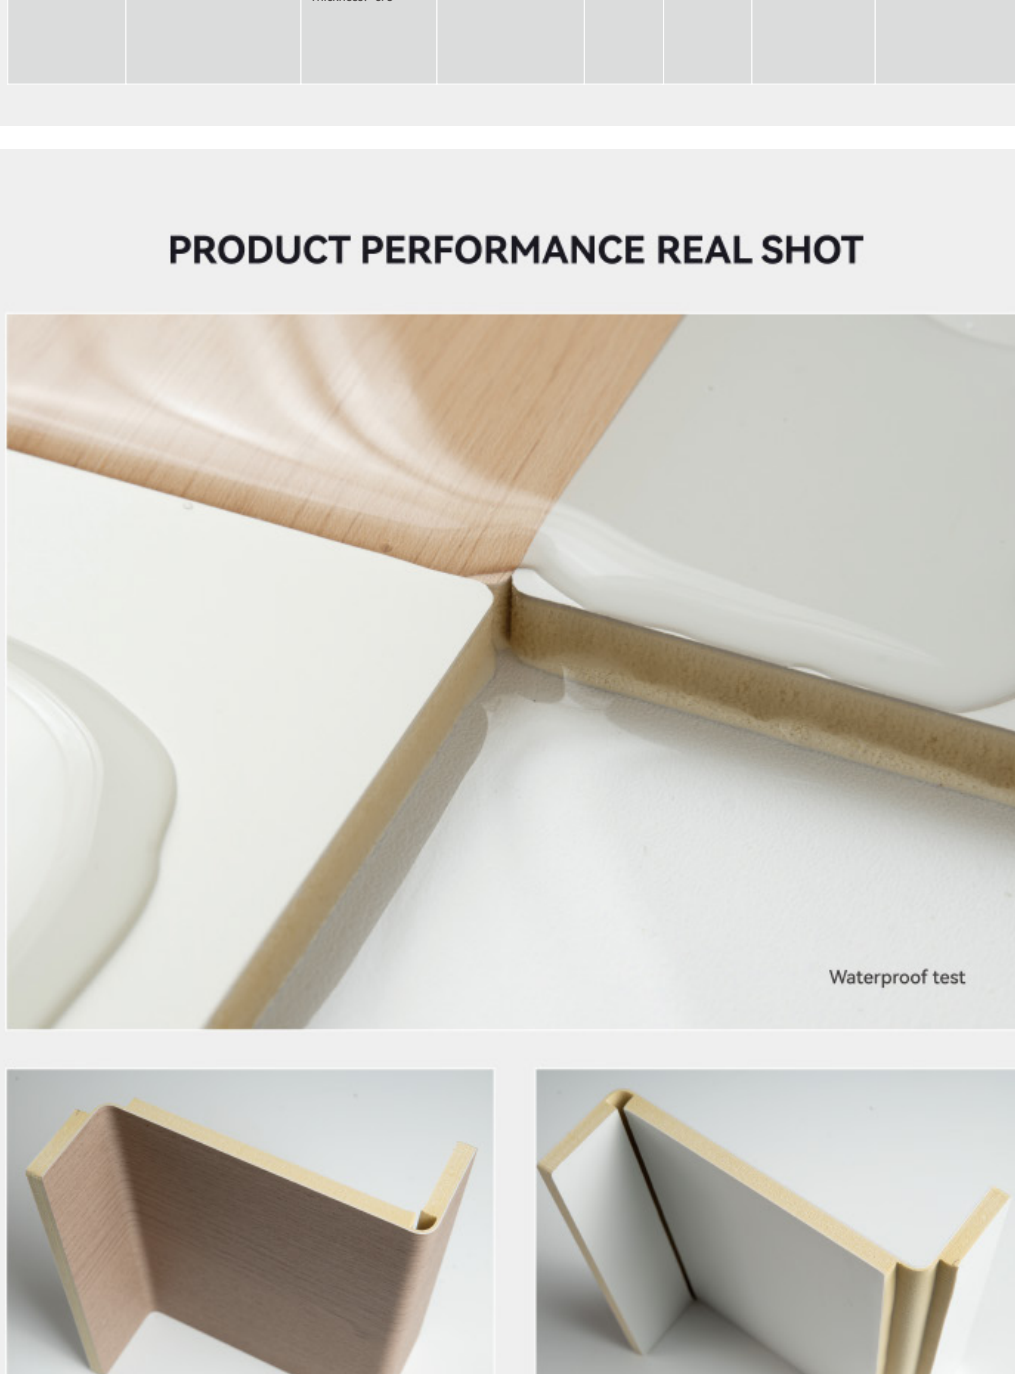


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


PRODUCT PERFORMANCE REAL SHOT

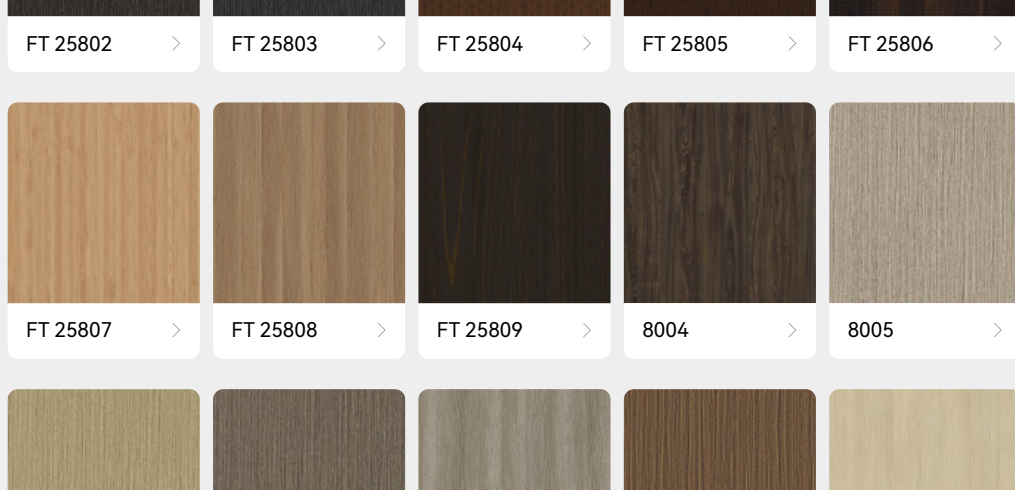

Waterproof test

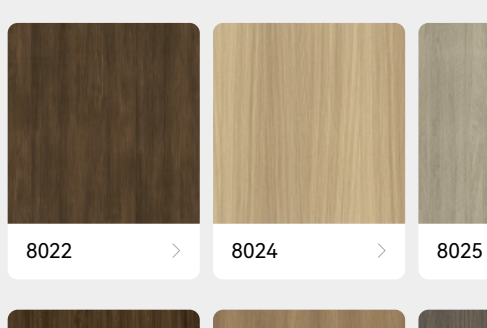

Bend forward

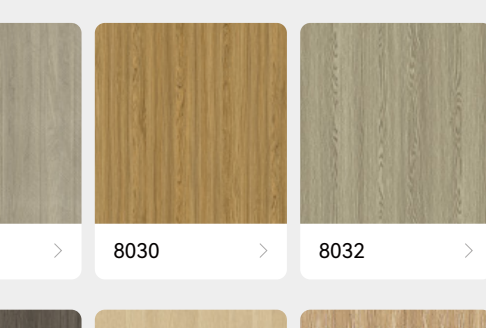

Bend backwards



EP LEVEL



FIRE RATING



WATERPROOF



BENDABLE

MORE WOOD GRAIN COLORS



INTERNATIONAL CERTIFICATION




Environmental Test Report

Reach

EU Highly Concerned Substance Report


SGS

Flame Retardant Test Report

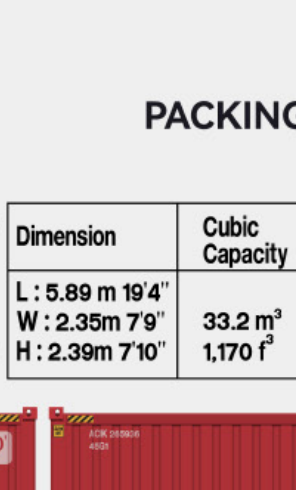

SGS


Formaldehyde Test Report

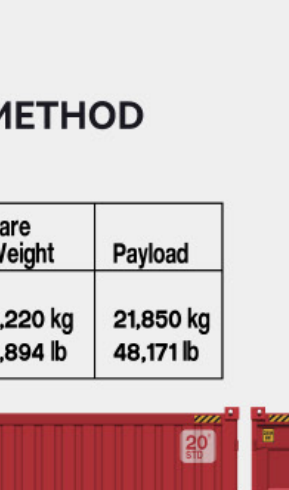

CE


Eu Safety Certification

FACTORY STRENGTH

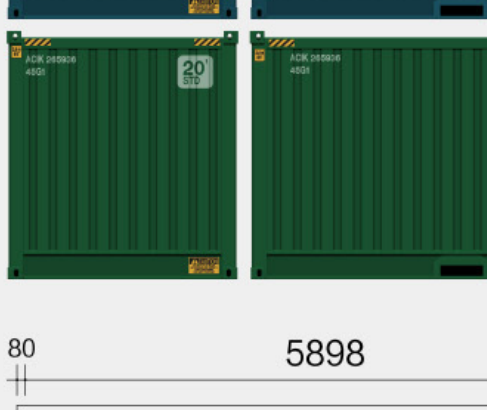


Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

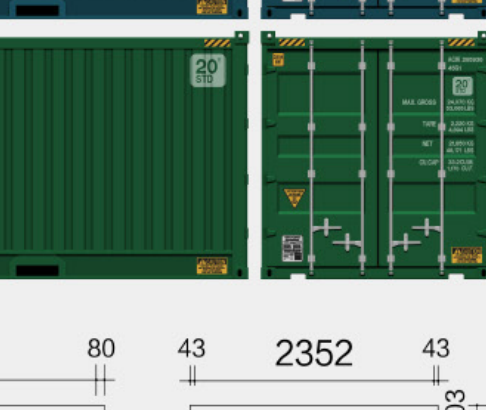


Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

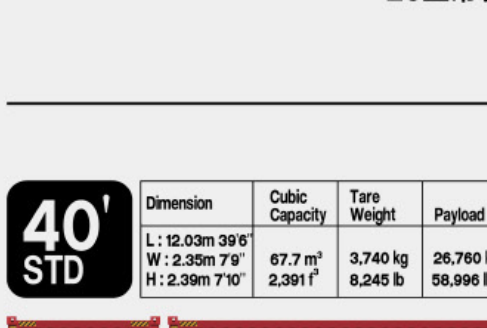

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

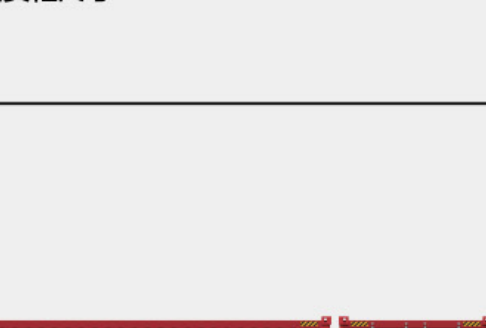

Environment


Keep executing 5S and lean production.
OHSAS18001, ISO14001, ISO9001

PACKING METHOD



20' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m³	2,220 kg	21,850 kg
W : 2.35 m 7'9"	1,170 f³	4,894 lb	48,171 lb
H : 2.39 m 7'10"			

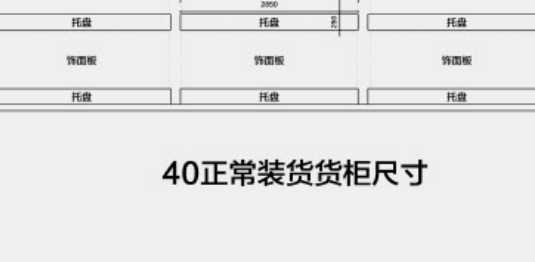

40' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03 m 39'6"	67.7 m³	3,740 kg	26,760 kg
W : 2.35 m 7'9"	2,391 f³	8,245 lb	58,996 lb
H : 2.39 m 7'10"			

40' 正常装货货柜尺寸