


PRODUCT INFORMATION

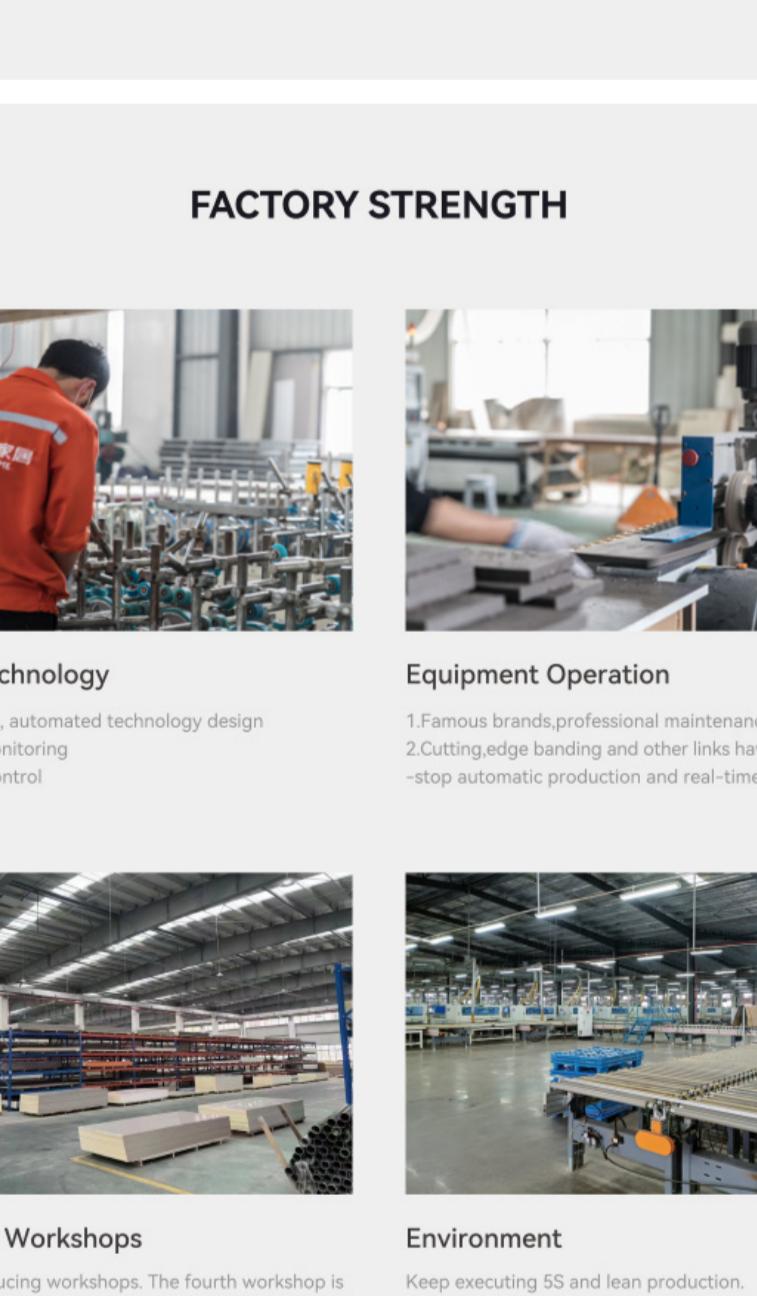

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT	
	Waterproof test
	Bend forward
	Bend backwards

	ENF	EP LEVEL
	B1	FIRE RATING
	WATERPROOF	
	BENDABLE	
	Formaldehyde Test Report	Reach
	EU Highly Concerned Substance Report	
	SGS Flame Retardant Test Report	
	SGS Formaldehyde Test Report	CE Eu Safety Certification

MORE CLOTH GRAIN COLORS

FT 25601	FT 25602	FT 25603	FT 25604	FT 25605

FT 25606	FT 25607	6001	6003	6004
6005	6009	6015	6016	6019
6021	6027	6035	6065	6066
6070	6071	6072	6073	6076
6079	6080	6081		

INTERNATIONAL CERTIFICATION	
	SGS Test Report
	SGS Environmental Test Report
	SGS EU Highly Concerned Substance Report
	SGS Flame Retardant Test Report
	SGS Formaldehyde Test Report
	CE Eu Safety Certification

FACTORY STRENGTH

Mature Technology	
1.Standardized, automated technology design 2.Real-time monitoring 3.PLC online control 4.G6 analysis	
Equipment Operation	

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines	
Keep executing 5S and lean production. OHSAS18001,ISO14001,ISO9001	

PACKING METHOD	
Dimension	Cubic Capacity
L: 5.89 m 19'	3.740 m ³
W: 2.35m 7'	2,220 kg
H: 2.39m 7"	4,894 lb
	21,850 kg
	48,171 lb

Dimension	
L: 12.03m 39' W: 2.35m 7' H: 2.39m 7"	

Dimension	
L: 12.03m 39' W: 2.35m 7' H: 2.39m 7"	

Dimension	
L: 5.89 m 19' W: 2.35m 7'	

Dimension	
L: 12.03m 39' W: 2.35m 7'	

Dimension	
L: 5.89 m 19' W: 2.35m 7'	

Dimension	
L: 12.03m 39' W: 2.35m 7'	