




701




PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm


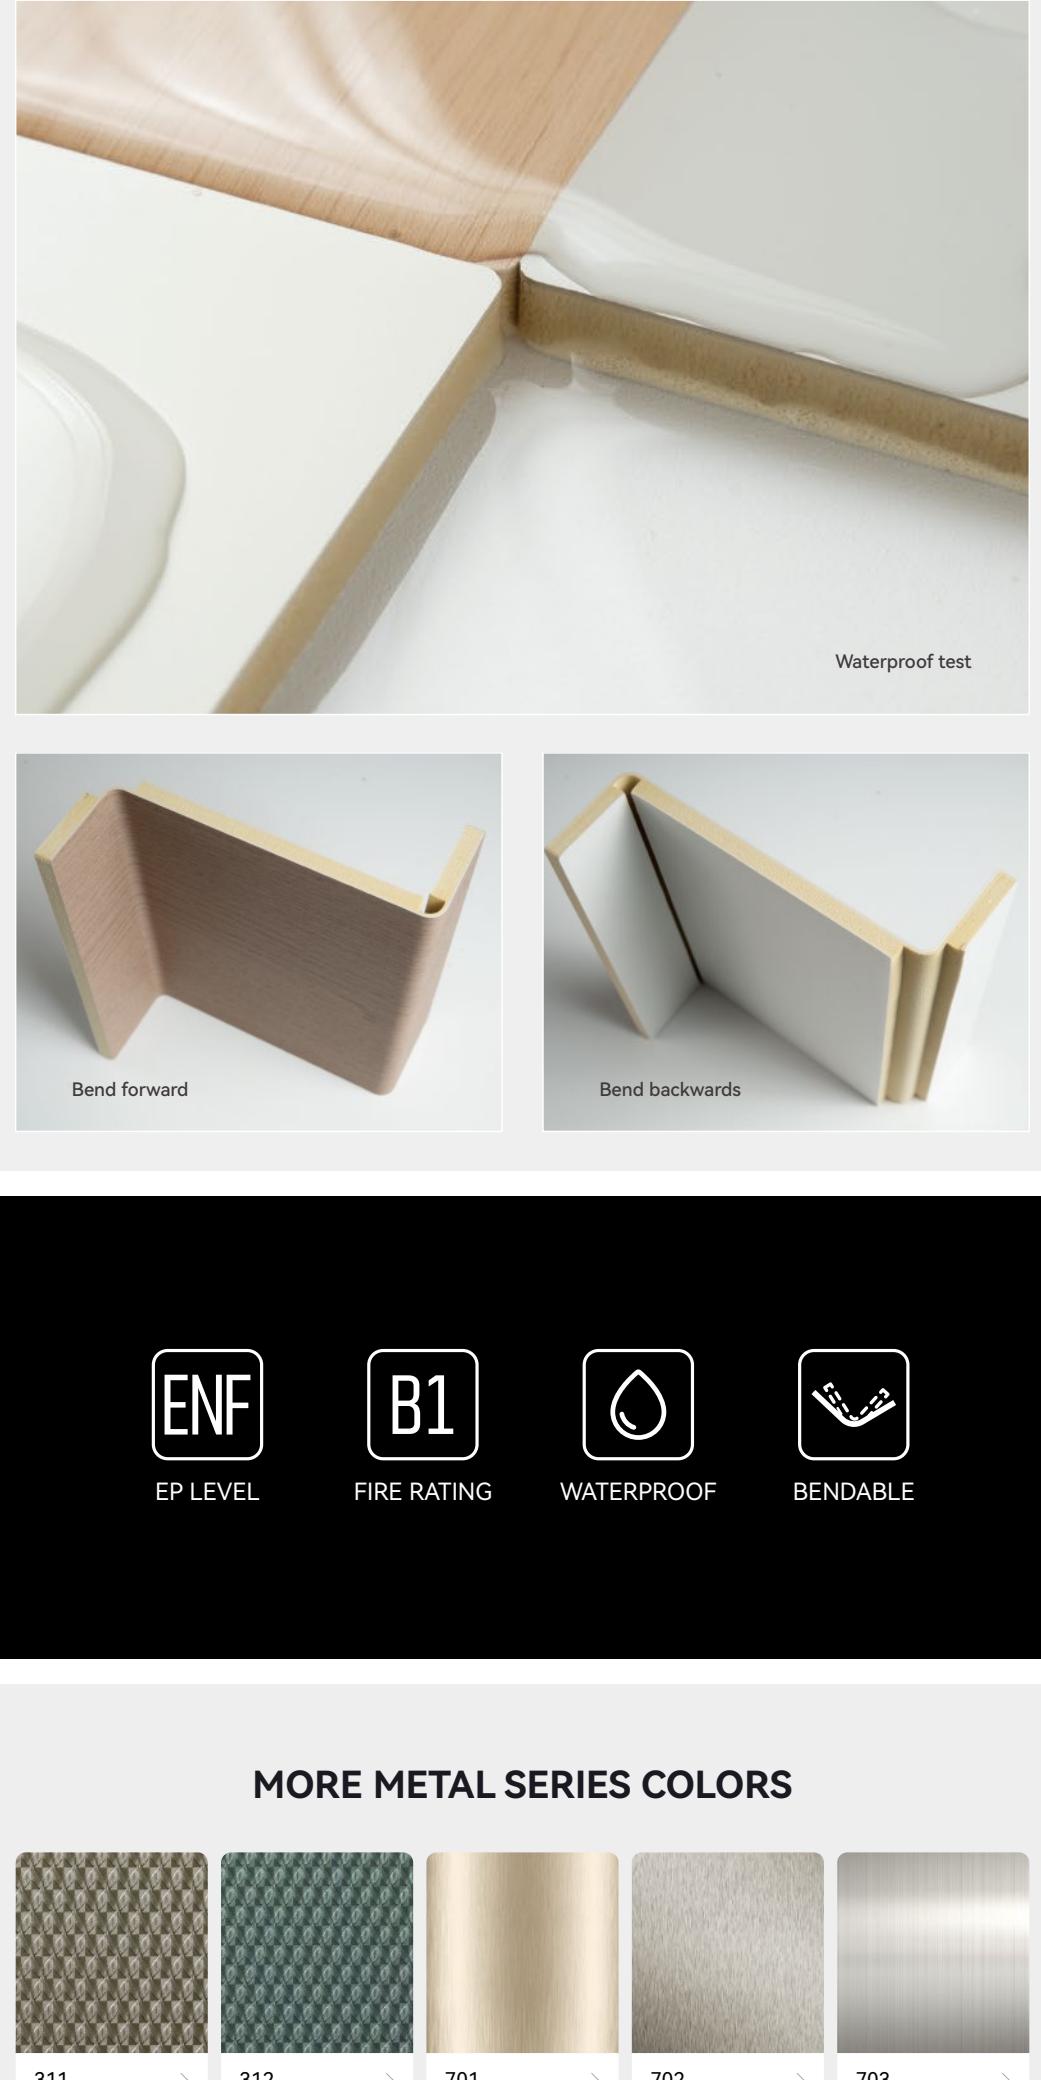


PRODUCT INFORMATION

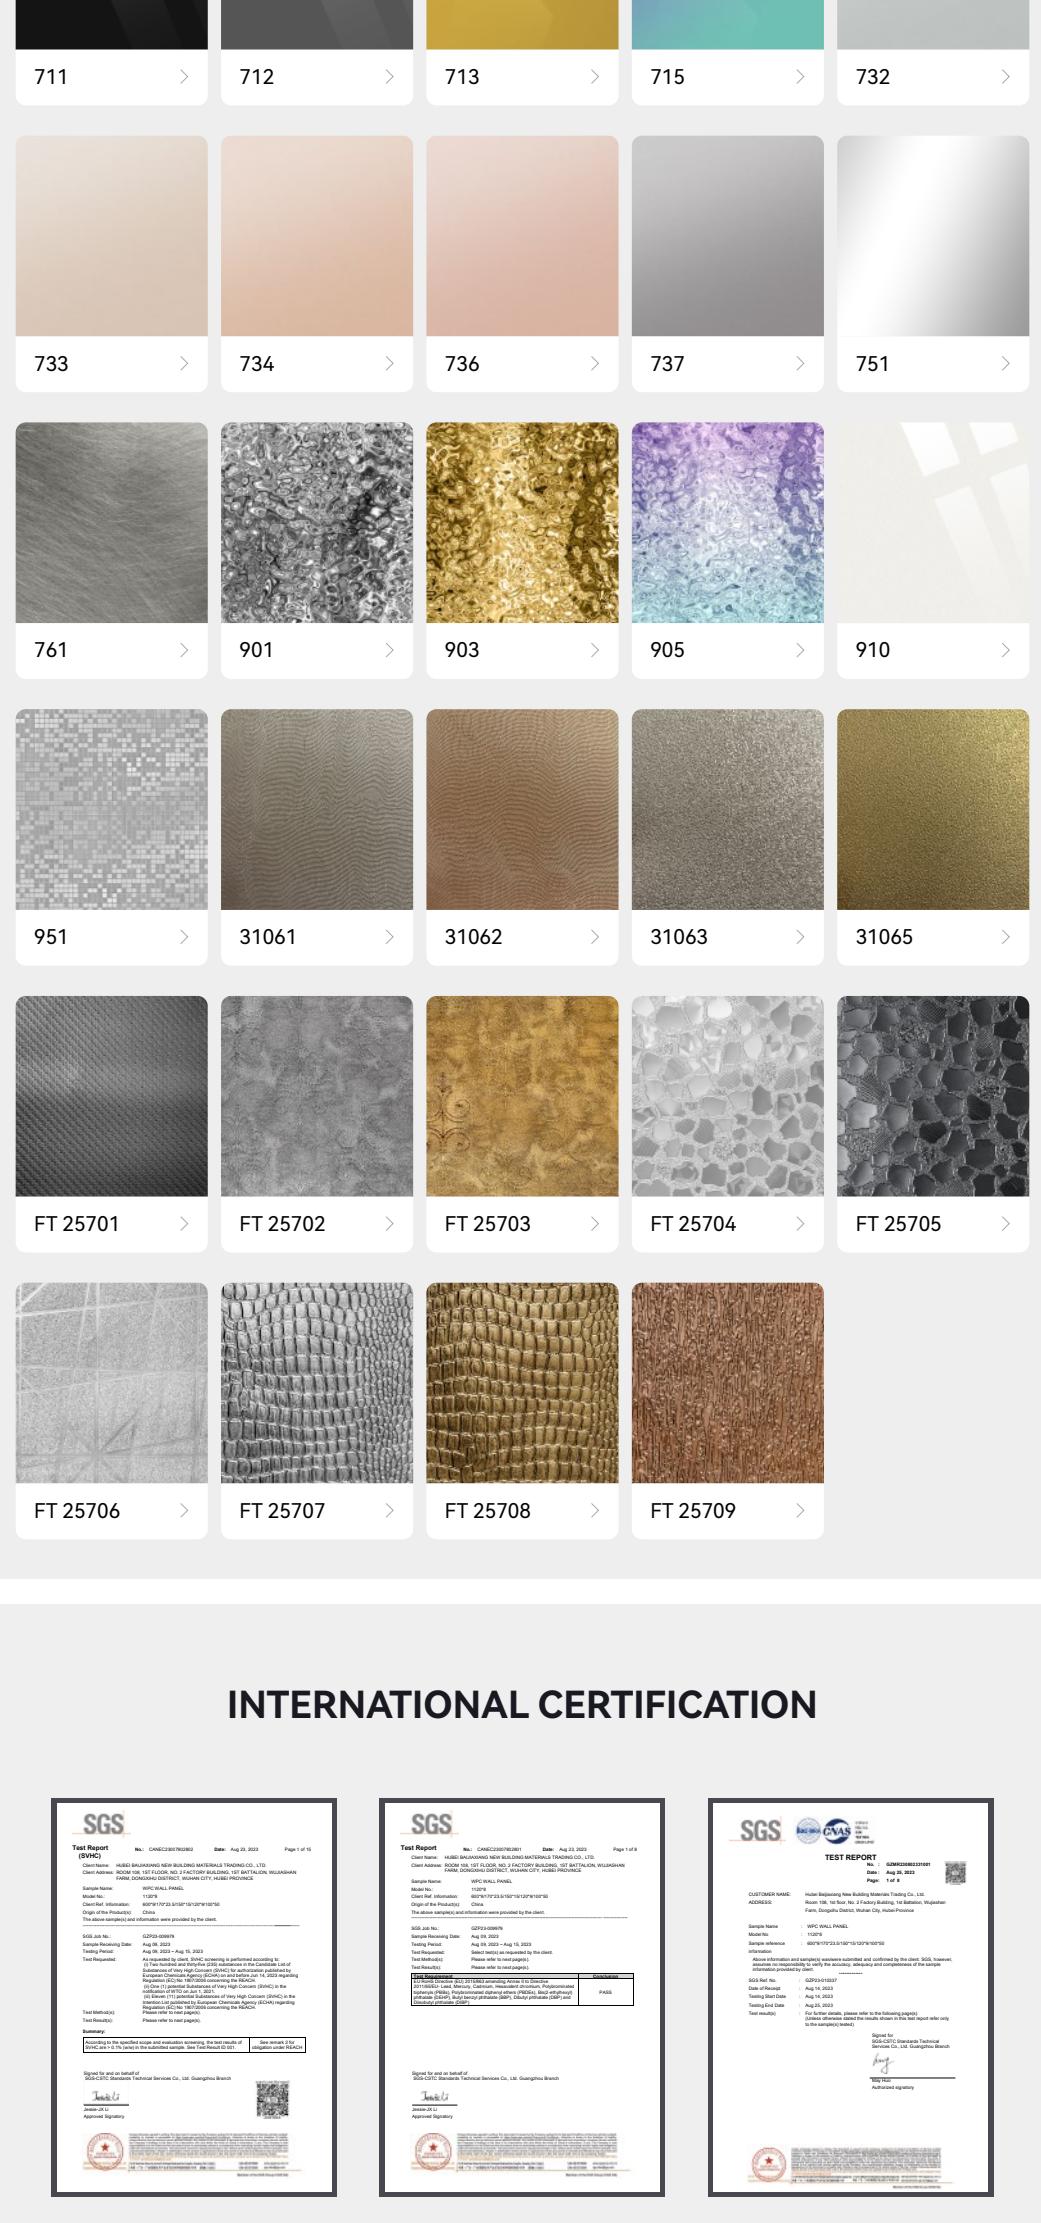

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

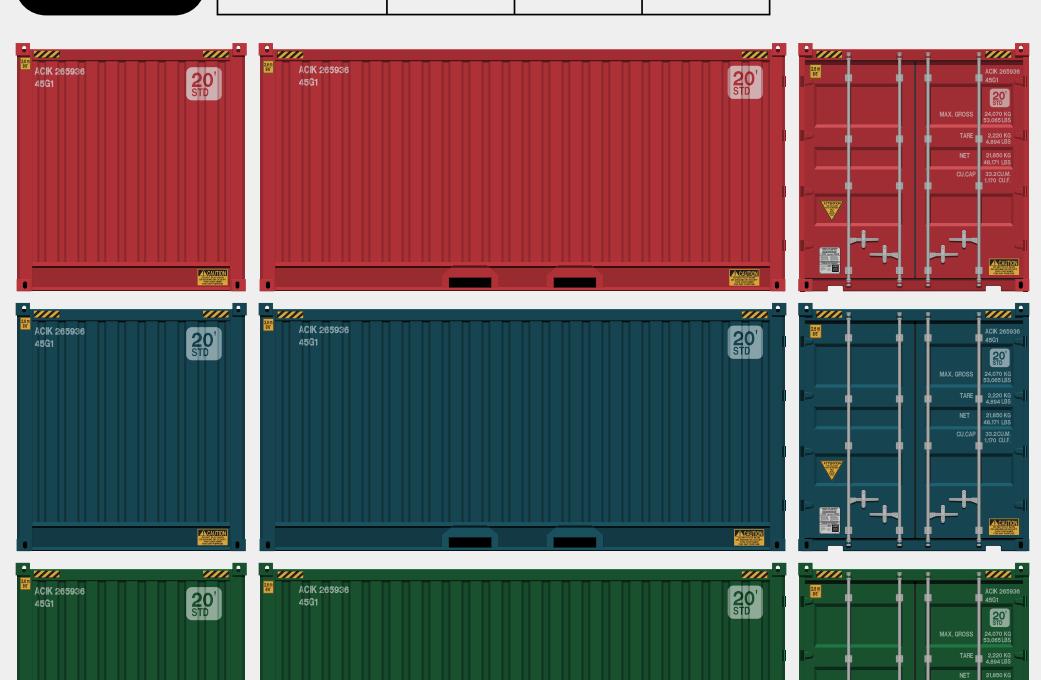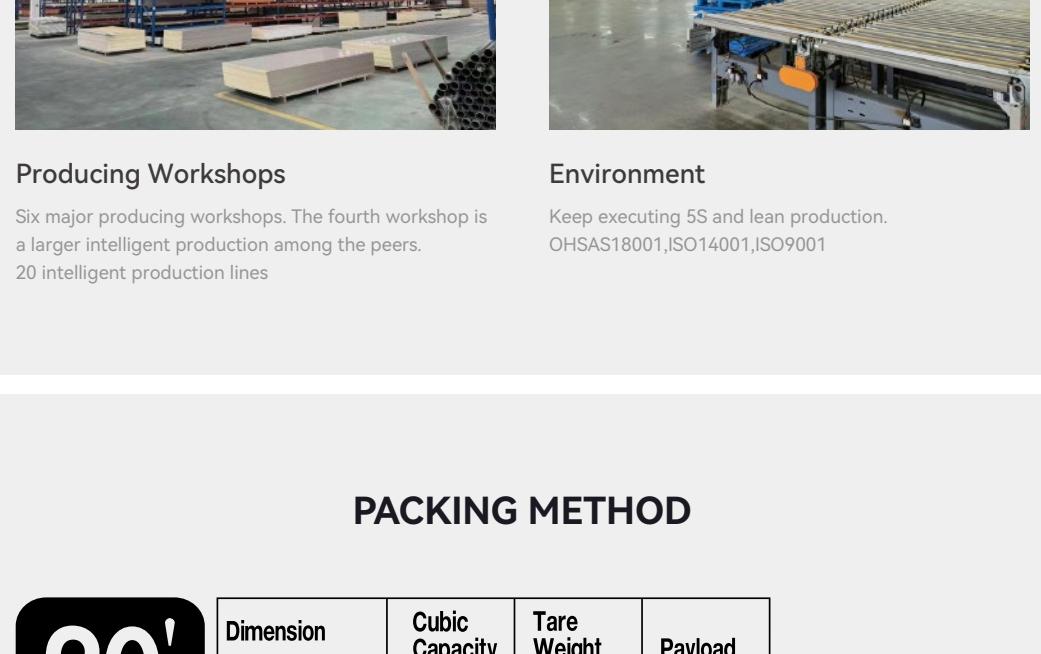

20 STD

Dimension

Cubic Capacity

Tare Weight

Payload

L: 5.89 m 19'4"

33.2 m³

2,220 kg

21.850 kg

W: 2.35m 7'9"

1,170 f³

4,894 lb

48,171 lb



20正常装货货柜尺寸

40 STD

Dimension

Cubic Capacity

Tare Weight

Payload

L: 12.03m 39'6"

67.7 m³


3,740 kg

26,760 kg

W: 2.35m 7'10"

8,245 lb

58,996 lb

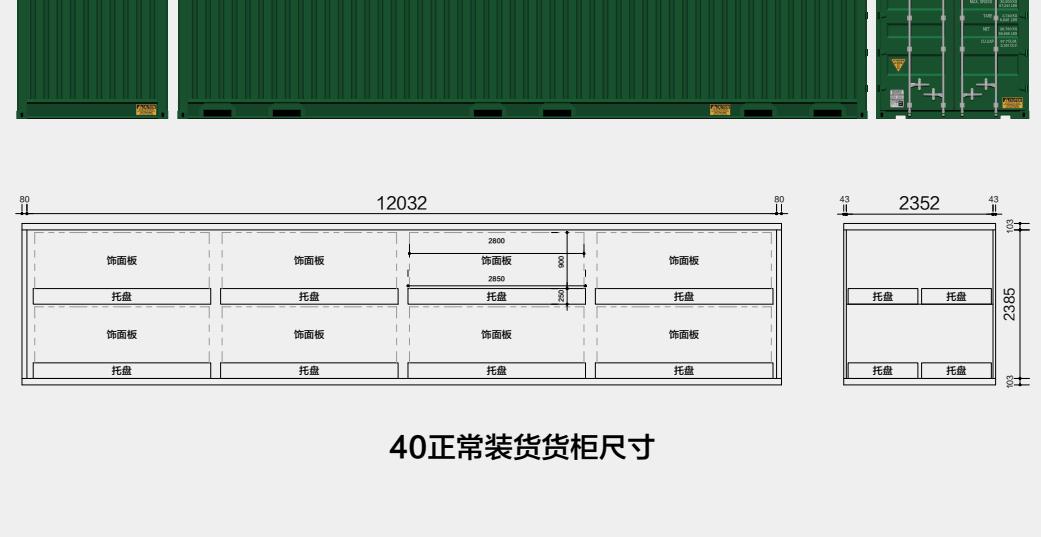

40正常装货货柜尺寸