

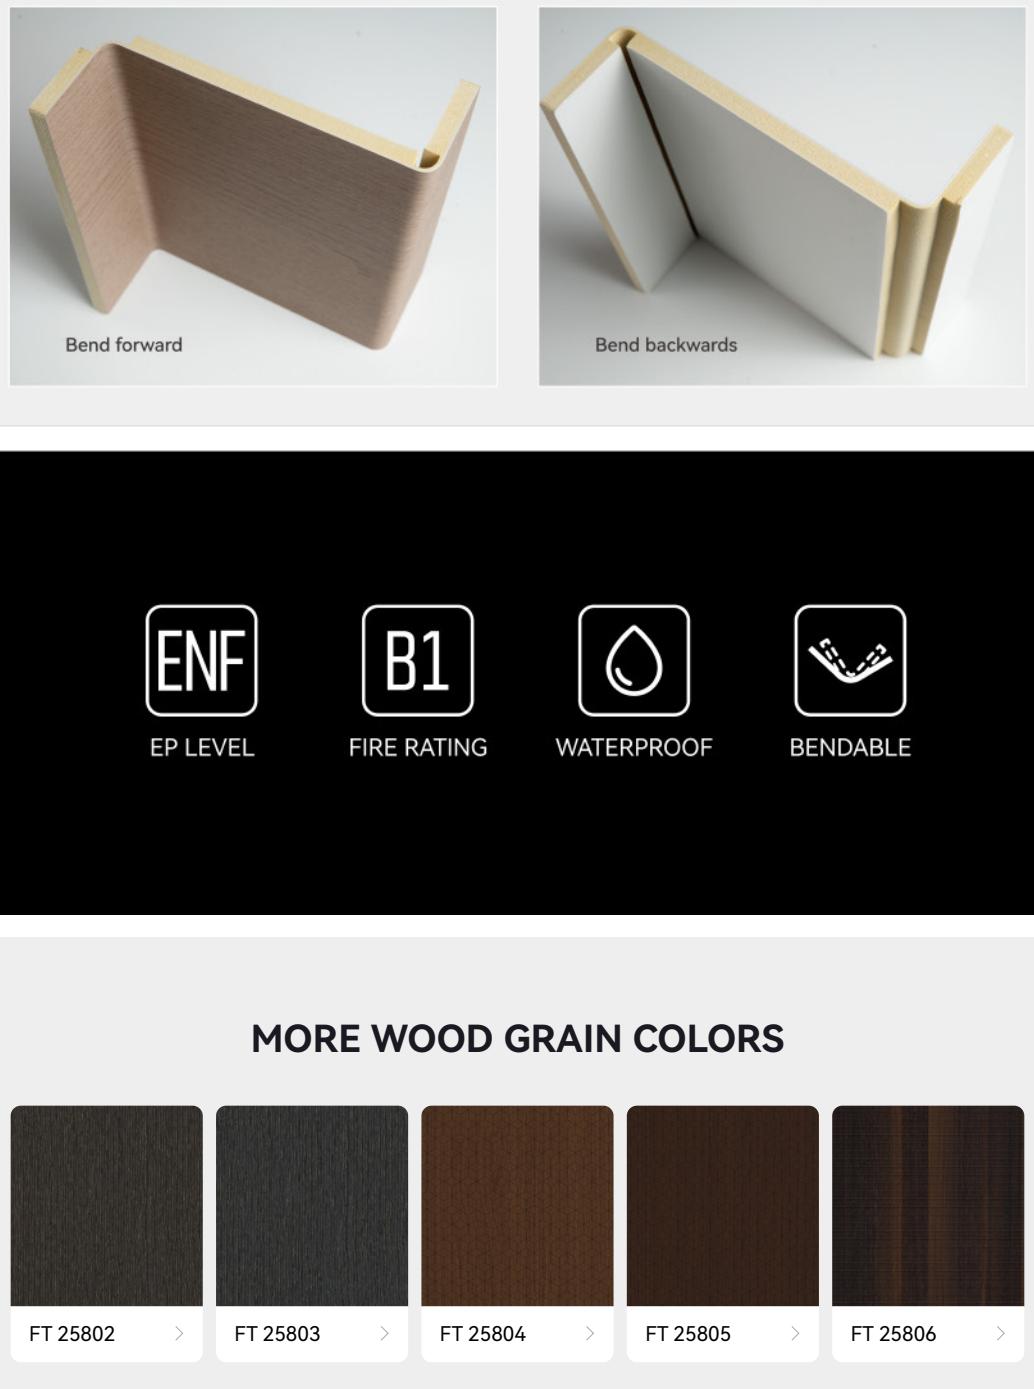




- WOOD GRAIN -

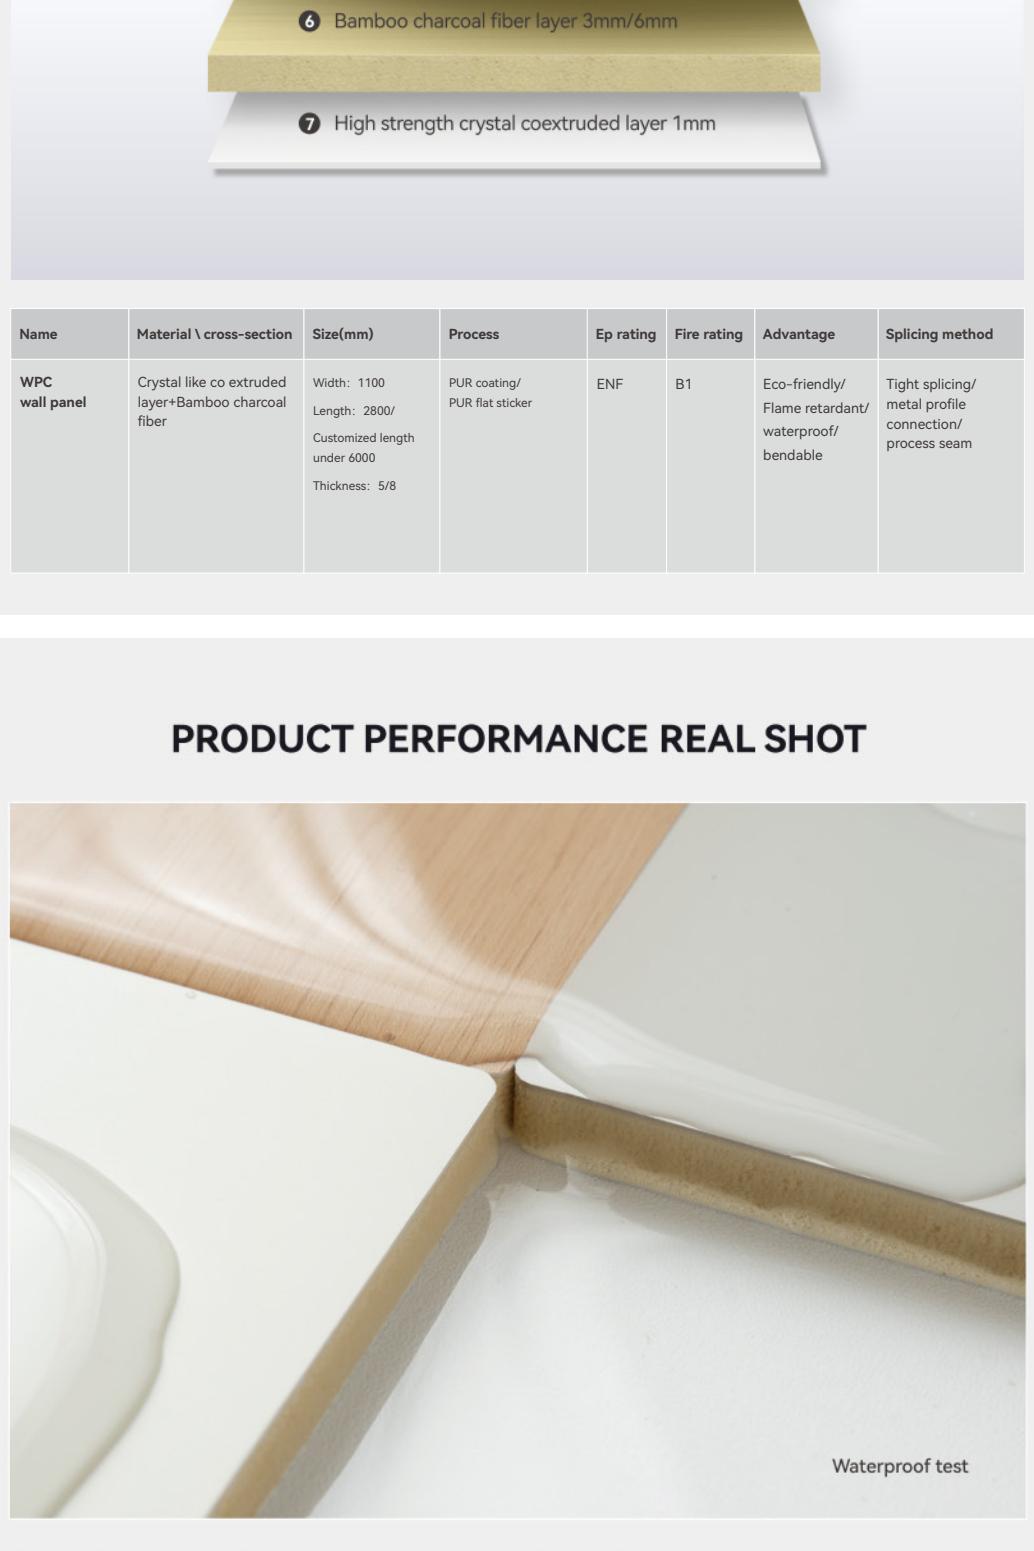

## PRODUCT INFORMATION

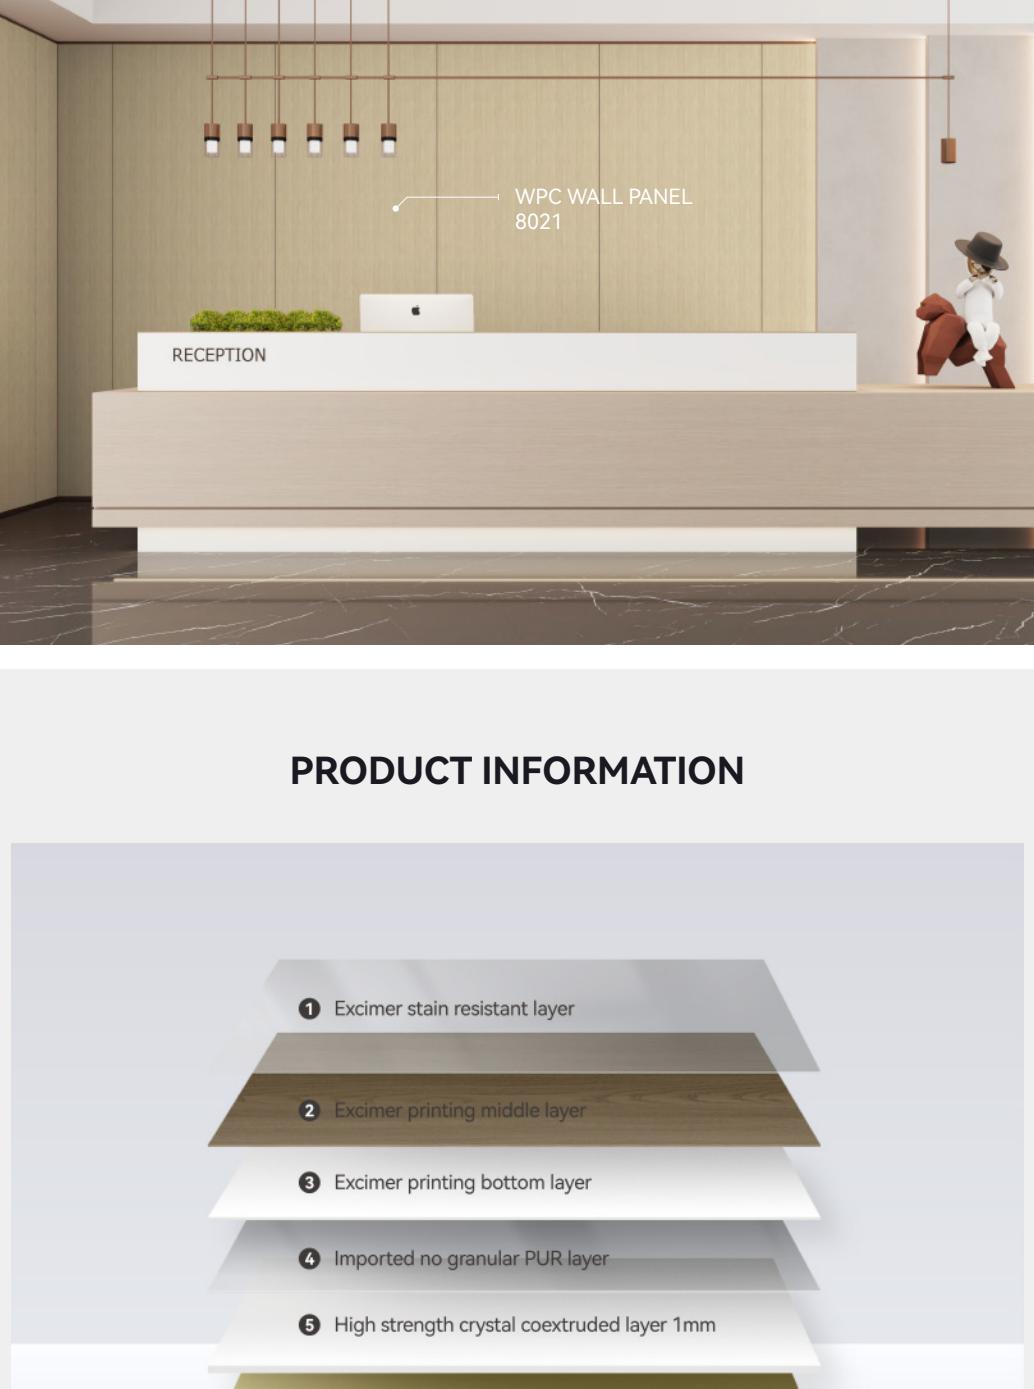

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

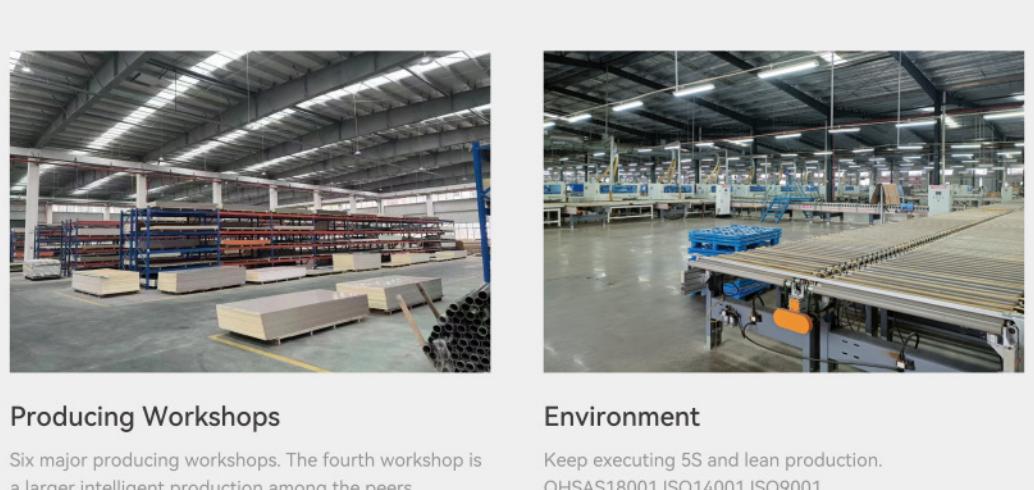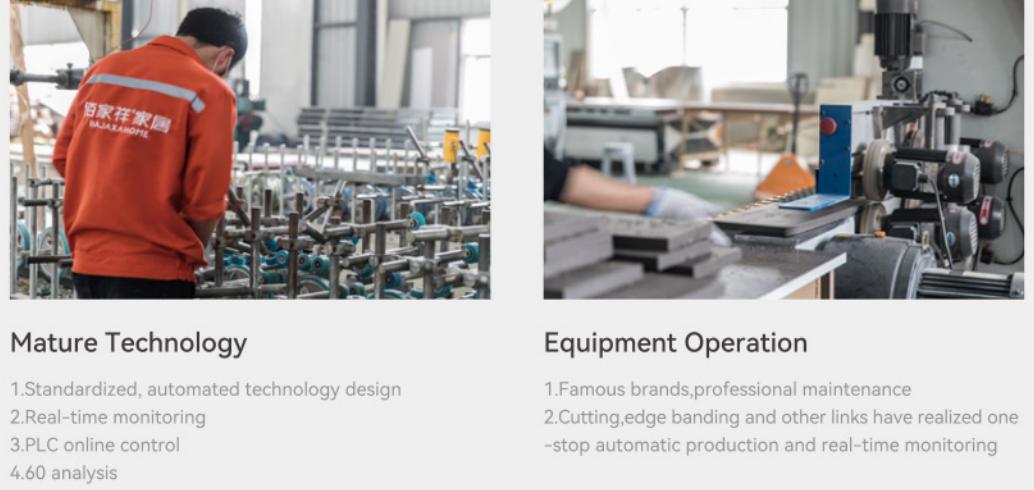

SGS

Environmental Test Report



EU Highly Concerned Substance Report

SGS

Flame Retardant Test Report



SGS

Formaldehyde Test Report

CE

Eu Safety Certification

## MORE WOOD GRAIN COLORS

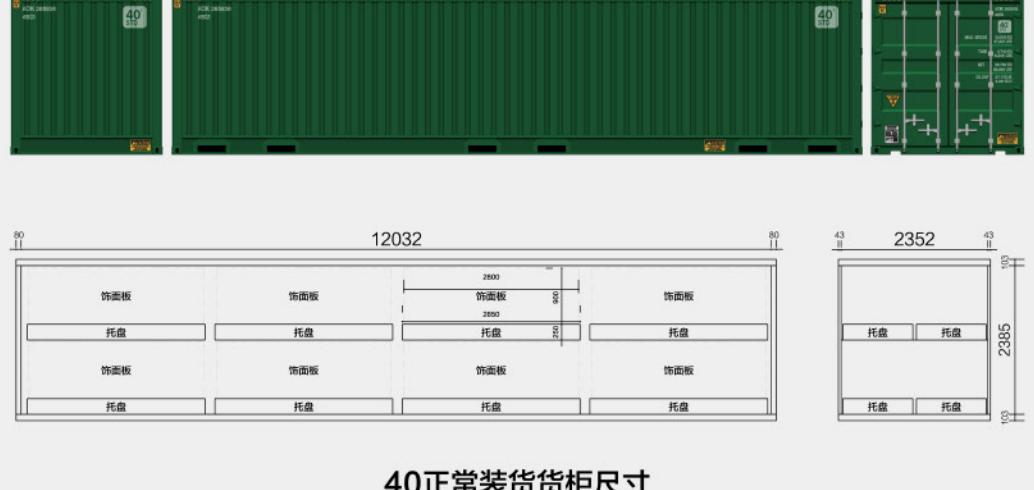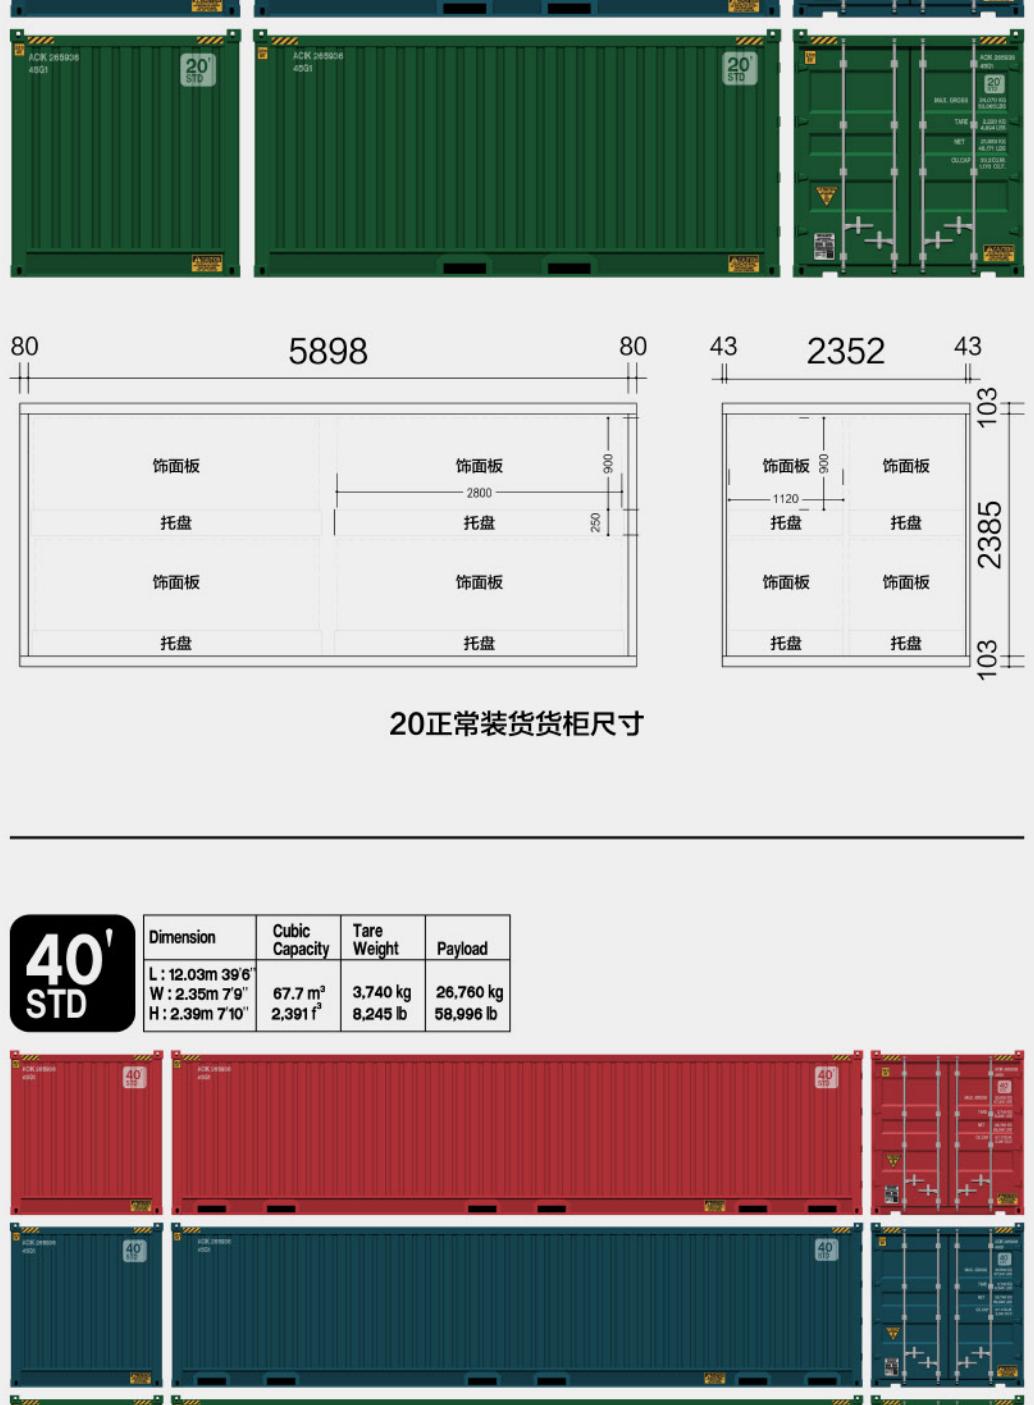

## FACTORY STRENGTH



Matured Technology

2.Real-time monitoring

3.PLC online control

4.G60 analysis

Famous brands.professional maintenance

2.Cutting-edge banding and other links have realized one-stop automatic production and real-time monitoring

20 intelligent production lines



Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

6 major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

12032

80 5898 80 43 2352 43 103

饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘

2800 250 2800 250 2800 250 2800 250 2800 250

20正常装货柜尺寸

