



81066

COLOR NUMBER



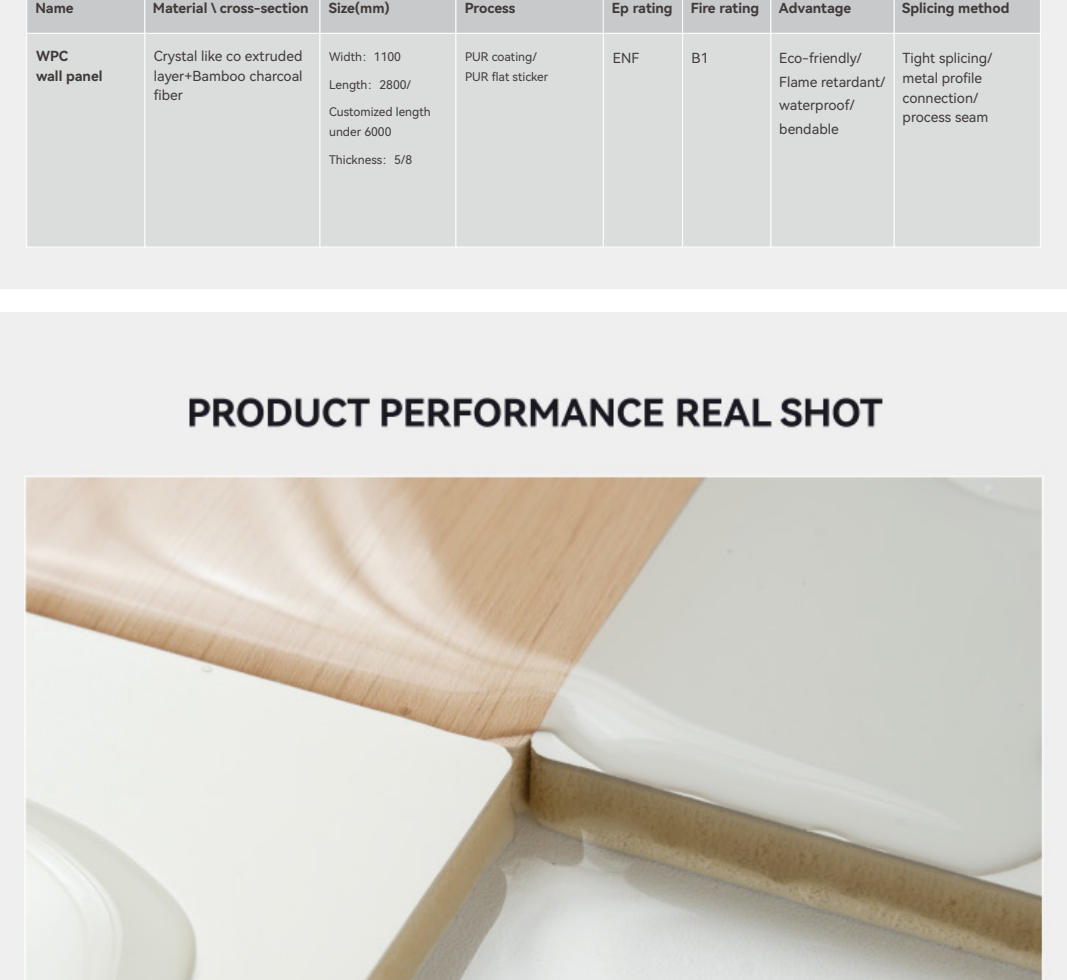


PRODUCT INFORMATION

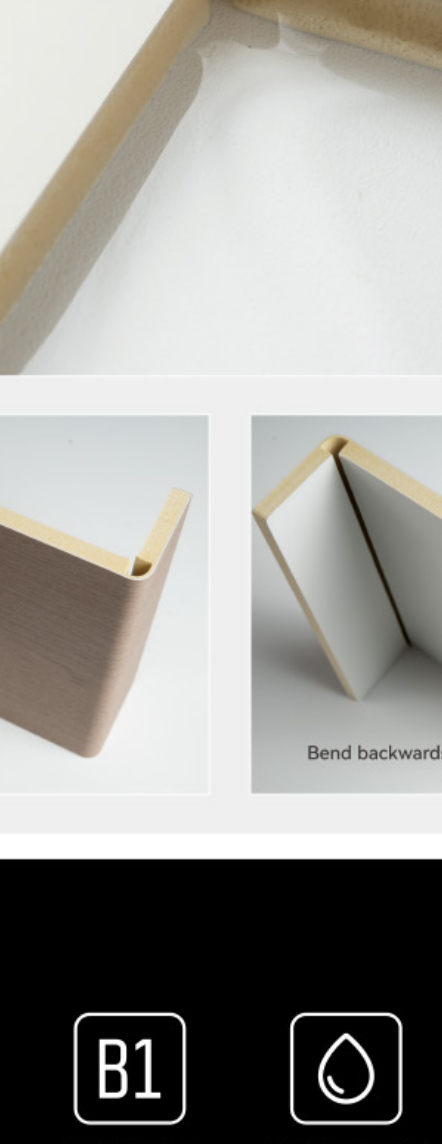

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

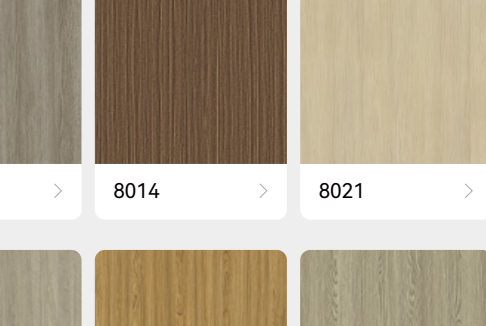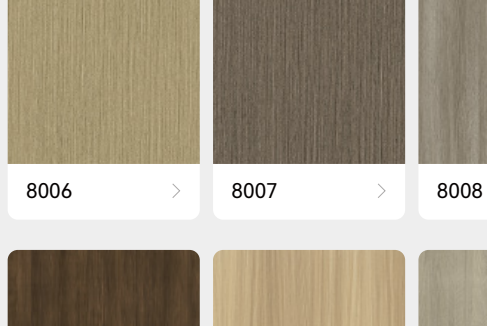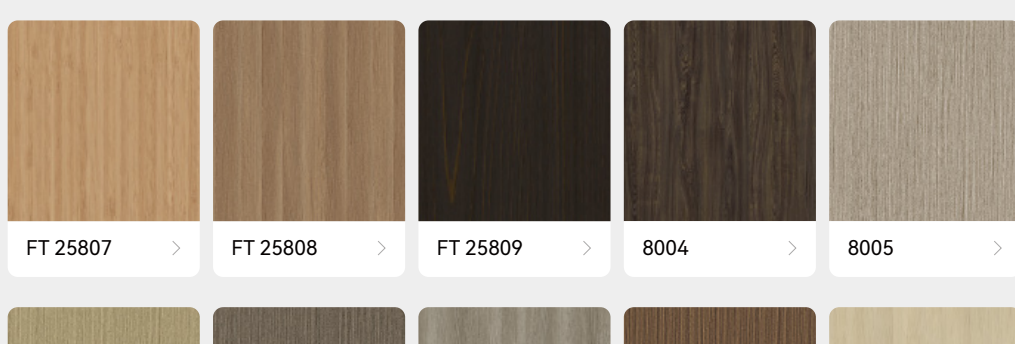

EP LEVEL



FIRE RATING



WATERPROOF





BENDABLE

MORE WOOD GRAIN COLORS



INTERNATIONAL CERTIFICATION

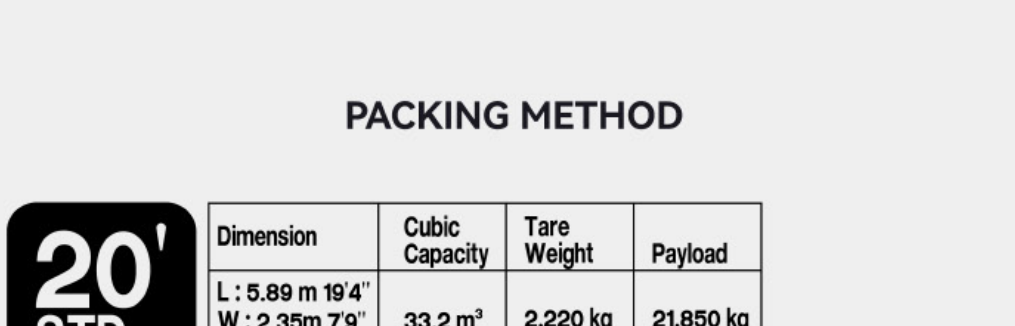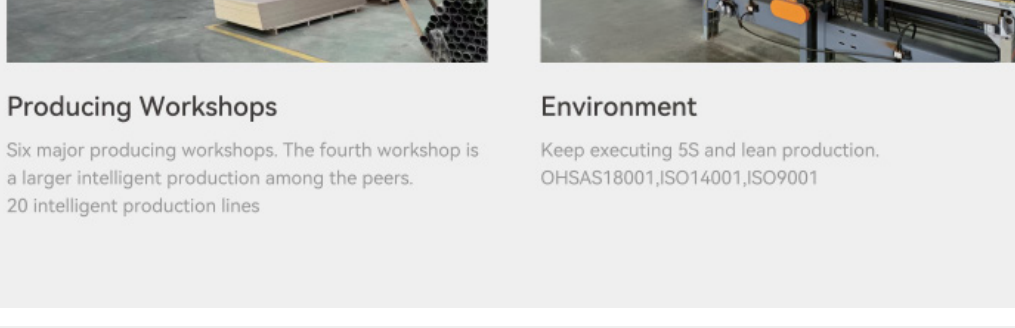


FACTORY STRENGTH




Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

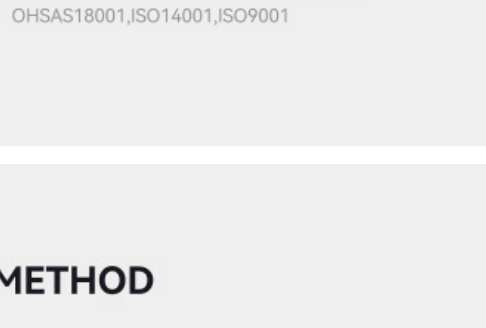


Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

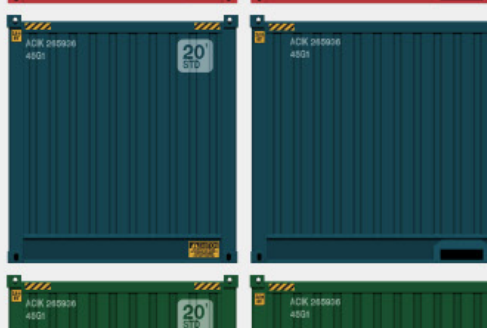

Producing Workshops


Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

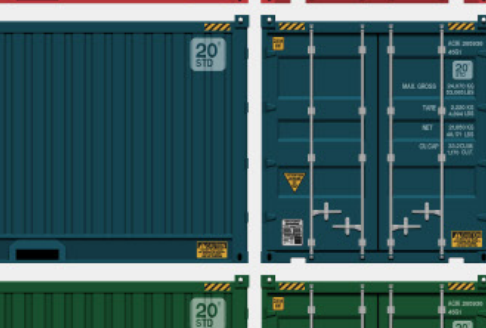


Environment

Keep executing 5S and lean production.
OHSAS18001, ISO14001, ISO9001


PACKING METHOD

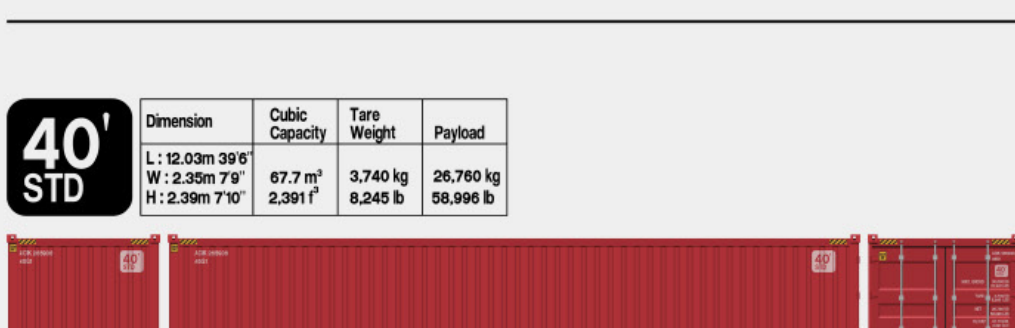

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m³	2,220 kg	21,850 kg
W : 2.35m 7'9"	1,170 f³	4,894 lb	48,171 lb
H : 2.39m 7'10"			

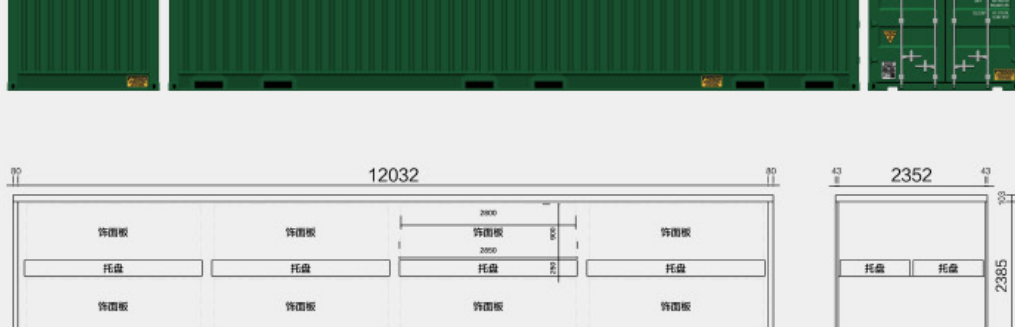

20正常装货货柜尺寸



Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m³	3,740 kg	26,760 kg
W : 2.35m 7'9"	2,391 f³	8,245 lb	58,996 lb
H : 2.39m 7'10"			

40正常装货货柜尺寸