


FT 25706




PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

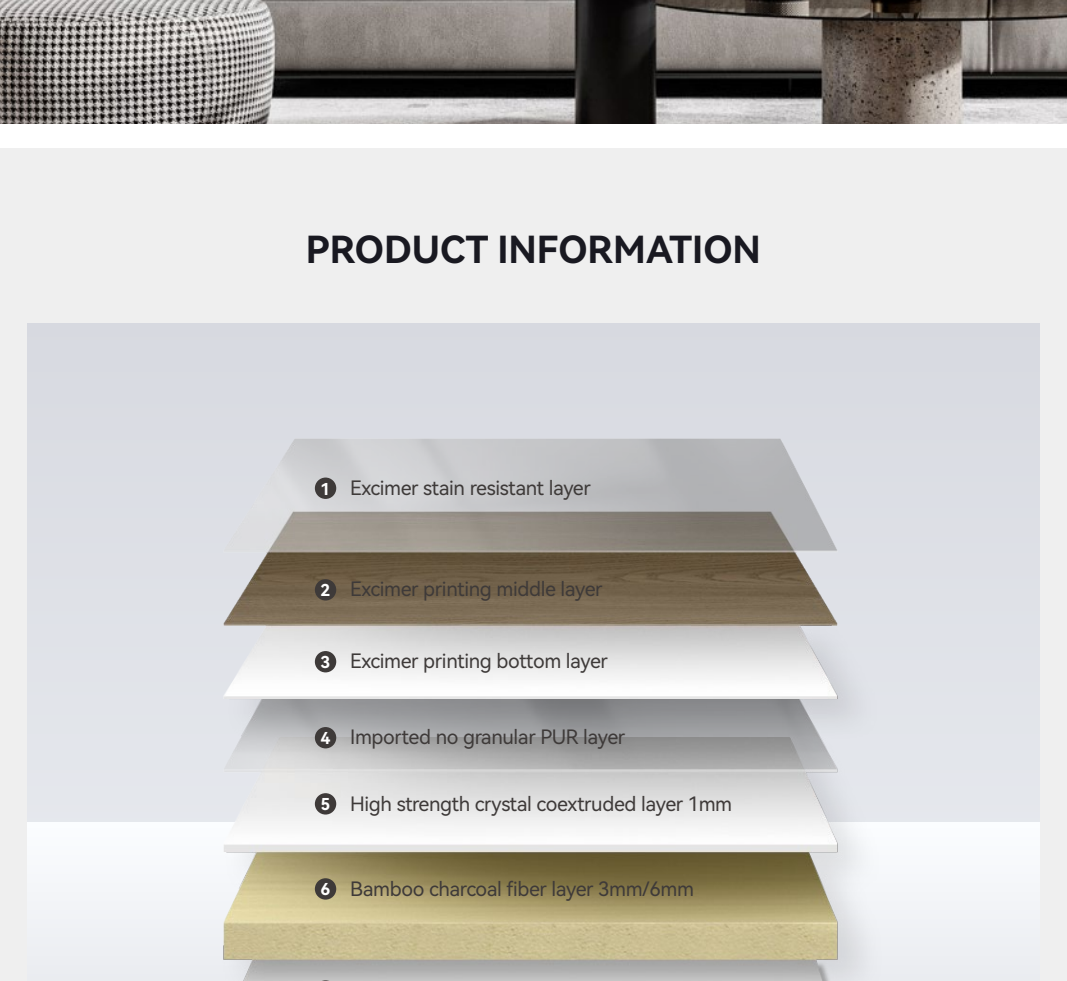

WPC WALL PANEL
FT 25706

PRODUCT INFORMATION

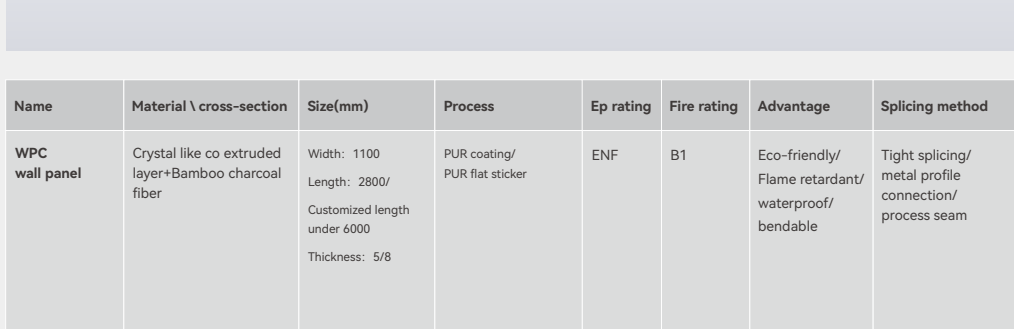

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


PRODUCT PERFORMANCE REAL SHOT



Waterproof test



Bend forward

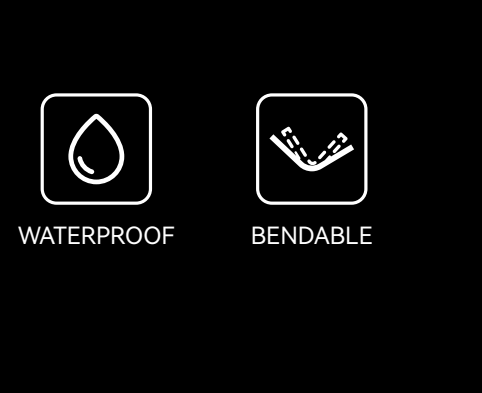


Bend backwards

ENF

EP LEVEL

B1

FIRE RATING




WATERPROOF




BENDABLE


INTERNATIONAL CERTIFICATION

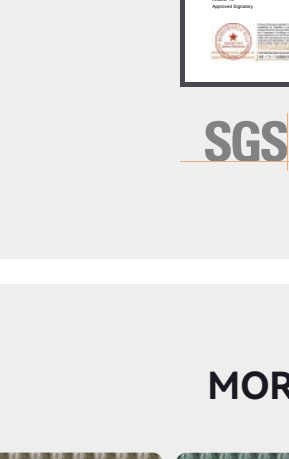


Environmental Test Report

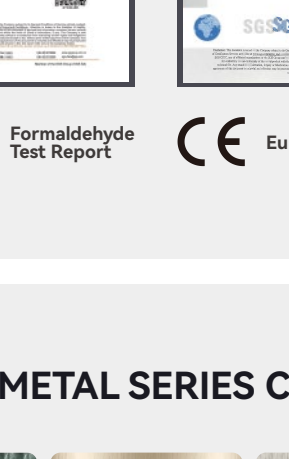


EU Highly Concerned Substance Report

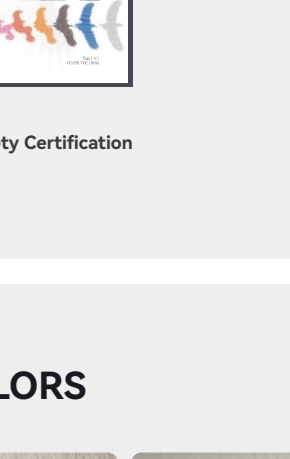

Flame Retardant Test Report

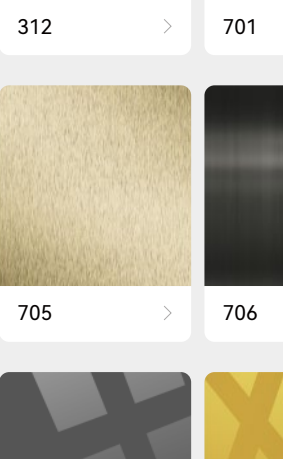


Formaldehyde Test Report

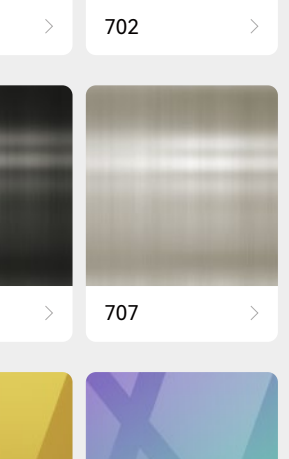


Eu Safety Certification

MORE METAL SERIES COLORS

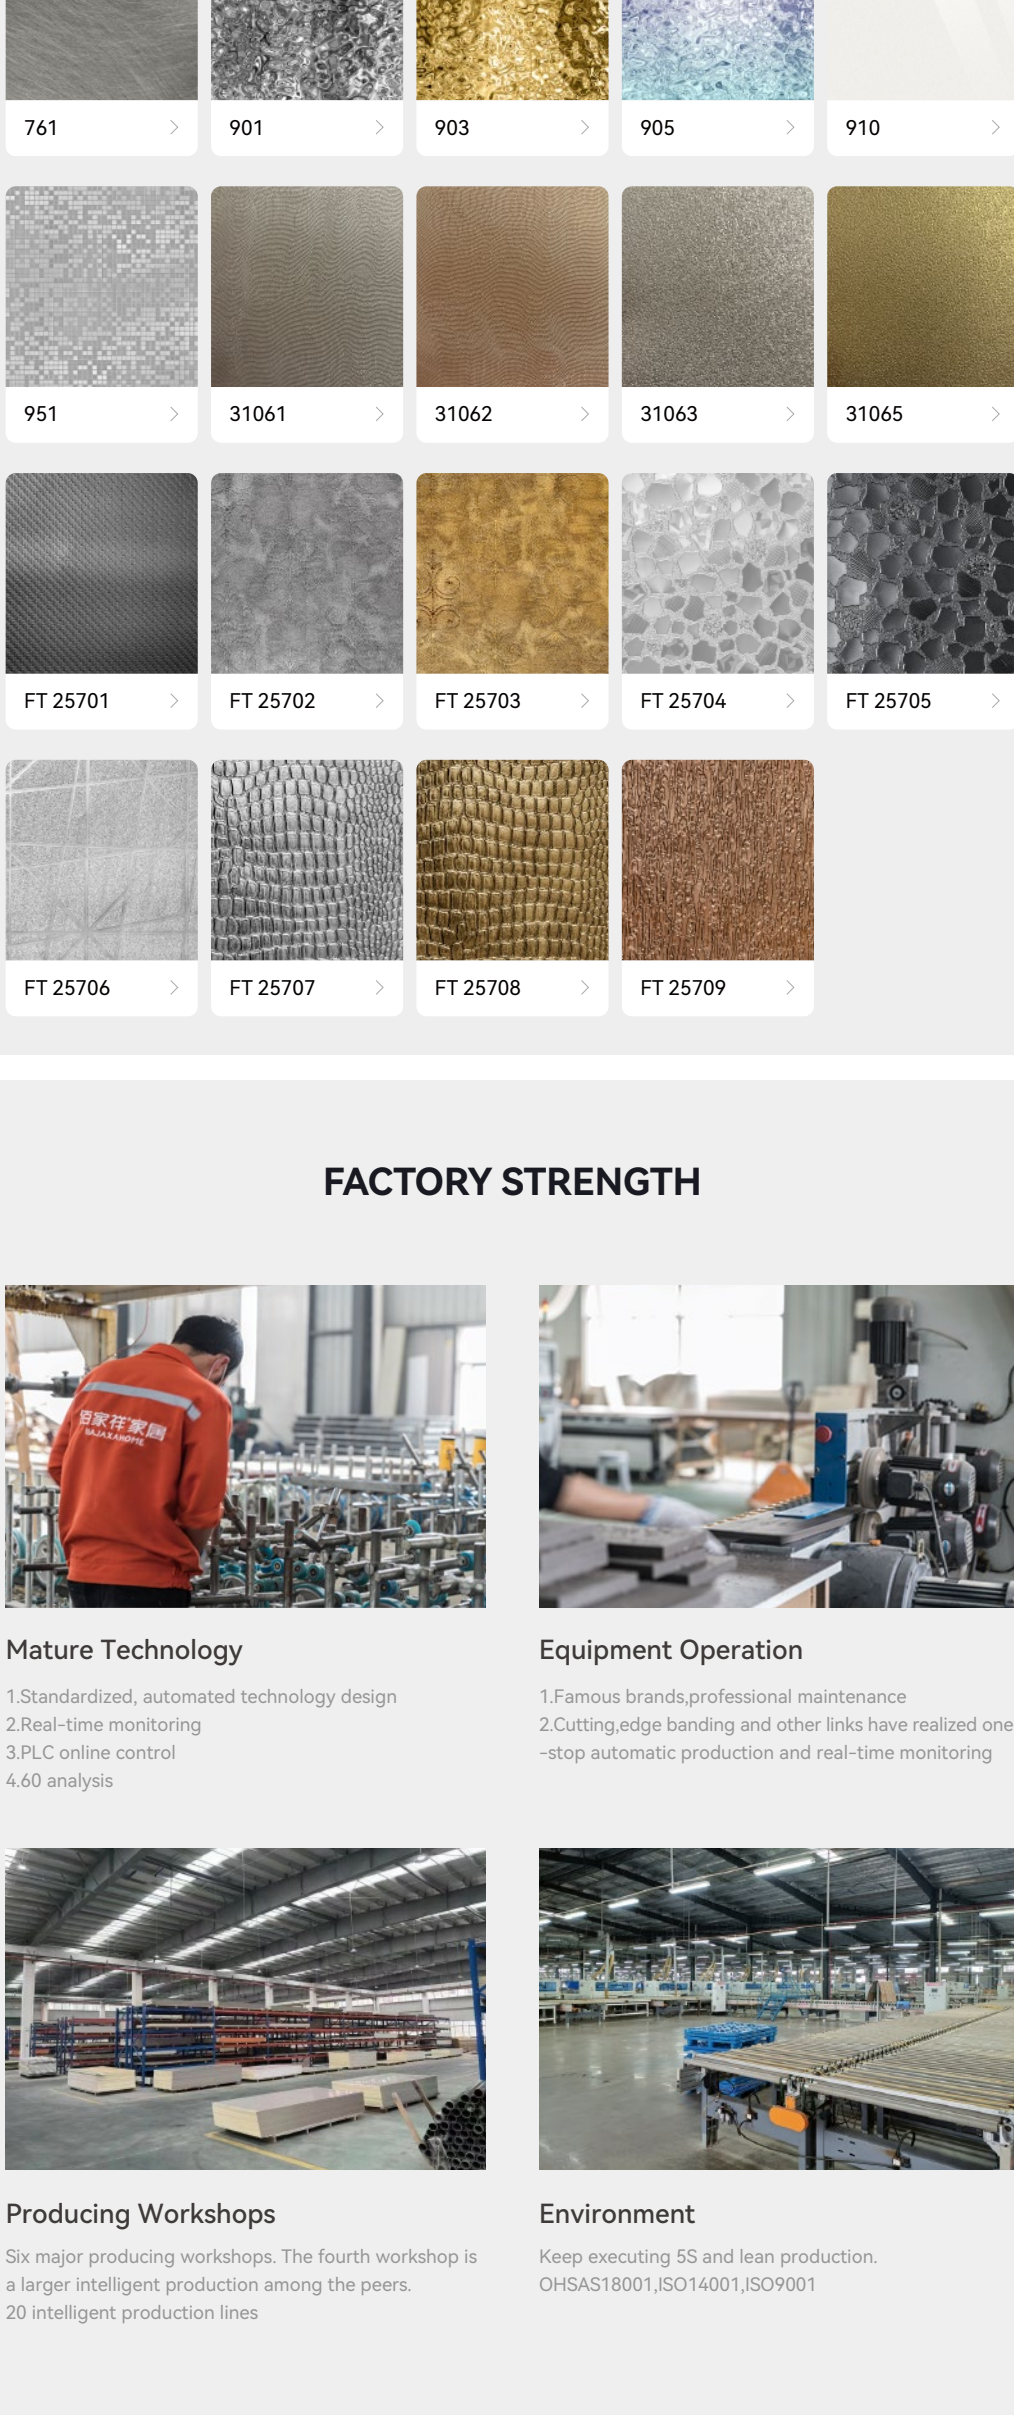


FACTORY STRENGTH

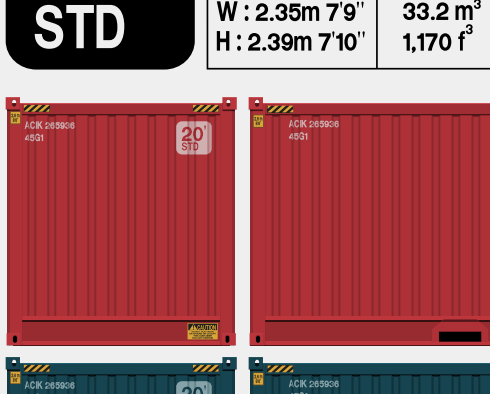

Mature Technology

- 1. Standardized, automated technology design
- 2. Real-time monitoring
- 3. PLC online control
- 4. 60 analysis

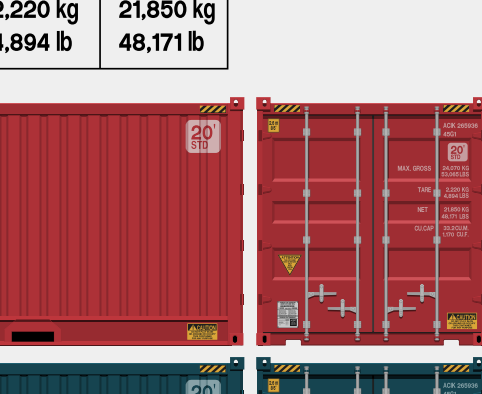


Equipment Operation

- 1. Famous brands, professional maintenance
- 2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring



Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

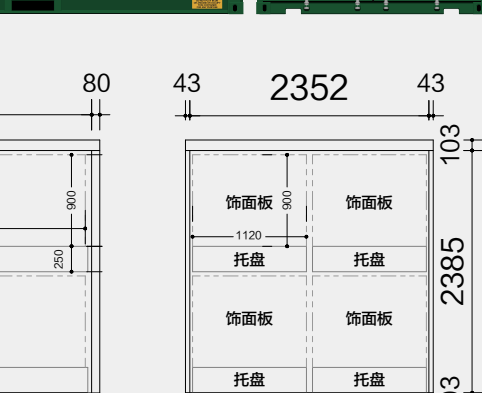

Environment

Keep executing 5S and lean production.
OHSAS18001, ISO14001, ISO9001

PACKING METHOD



Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"			
W : 2.35m 7'9"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb
H : 2.39m 7'10"			



20' 正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"			
W : 2.35m 7'9"	67.7 m³ 2,391 f³	3,740 kg 8,245 lb	26,780 kg 58,996 lb
H : 2.39m 7'10"			

40' 正常装货货柜尺寸