

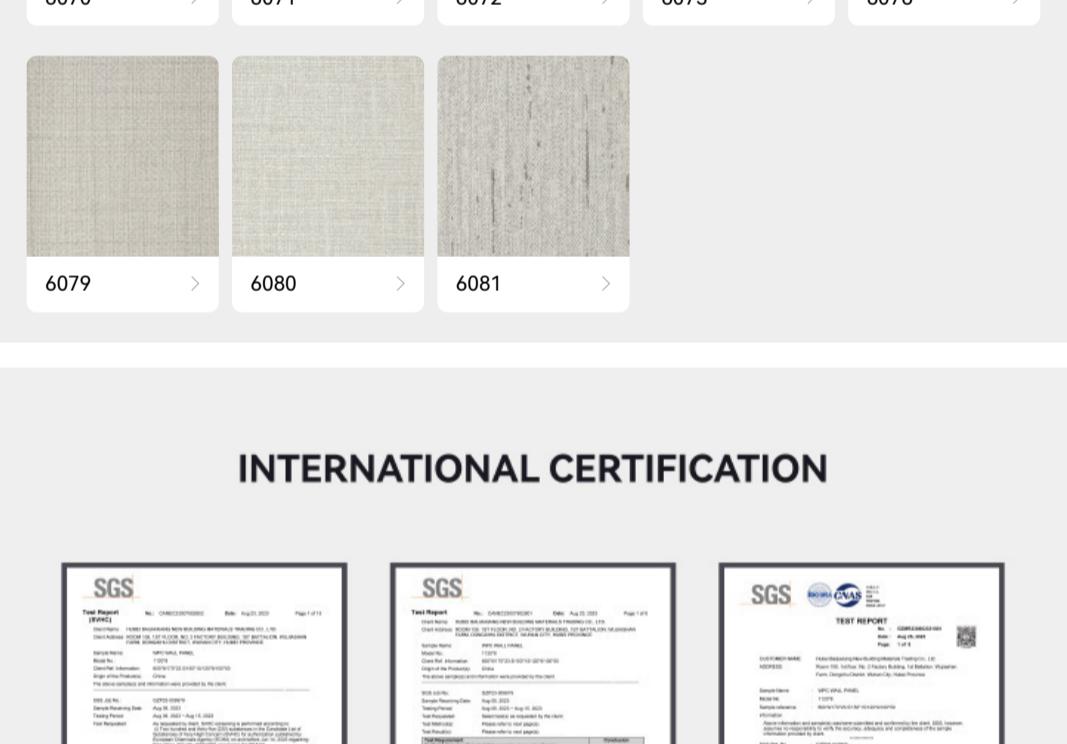
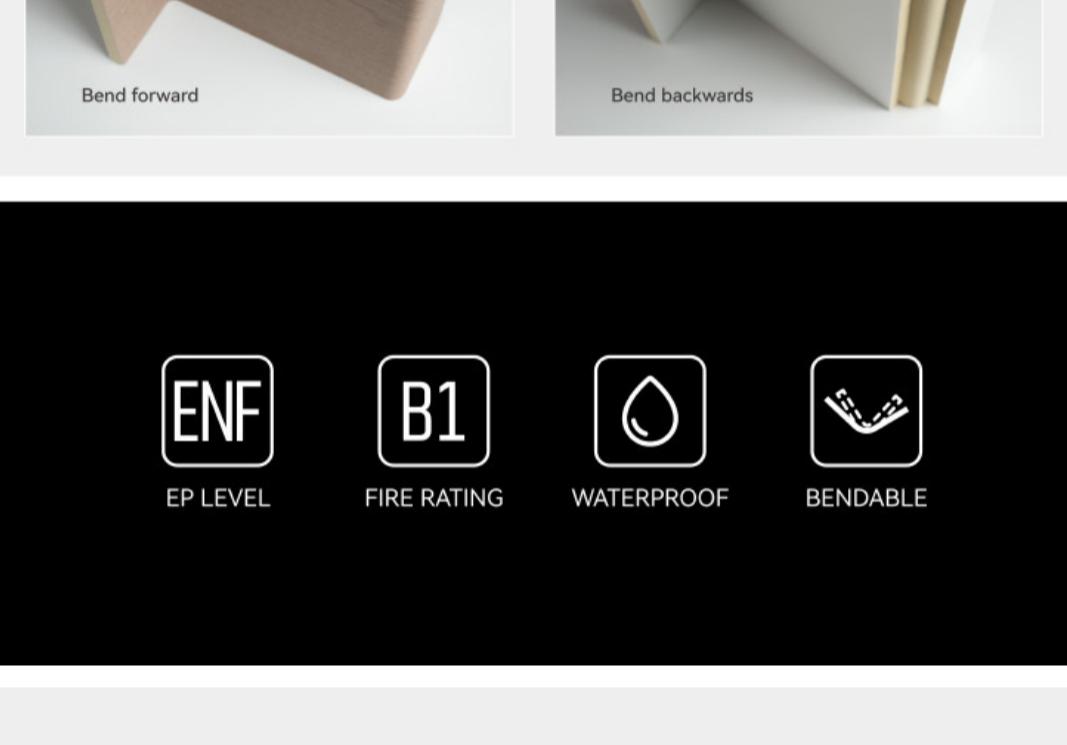
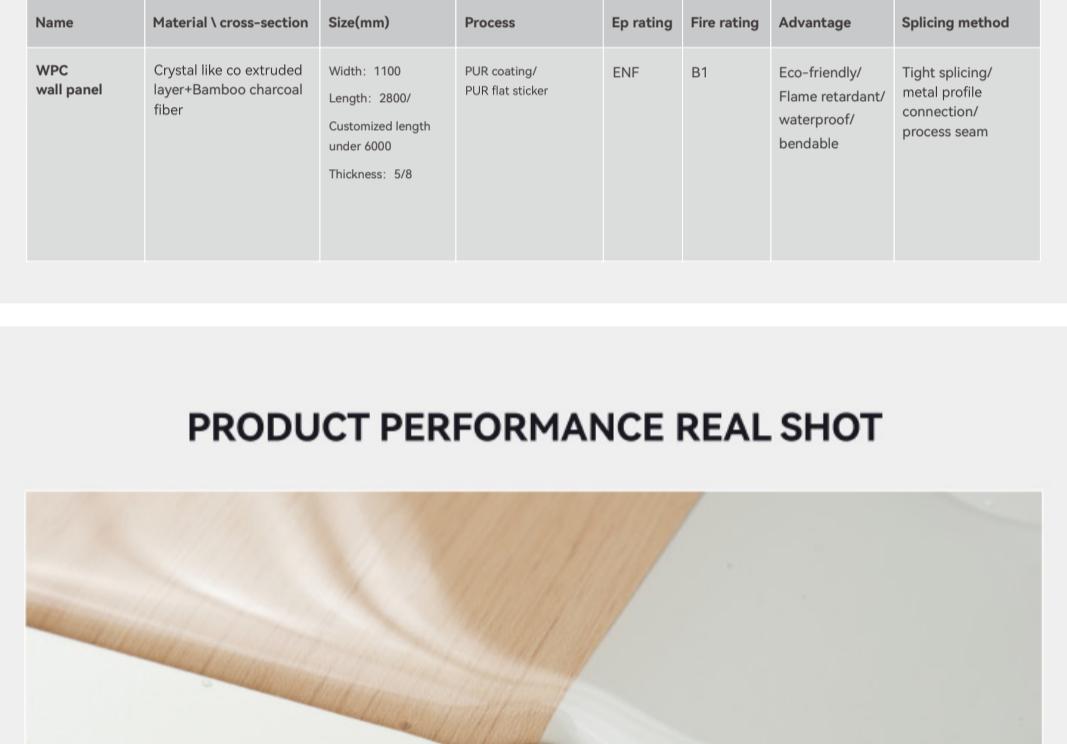


- CLOTH GRAIN -

6071
COLOR NUMBER

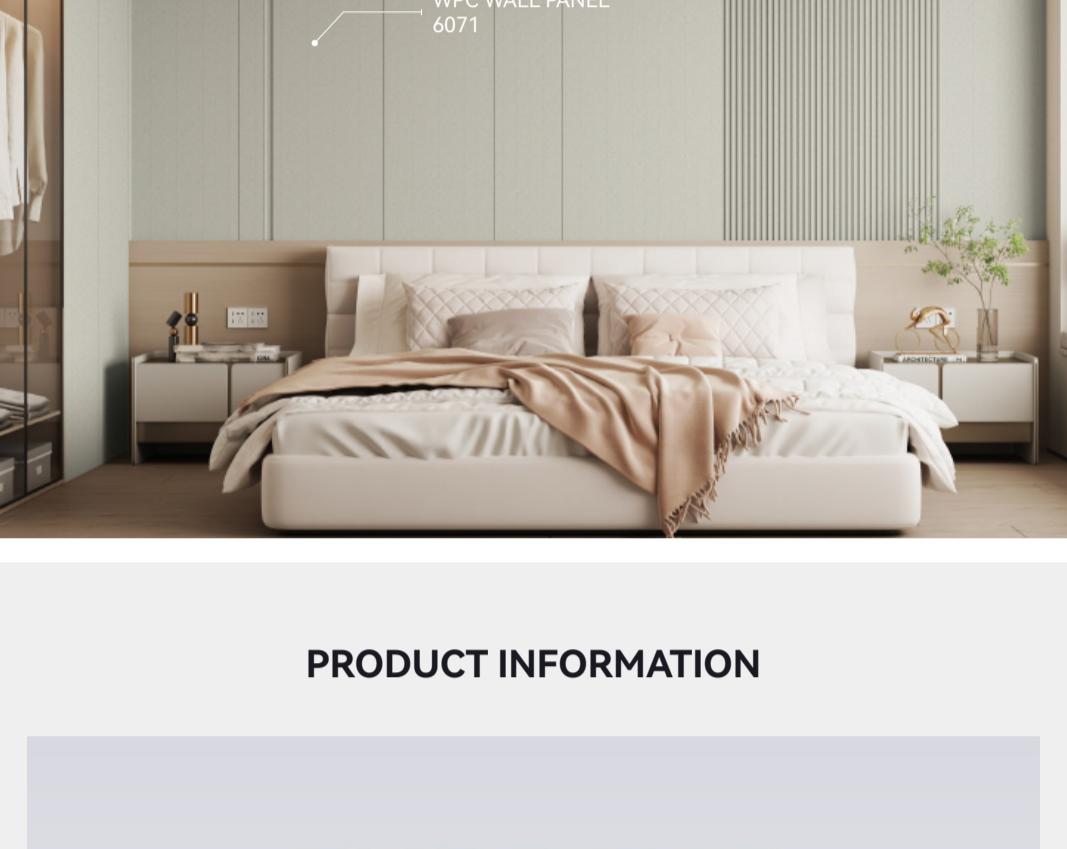


PRODUCT INFORMATION












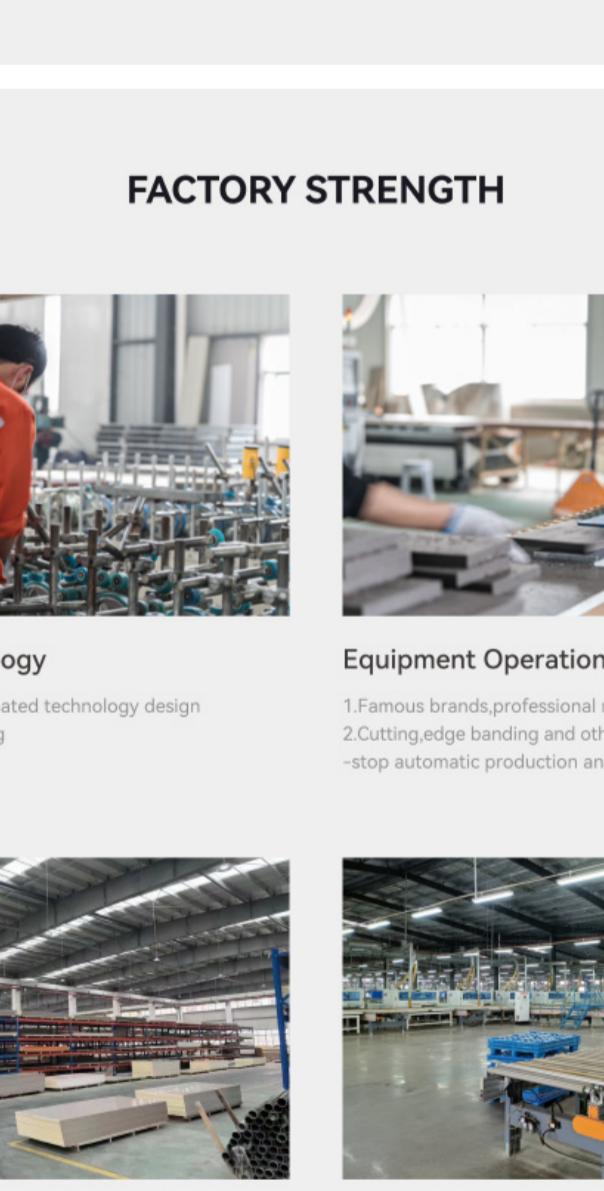


Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

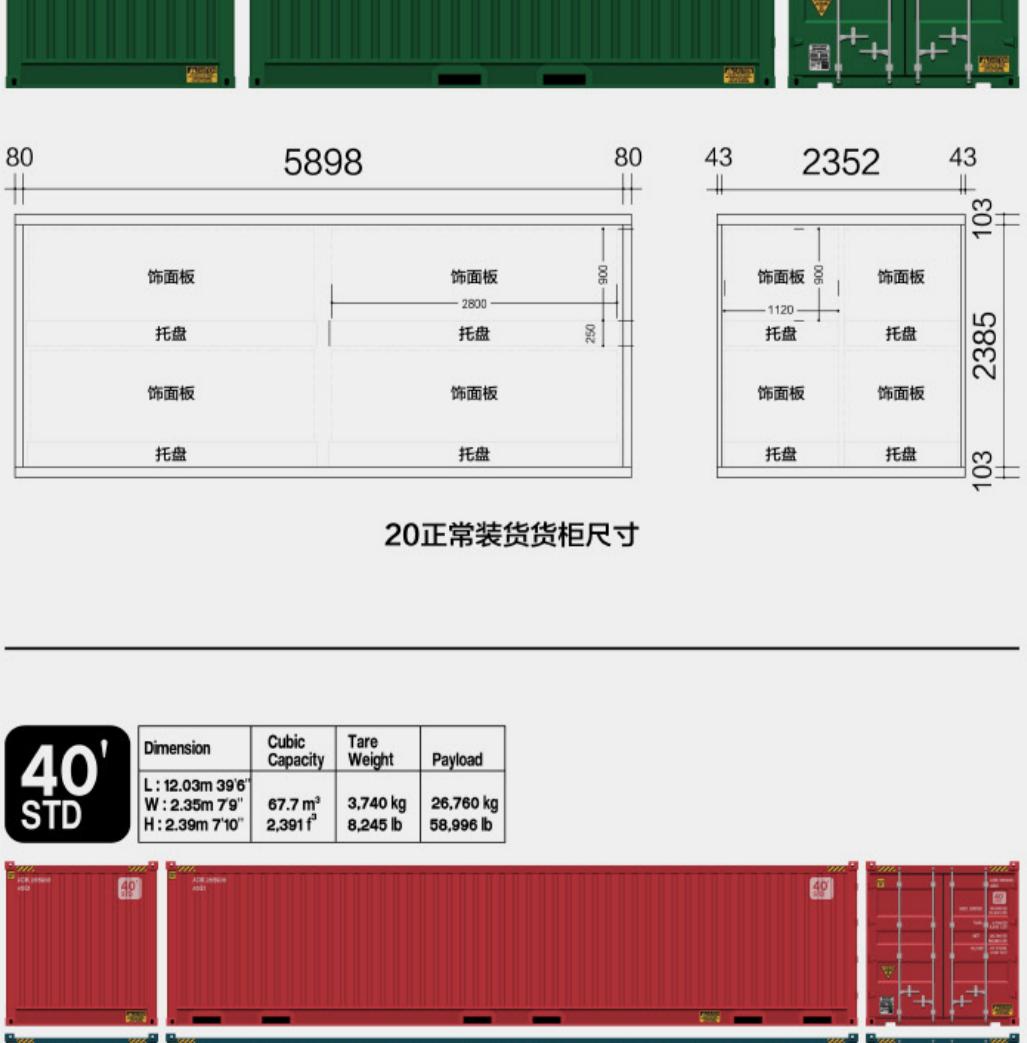

FACTORY STRENGTH

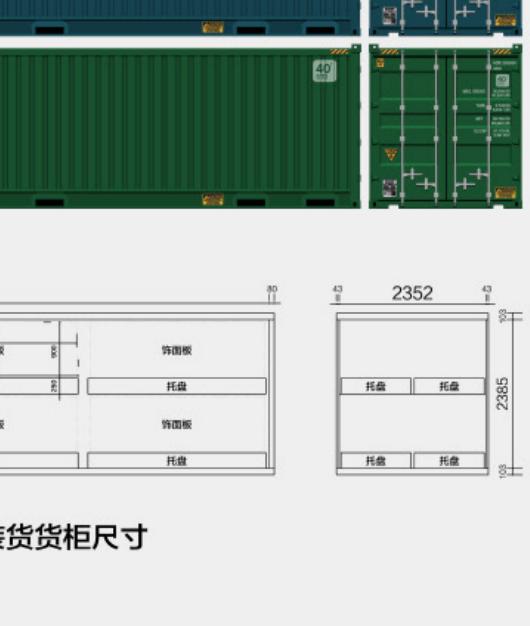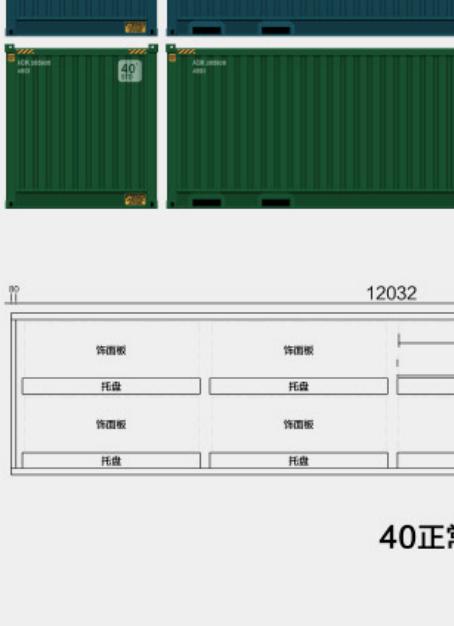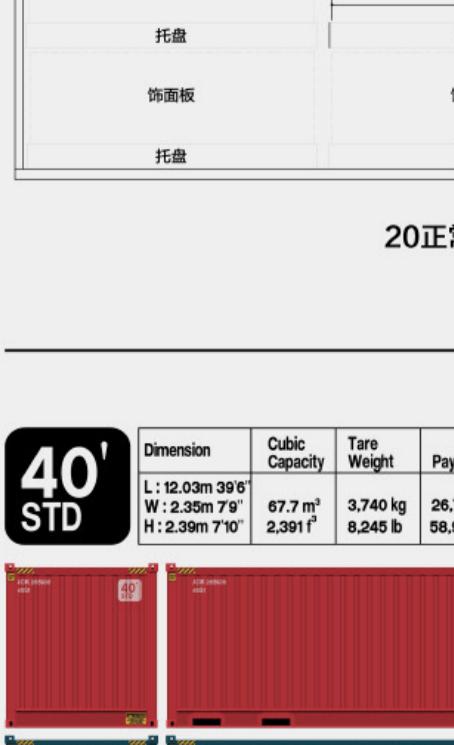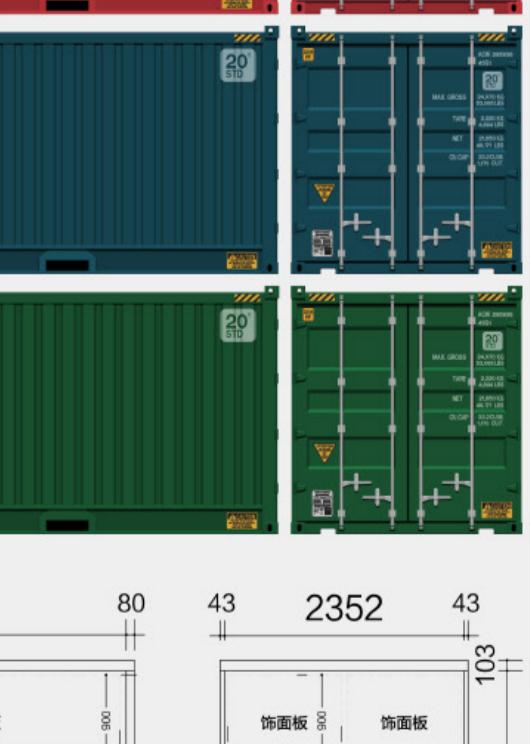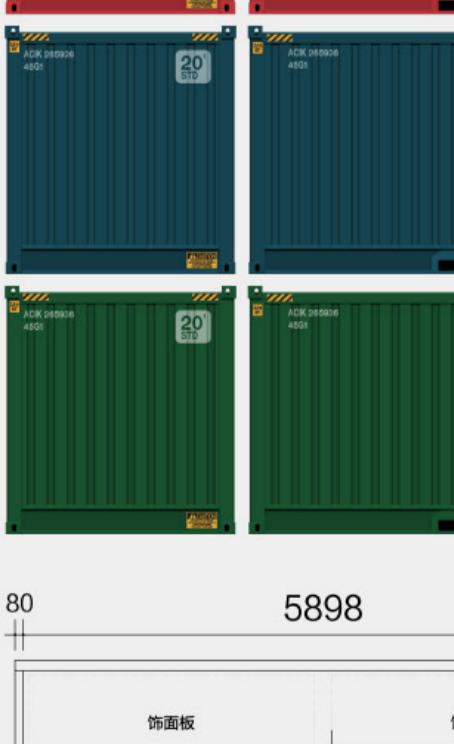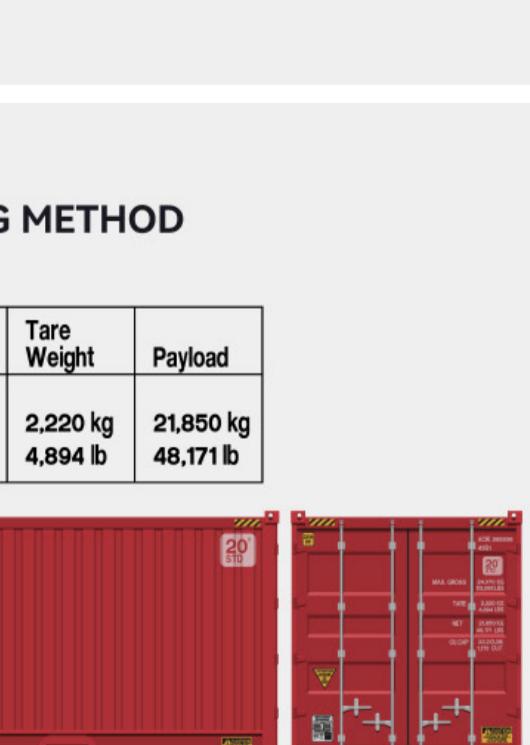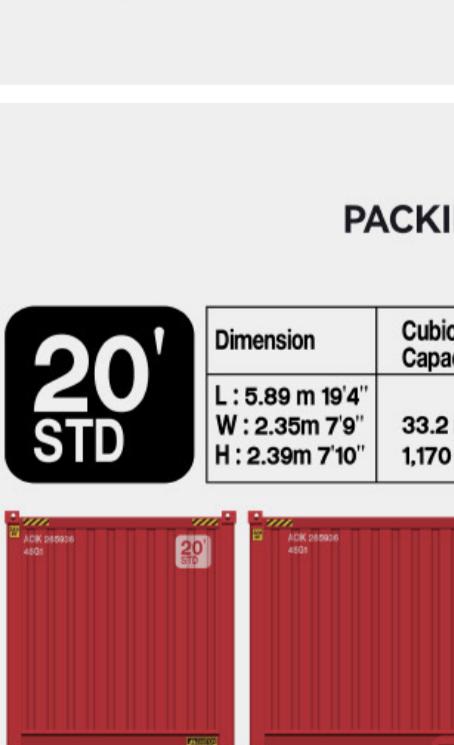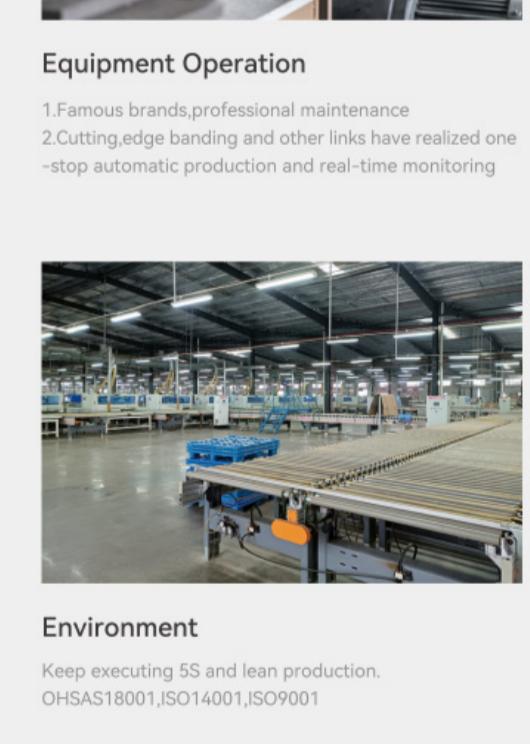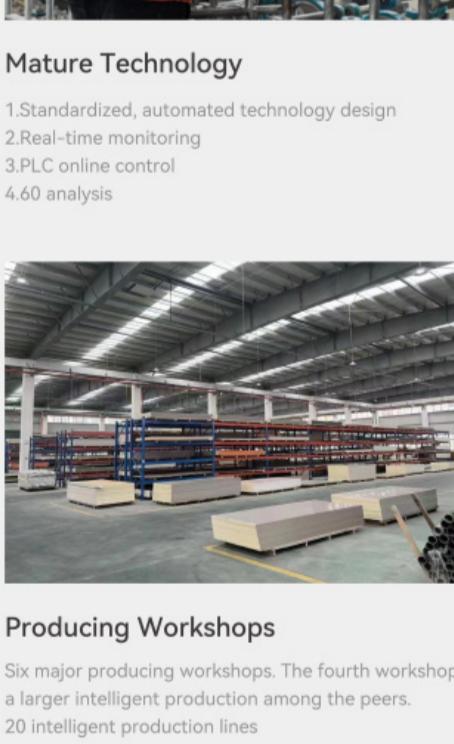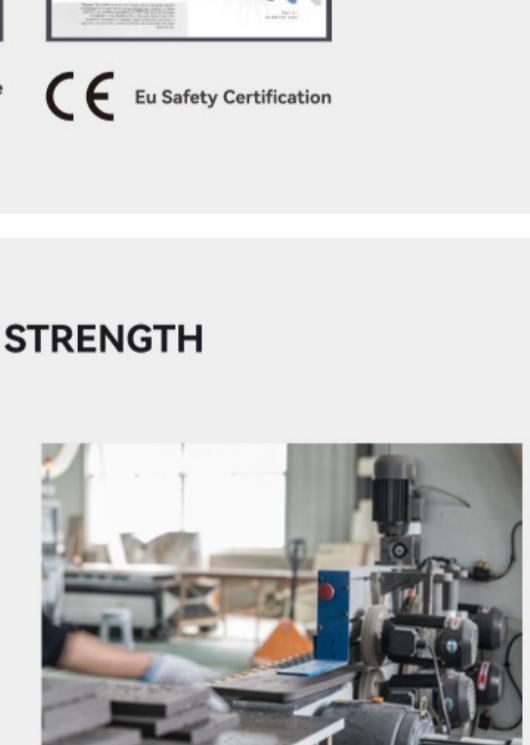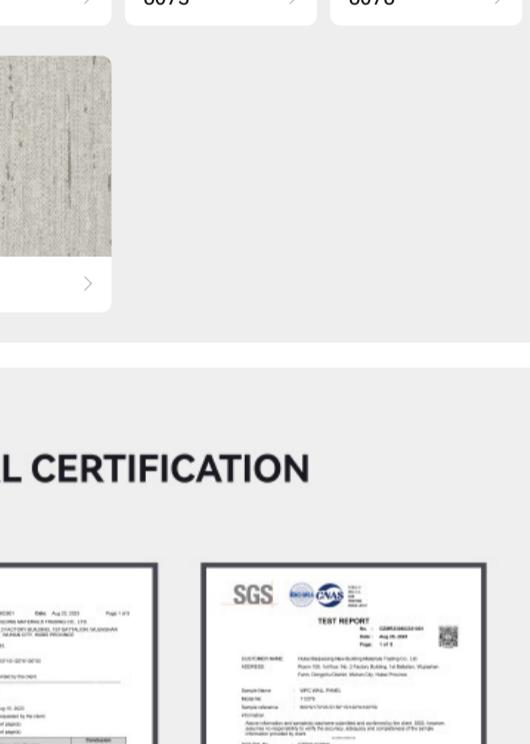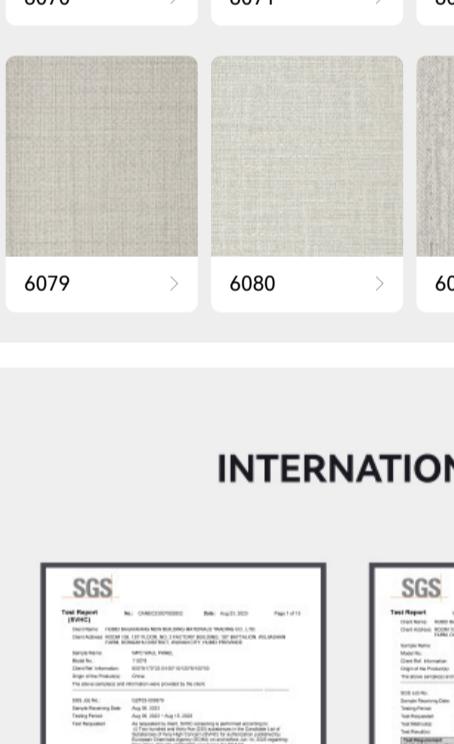

PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89 m 19'11" W: 2.35m 7'9" H: 2.29m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

