


FT 25704




PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

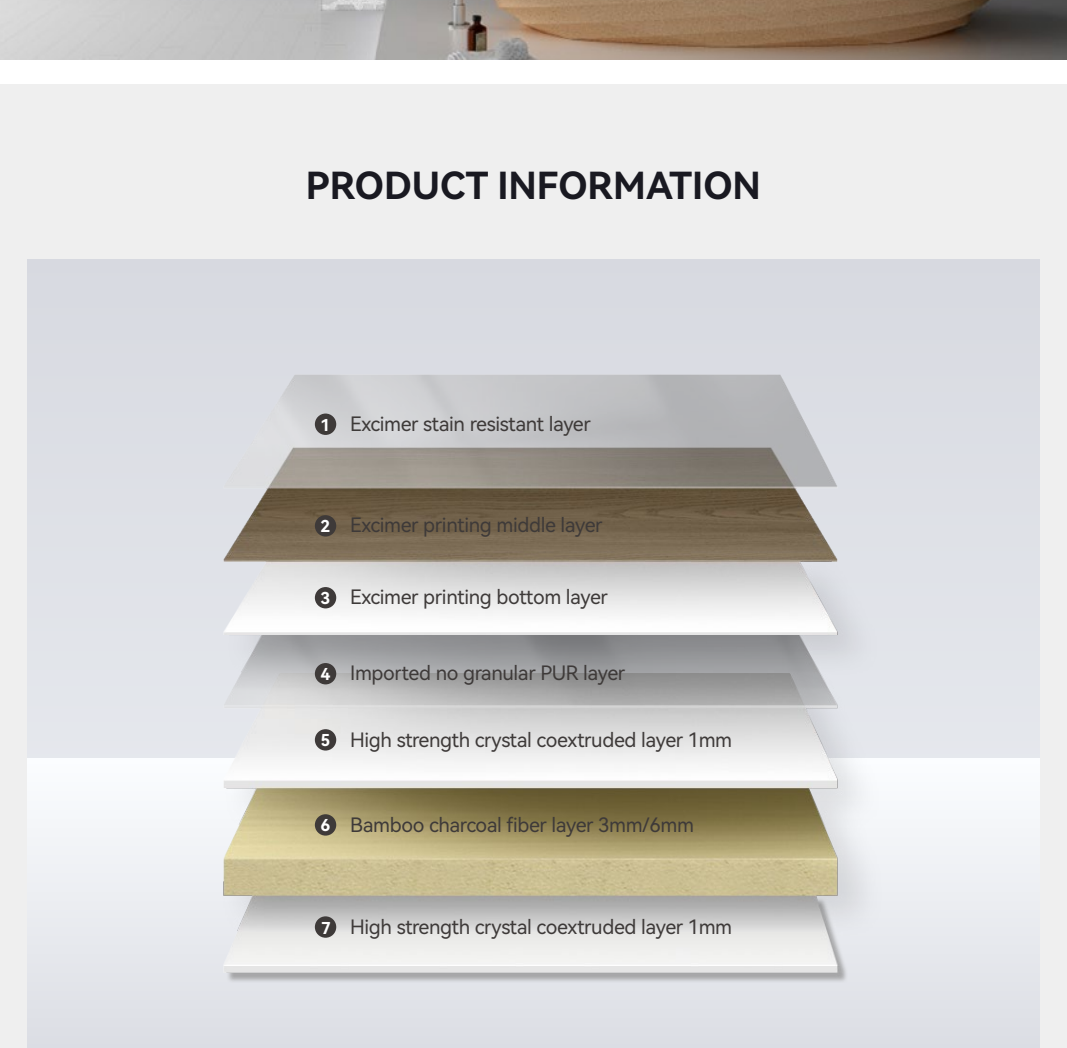

PRODUCT INFORMATION

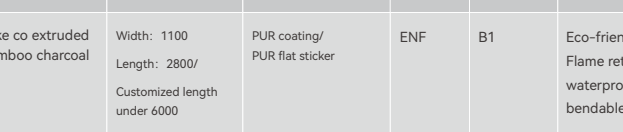


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


PRODUCT PERFORMANCE REAL SHOT



Waterproof test

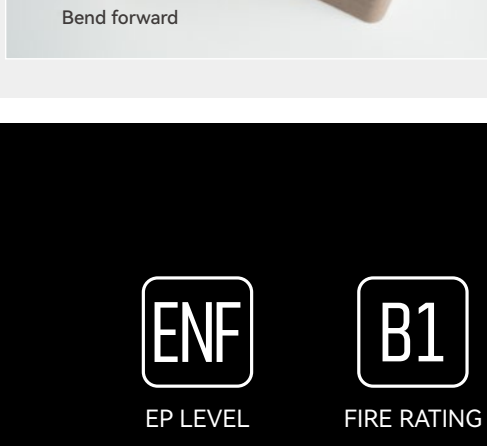

Bend forward

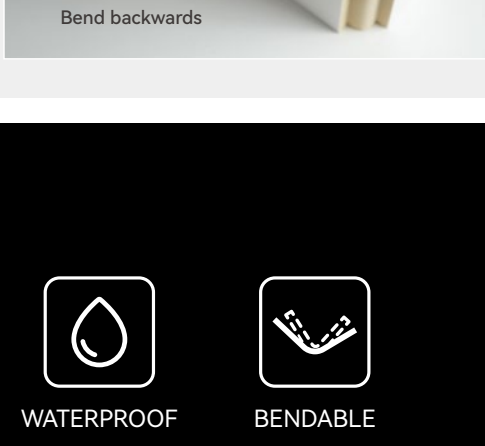


Bend backwards

ENF


EP LEVEL

B1

FIRE RATING



WATERPROOF




BENDABLE

INTERNATIONAL CERTIFICATION




Environmental Test Report

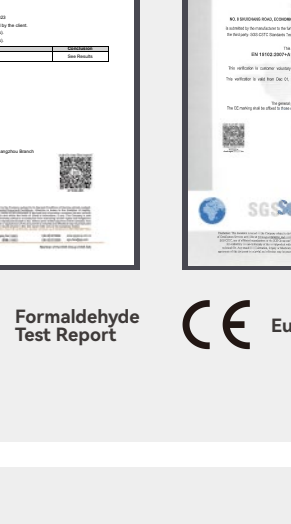


Reach


EU Highly Concerned Substance Report

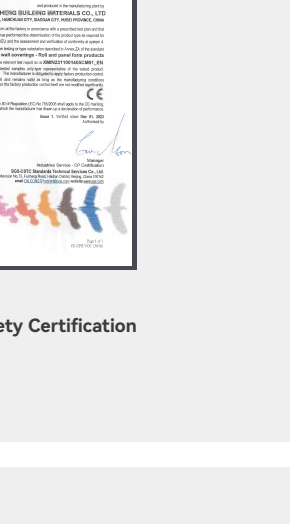

SGS Flame Retardant Test Report







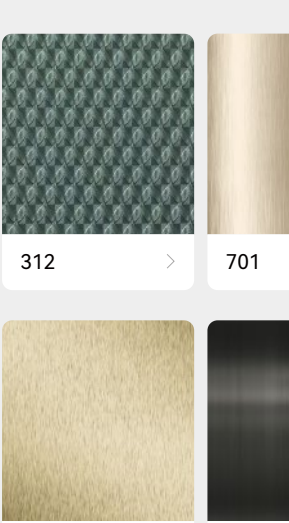


SGS Formaldehyde Test Report

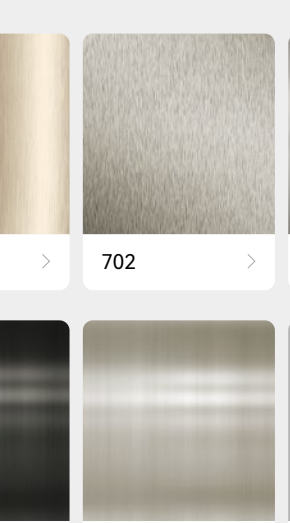


CE Eu Safety Certification

MORE METAL SERIES COLORS

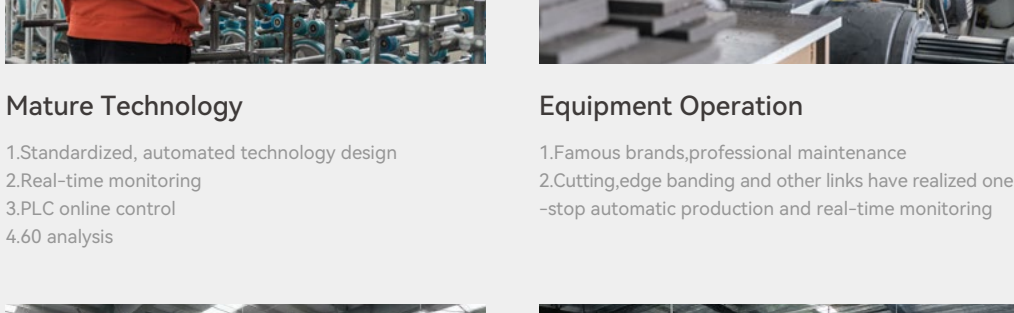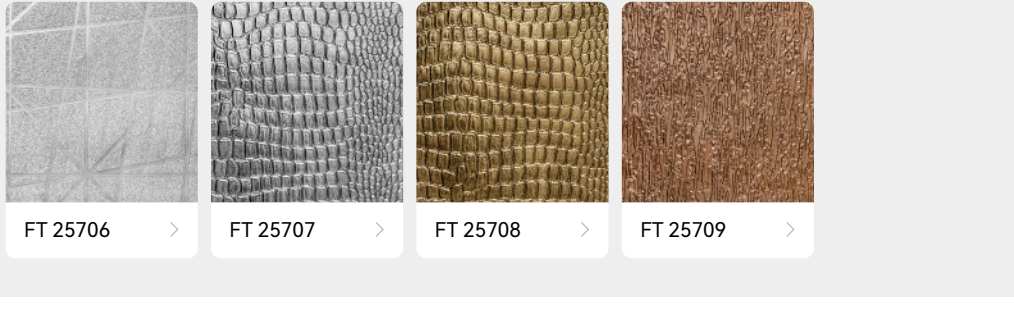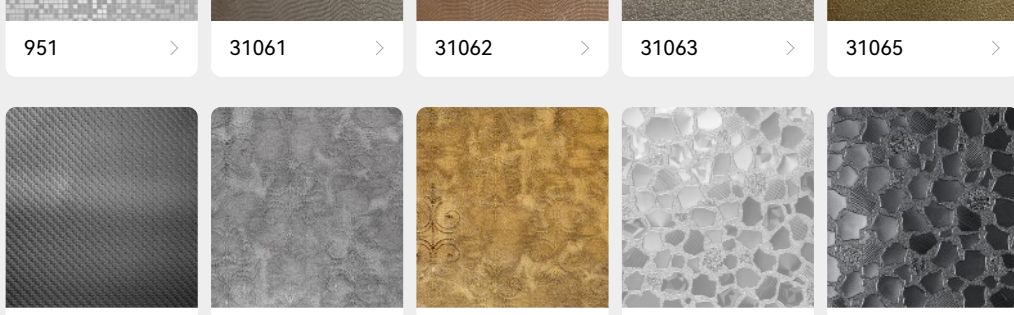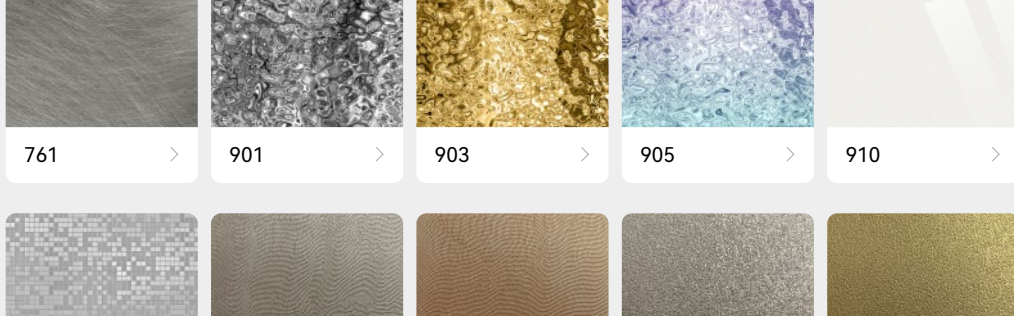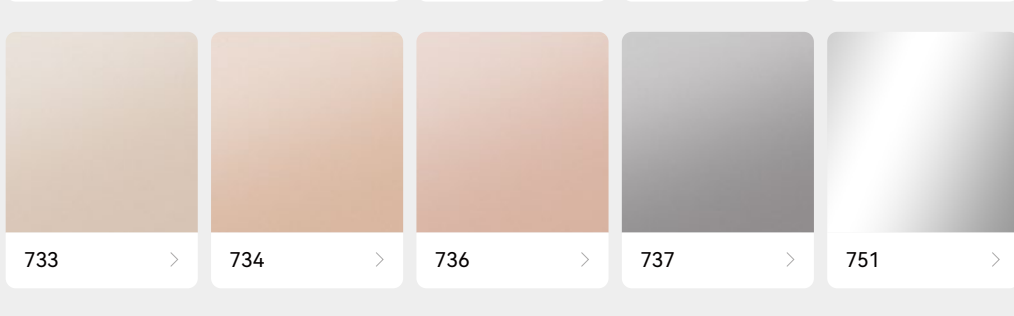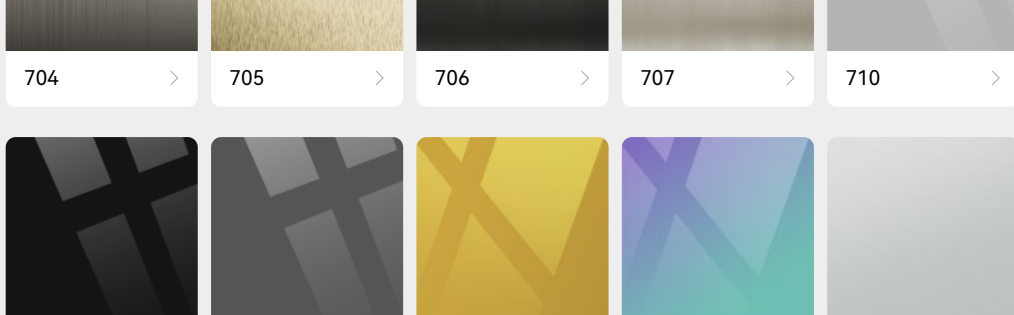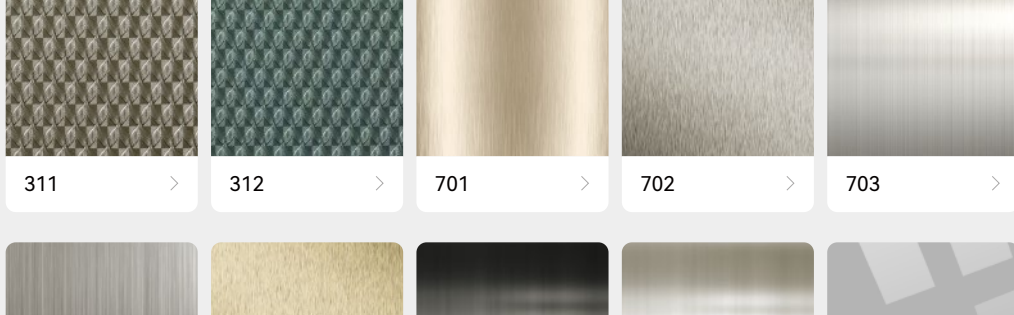


FACTORY STRENGTH

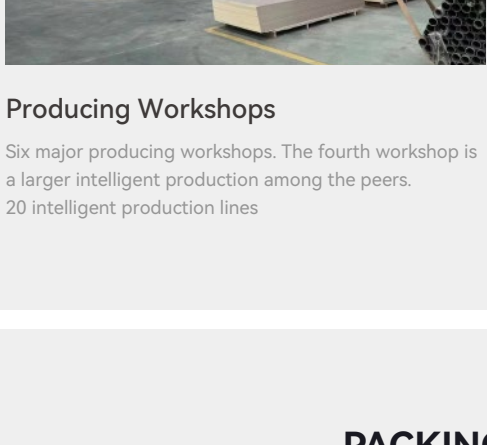

Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

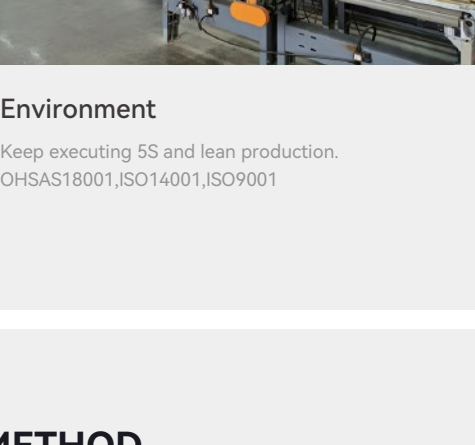

Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring



Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.  
20 intelligent production lines





Environment

Keep executing 5S and lean production.  
OHSAS18001, ISO14001, ISO9001

PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m <sup>3</sup>	2,220 kg	21,850 kg
W : 2.35m 7'9"	1,170 f <sup>3</sup>	4,894 lb	48,171 lb
H : 2.39m 7'10"			

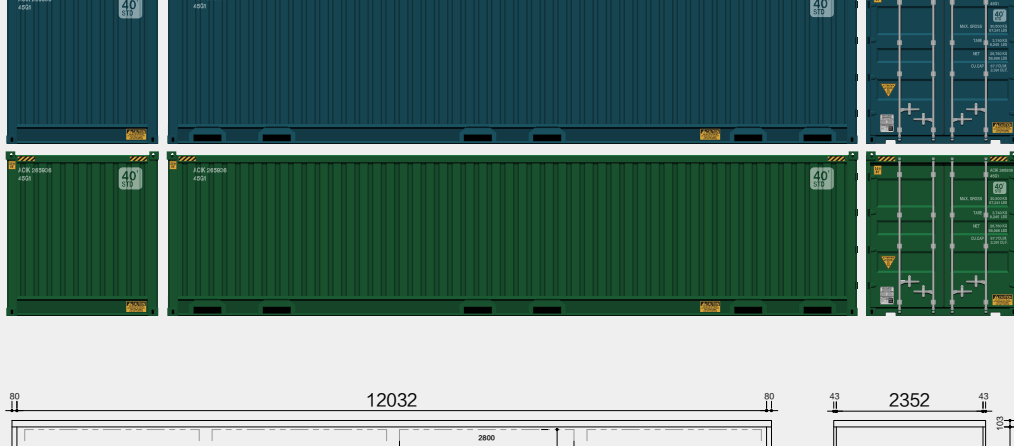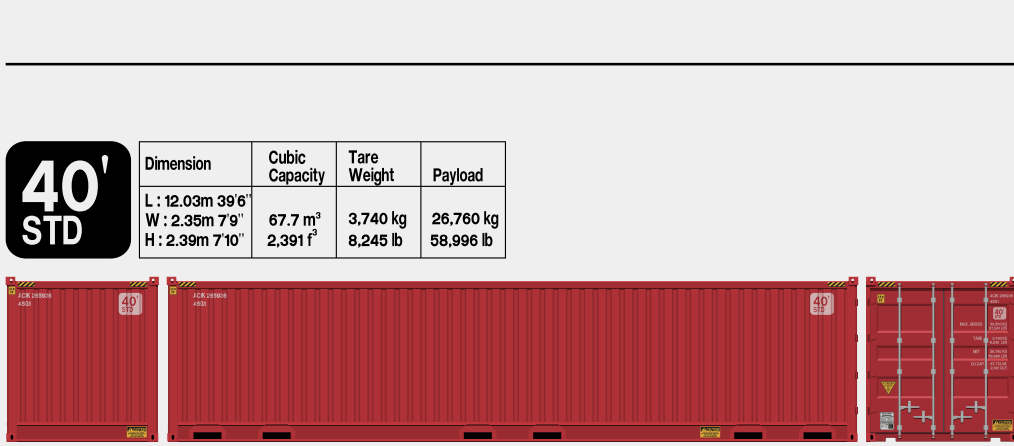

20正常装货货柜尺寸



40正常装货货柜尺寸