

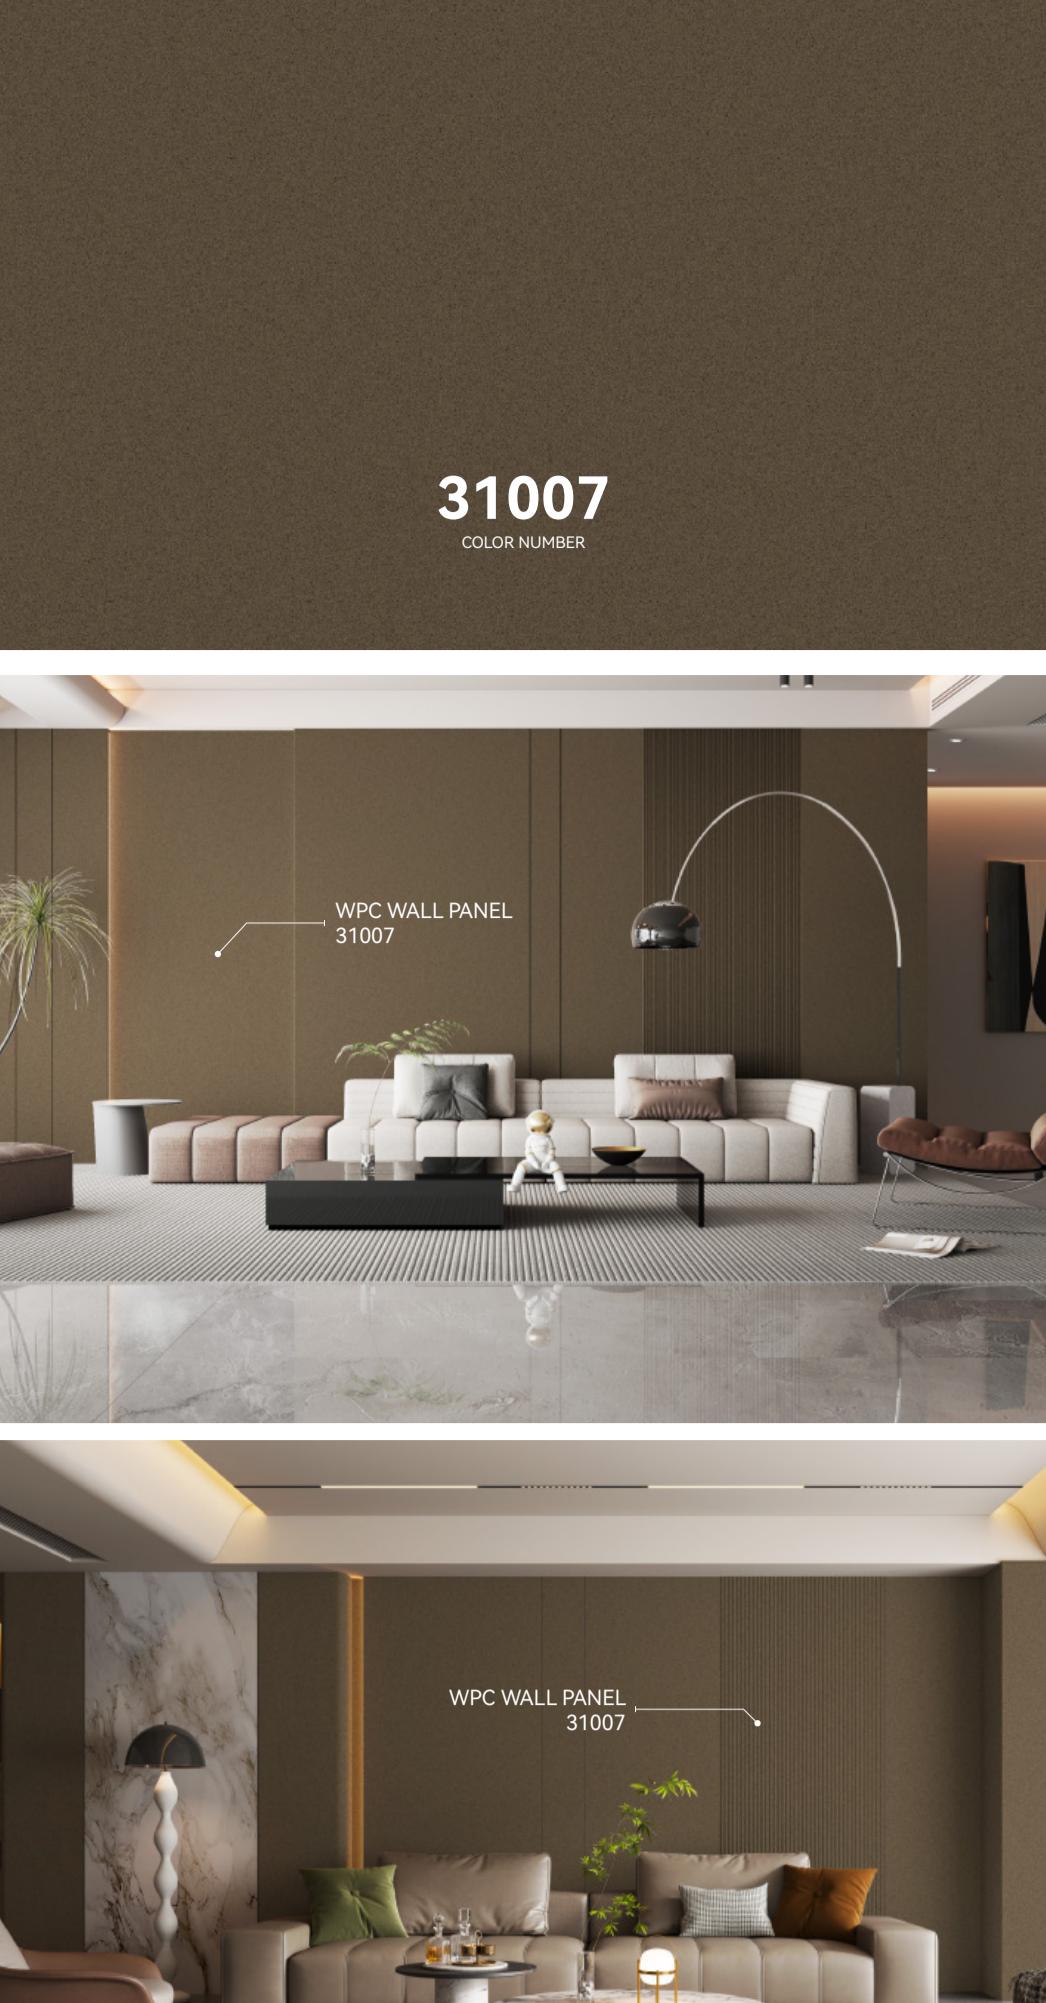


- SOLID COLOR -

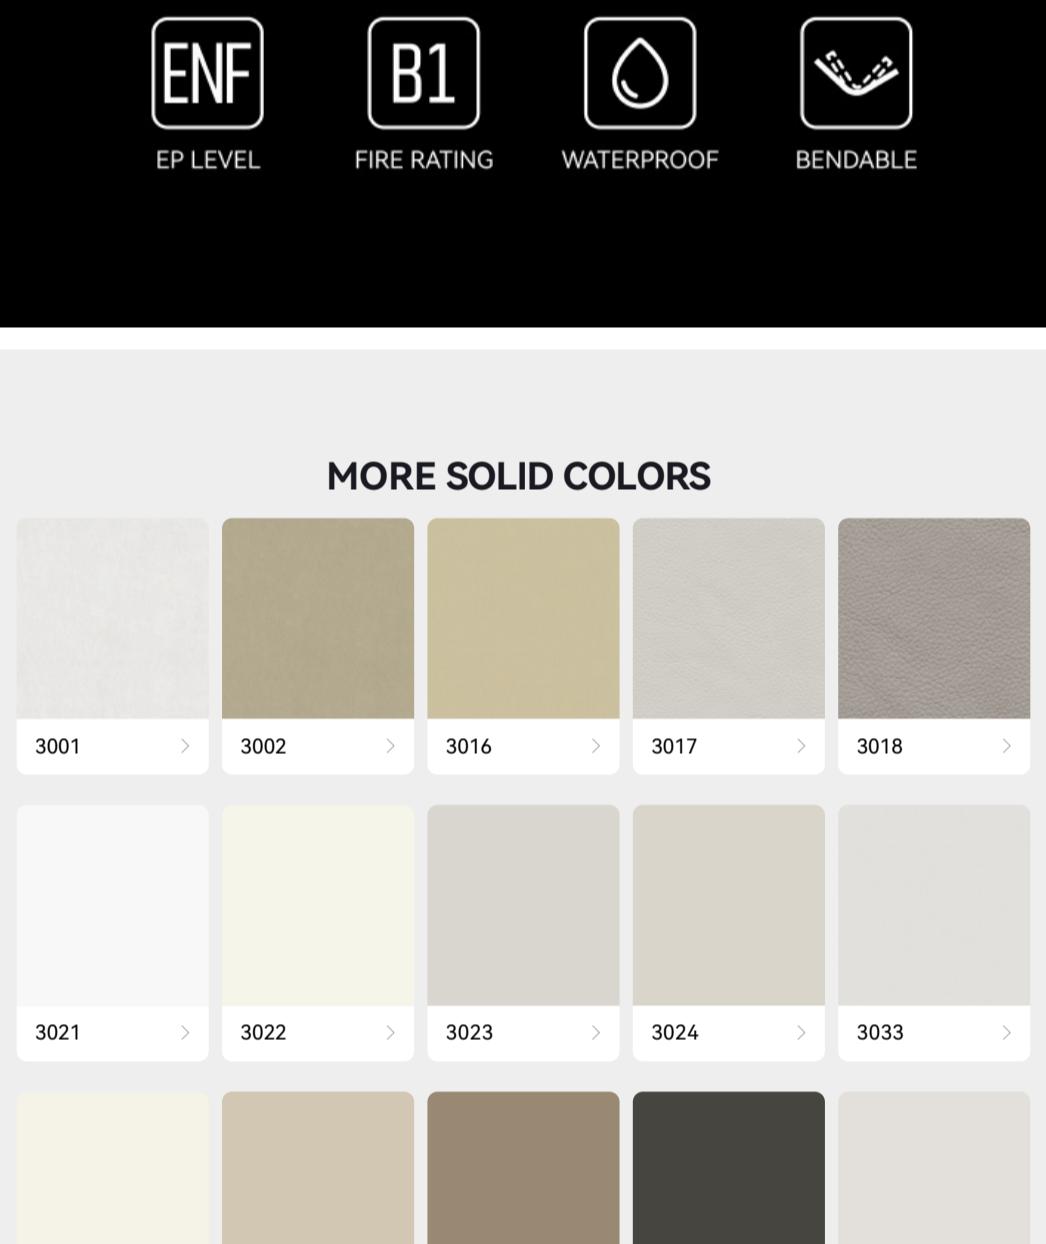


31007

COLOR NUMBER


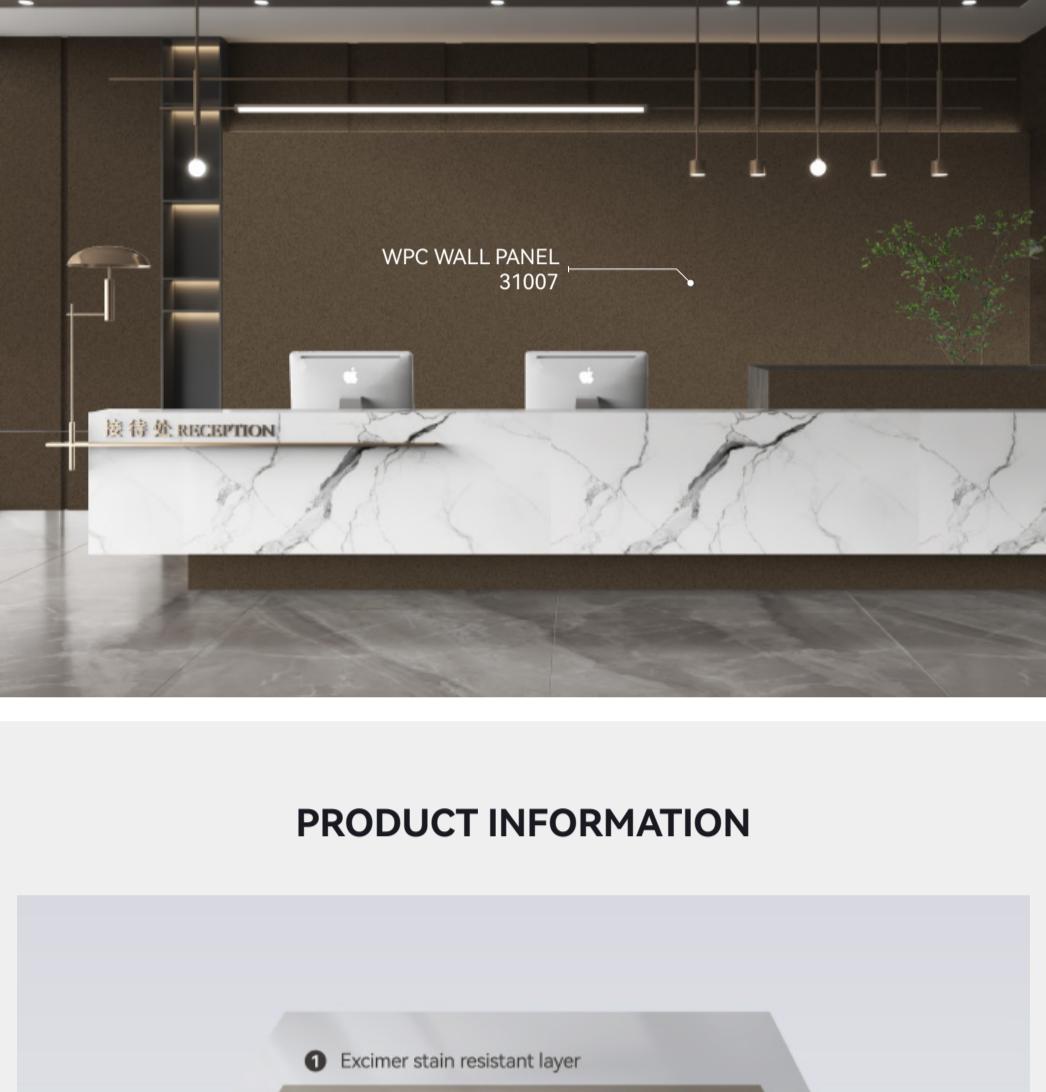


PRODUCT INFORMATION

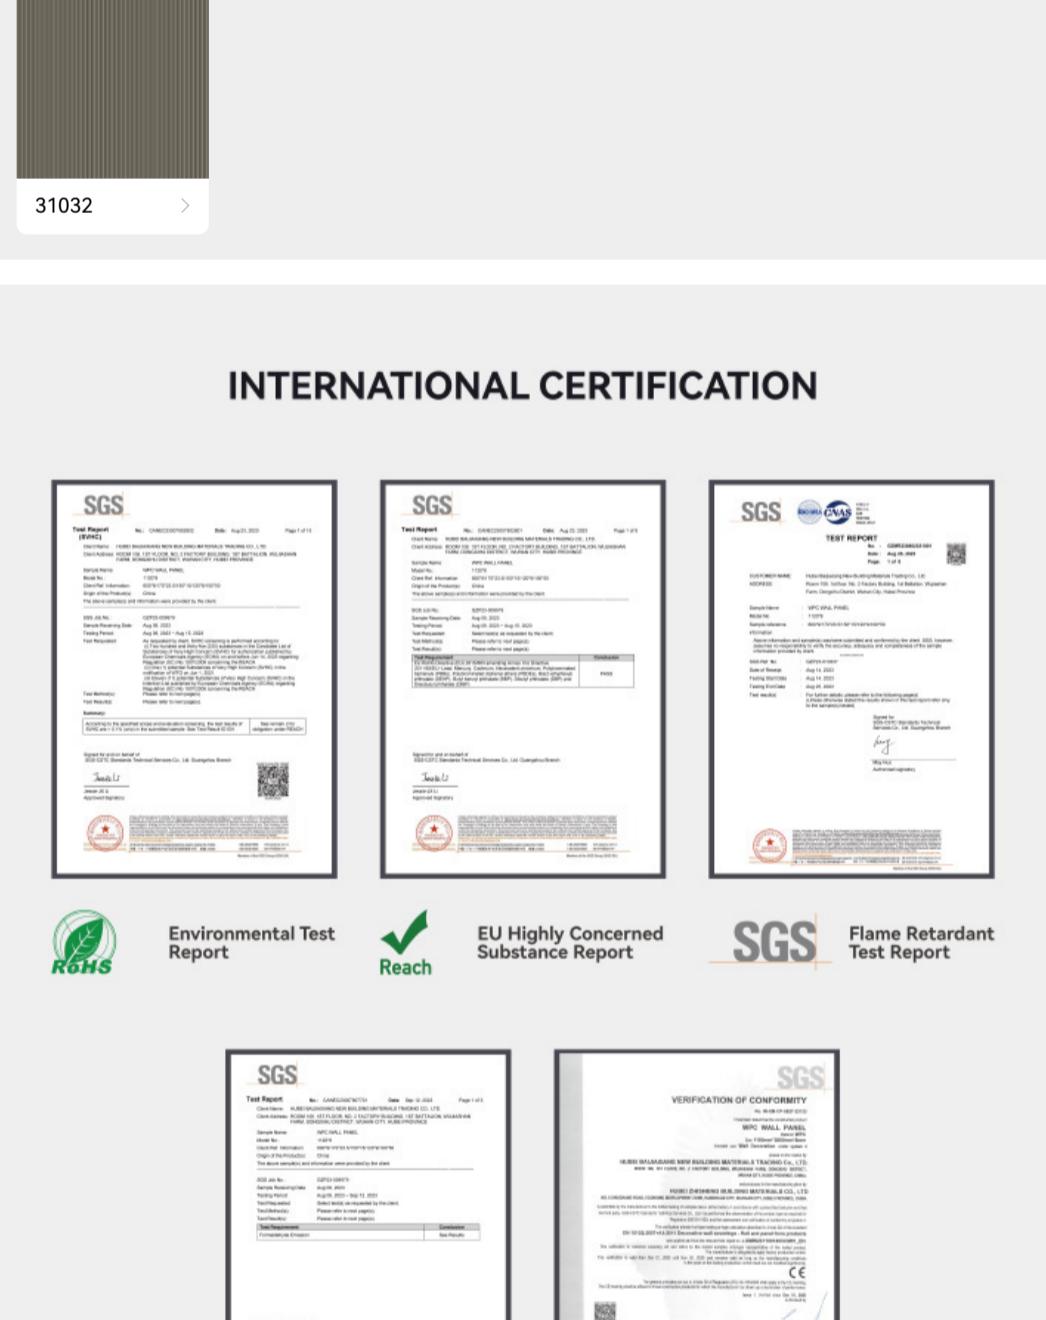

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 L: 12.03m 39' W: 2.35m 7'9" H: 2.39m 7'10"	PUR coating/ PUR flat sticker Customized length under 6000 Thickness: 5/8	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

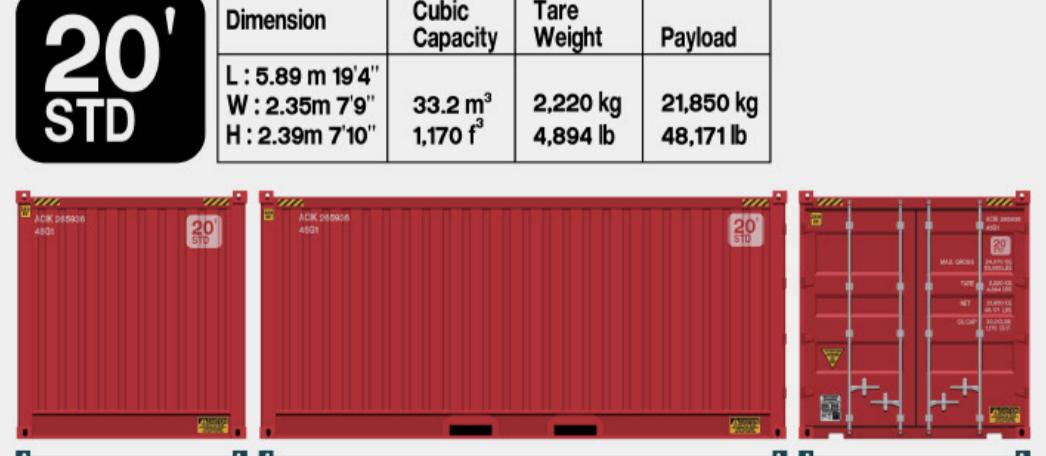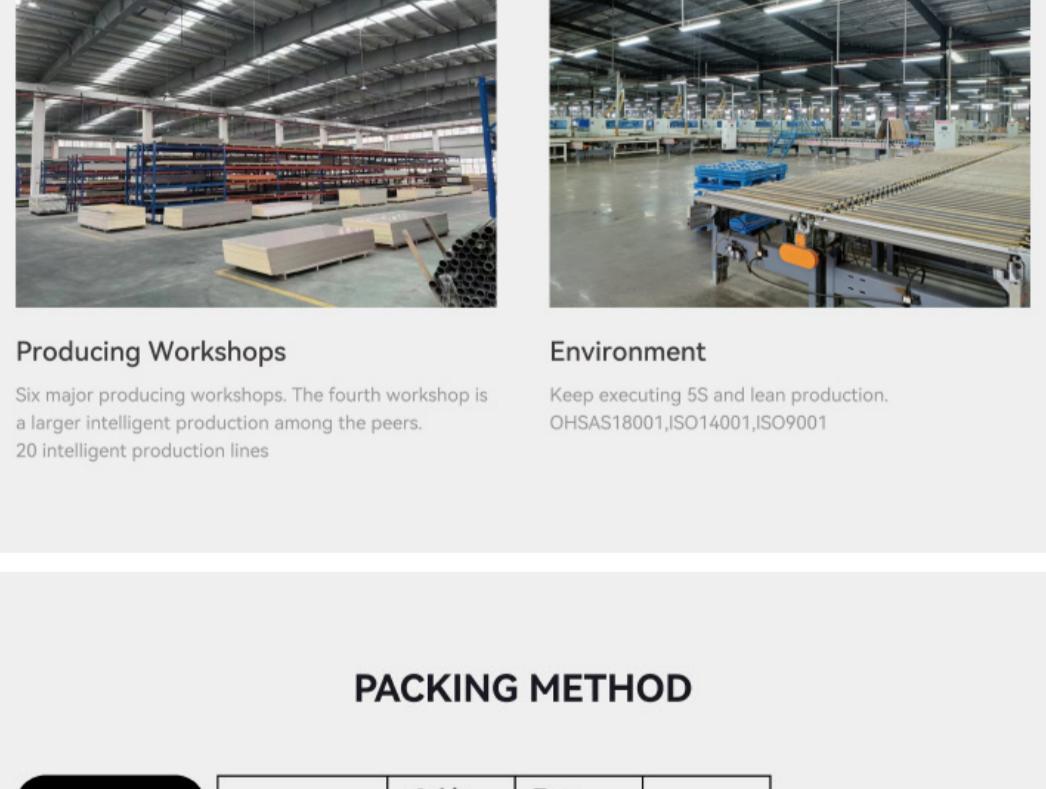

Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis

Equipment Operation

- 1.Famous brands,professional maintenance
- 2.Cutting,edge banding and other lines have realized one-stop automatic production and real-time monitoring



Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

Environment

Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

