




YW 1501





PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

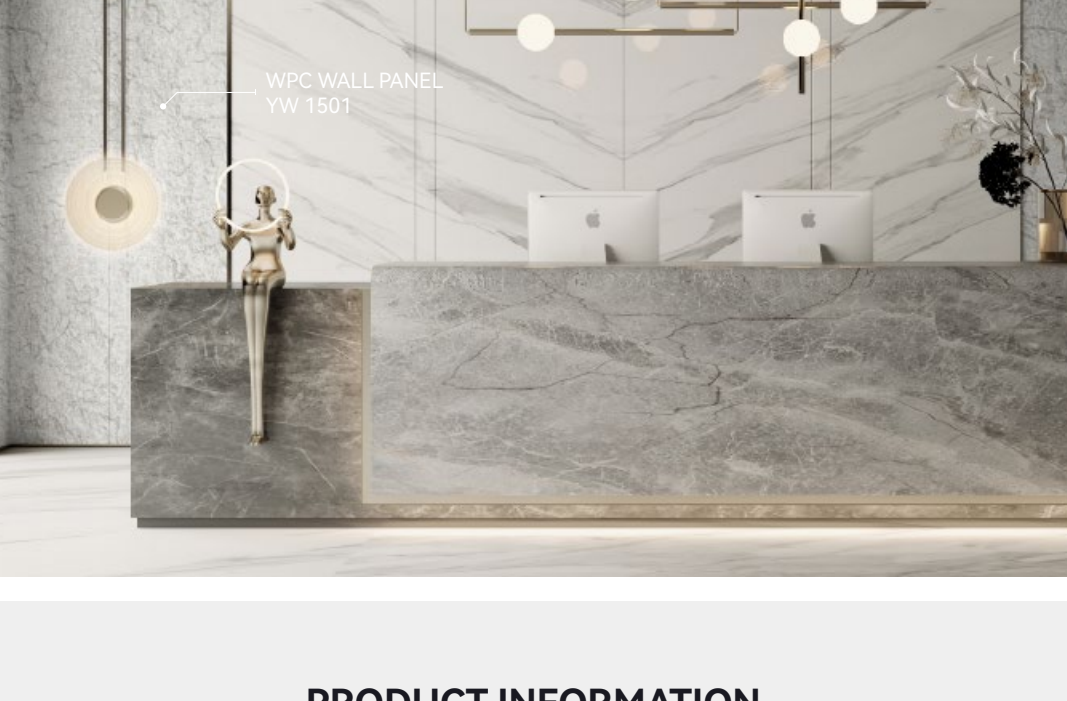



PRODUCT INFORMATION




Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

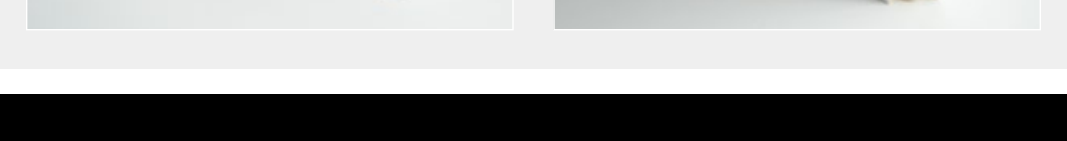





EP LEVEL



FIRE RATING




WATERPROOF




BENDABLE


MORE EMBOSSING COLORS




YW 1501 >




YW 1502 >




YW 1503 >




YW 1801 >




YW 1802 >




YW 1803 >




YW 1804 >




YW 1805 >



YW 1806 >




YW 1807 >




YW 1808 >


INTERNATIONAL CERTIFICATION



SGS Environmental Test Report



SGS EU Highly Concerned Substance Report



SGS Flame Retardant Test Report




SGS Formaldehyde Test Report




CE Eu Safety Certification

FACTORY STRENGTH

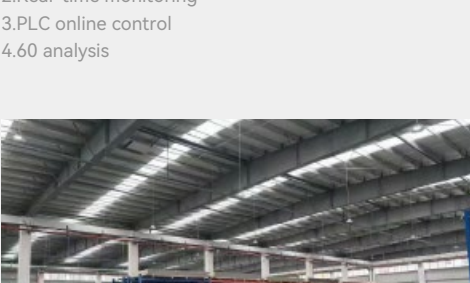


Mature Technology

1.Standardized, automated technology design
2.Real-time monitoring
3.PLC online control
4.60 analysis

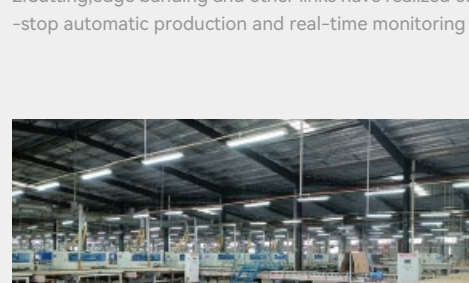


Equipment Operation

1.Famous brands,professional links have realized one
2.Cutting,edge banding and other links have realized one
-stop automatic production and real-time monitoring

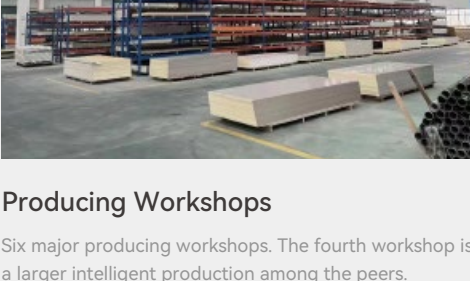

Producing Workshops


Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

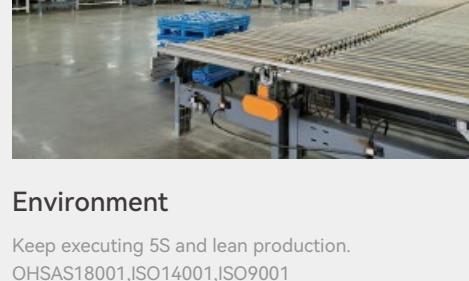

Environment






Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001






PACKING METHOD













20' STD






Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb











<