





51016




PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm




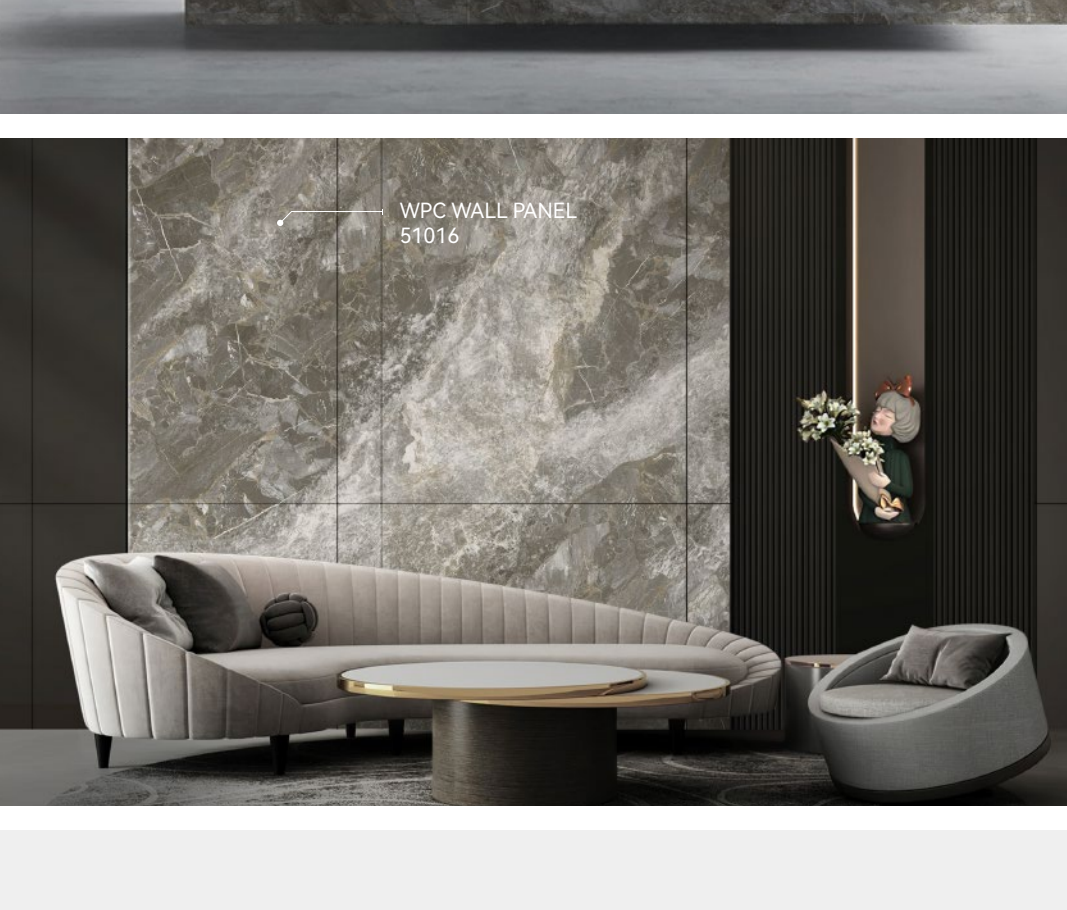


PRODUCT INFORMATION



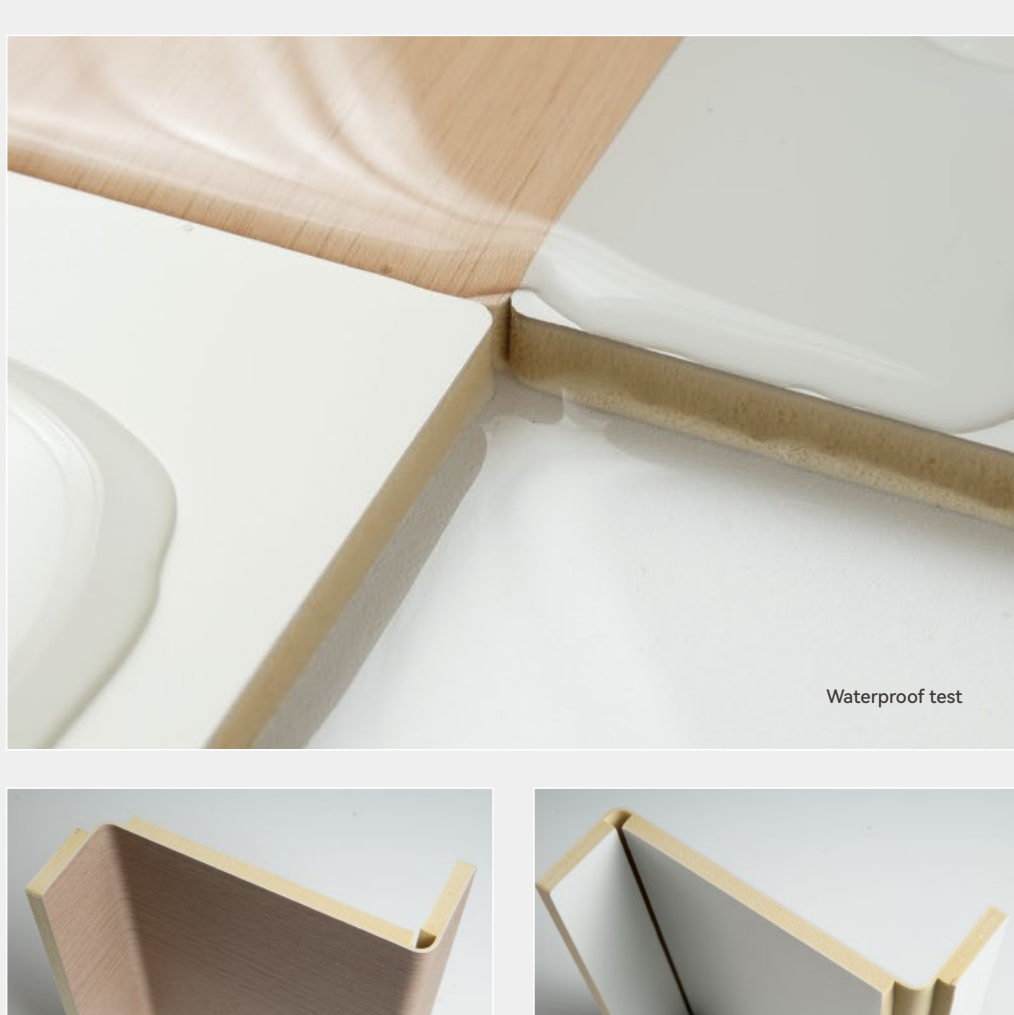


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


PRODUCT PERFORMANCE REAL SHOT

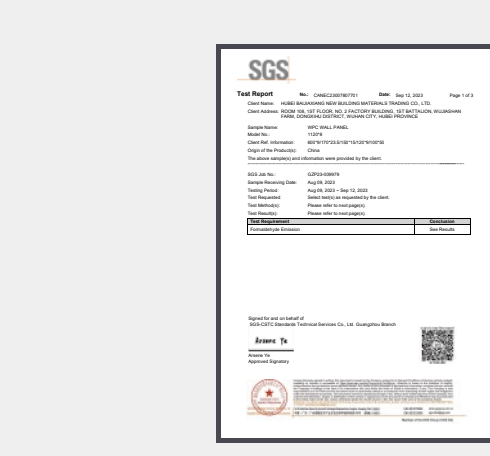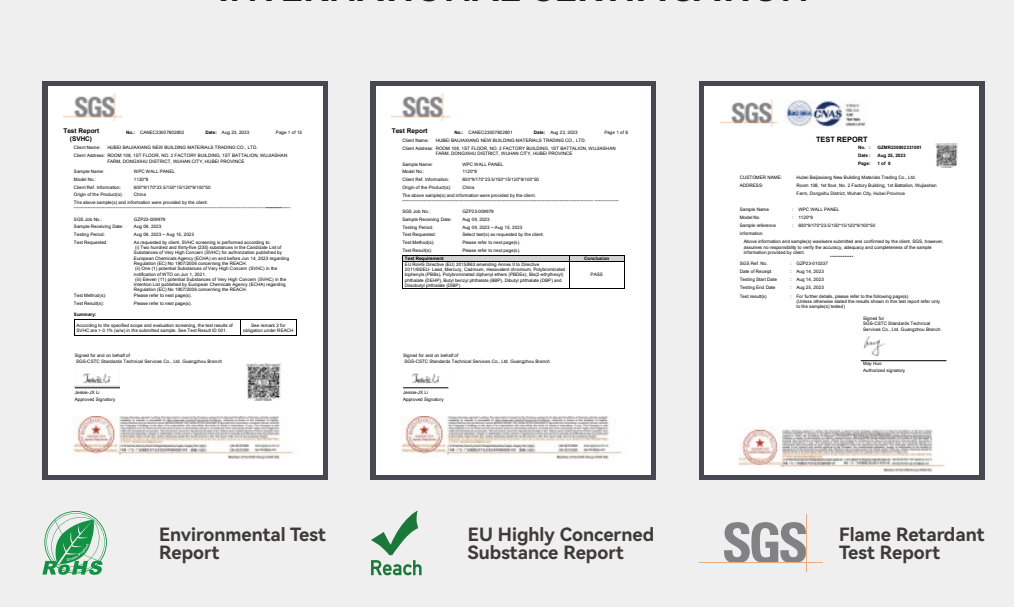

INTERNATIONAL CERTIFICATION

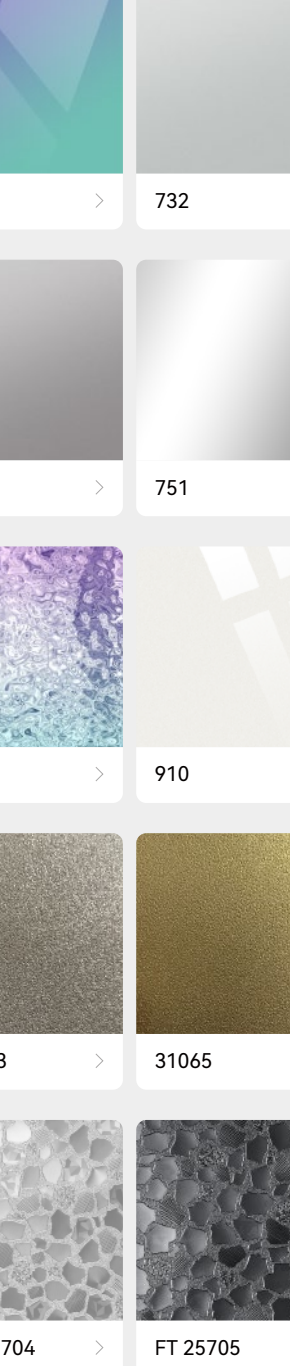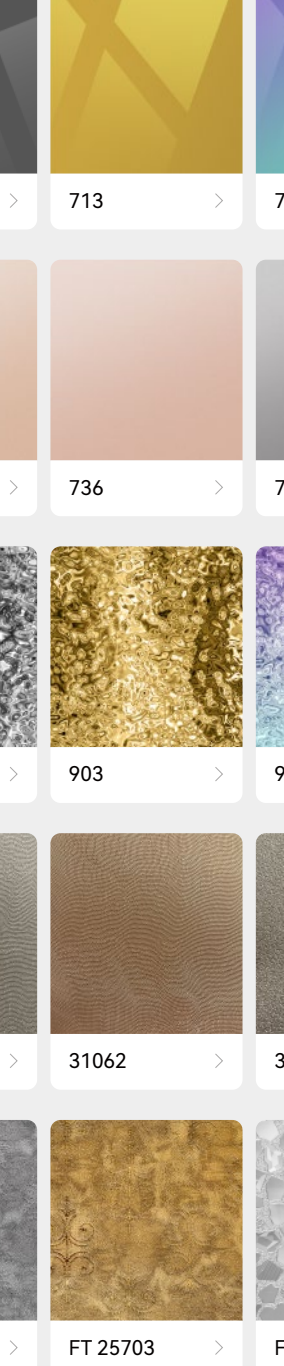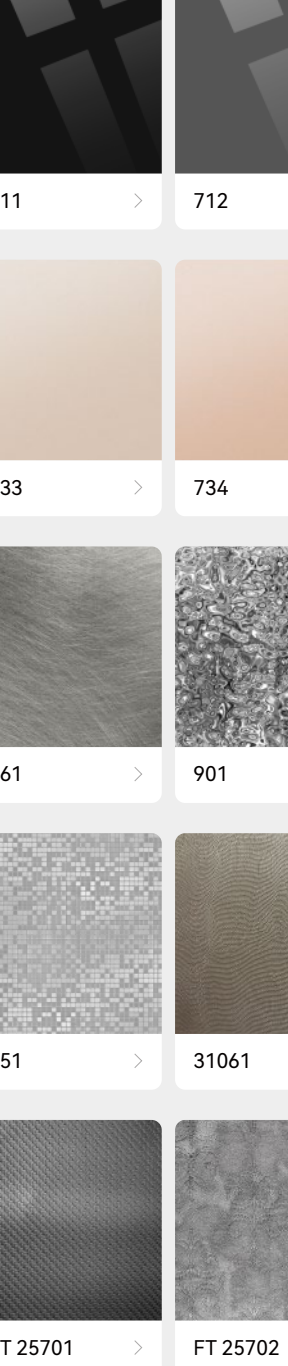



Environmental Test Report




EU Highly Concerned Substance Report



Flame Retardant Test Report

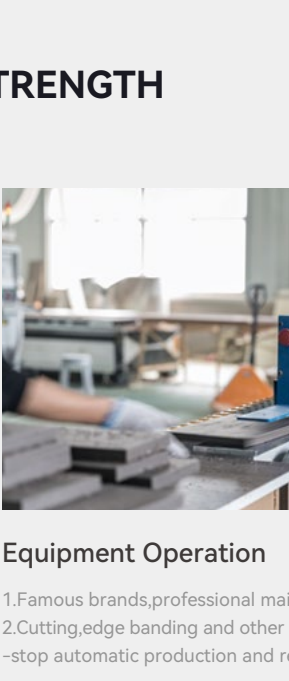


Formaldehyde Test Report




Eu Safety Certification

MORE METAL SERIES COLORS

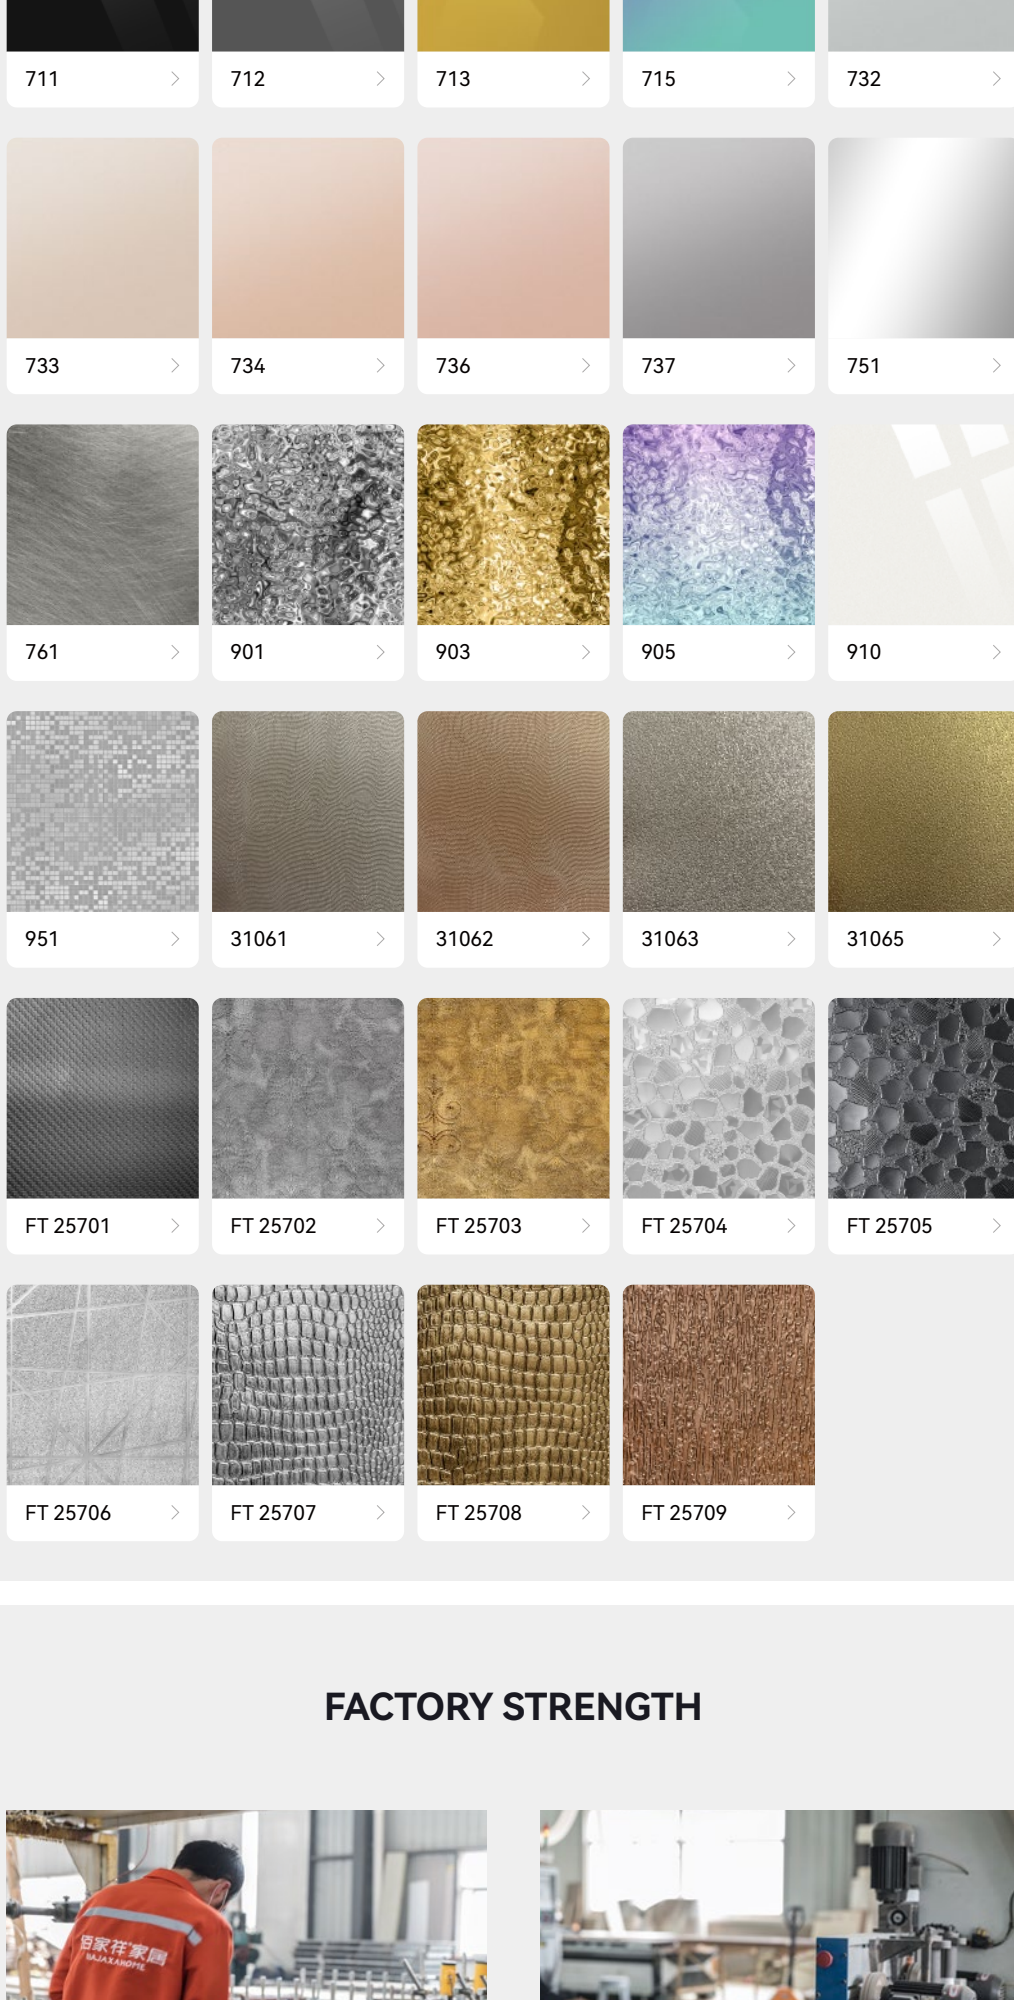


FACTORY STRENGTH

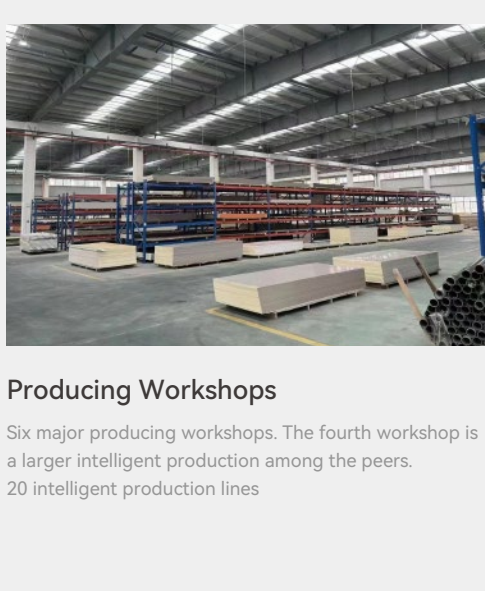


Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 6.0 analysis

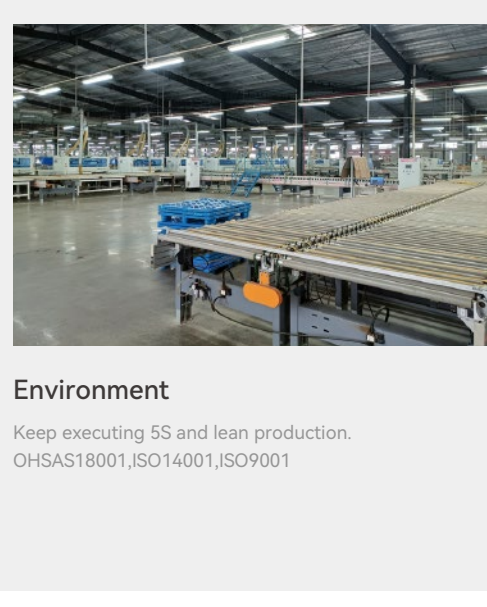

Equipment Operation

1. Famous brands, professional maintenance
2. Cutting edge banding and other links have realized one-stop automatic production and real-time monitoring

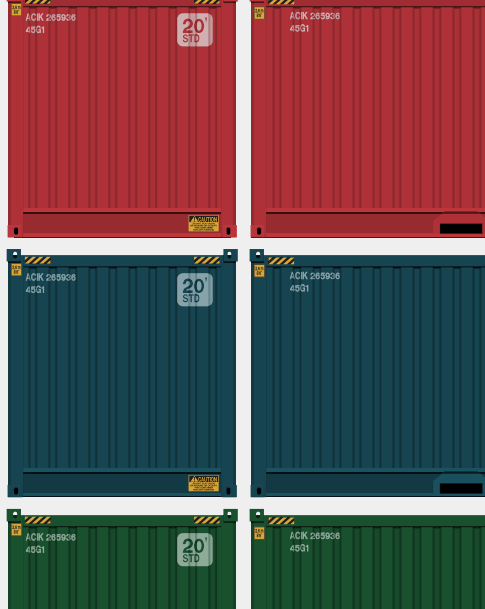

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines




Environment


Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001


PACKING METHOD

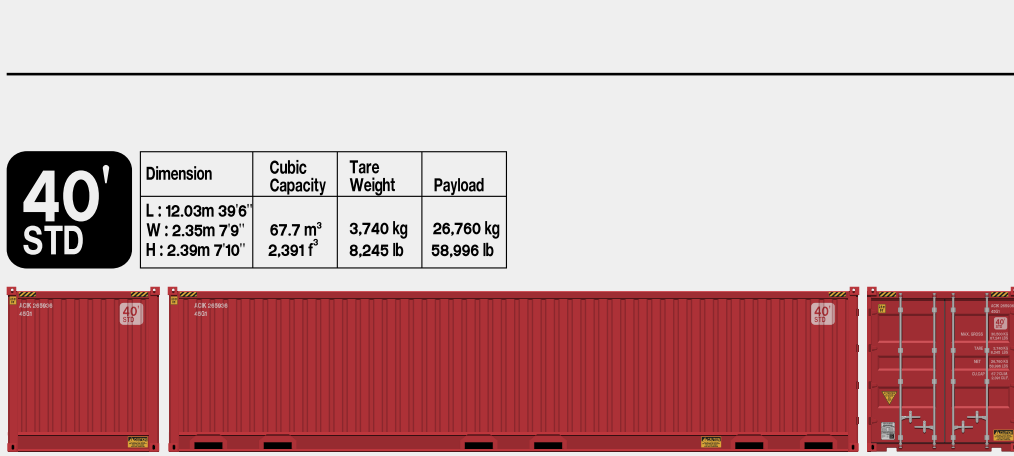

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m³	2,220 kg	21,850 kg
W : 2.35 m 7'9"	1,170 f³	4,894 lb	48,171 lb
H : 2.39 m 7'10"			

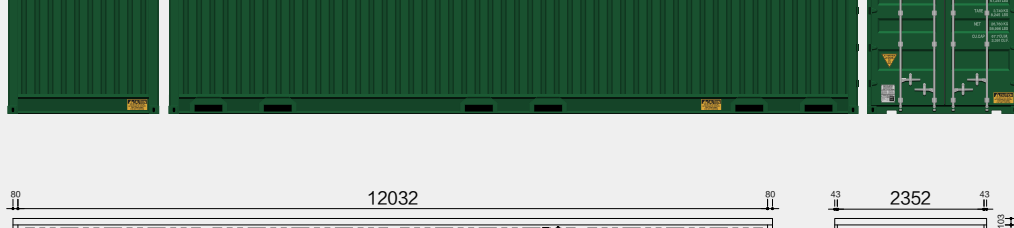

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03 m 39'6"	67.7 m³	26,760 kg	58,996 kg
W : 2.35 m 7'9"	2,391 f³	8,245 lb	
H : 2.39 m 7'10"			



40正常装货货柜尺寸