

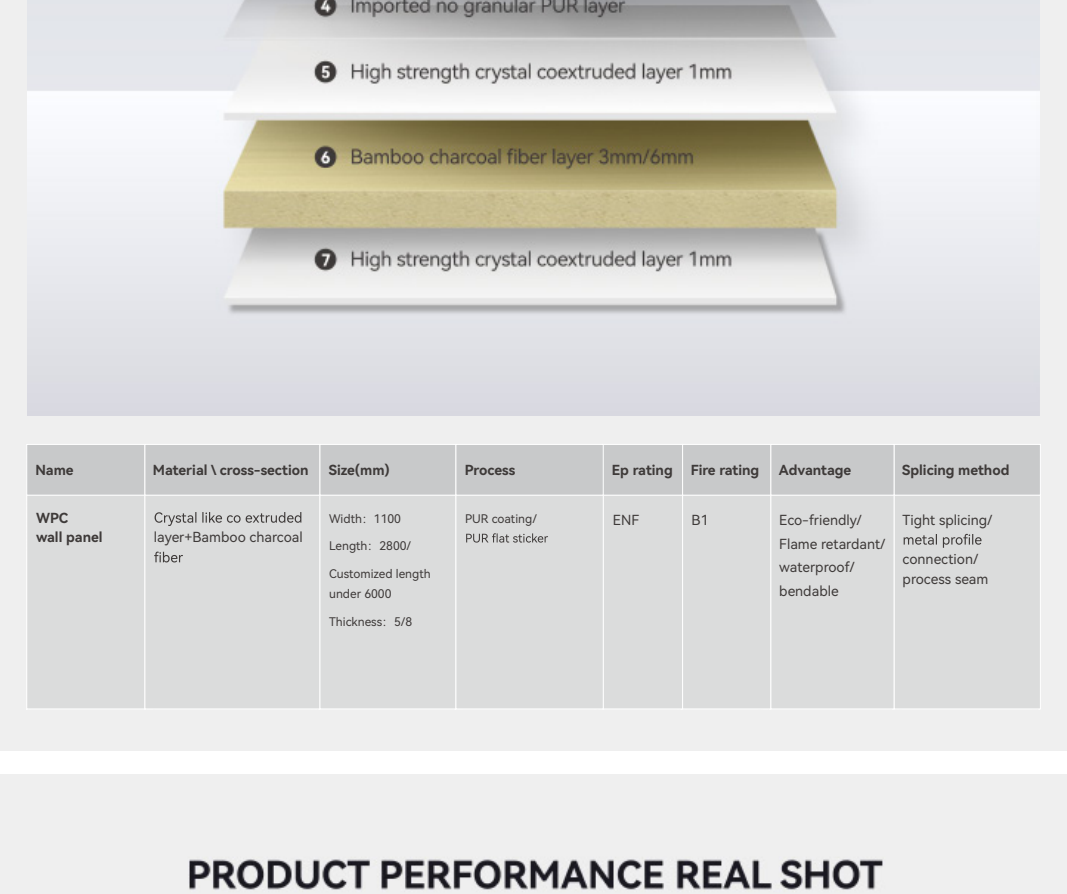


## 6016

COLOR NUMBER




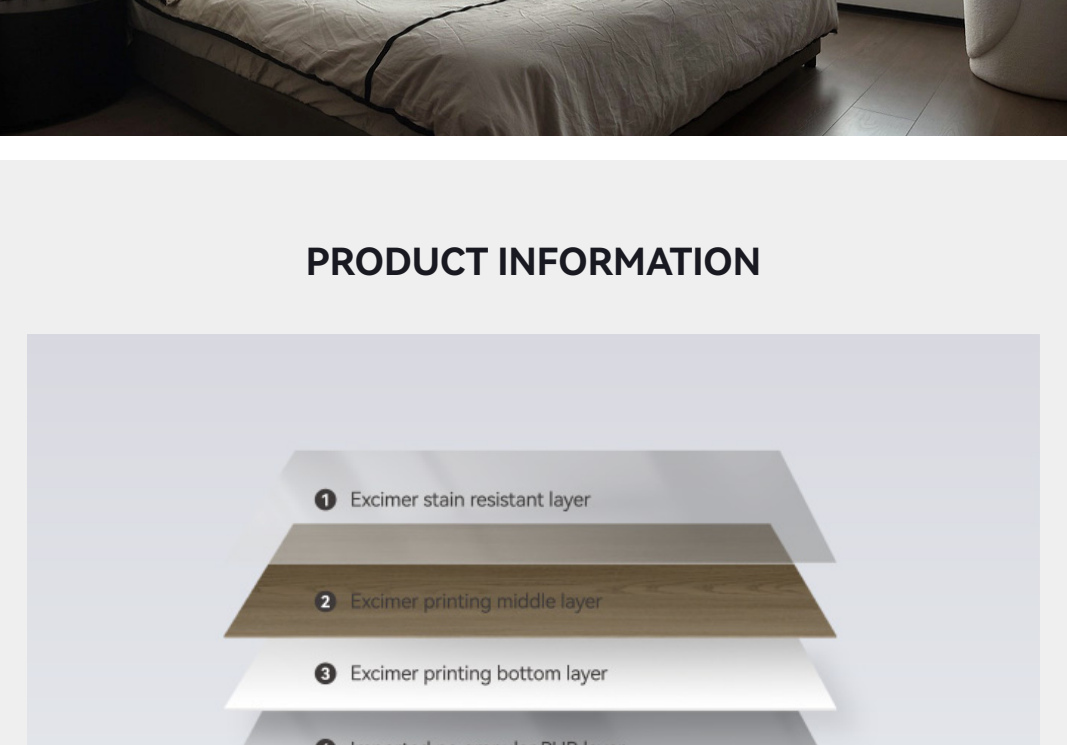


## PRODUCT INFORMATION




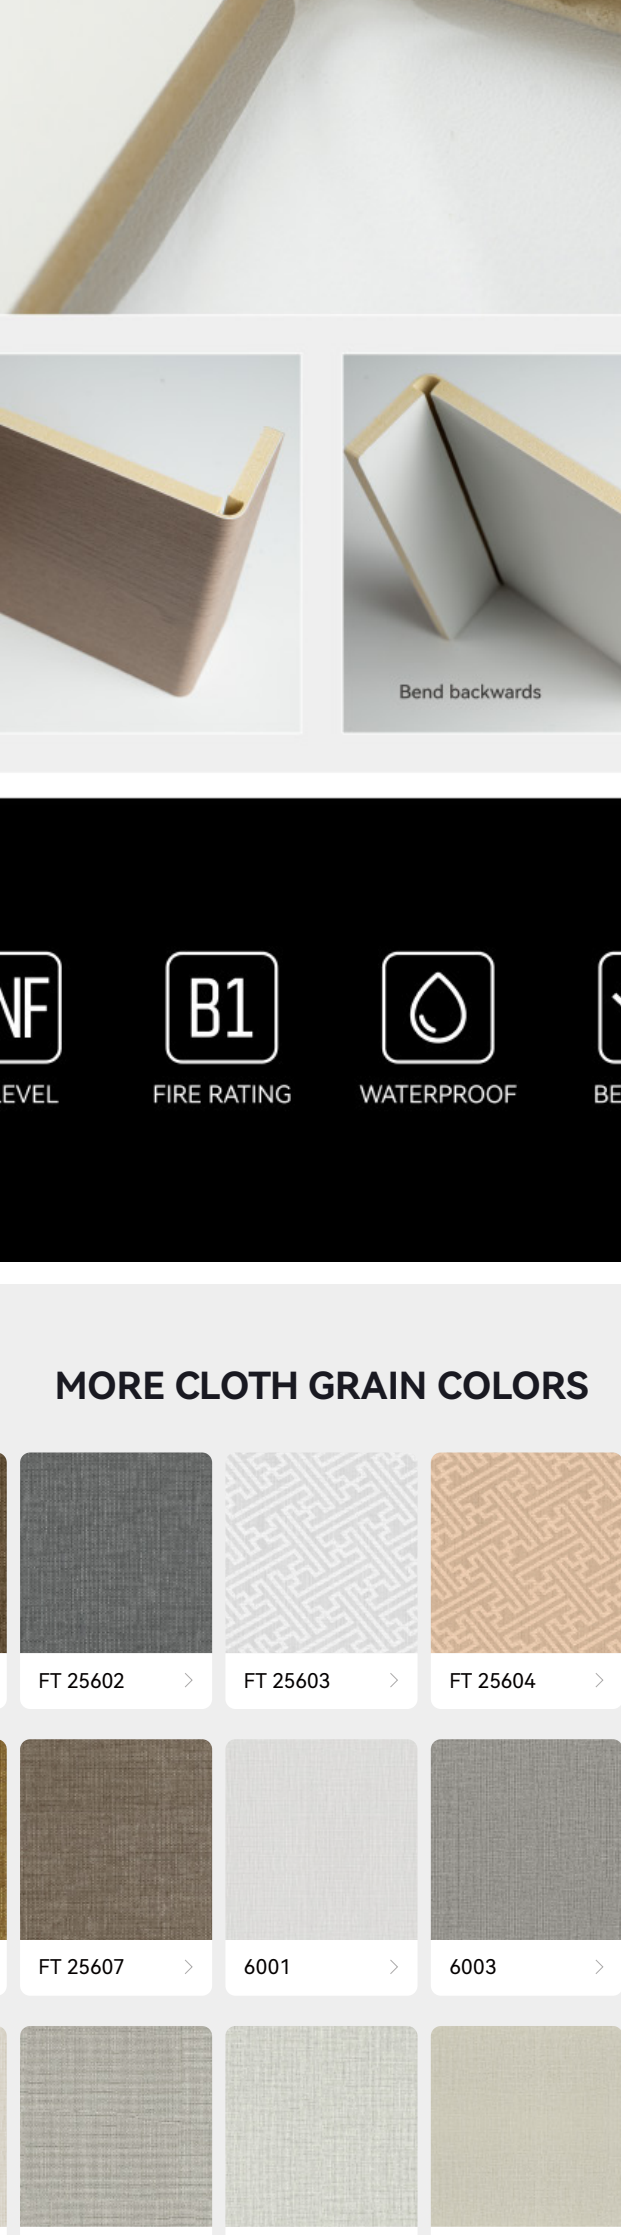


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer-Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ connection/ process seam



## PRODUCT PERFORMANCE REAL SHOT

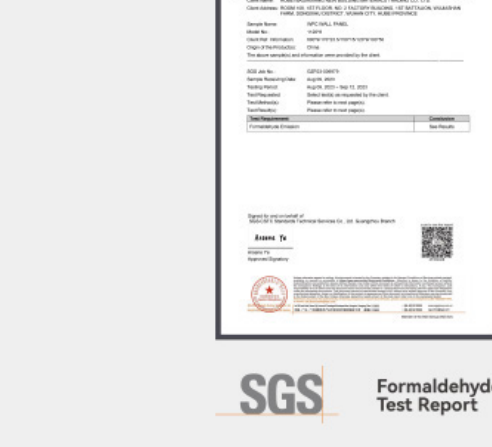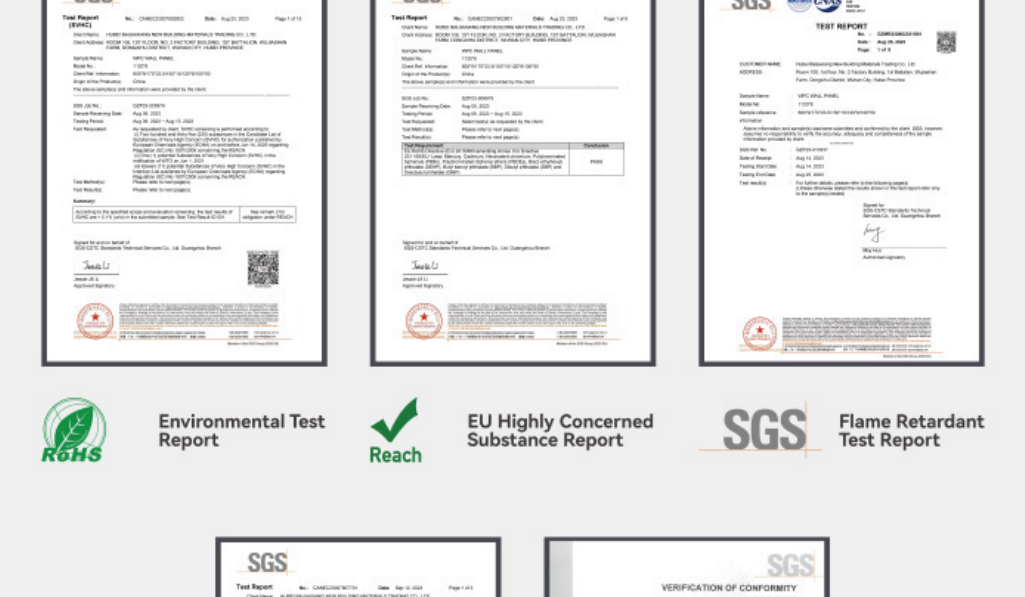

## MORE CLOTH GRAIN COLORS

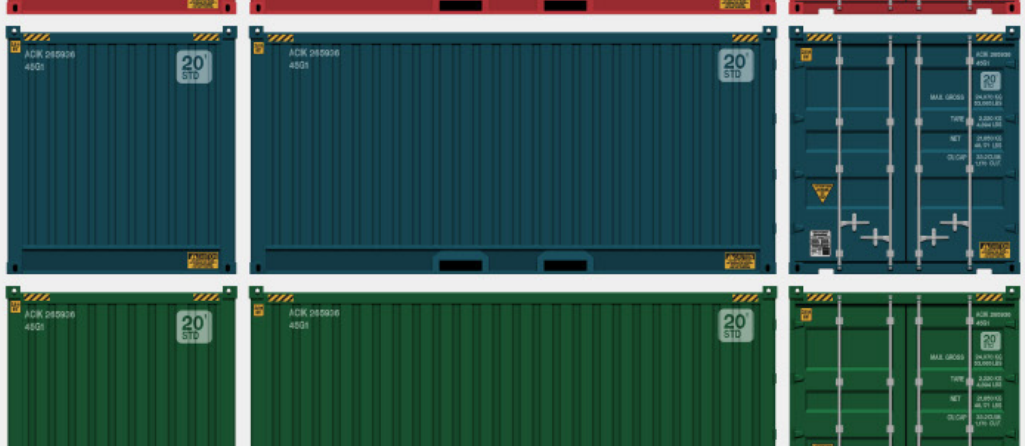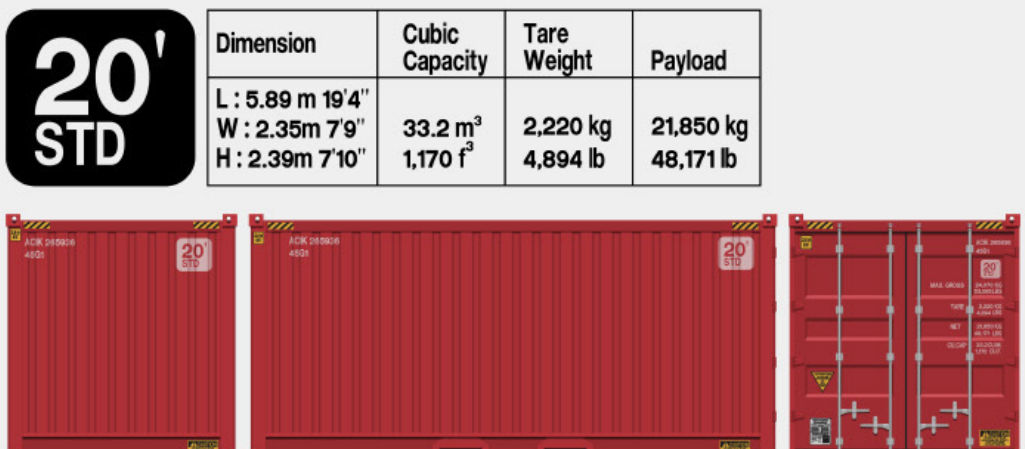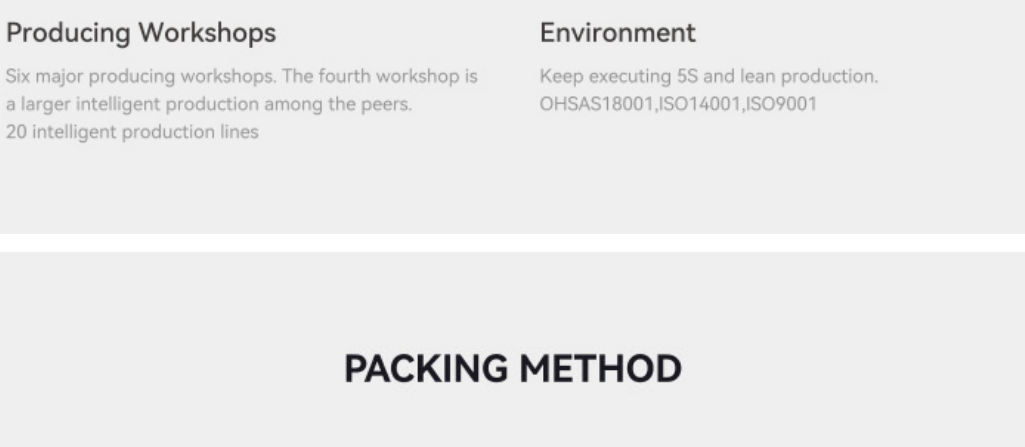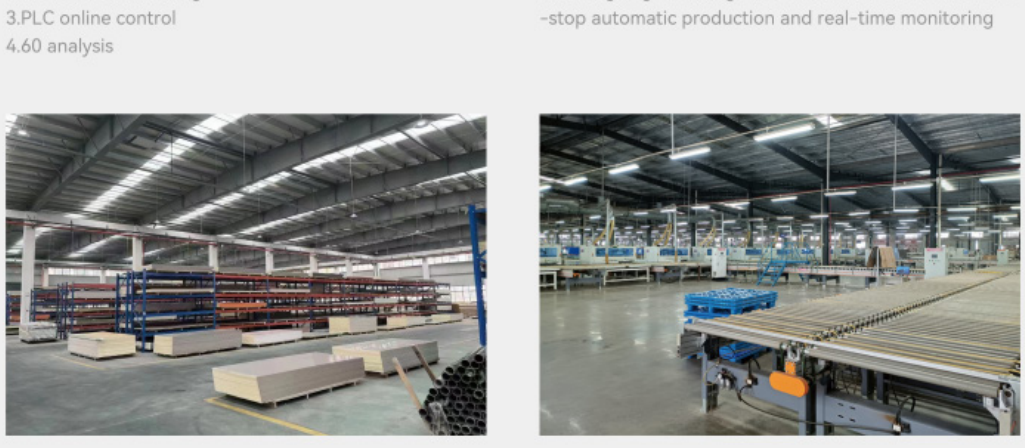


## INTERNATIONAL CERTIFICATION

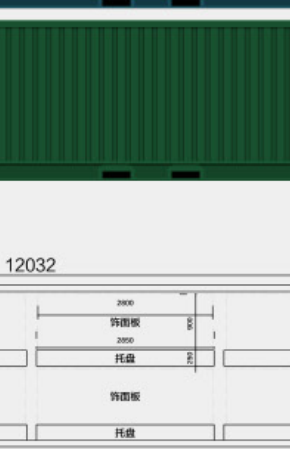

Environmental Test Report



EU Highly Concerned Substance Report



Flame Retardant Test Report





Formaldehyde Test Report



Eu Safety Certification

## FACTORY STRENGTH

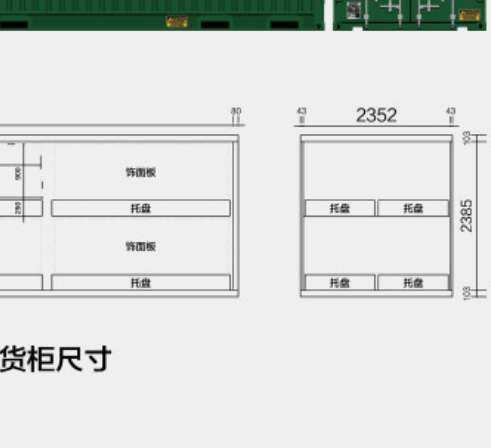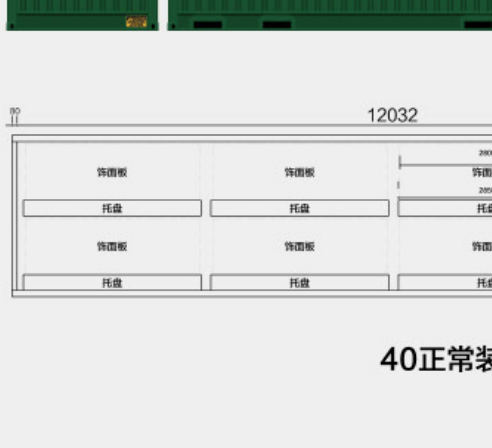

### Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 6D analysis

### Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring



### Producing Workshops



Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines

### Environment

Keep executing 5S and lean production. OHSAS18001, ISO14001, ISO9001

## PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89 m 19'4"			
	W : 2.35m 7'9"	33.2 m³	2,220 kg	21,850 kg
	H : 2.39m 7'10"	1,170 f³	4,894 lb	48,171 lb

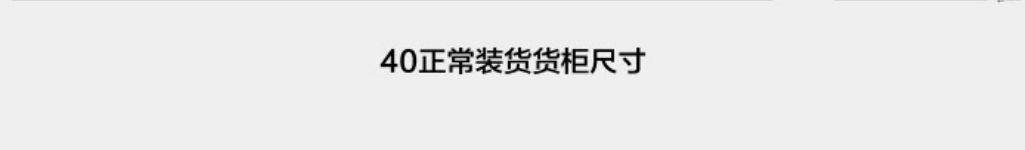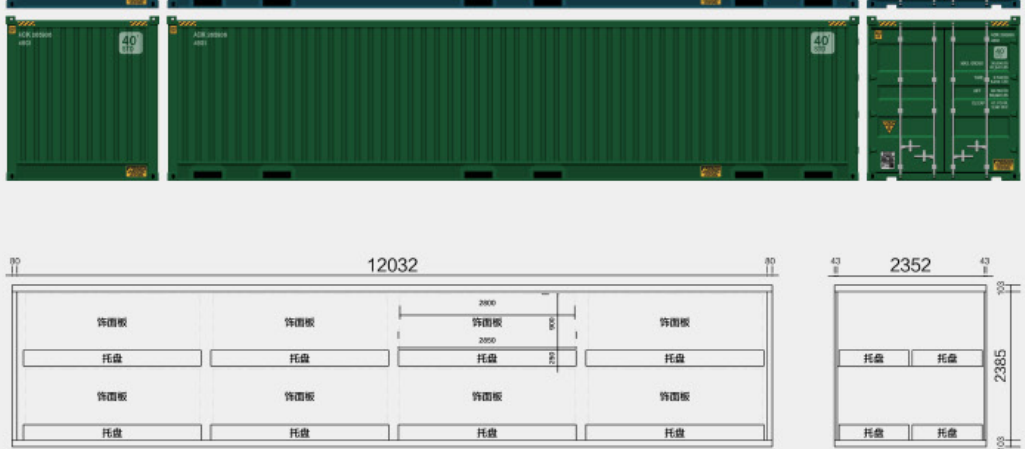

20正常装货货柜尺寸

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 12.03m 39'6"			
	W : 2.35m 7'9"	67.7 m³	3,740 kg	26,760 kg
	H : 2.39m 7'10"	2,391 f³	8,245 lb	58,996 lb



40正常装货货柜尺寸