




# KA 57504





### PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm


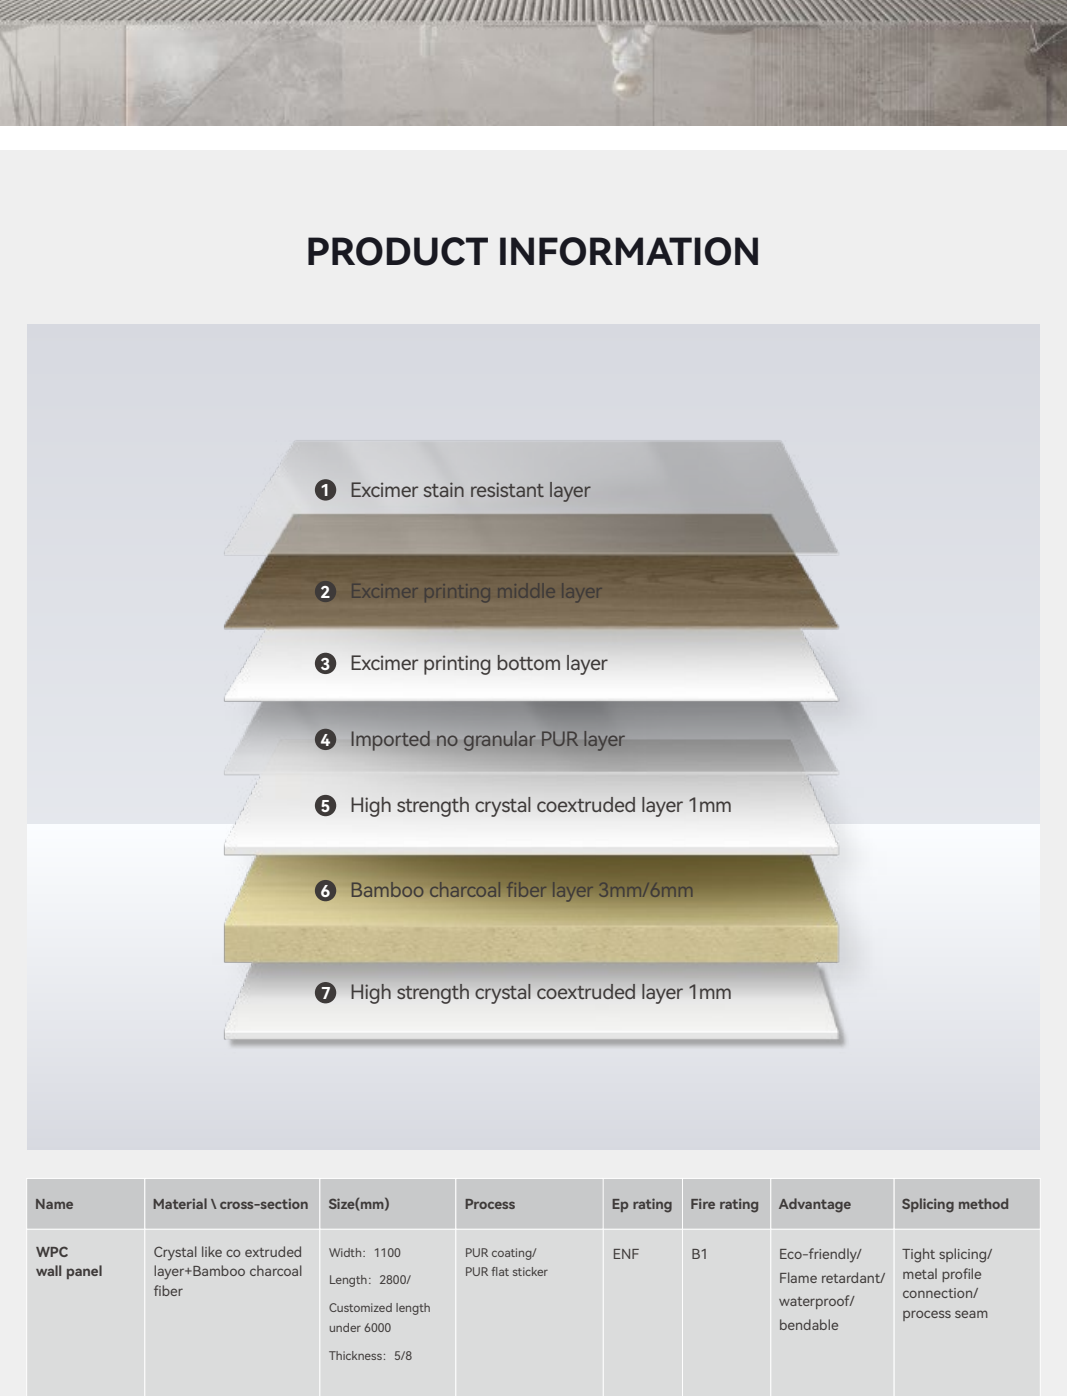



## PRODUCT INFORMATION




Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 4000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

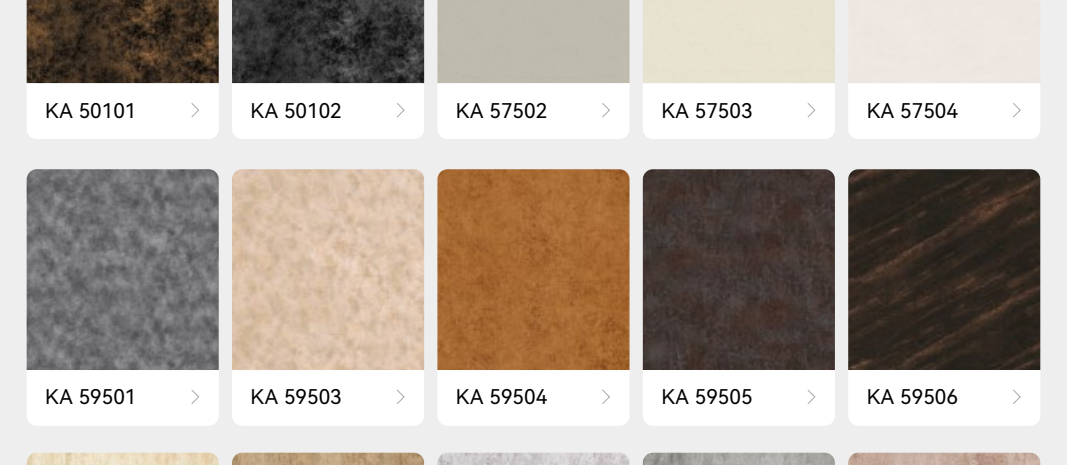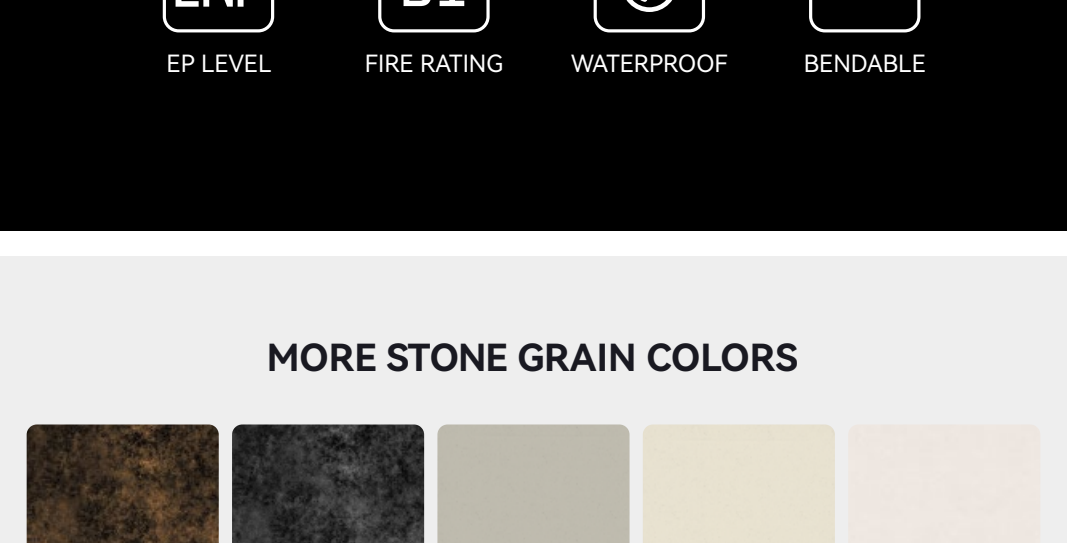





EP LEVEL



FIRE RATING




WATERPROOF




BENDABLE


## MORE STONE GRAIN COLORS




KA 50101 >




KA 50102 >




KA 57502 >




KA 57503 >




KA 57504 >




KA 59501 >




KA 59503 >




KA 59504 >




KA 59505 >




KA 59506 >




FT 258512 >




FT 258513 >




FT 258514 >




FT 258515 >




FT 25501 >




FT 25502 >




FT 25507 >




5003 >




5004 >




5007 >




5009 >




5018 >




5023 >




5026 >




5032 >




5033 >




5036 >




5037 >




5038 >




5039 >




51001 >




51003 >




51005 >




51006 >




51007 >



51012 >




51014 >




51016 >


## INTERNATIONAL CERTIFICATION




Environmental Test Report




EU Highly Concerned Substance Report



Flame Retardant Test Report




Formaldehyde Test Report




Eu Safety Certification

## FACTORY STRENGTH

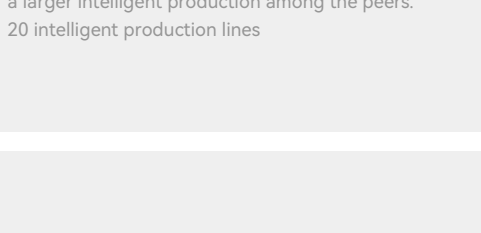


**Mature Technology**

- 1. Standardized, automated technology design
- 2. Real-time monitoring
- 3. PLC online control
- 4. 60 analysis

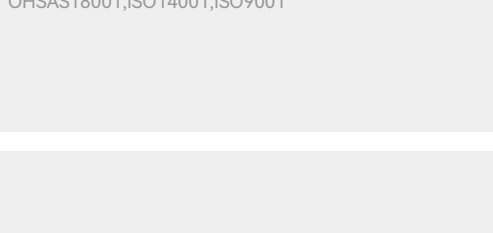

**Equipment Operation**


- 1. Famous brands, professional maintenance
- 2. Cutting-edge banding and other links have realized one-stop automatic production and real-time monitoring

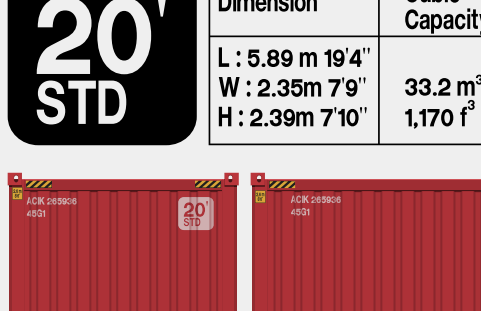

**Producing Workshops**

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

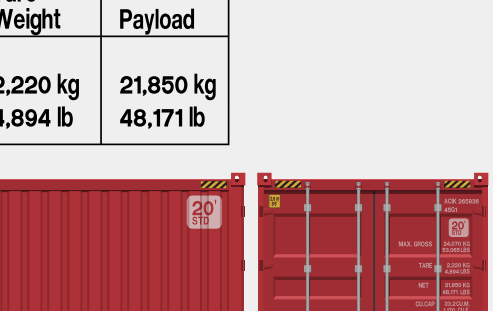


**Environment**


Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

## PACKING METHOD



Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89m 19'4"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb
W : 2.35m 7'9"			
H : 2.39m 7'10"			





## 40' normal cargo container dimensions



Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m³ 2,391 f³	3,740 kg 8,245 lb	26,760 kg 58,996 lb
W : 2.35m 7'9"			
H : 2.39m 7'10"			



