



31062





PRODUCT SIZE


Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

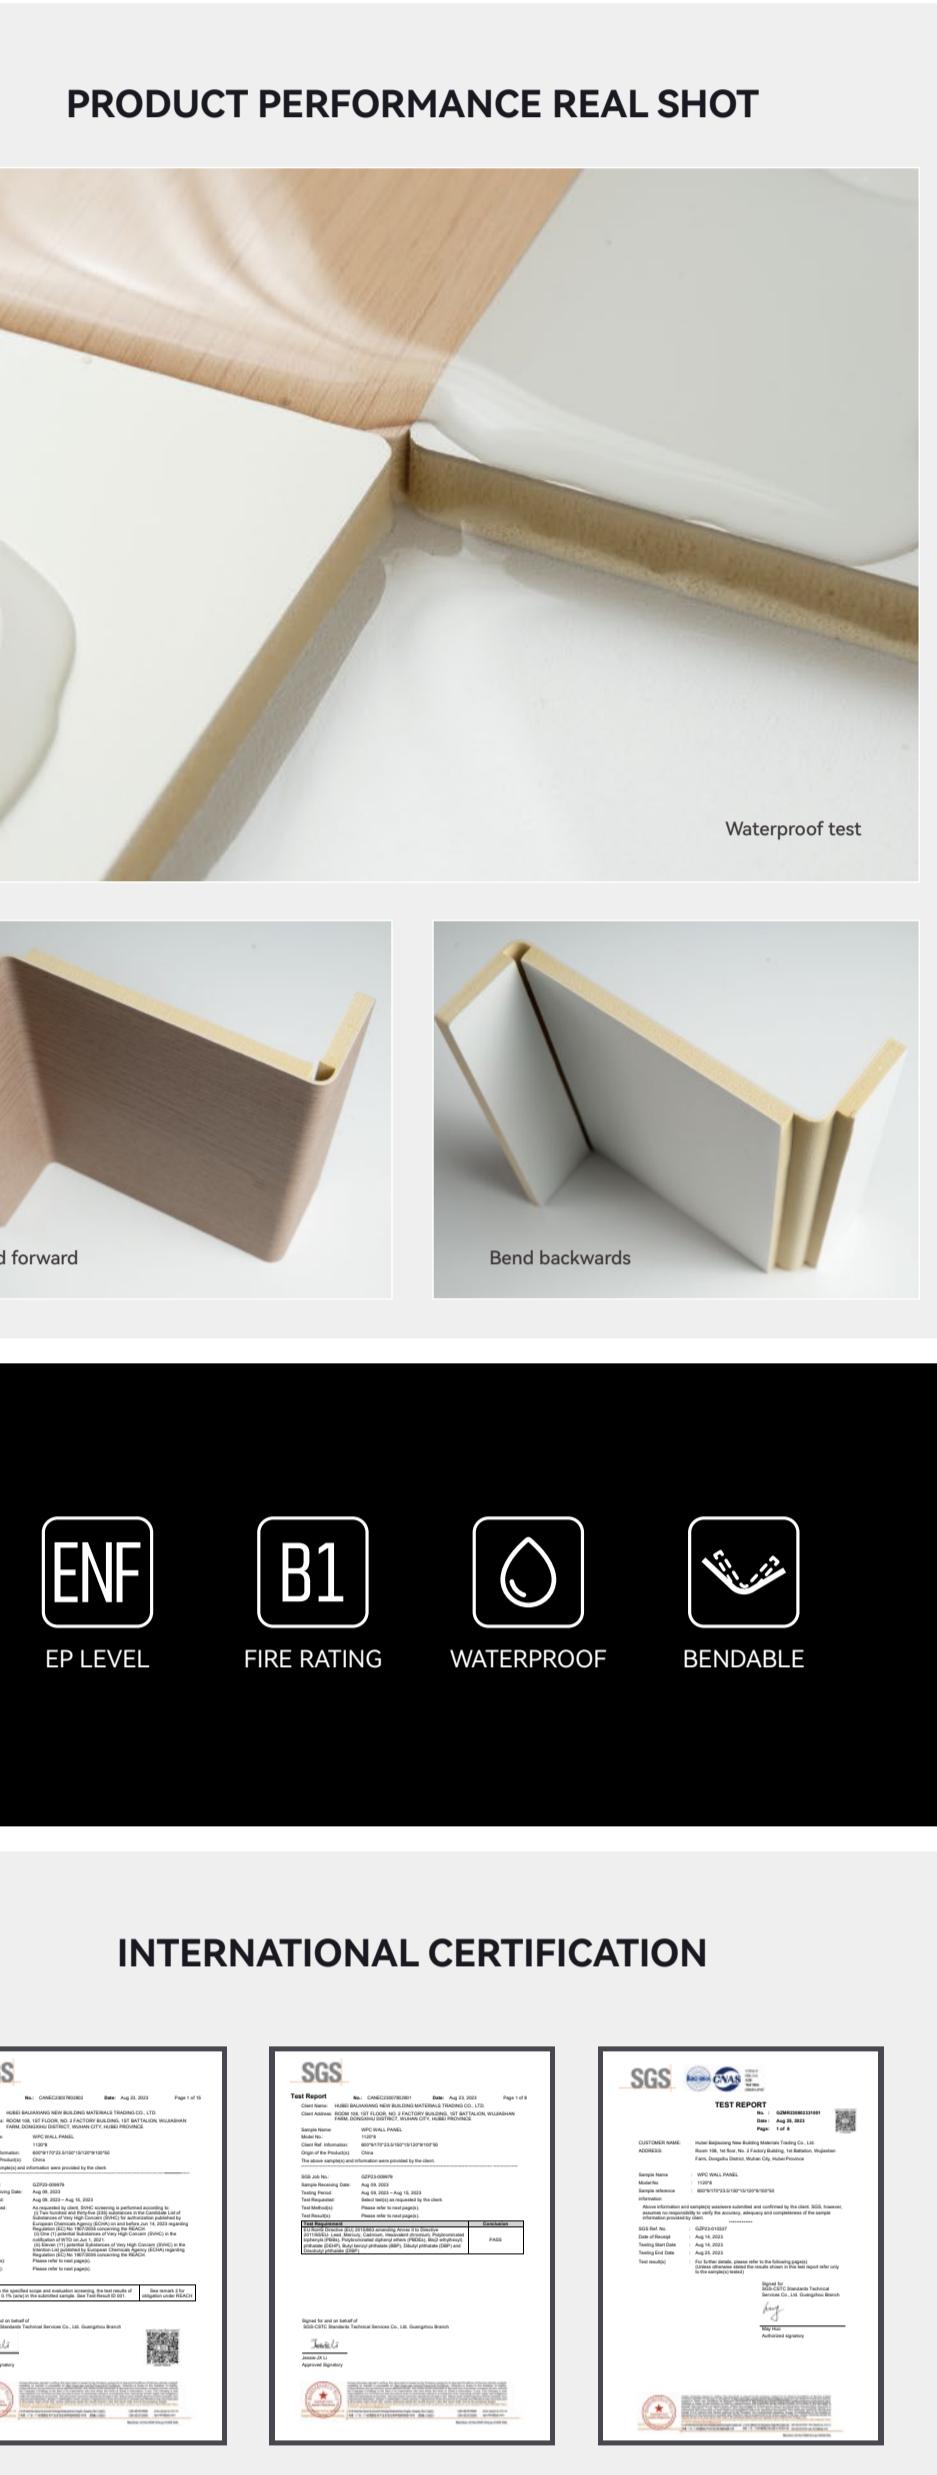

PRODUCT INFORMATION

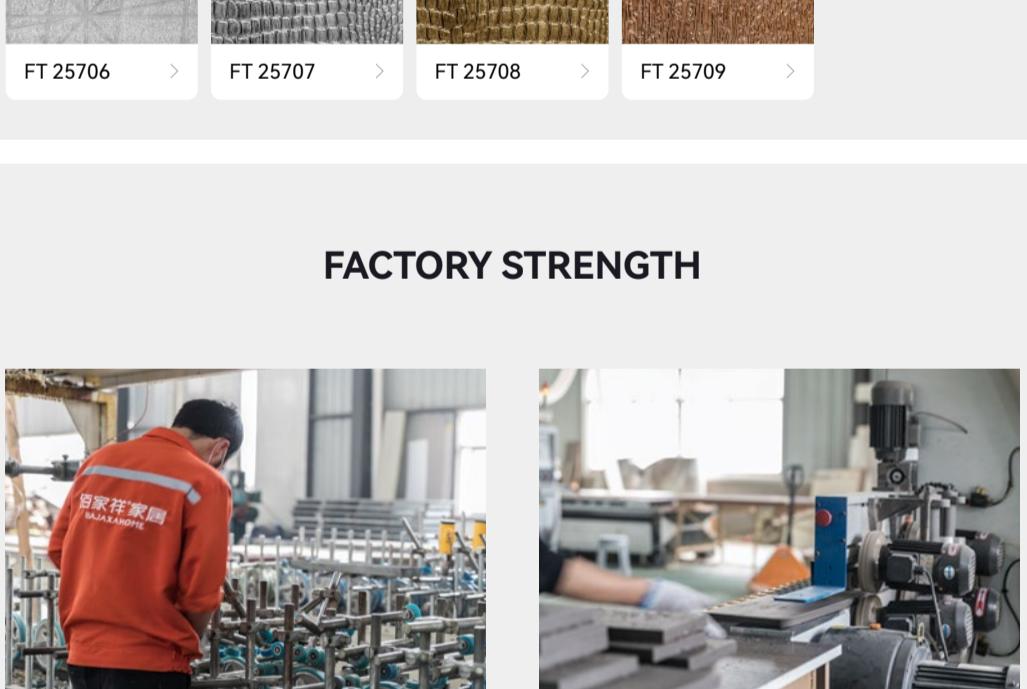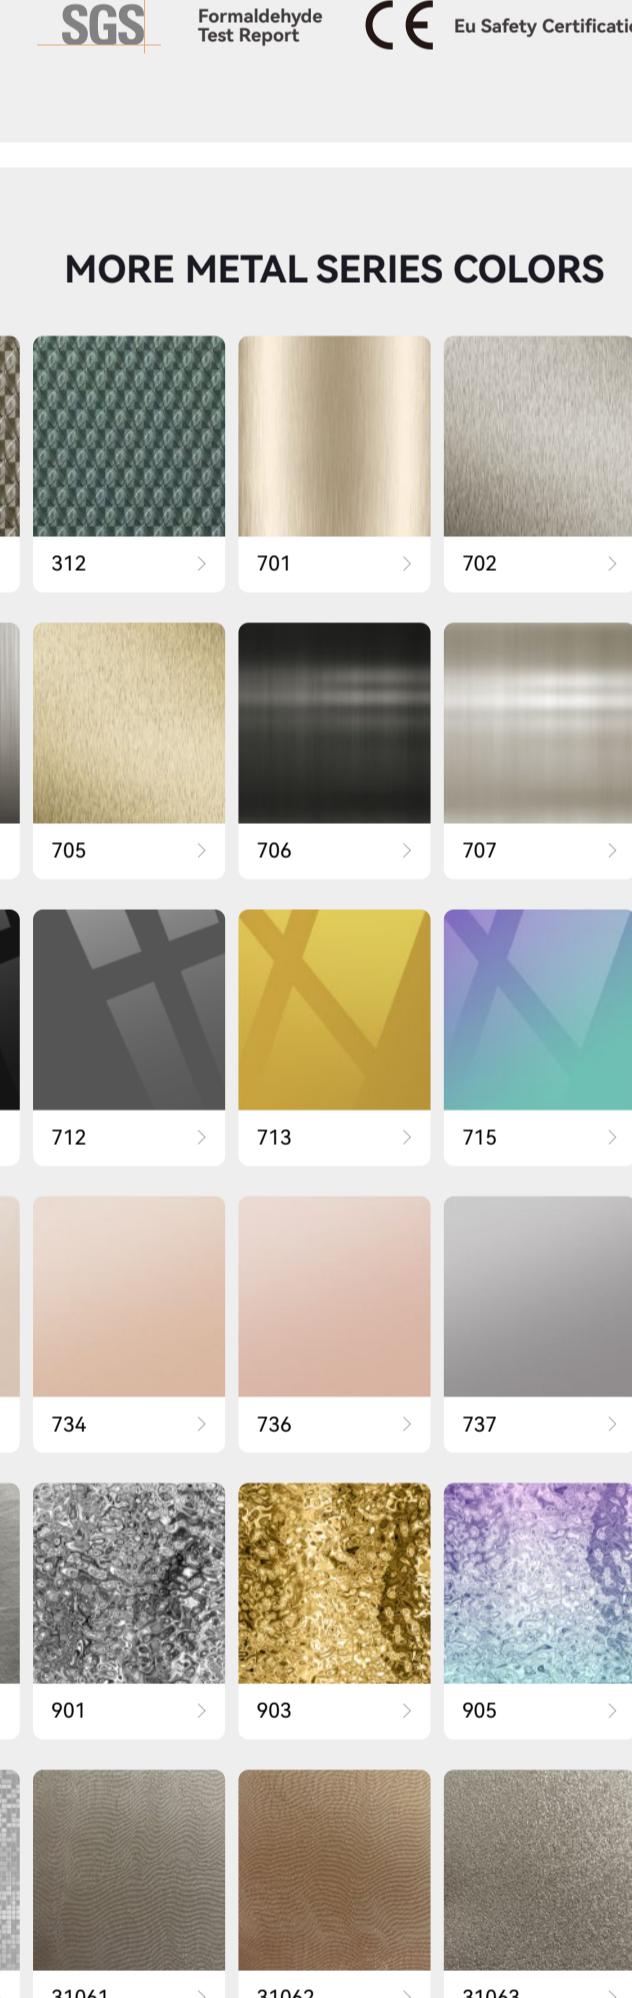

PRODUCT PERFORMANCE REAL SHOT

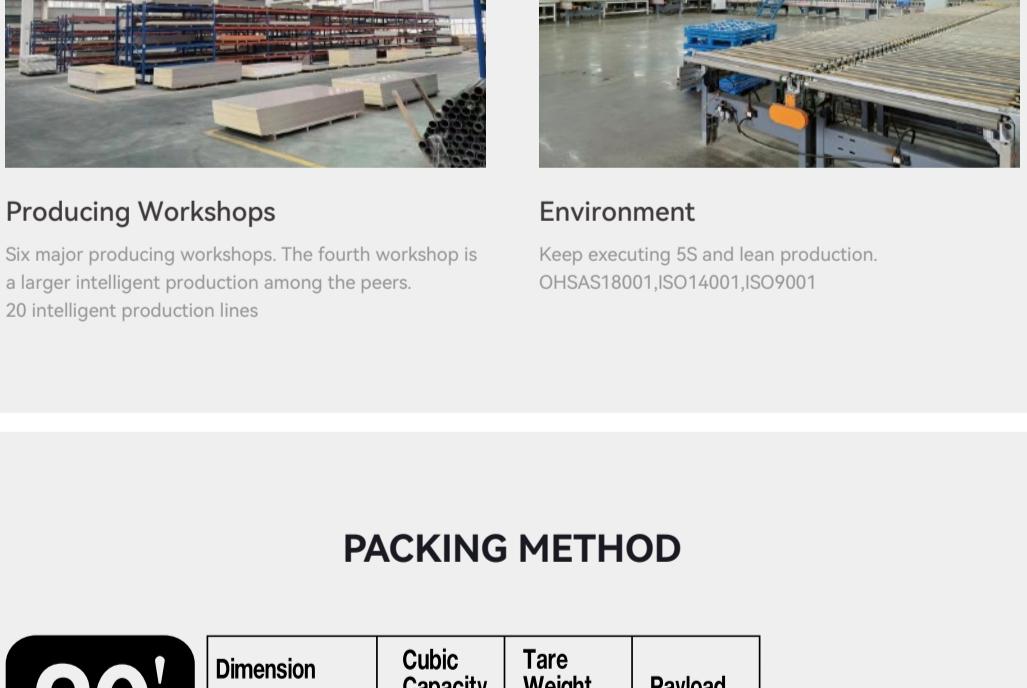

ENF

EP LEVEL


B1

FIRE RATING


WATERPROOF

BENDABLE

INTERNATIONAL CERTIFICATION



MORE METAL SERIES COLORS

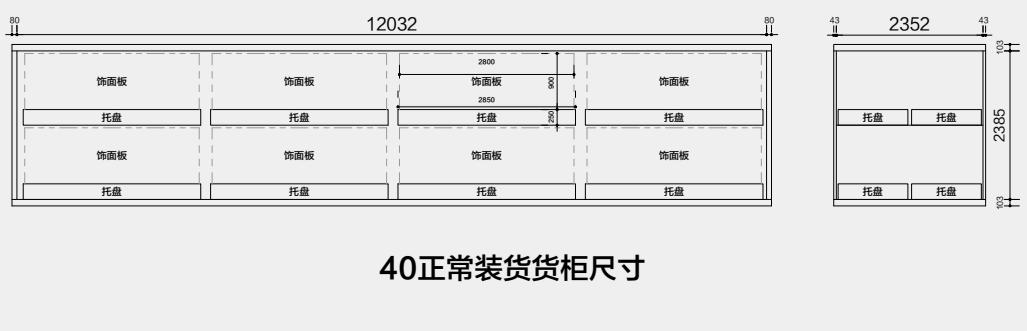

FACTORY STRENGTH

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

Environment




Keep executing 5S and lean production.

OHSA518001, ISO14001, ISO9001

PACKING METHOD

20 STD

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

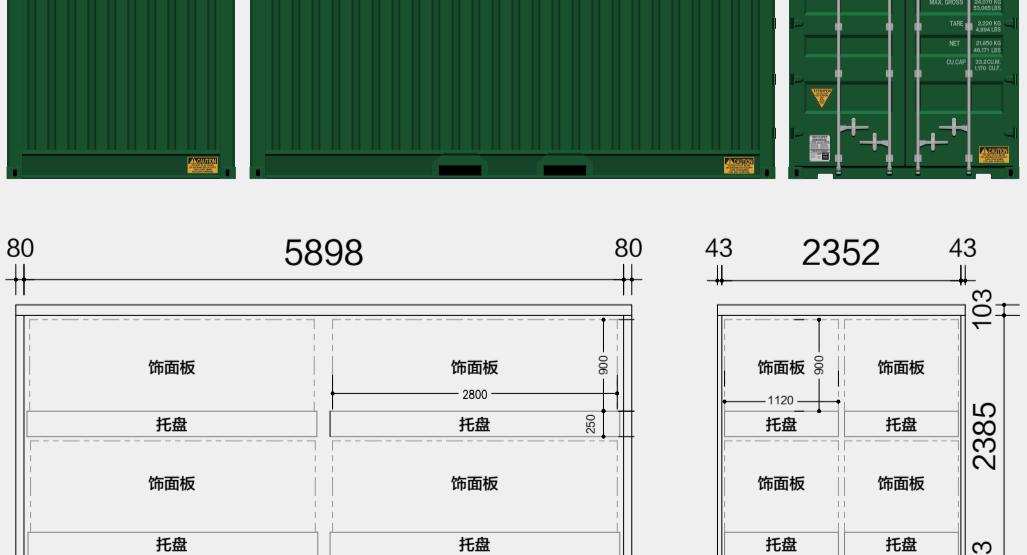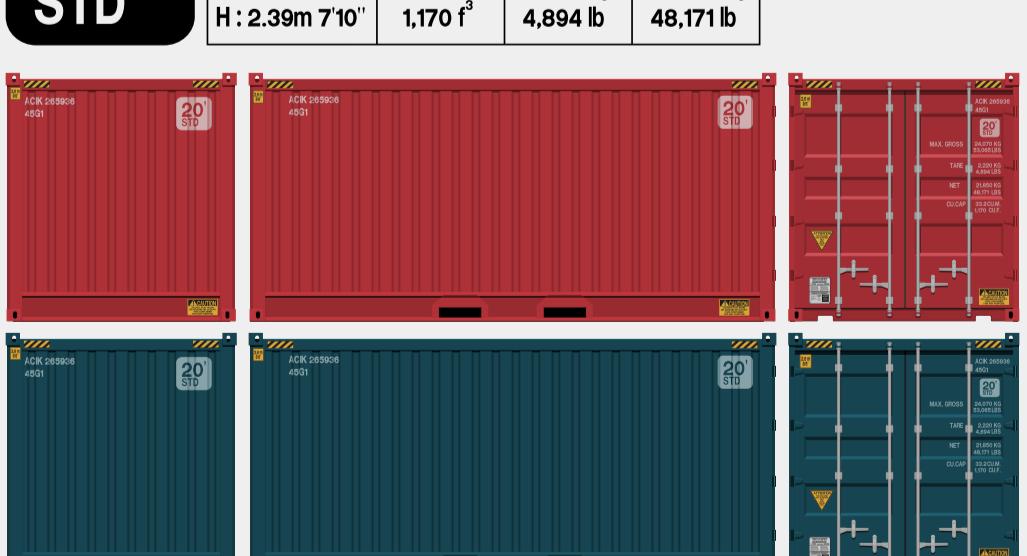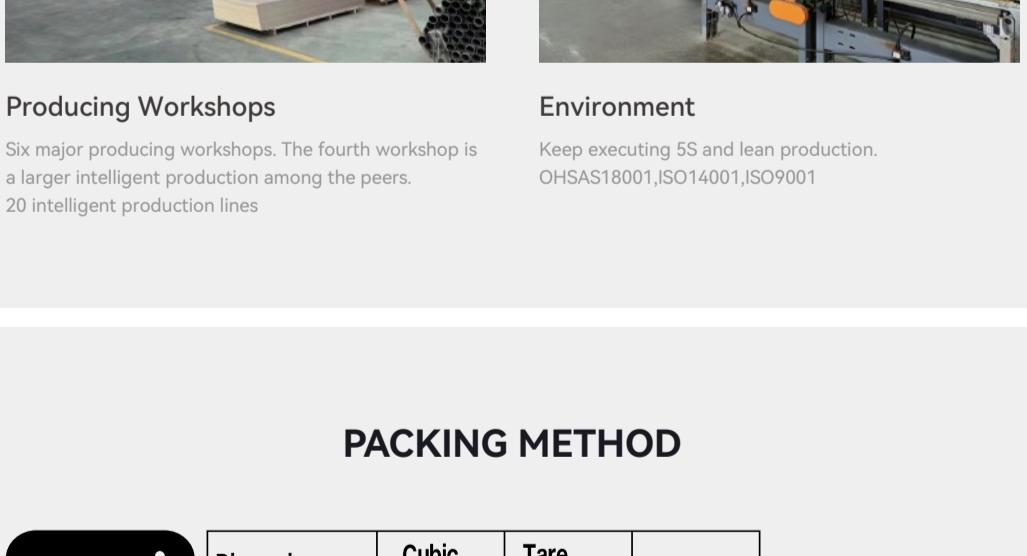

20正常装货货柜尺寸



40正常装货货柜尺寸