
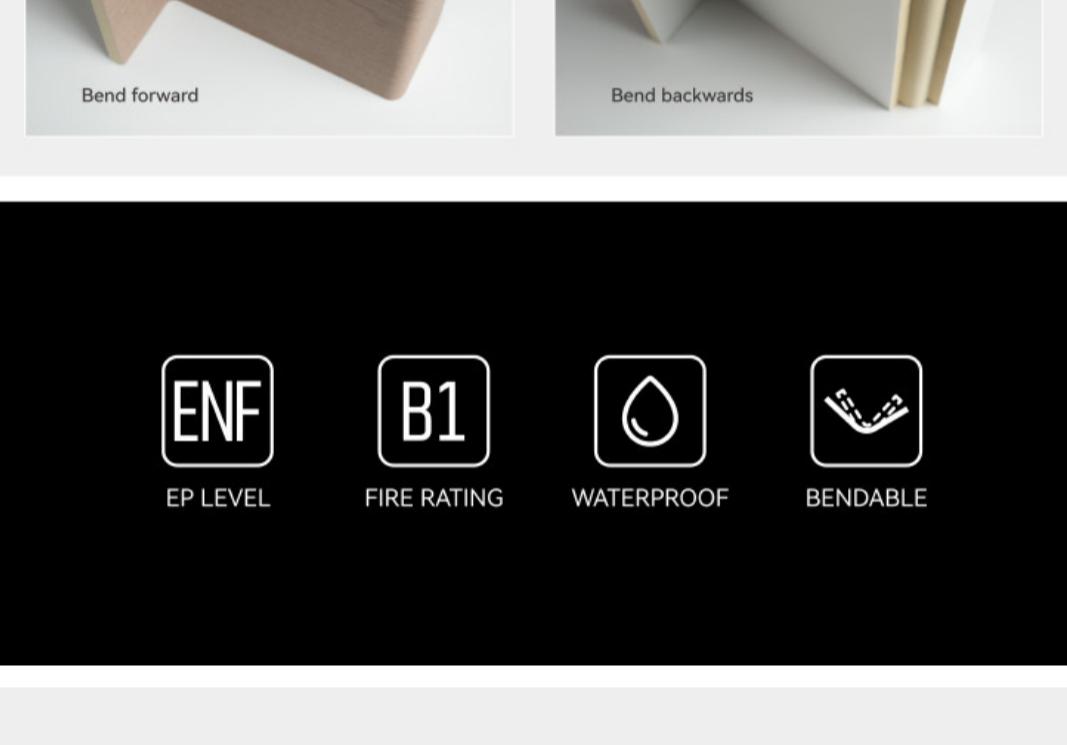
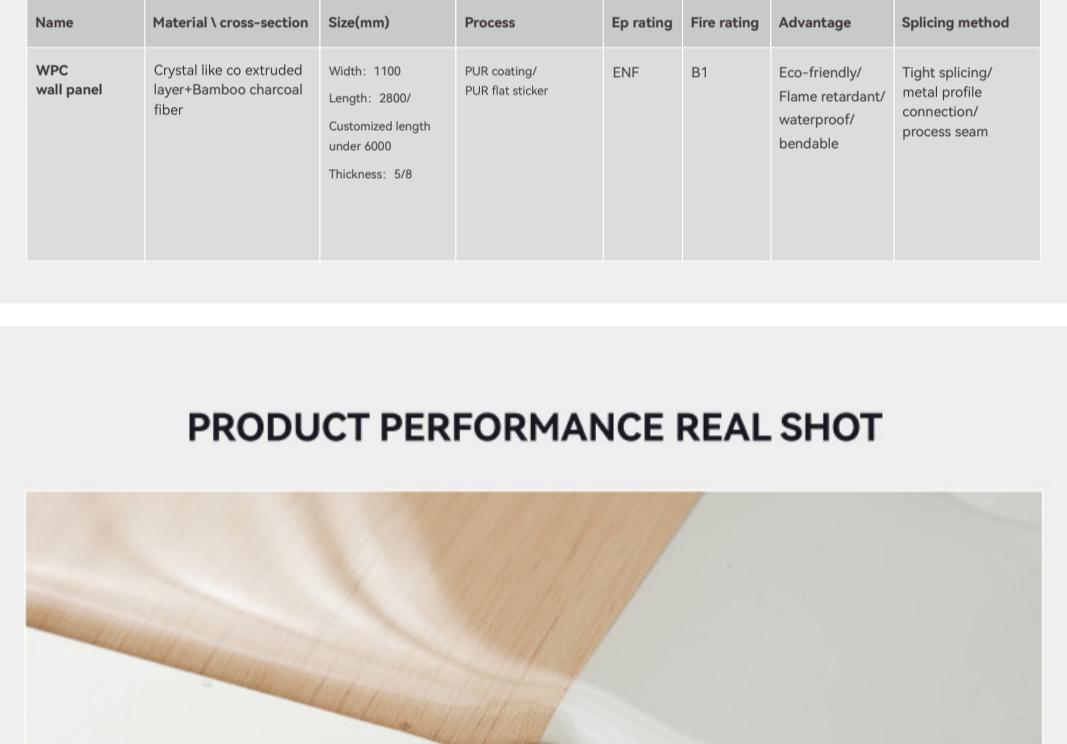
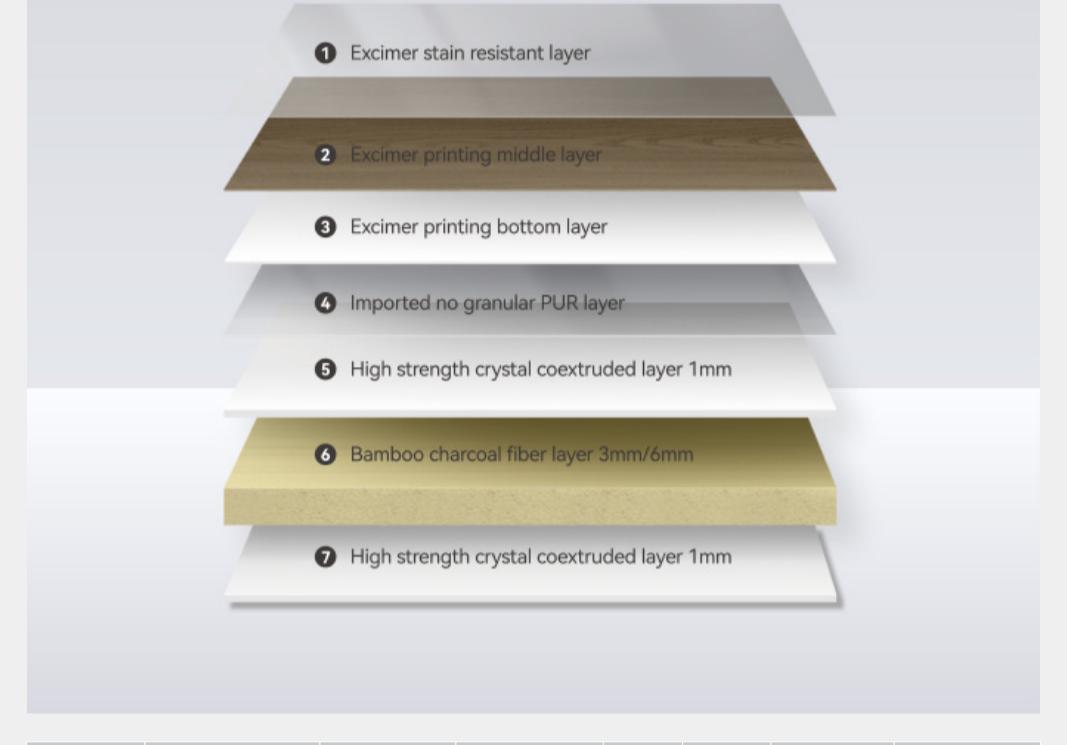


- CLOTH GRAIN -

FT 25605



COLOR NUMBER

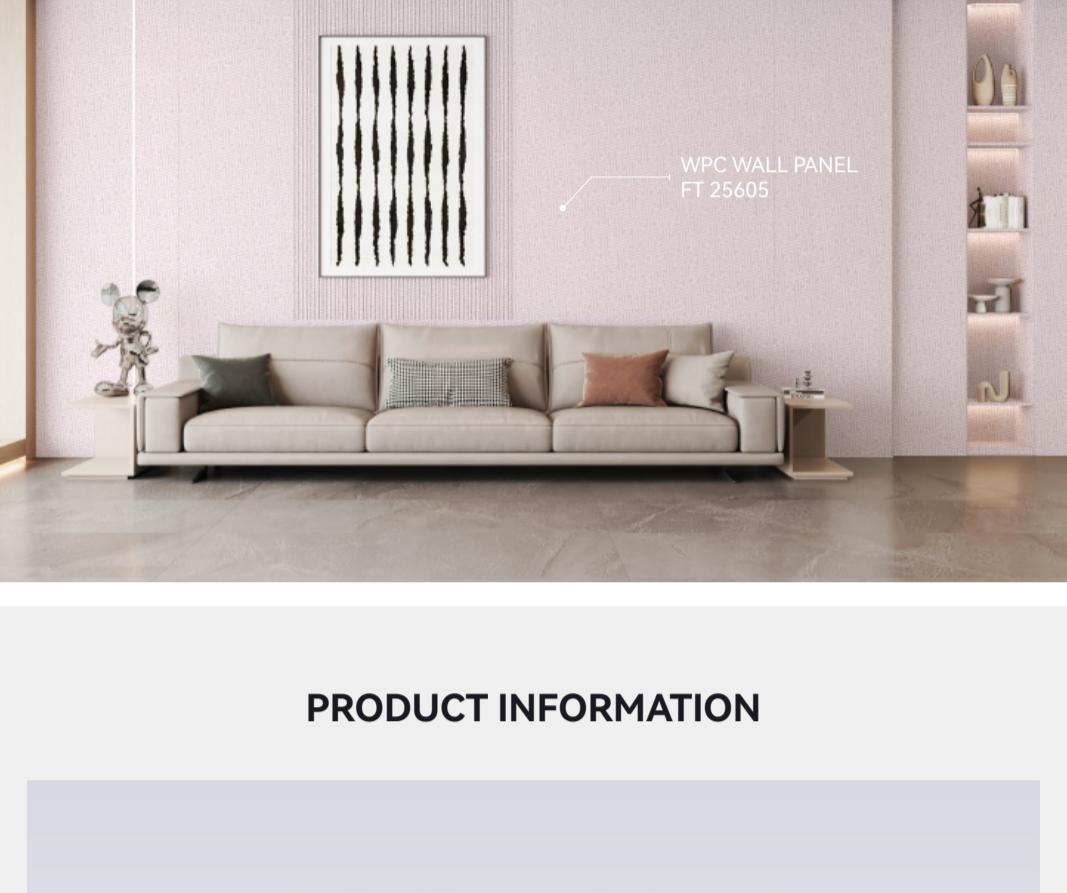

PRODUCT INFORMATION

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

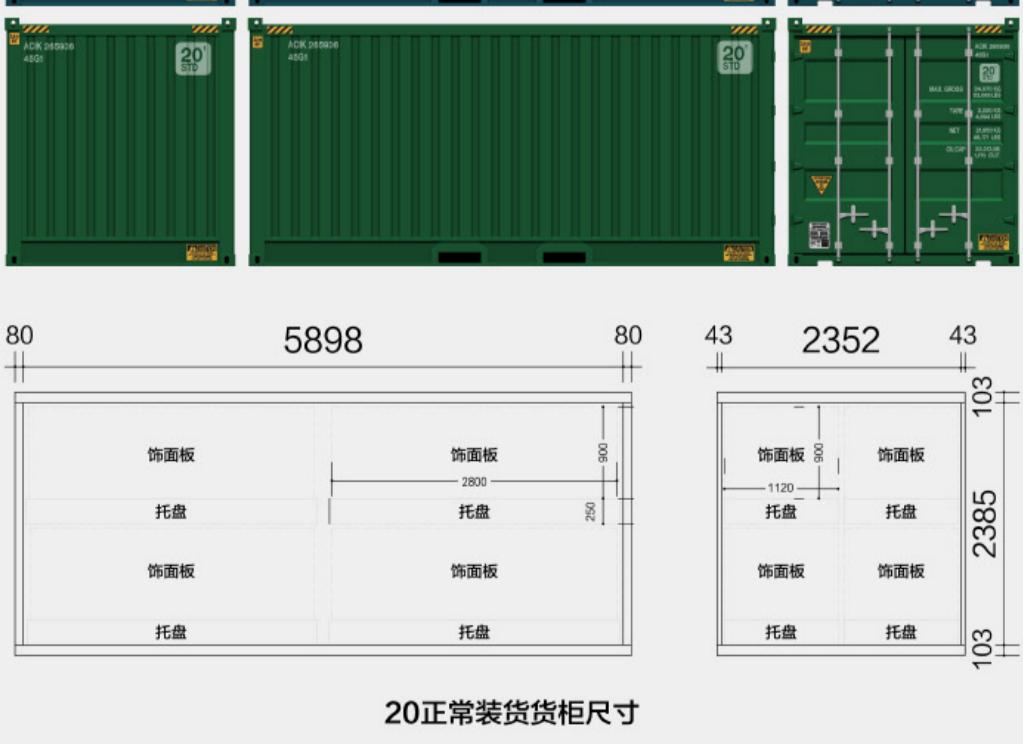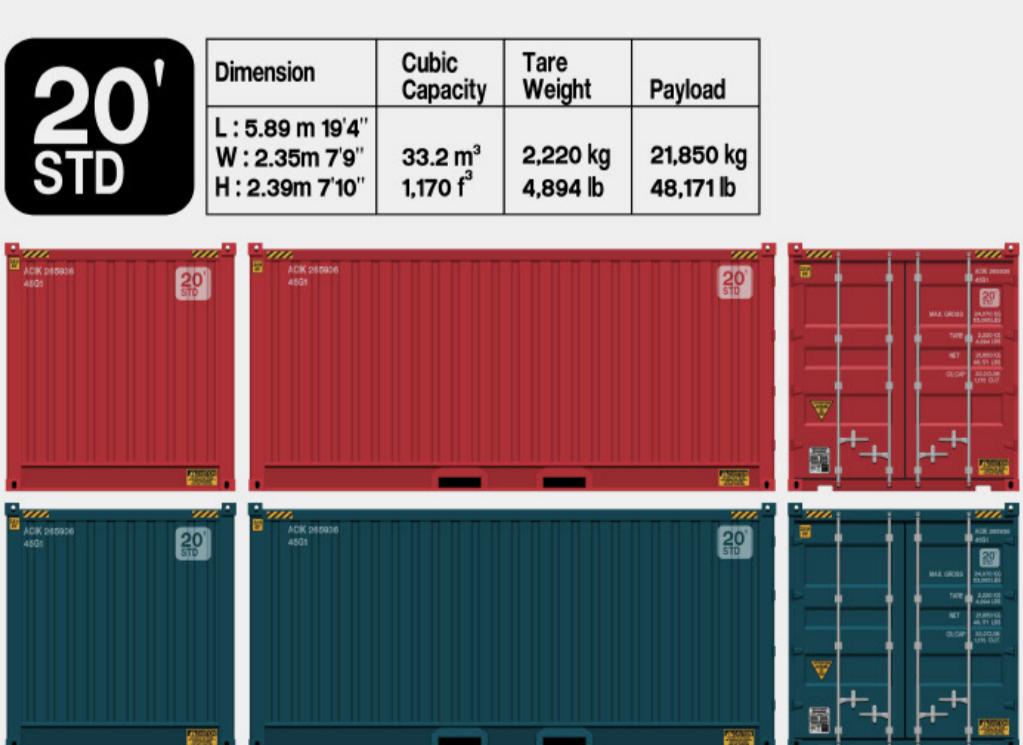

FACTORY STRENGTH

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.29m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'8" W: 2.35m 7'9" H: 2.29m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

20'正常装货柜尺寸	12032	2352	
饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘	2800 2800 2800 2800 2800 2800 2800 2800	1120 1120 1120 1120 1120 1120 1120 1120	80 80 80 80 80 80 80 80

20'正常装货柜尺寸

40'正常装货柜尺寸	12032	2352	
饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘 饰面板 托盘	2800 2800 2800 2800 2800 2800 2800 2800 2800 2800 2800 2800 2800 2800 2800 2800	1120 1120 1120 1120 1120 1120 1120 1120 1120 1120 1120 1120 1120 1120 1120 1120	80 80 80 80 80 80 80 80 80 80 80 80 80 80 80 80

40'正常装货柜尺寸