


SOLID COLOR SERIES

WPC wall panel

WPC uses polyethylene, polypropylene, and polyvinyl chloride instead of commonly used resin adhesives to mix with more than 50% of waste plant fibers such as wood powder, rice husk, and straw to form new wood materials.

Then, it produces boards or profiles through plastic processing processes such as extrusion, molding, and injection molding.



Waterproof




Insect prevention

E0


Environmental protection

B1


Flame-retardant

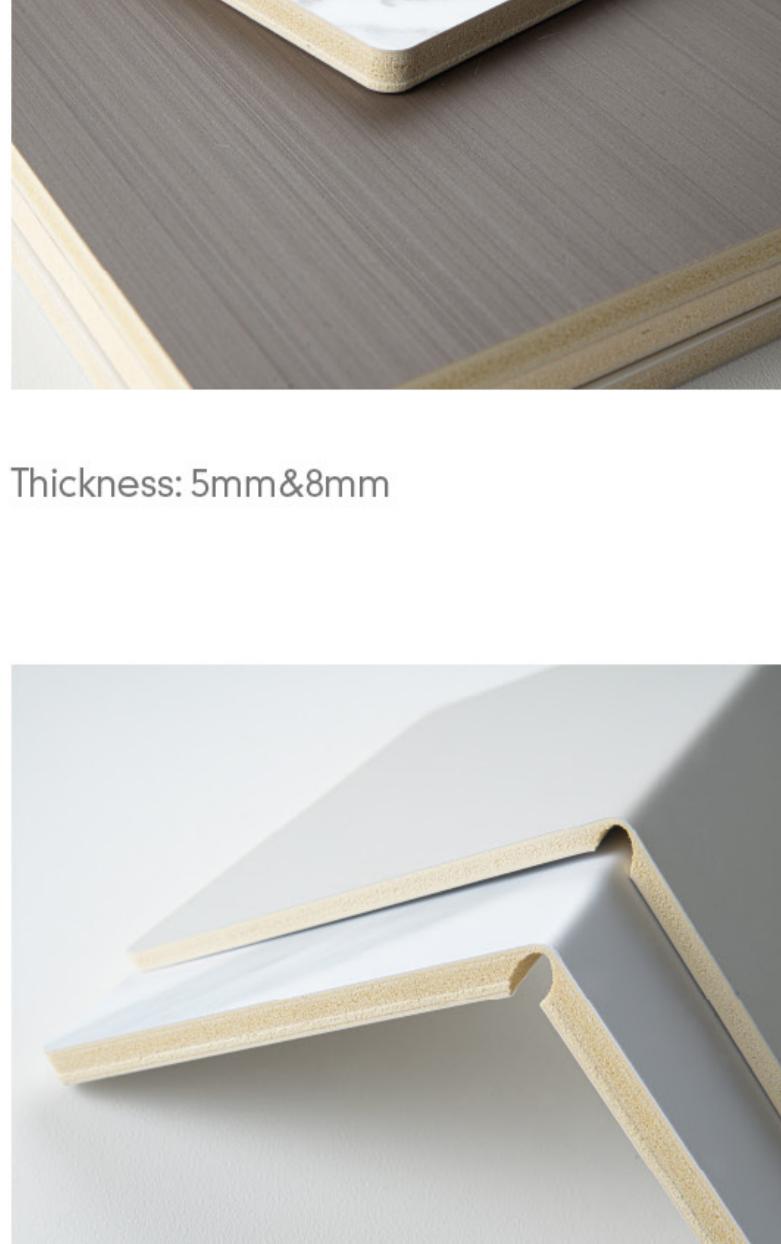

Thickness: 5mm&8mm

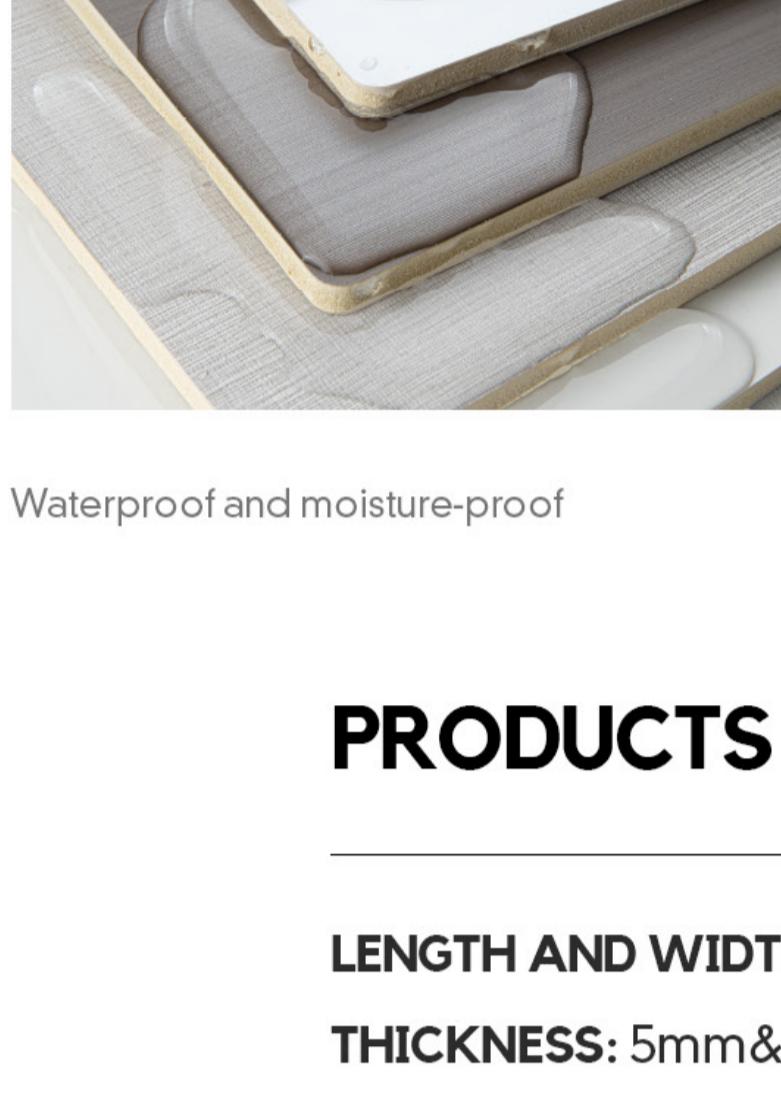

Bending and shaping

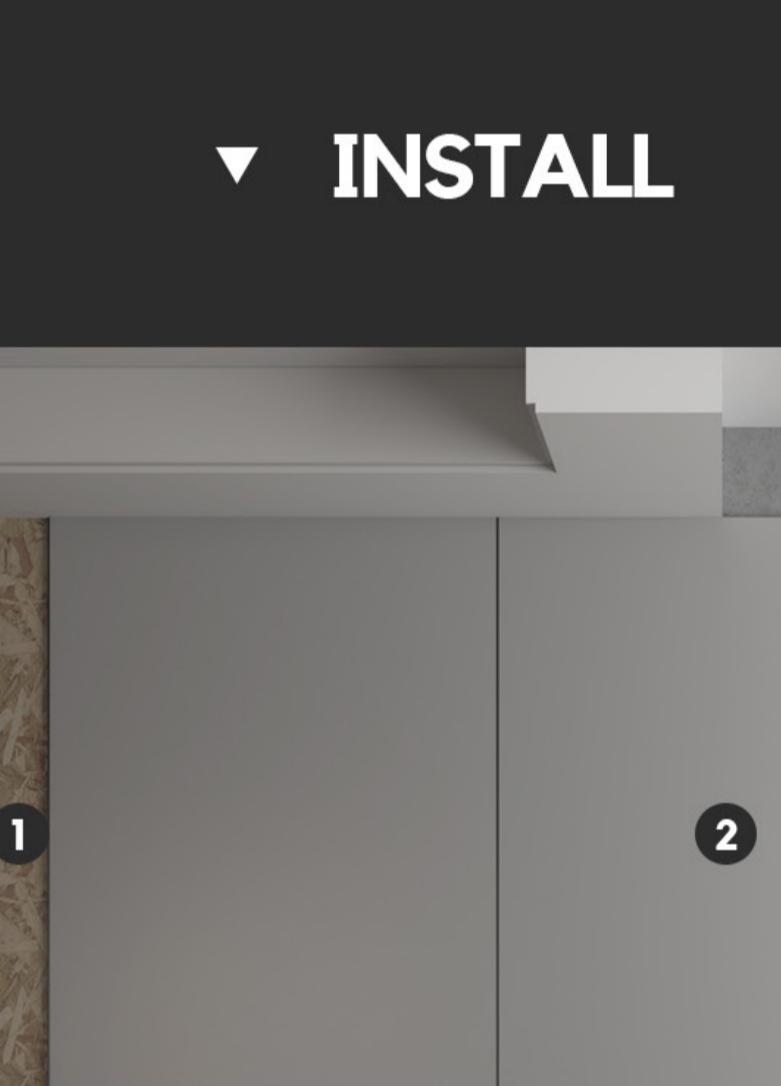

Waterproof and moisture-proof

PRODUCTS

LENGTH AND WIDTH: 1120*2800(mm)


THICKNESS: 5mm&8mm

ENVIRONMENTAL PROTECTION GRADE: ENF

FIRE RATING: B1

PERFORMANCE: waterproof&bendable

▼ INSTALL

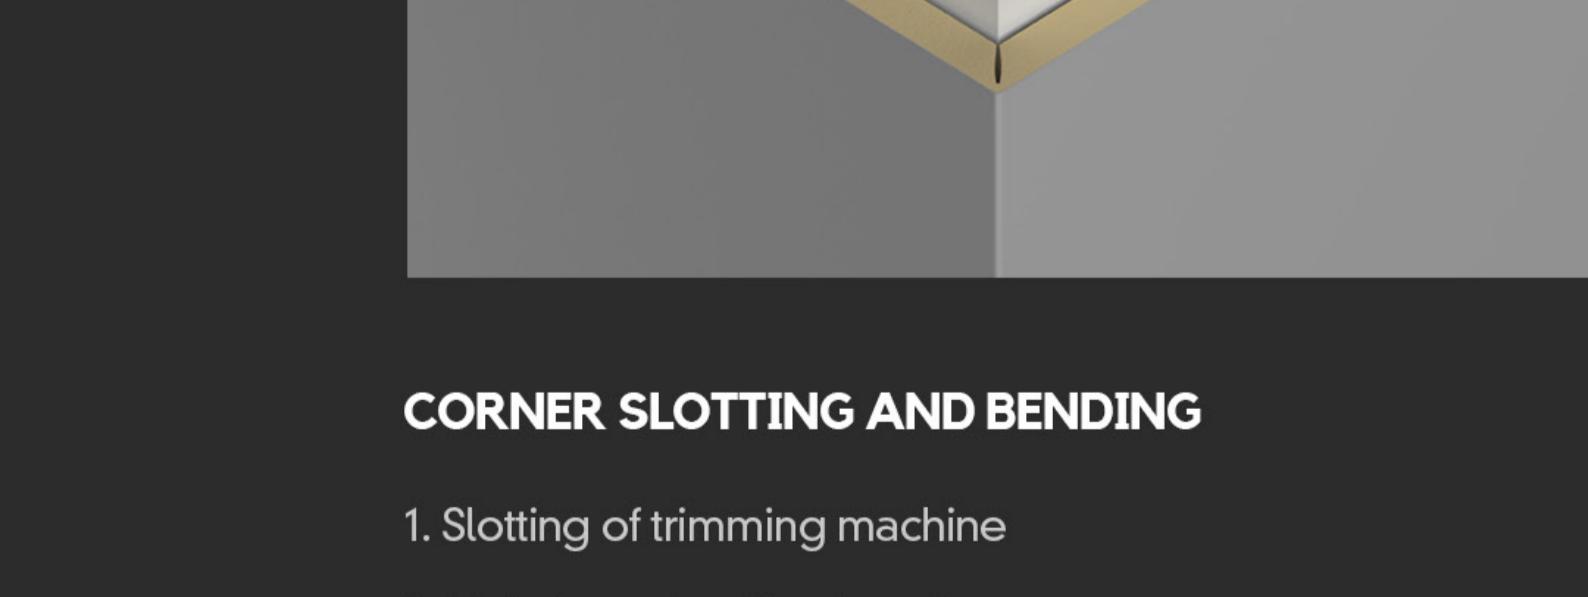

1&4. Puttying and leveling

2. Apply structural adhesive on the back

3. Metal profile connection

5. Rough wall

1. Apply structural adhesive on the back

2. Metal profile connection

3. Puttying and leveling

4. Apply structural adhesive on the back

1. Puttying and leveling

2. Metal profile connection

3. Puttying and leveling

4. Apply structural adhesive on the back

1. Puttying and leveling

2. Metal profile connection

3. Puttying and leveling

4. Apply structural adhesive on the back

1. Puttying and leveling

2. Metal profile connection

3. Puttying and leveling

4. Apply structural adhesive on the back

1. Puttying and leveling

2. Metal profile connection



3. Puttying and leveling

4. Apply structural adhesive on the back

▼ PACKING METHOD

饰面板 / WPC WALL PANEL
托 盘 / TRAY

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m ³	2,220 kg	21,850 kg	
W : 2.35m 7'9"	1,170 f ³	4,894 lb	48,171 lb	
H : 2.39m 7'10"				

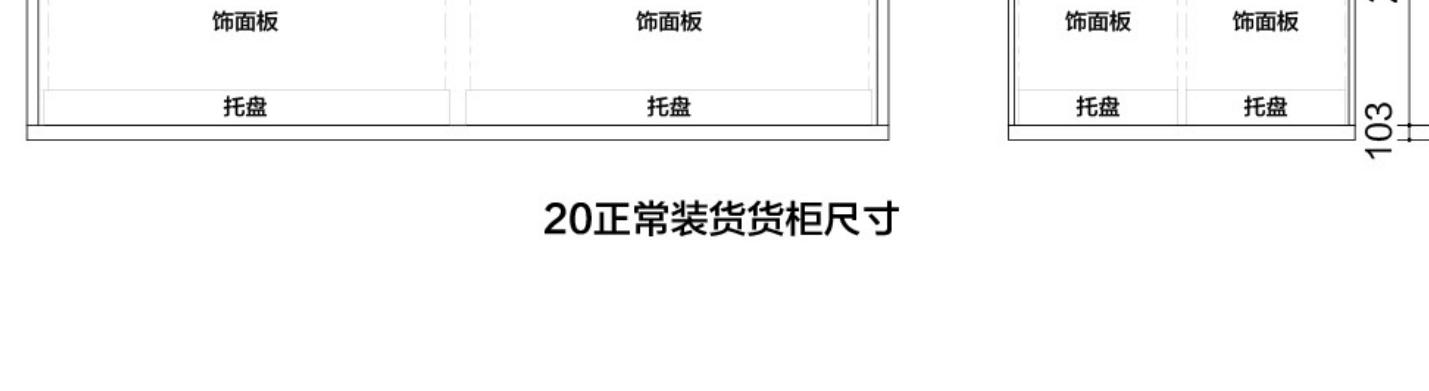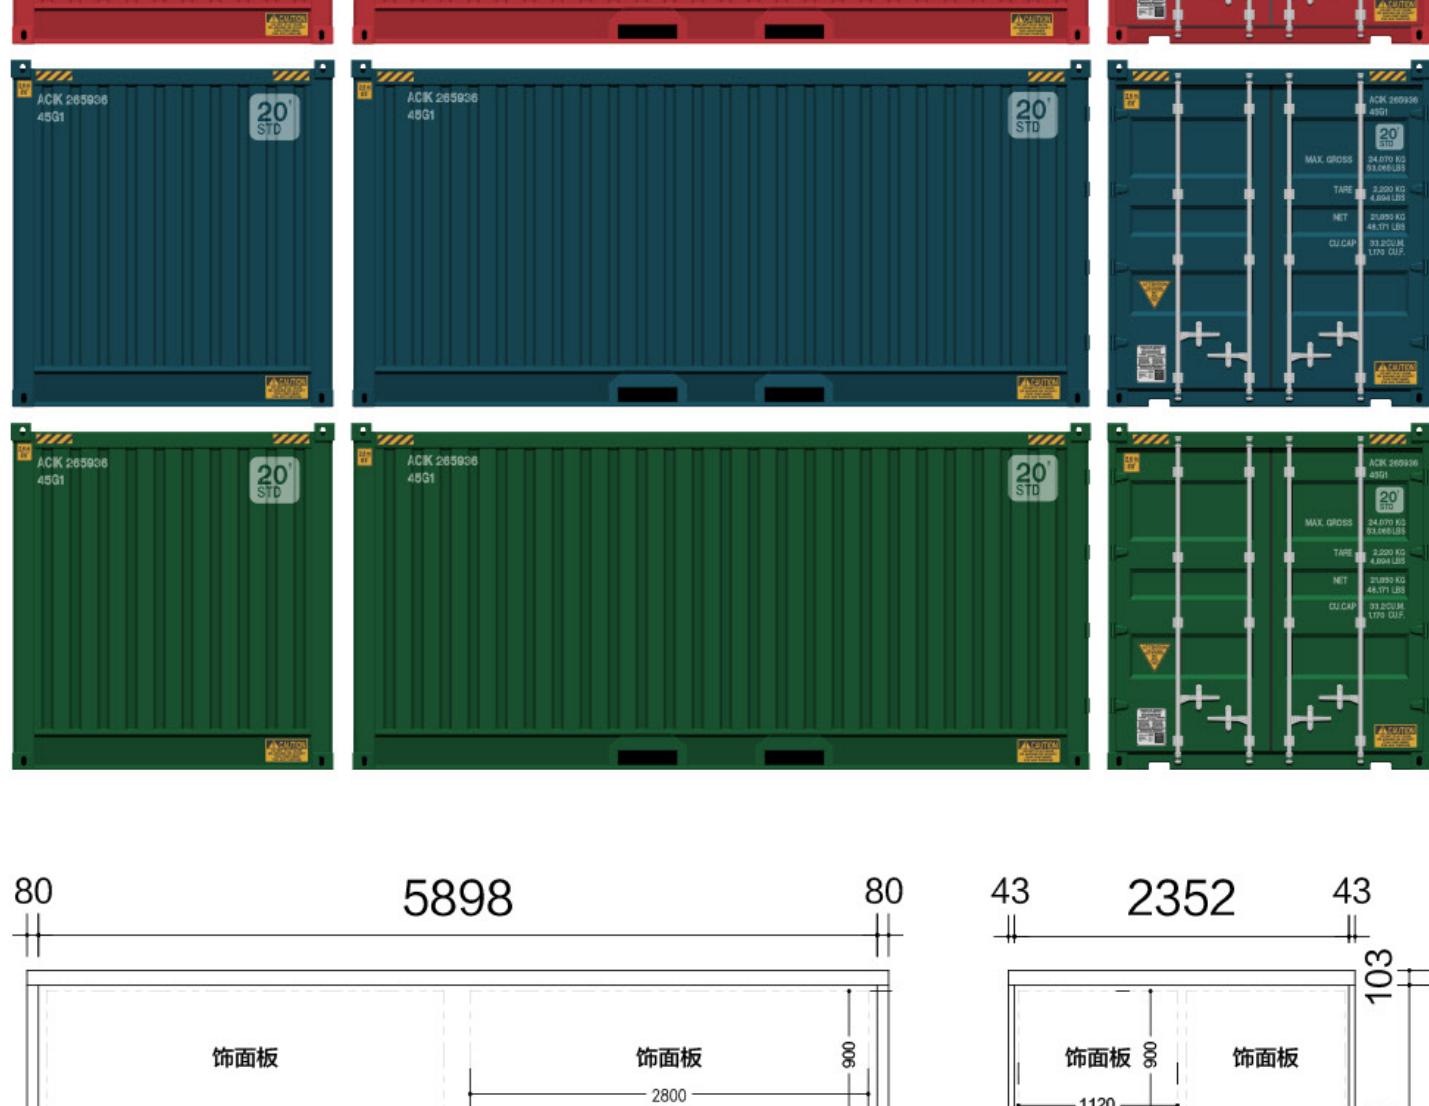

20正常装货柜尺寸

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m ³	3,740 kg	26,760 kg	
W : 2.35m 7'9"	2,391 f ³	8,245 lb	58,996 lb	
H : 2.39m 7'10"				



40正常装货柜尺寸

SOLID COLOR SERIES CASE ▼

#

SOLID COLOR SERIES

3060

WPC WALL PANEL



SOLID COLOR SERIES 3060

NAME: WPC wall panel

MATERIAL: Nanofiber powder

LENGTH AND WIDTH: 1120*2800(mm)

THICKNESS: 5mm&8mm

ENVIRONMENTAL PROTECTION GRADE: ENF

FIRE RATING: B1


PERFORMANCE: waterproof&bendable

SOLID COLOR SERIES

3060

WPC WALL PANEL


▼ COLOUR

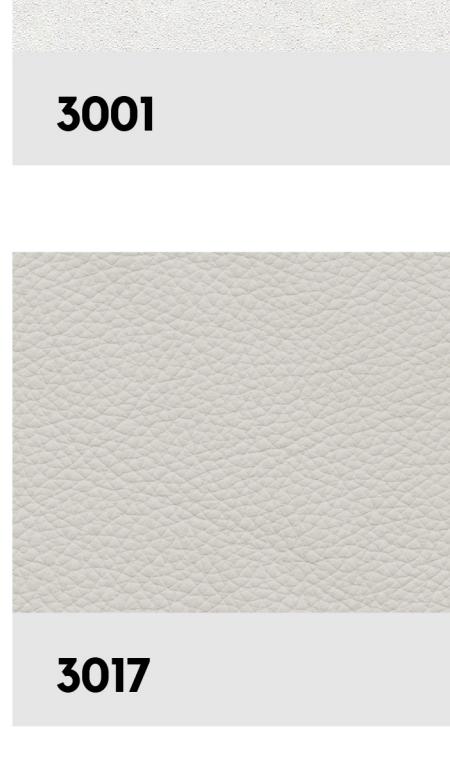


3001




3002

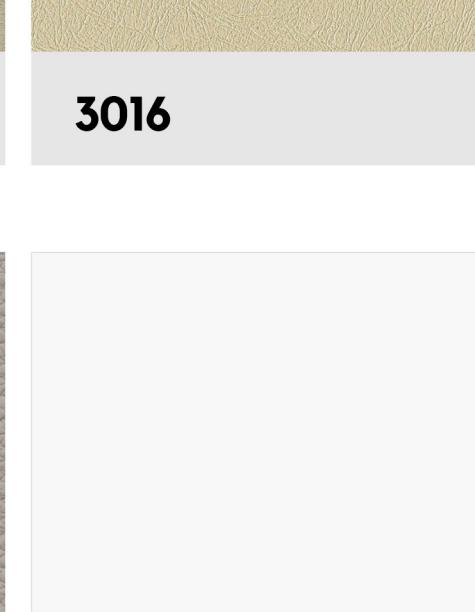


3016

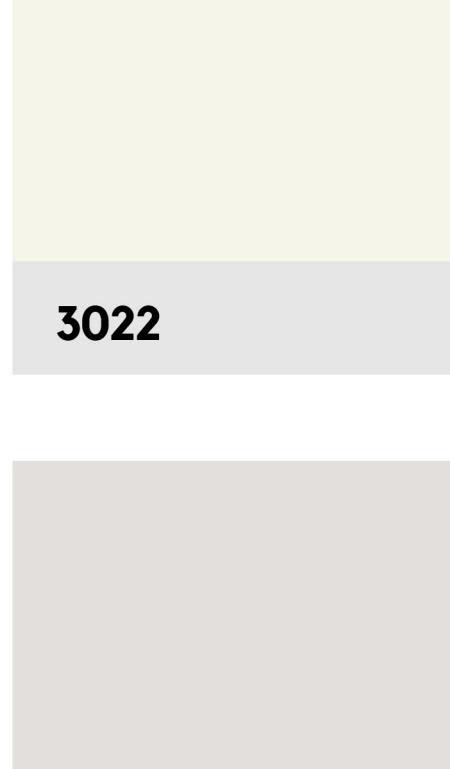


3017

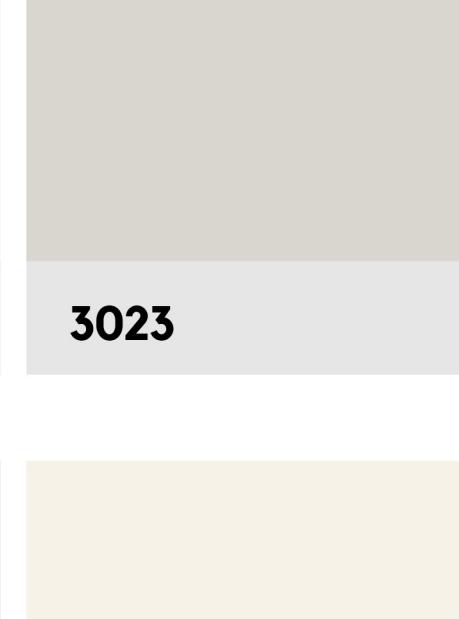


3018

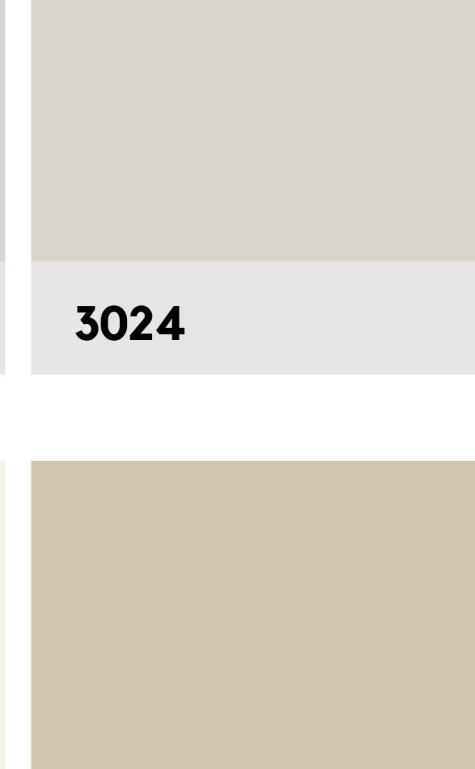


3021

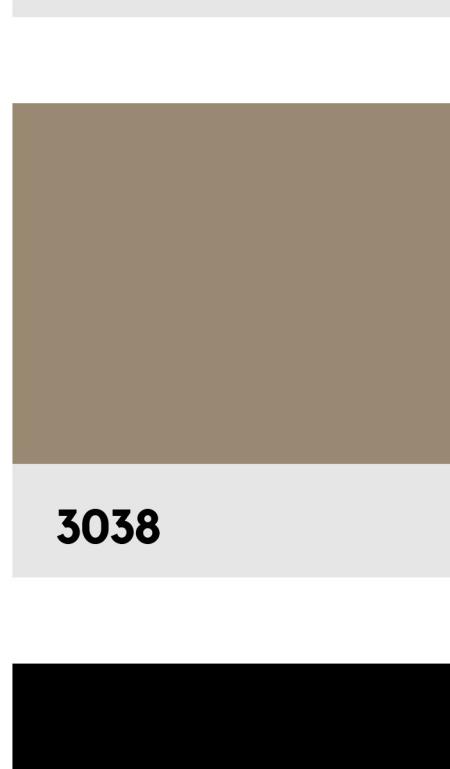


3022

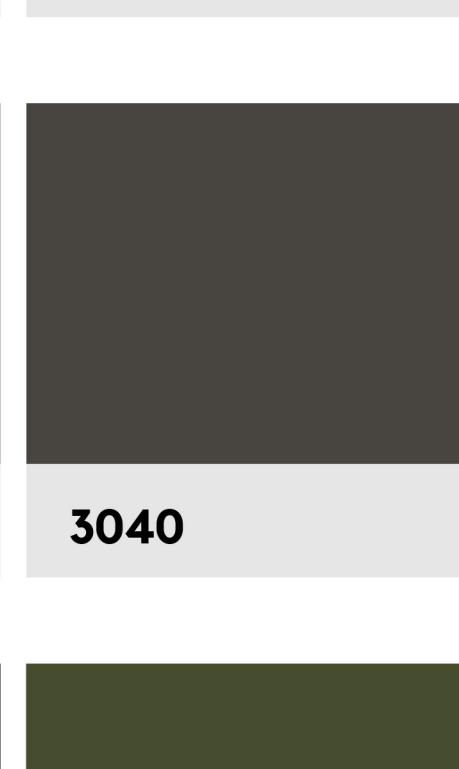


3023

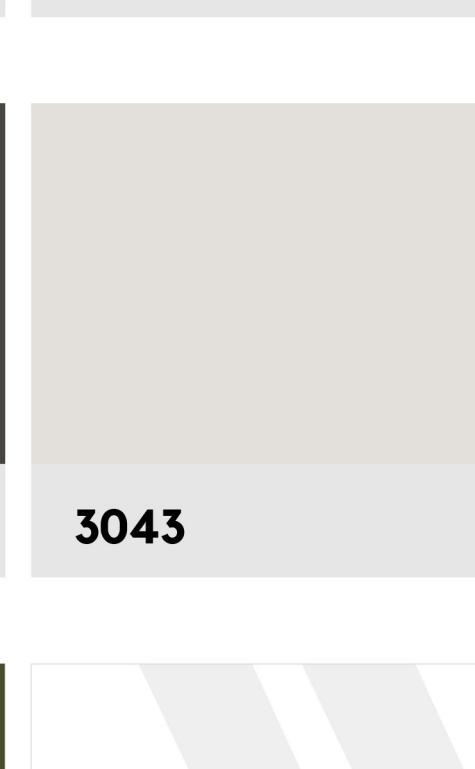


3024

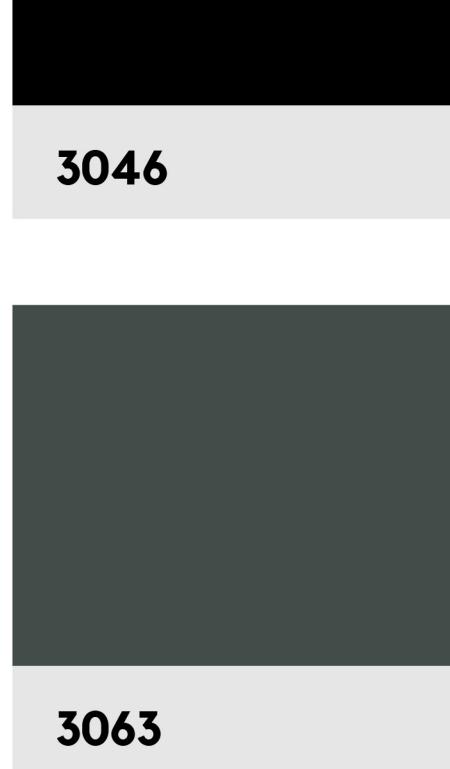

3033

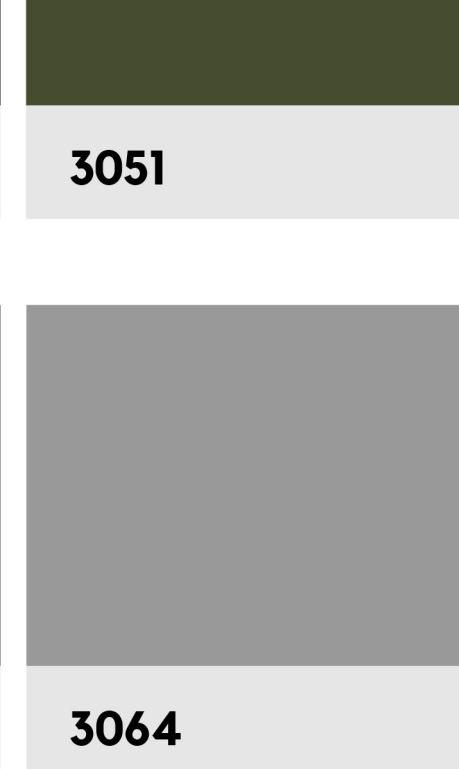


3036

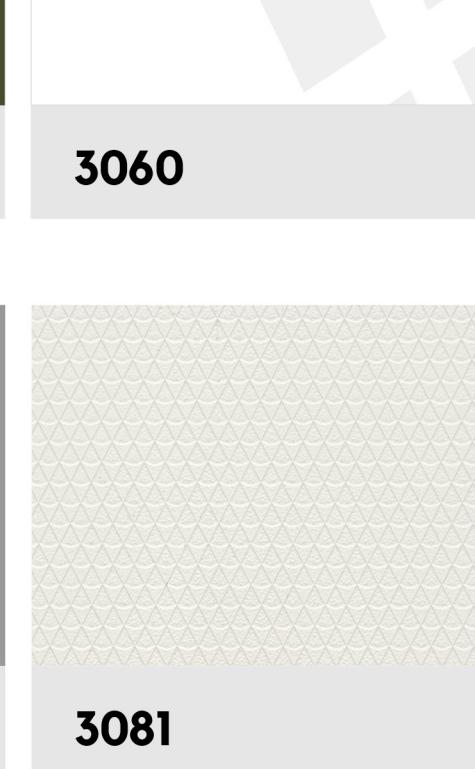

3037



3038

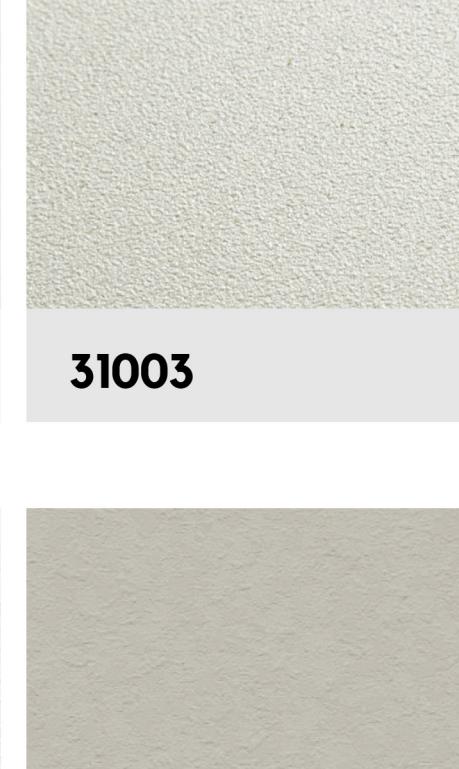

3040




3043



3046



3051

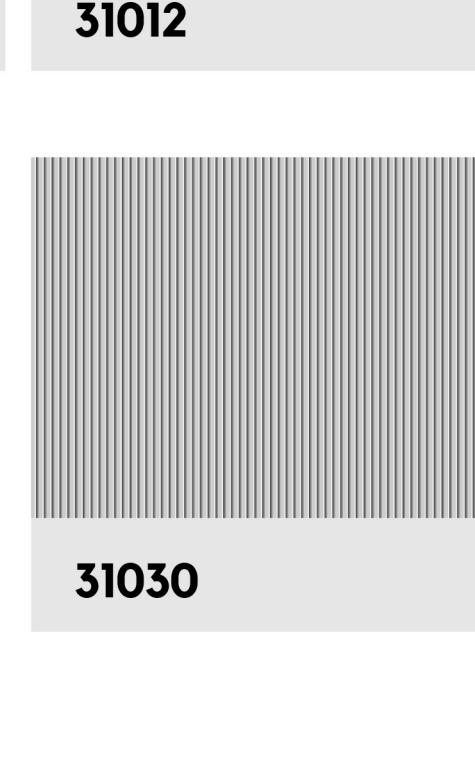

3060



3063



3064



3081

31009

31003

31007

31011

31012

31012

31020


31021

31030


31031

31032

▼ BRAND FACTORY

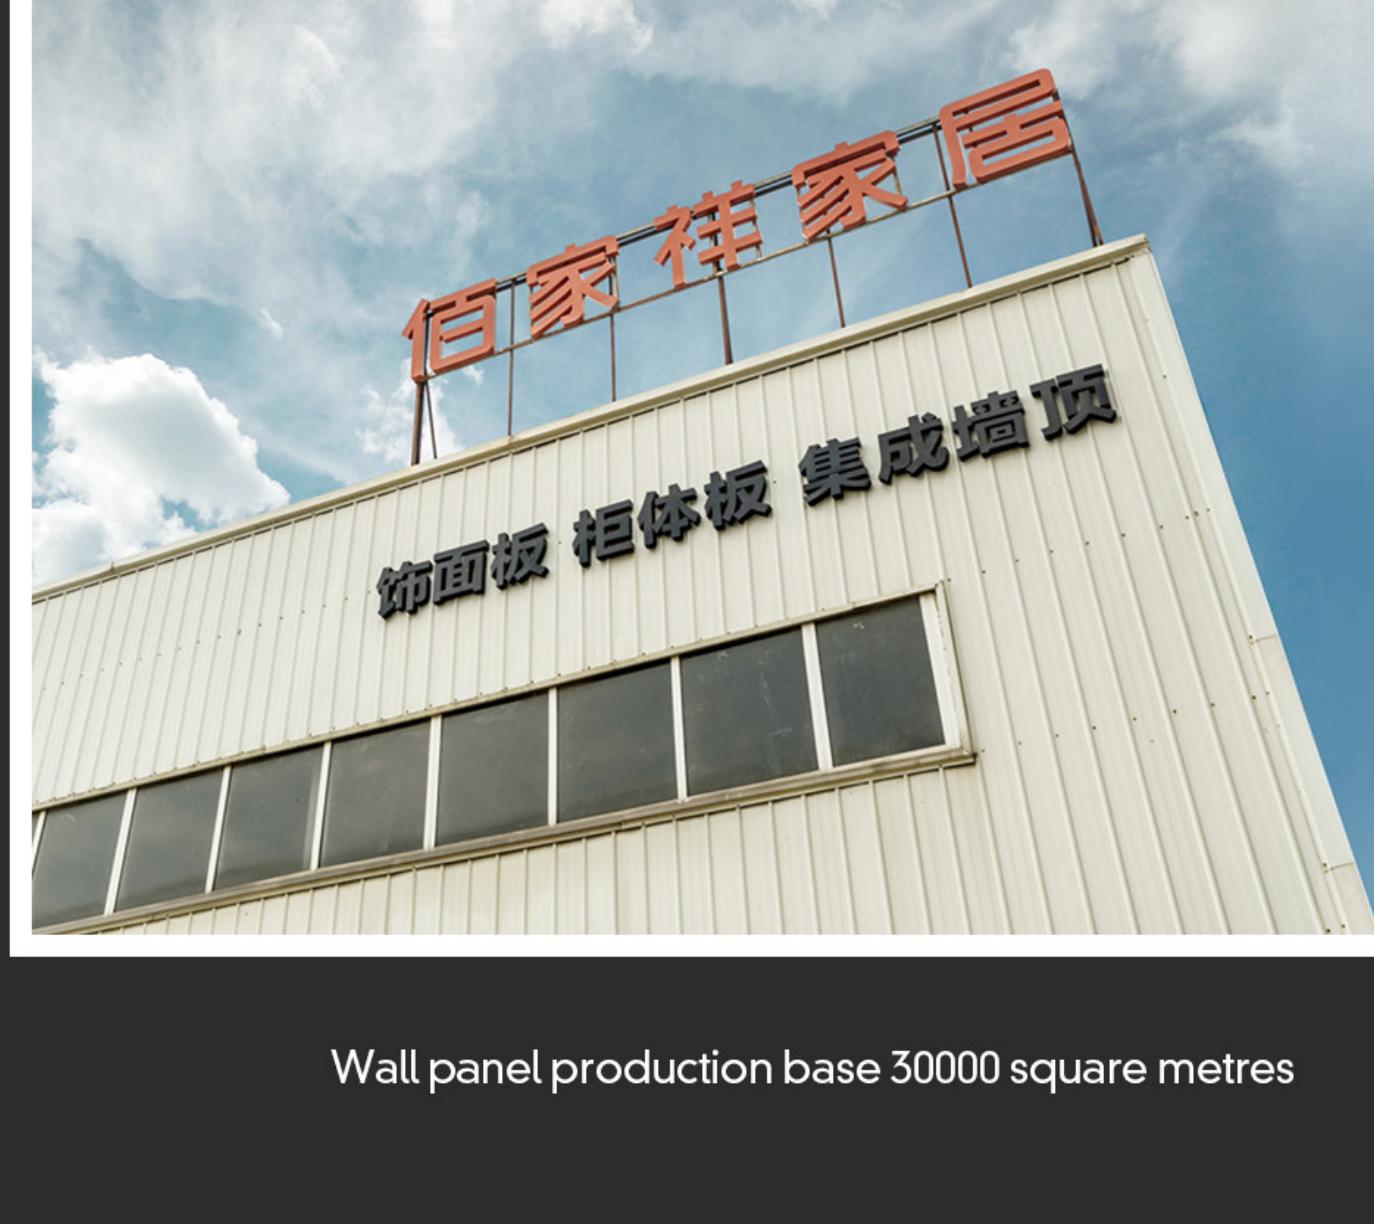

Wall panel production base 30000 square metres

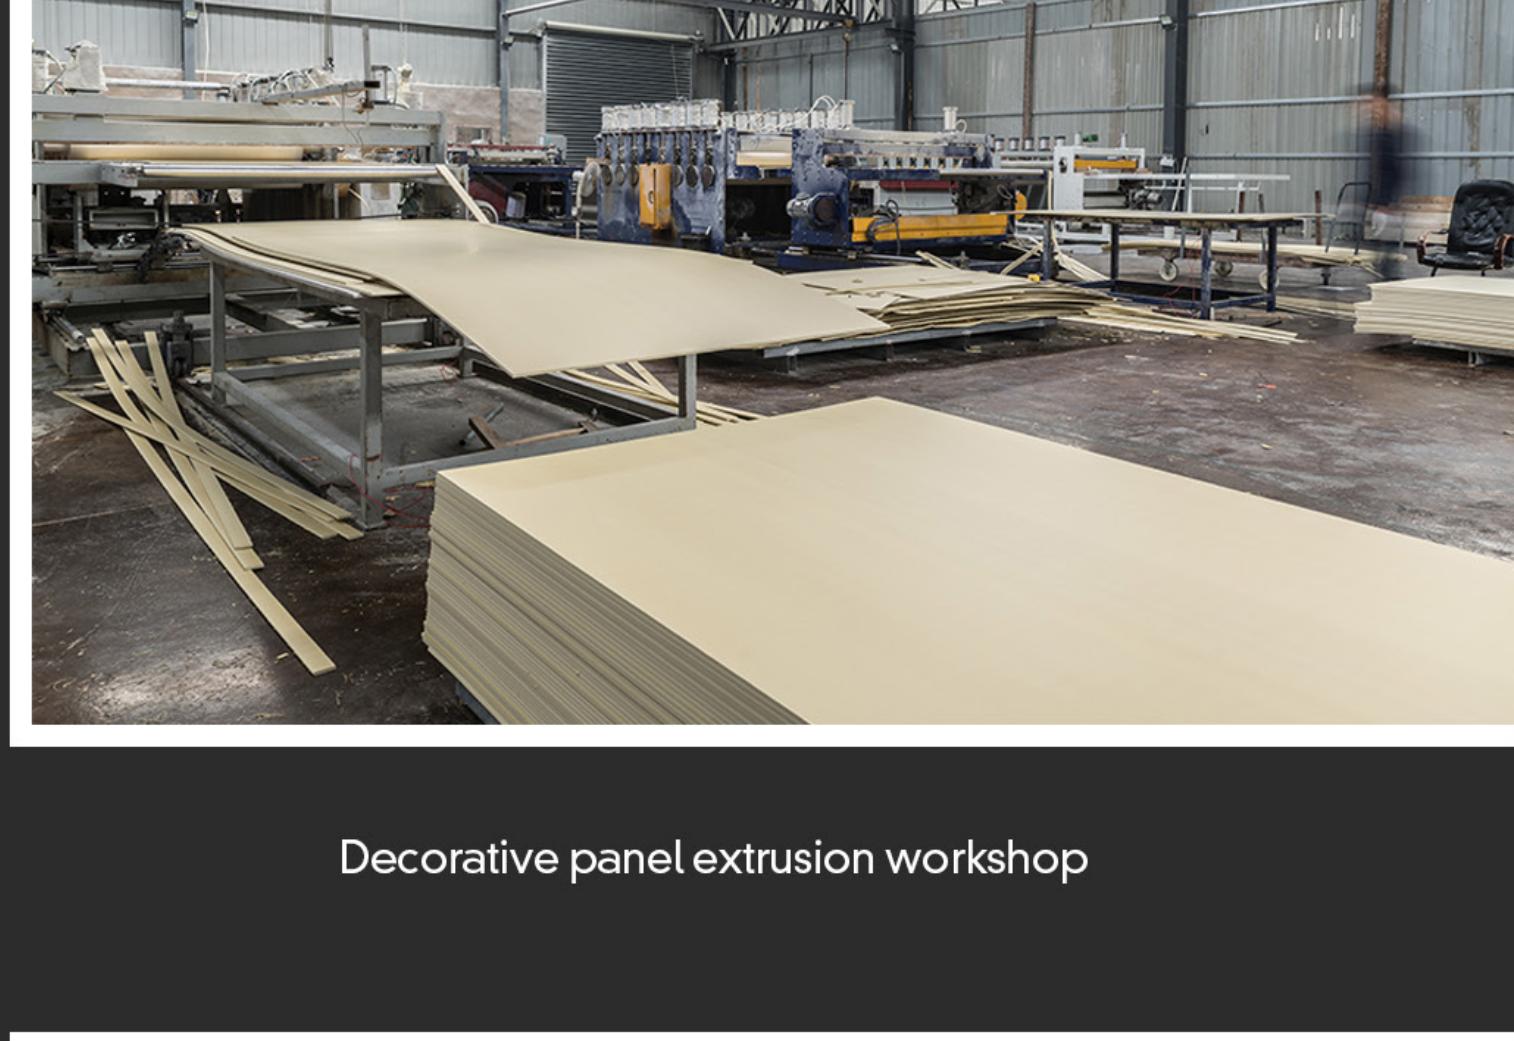

Decorative panel extrusion workshop



Bamboo charcoal fiber coating workshop

▼ BRAND PATENTS

