



910

1100mm

2800mm

1100mm

PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm



PRODUCT INFORMATION

1

Excimer stain resistant layer

2

Excimer printing middle layer

3

Excimer printing bottom layer

4

Imported no granular PUR layer

5

High strength crystal coextruded layer 1mm

6

Bamboo charcoal fiber layer 3mm/6mm

7

High strength crystal coextruded layer 1mm


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
------	--------------------------	----------	---------	-----------	-------------	-----------	-----------------

WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam
----------------	--	---	----------------------------------	-----	----	--	---


PRODUCT PERFORMANCE REAL SHOT



Waterproof test

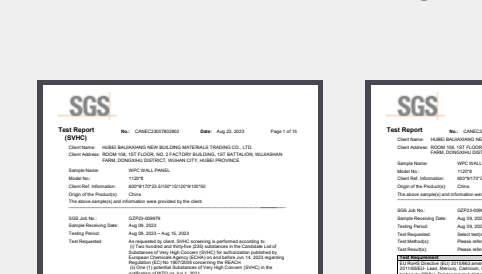

Bend forward

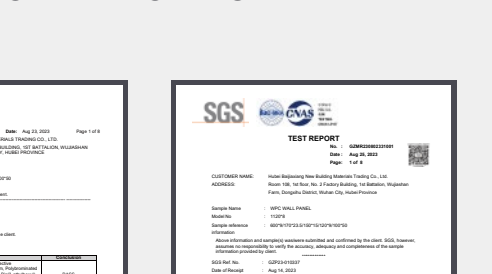

Bend backwards

ENF

EP LEVEL


B1

FIRE RATING

WATERPROOF

BENDABLE


INTERNATIONAL CERTIFICATION

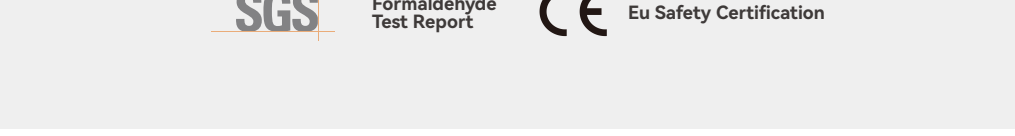

Environmental Test Report

Reach

Flame Retardant Test Report

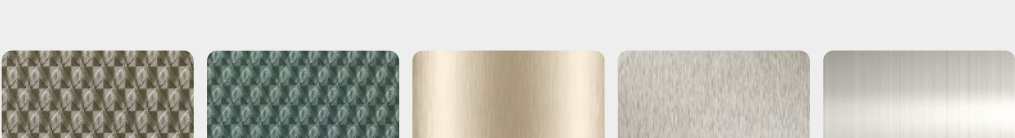

Formaldehyde Test Report

Eu Safety Certification

MORE METAL SERIES COLORS

311

312

701

702

703

704

705

706

707

710

711

712

713

715

732

733

734

736

737

751

761

901

903

905

910

951

31061

31062

31063

31065

FT 25701

FT 25702

FT 25703

FT 25704

FT 25705

FT 25706

FT 25707

FT 25708

FT 25709

FACTORY STRENGTH

Mature Technology

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.6.0 analysis

Equipment Operation

- 1.Famous brands,professional maintenance
- 2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines

Environment

Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001

PACKING METHOD

20'
STD


Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb
W : 2.35m 7'9"			
H : 2.39m 7'10"			



20正常装货货柜尺寸

40'
STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m³ 2,391 f³	3,740 kg 8,245 lb	26,760 kg 58,996 lb
W : 2.35m 7'9"			
H : 2.39m 7'10"			

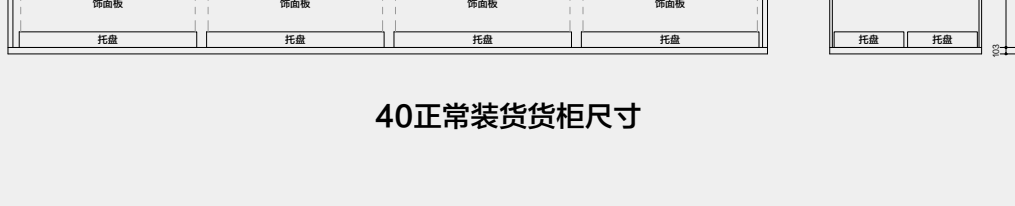

40正常装货货柜尺寸