



FT 25711



PRODUCT SIZE	
Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

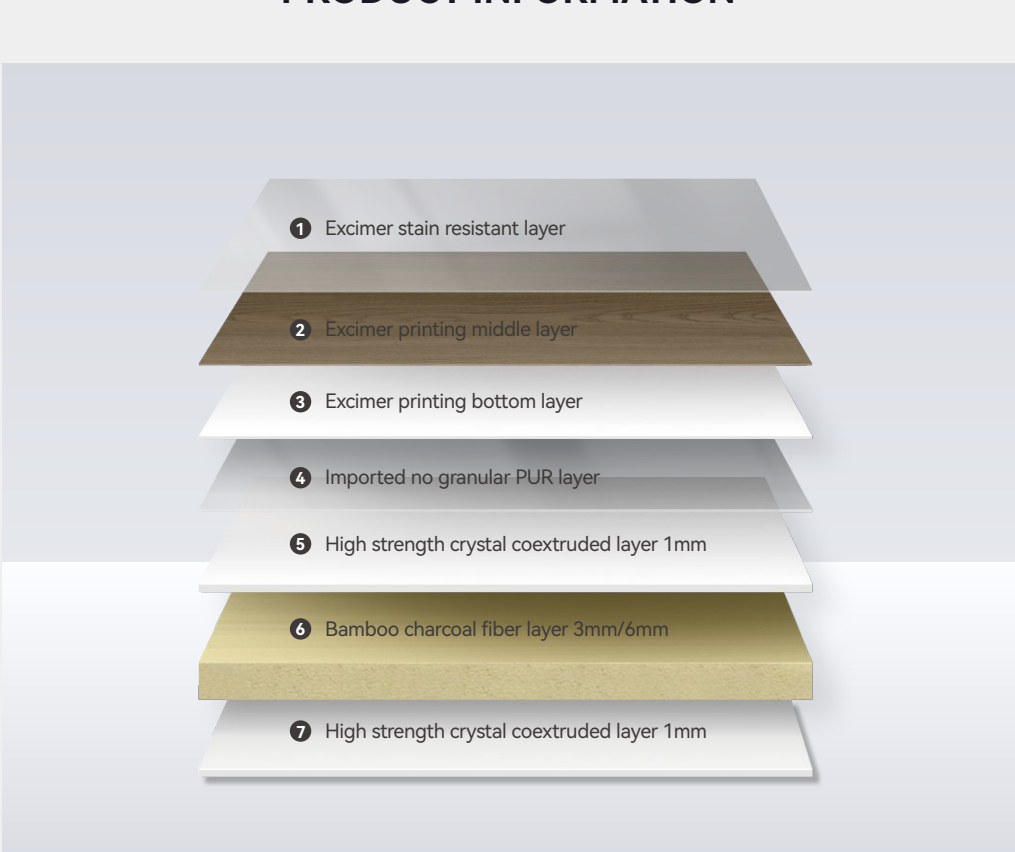


PRODUCT INFORMATION

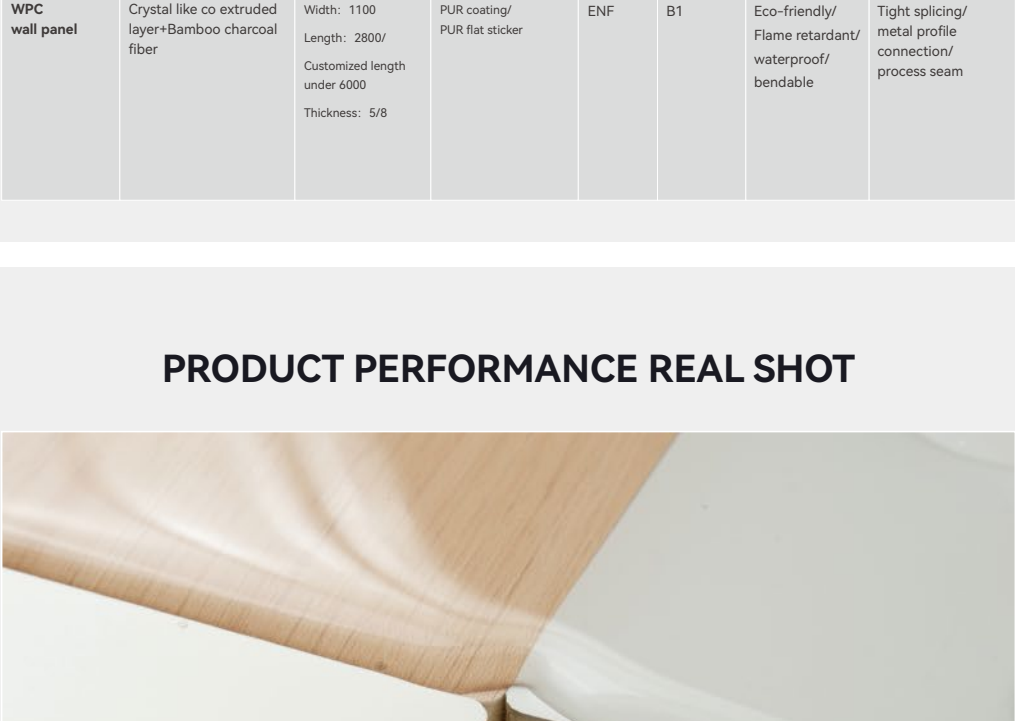


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

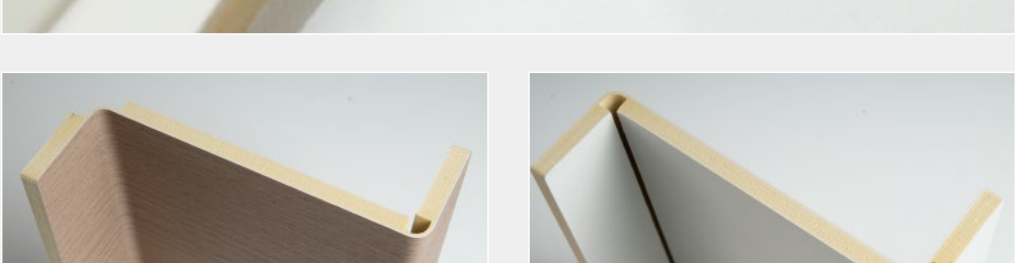

Waterproof test

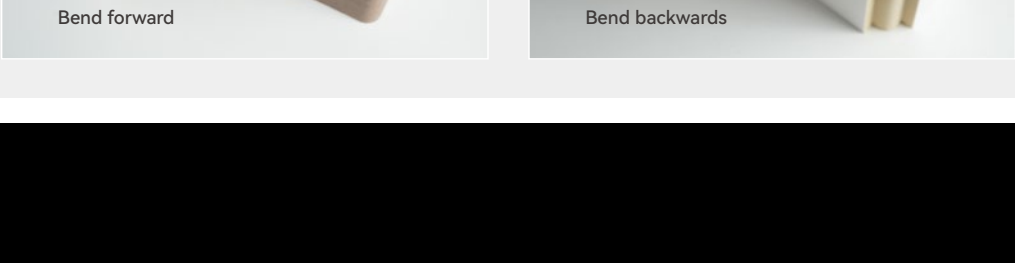

Bend forward Bend backwards




ENF
EP LEVEL

B1
FIRE RATING

WATERPROOF


BENDABLE

INTERNATIONAL CERTIFICATION

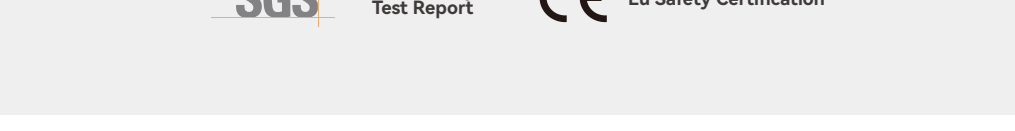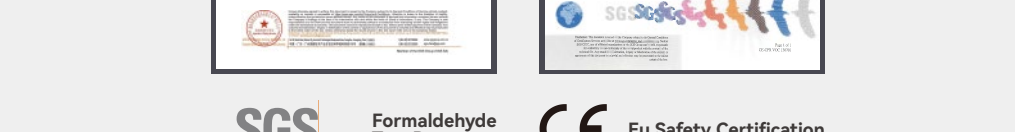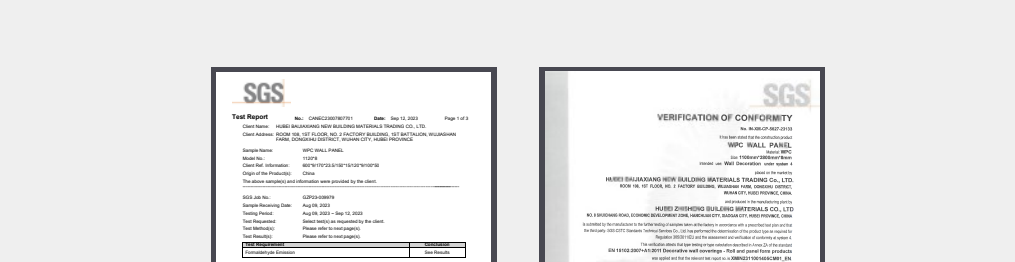


Environmental Test Report Reach EU Highly Concerned Substance Report SGS Flame Retardant Test Report SGS Formaldehyde Test Report CE Eu Safety Certification

MORE METAL SERIES COLORS

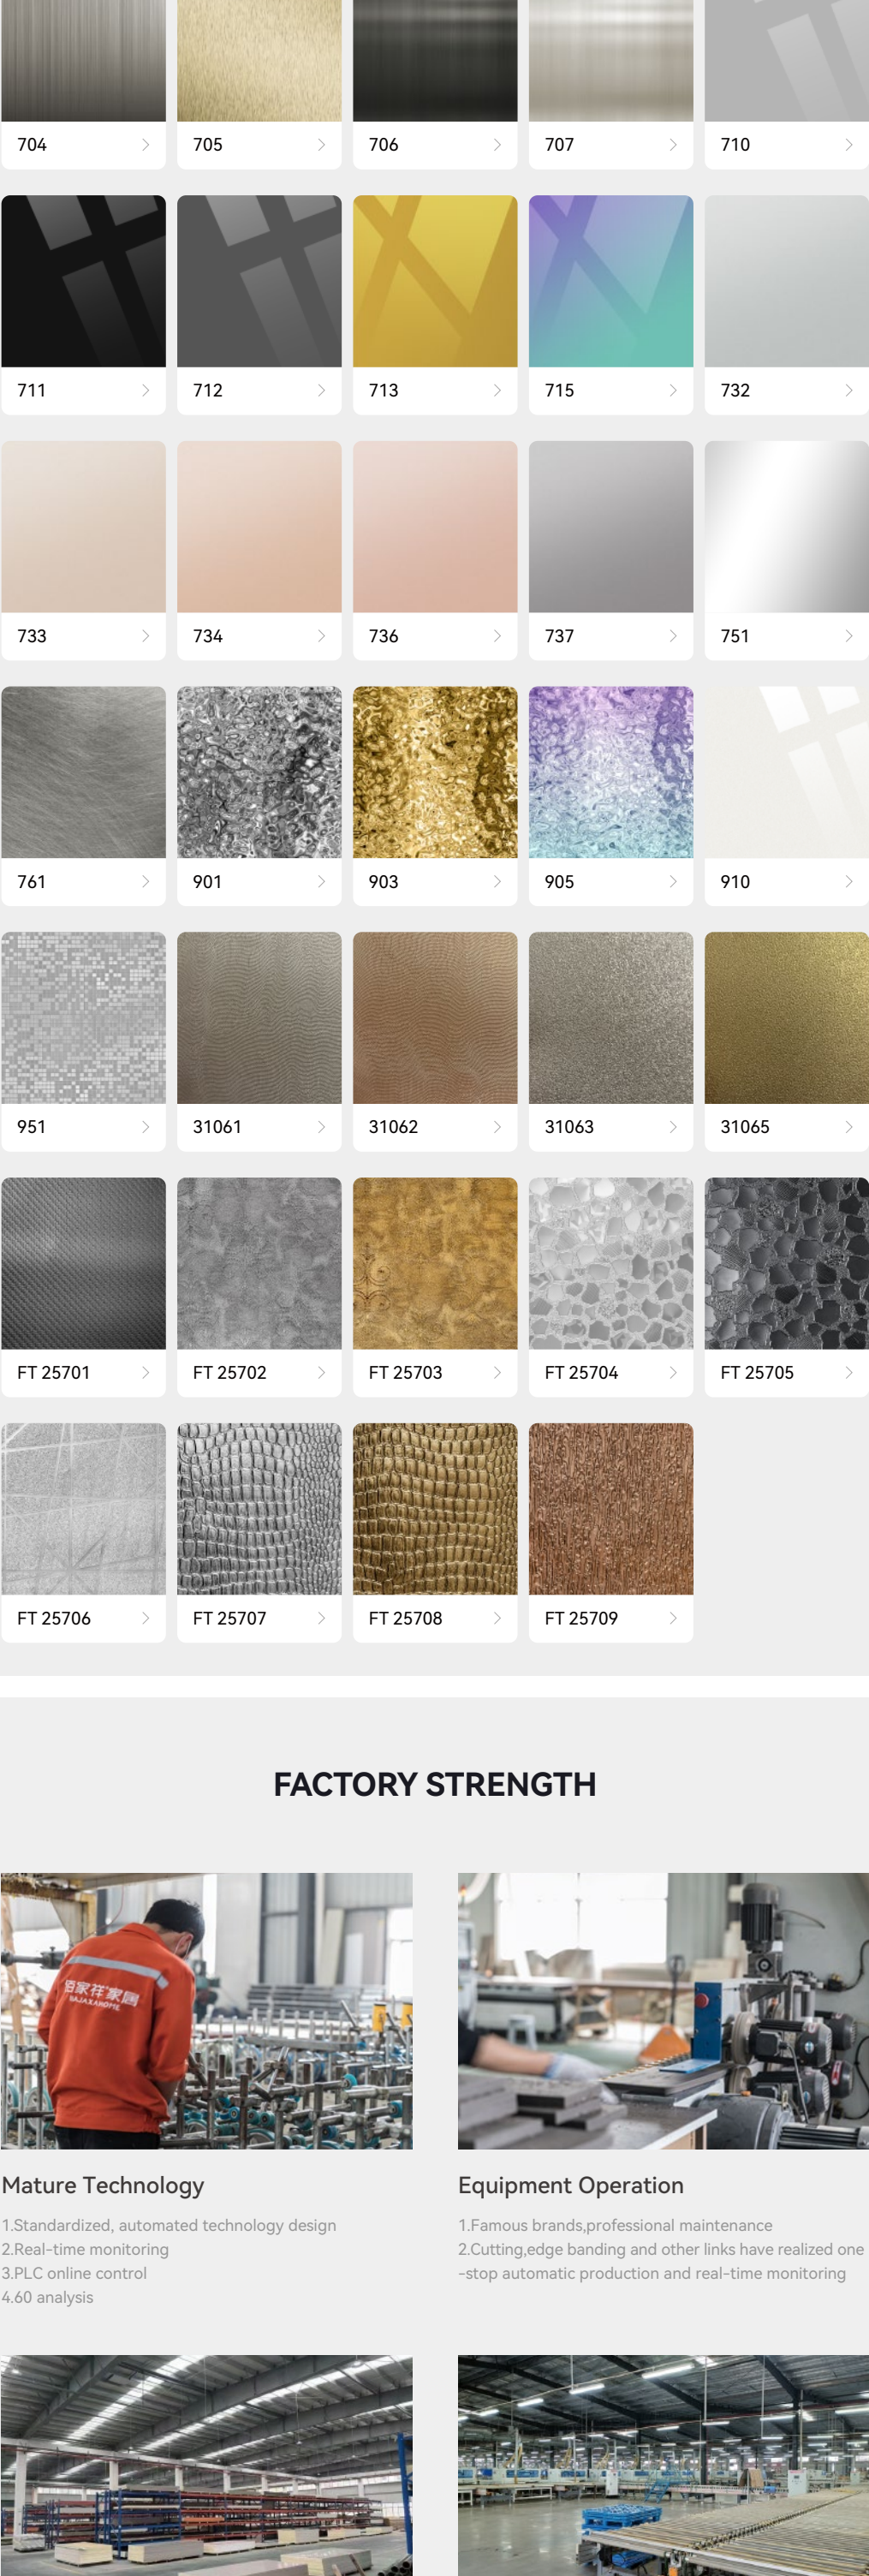

FACTORY STRENGTH

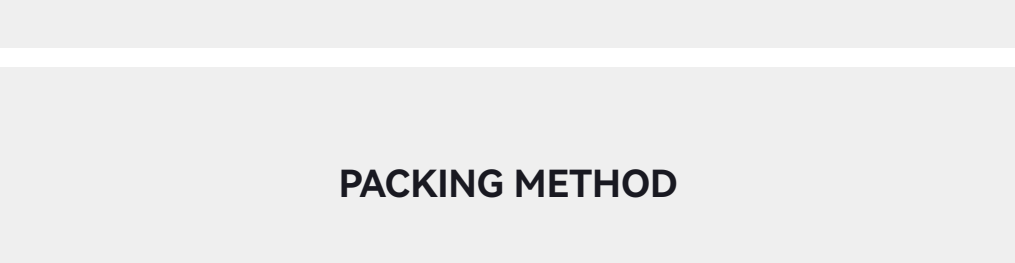

Mature Technology Equipment Operation


- 1.Standardized, automated technology design

2.Real-time monitoring

3.PLC online control

4.60 analysis
- 1.Famous brands,professional maintenance

2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring

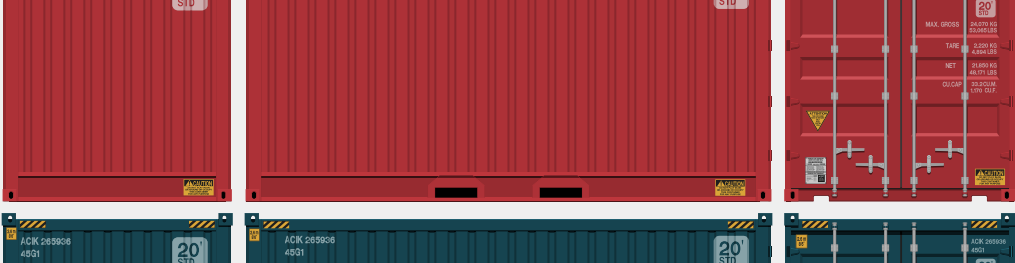

Producing Workshops Environment

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.


20 intelligent production lines

Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m³	2,220 kg	21,850 kg
W : 2.35m 7'9"	1,170 f³	4,894 lb	48,171 lb
H : 2.39m 7'10"			

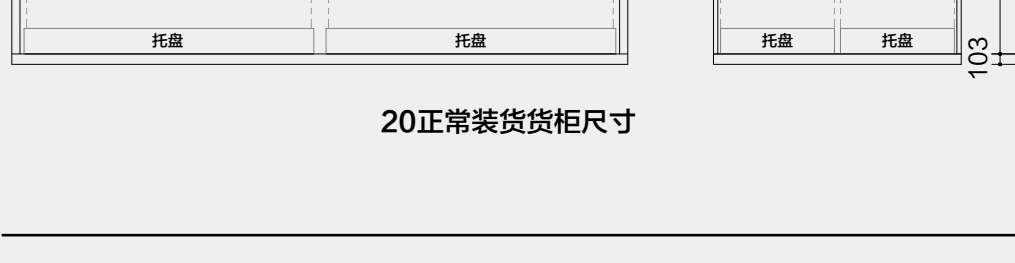

20正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m³	3,740 kg	26,760 kg
W : 2.35m 7'9"	2,391 f³	8,245 lb	58,996 lb
H : 2.39m 7'10"			



40正常装货货柜尺寸