

SGS
RoHS

KA 59501


±
+
-




PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

WPC WALL PANEL
KA 59501

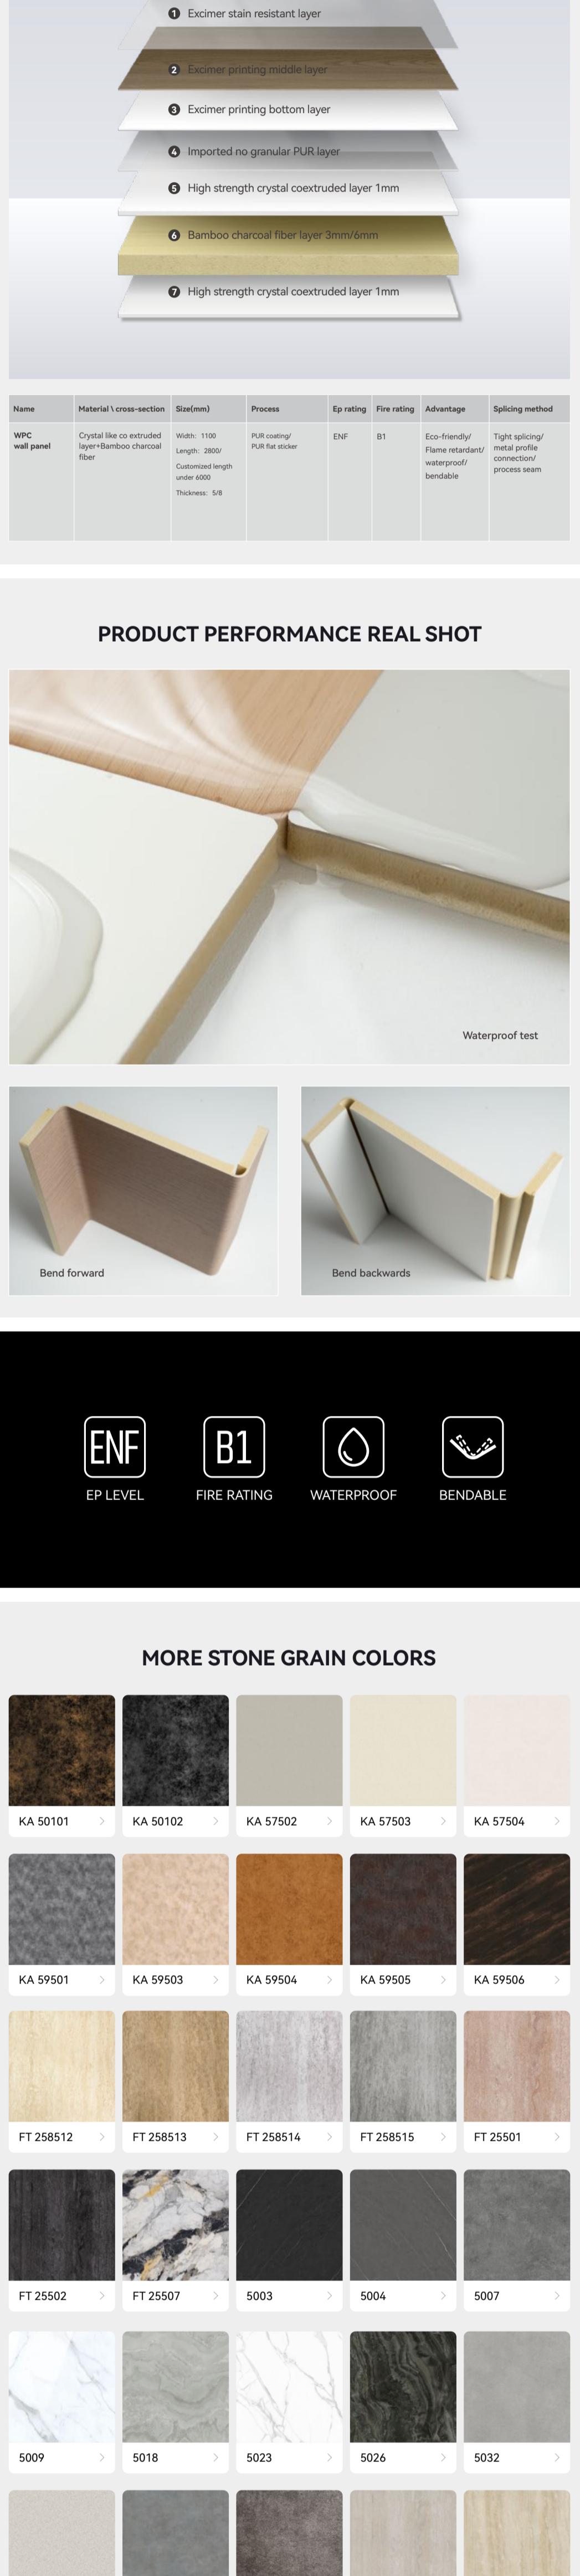


PRODUCT INFORMATION

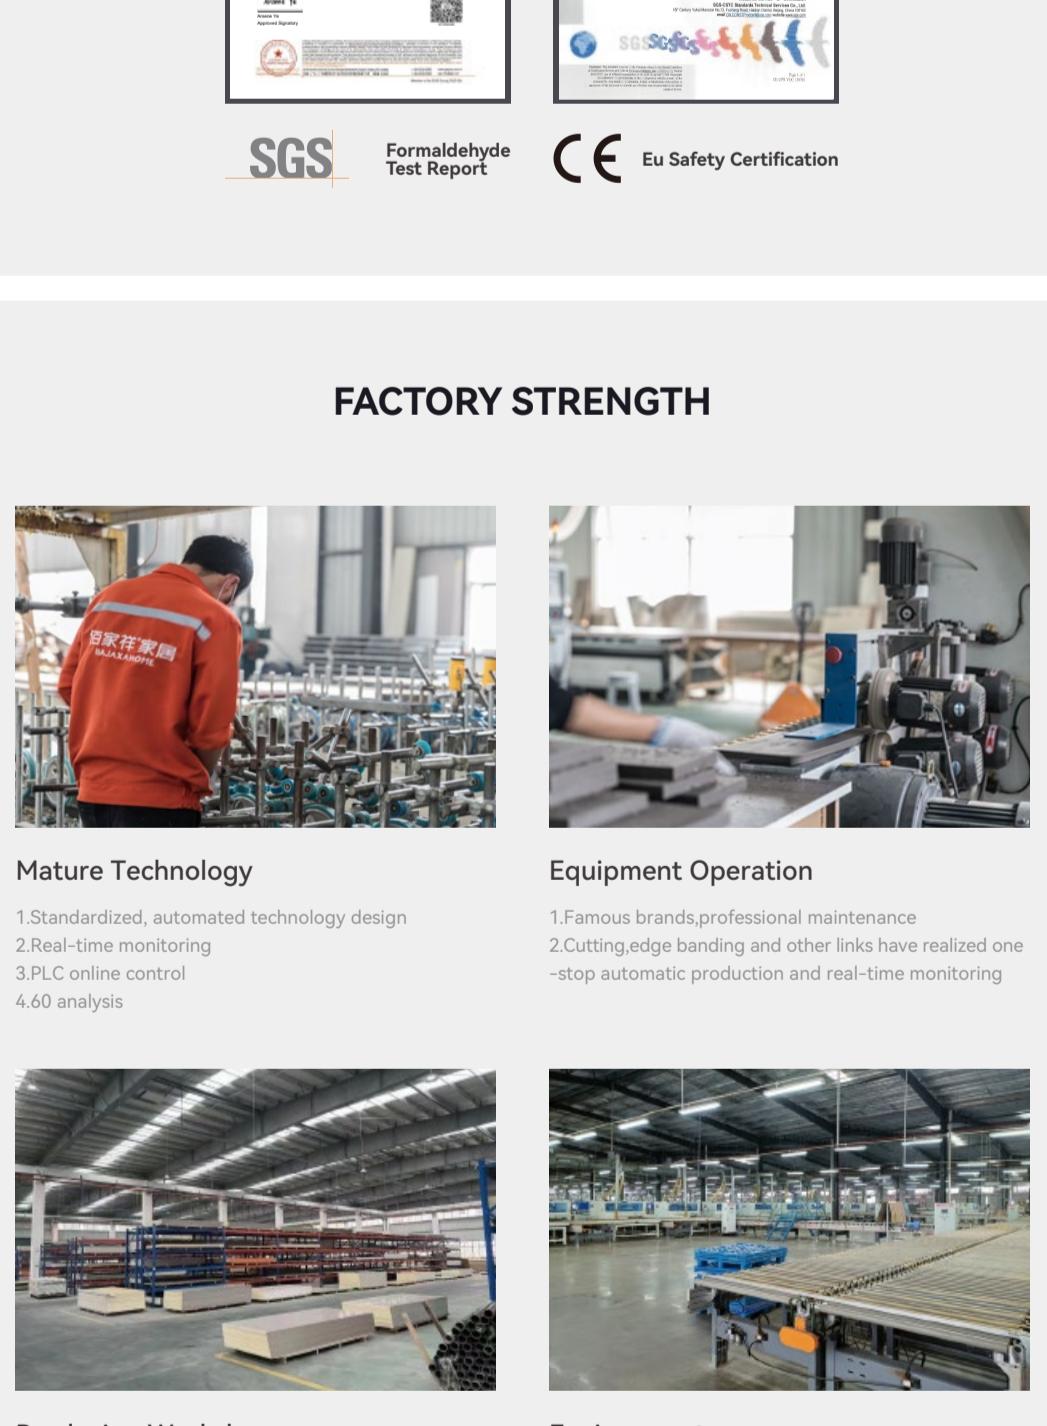

Name	Material \ cross-section	Size(mm)	Process	EP rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

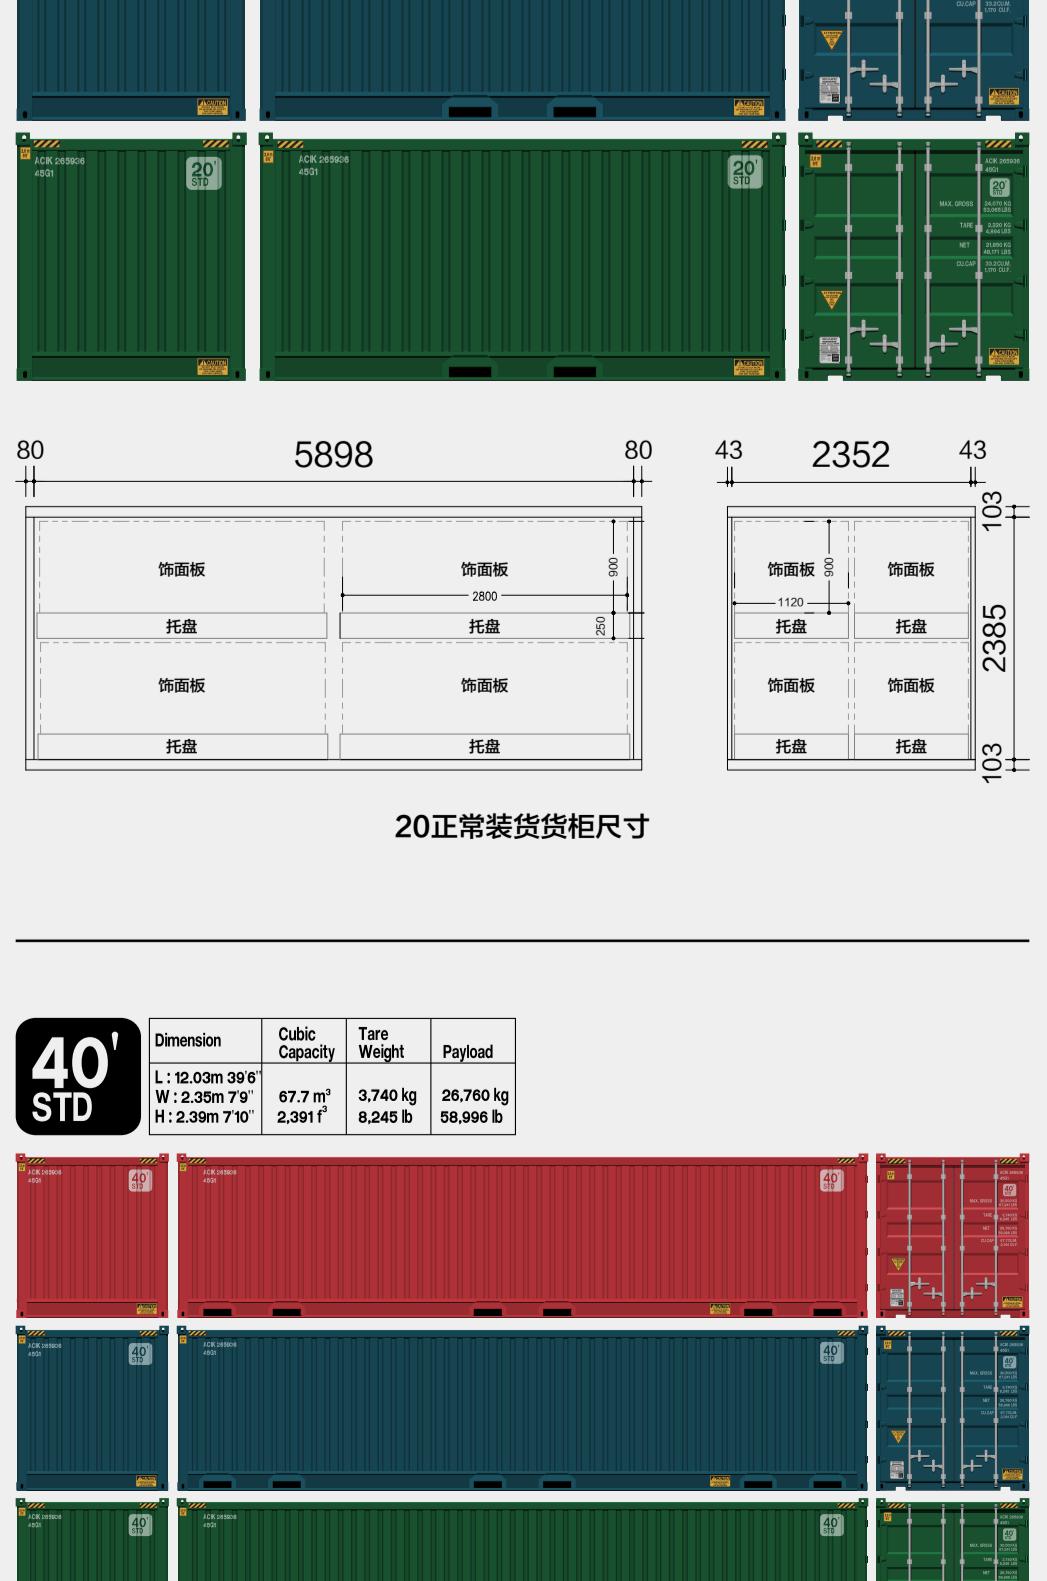

ENF	B1	WATERPROOF	BENDABLE
EP LEVEL	FIRE RATING	Reach	SGS Flame Retardant Test Report

FORMALDEHYDE TEST REPORT

Formaldehyde Test Report

SGS	Environmental Test Report	EU Highly Concerned Substance Report	SGS Flame Retardant Test Report
Formaldehyde Test Report	Reach	SGS Flame Retardant Test Report	Formaldehyde Test Report

SGS	Formaldehyde Test Report	CE Eu Safety Certification
Formaldehyde Test Report	Reach	SGS Flame Retardant Test Report

FACTORY STRENGTH

Mature Technology

- Standardized, automated technology design
- Real-time monitoring
- PLC online control
- 4.60 analysis

Equipment Operation

- Famous brands, professional maintenance
- Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

Environment

Keep executing 5S and lean production.
OHSAS18001, ISO14001, ISO9001

20正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89m 19'4" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

40正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.40 m ³ 2,391 f ³	3,740 kg 8,245 lb	58,996 kg 130,711 lb

40正常装货货柜尺寸