



3022

COLOR NUMBER


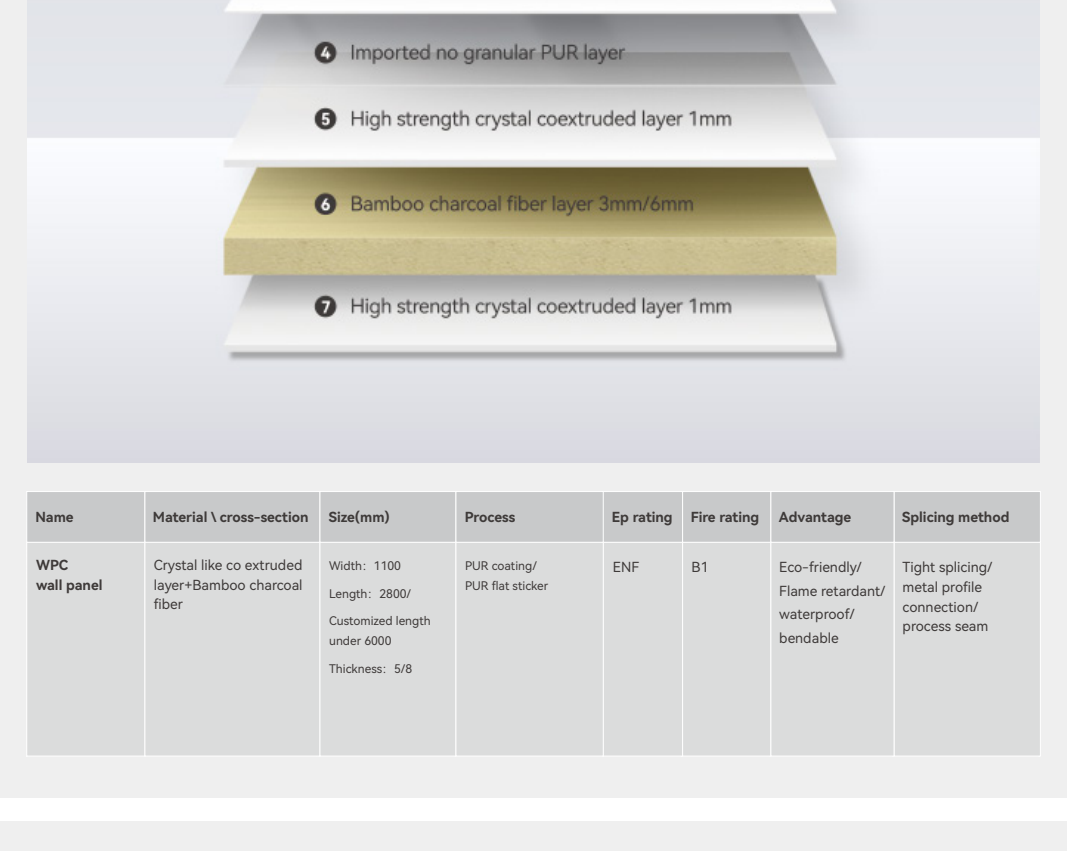


PRODUCT INFORMATION

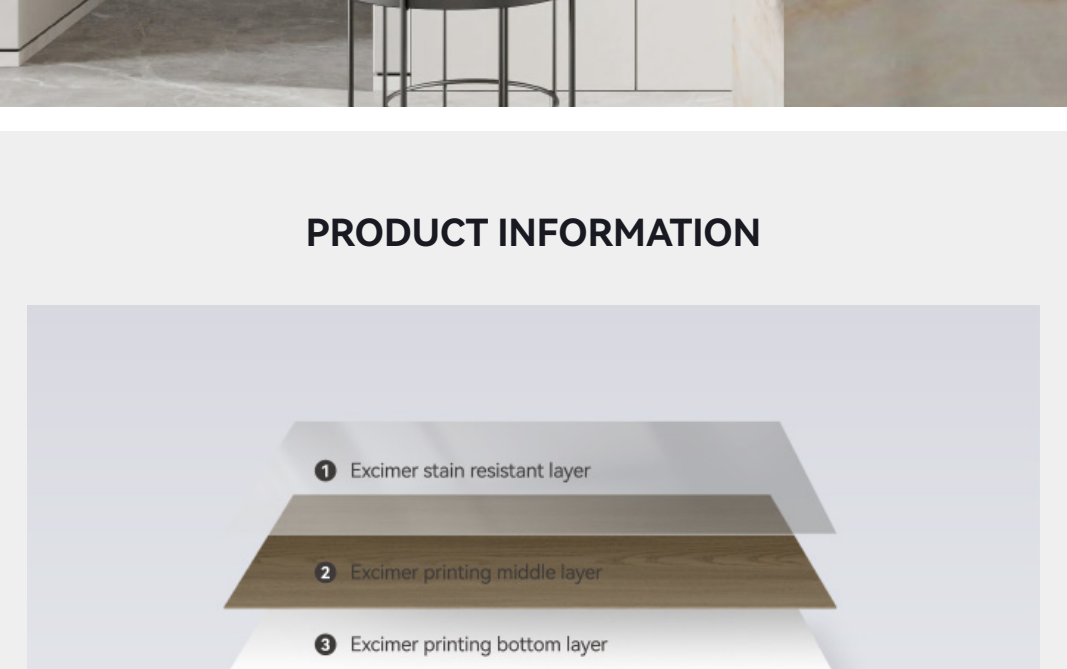

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

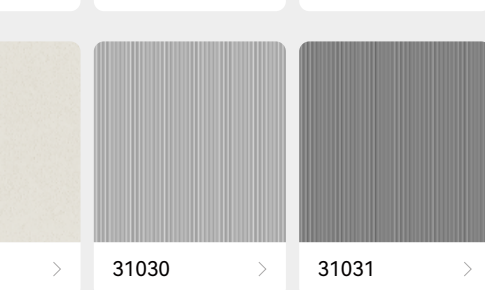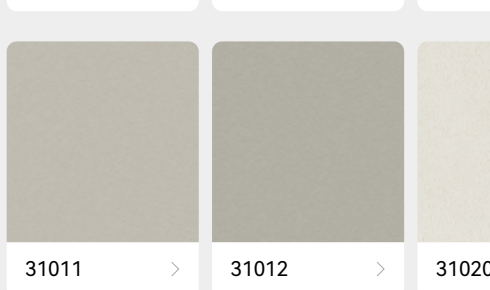

ENF

EP LEVEL











B1

FIRE RATING





WATERPROOF

BENDABLE














MORE SOLID COLORS

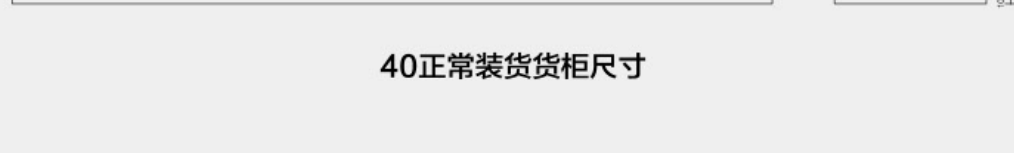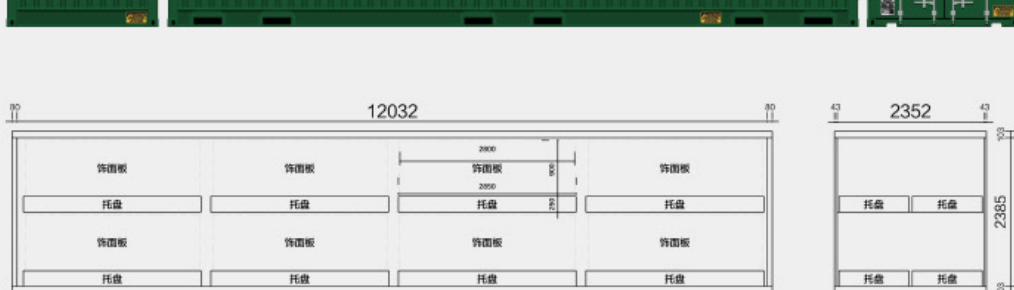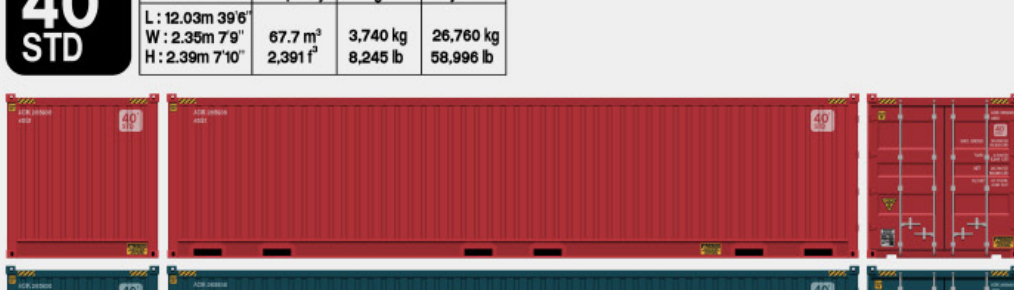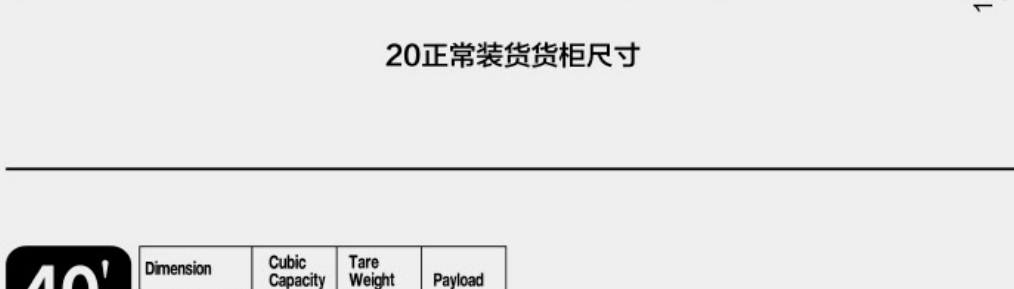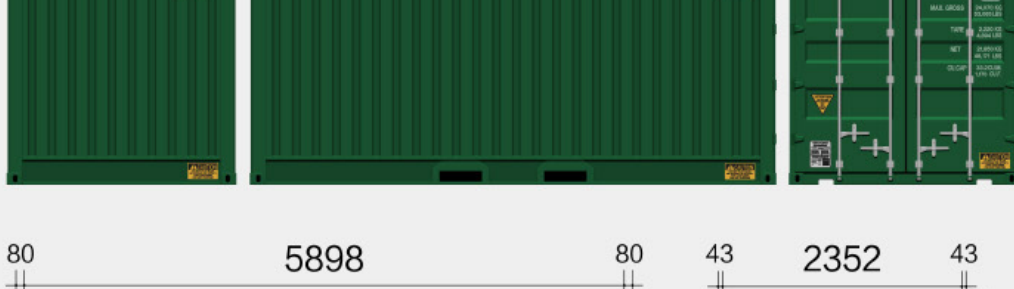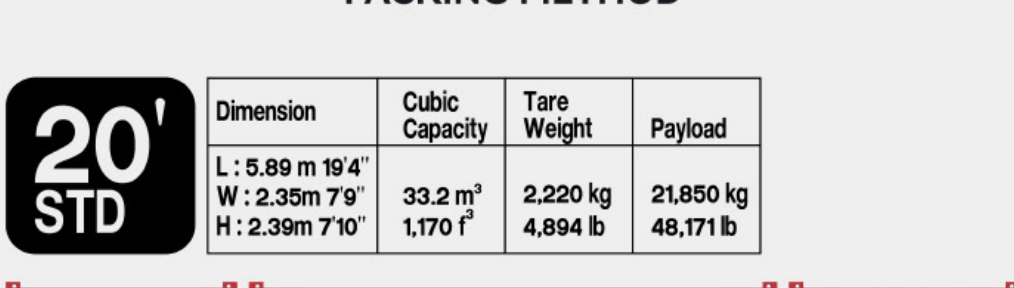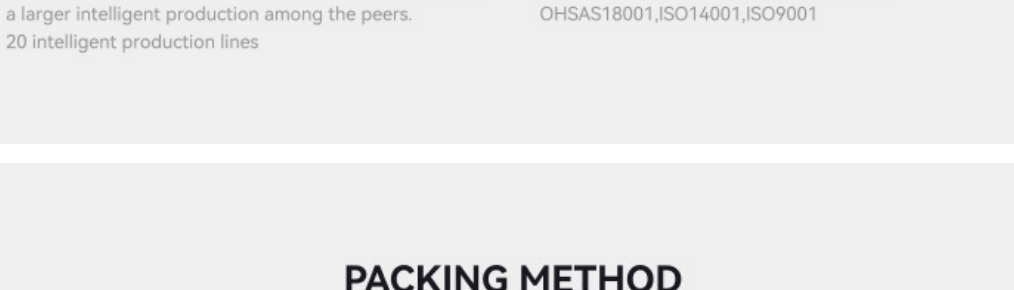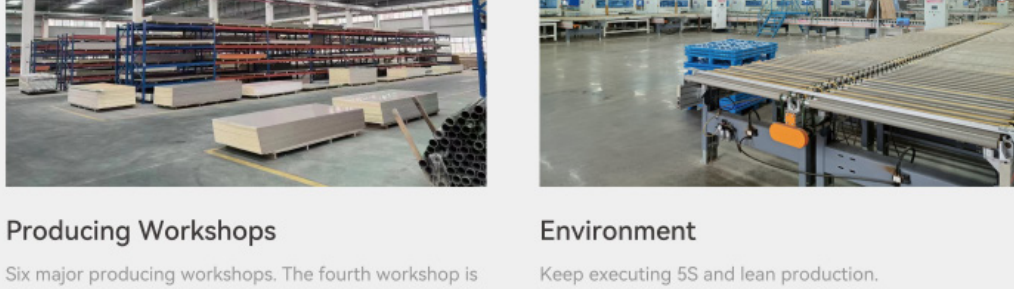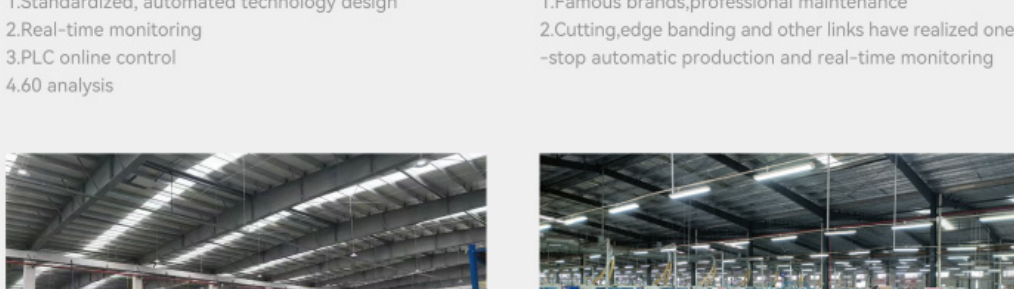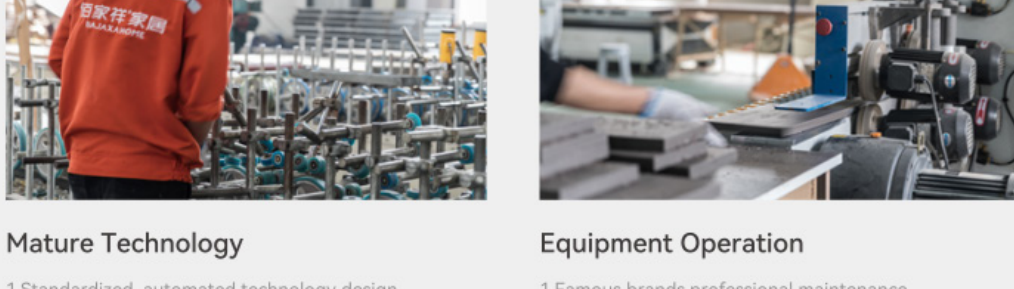



INTERNATIONAL CERTIFICATION

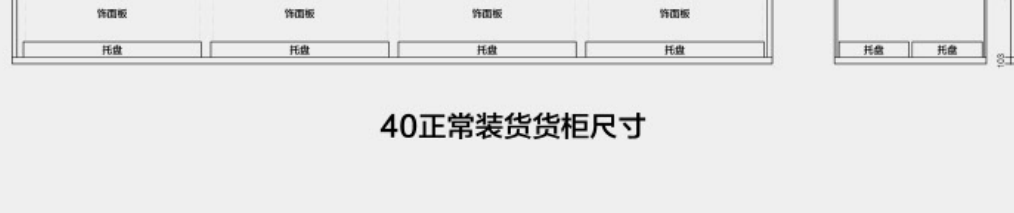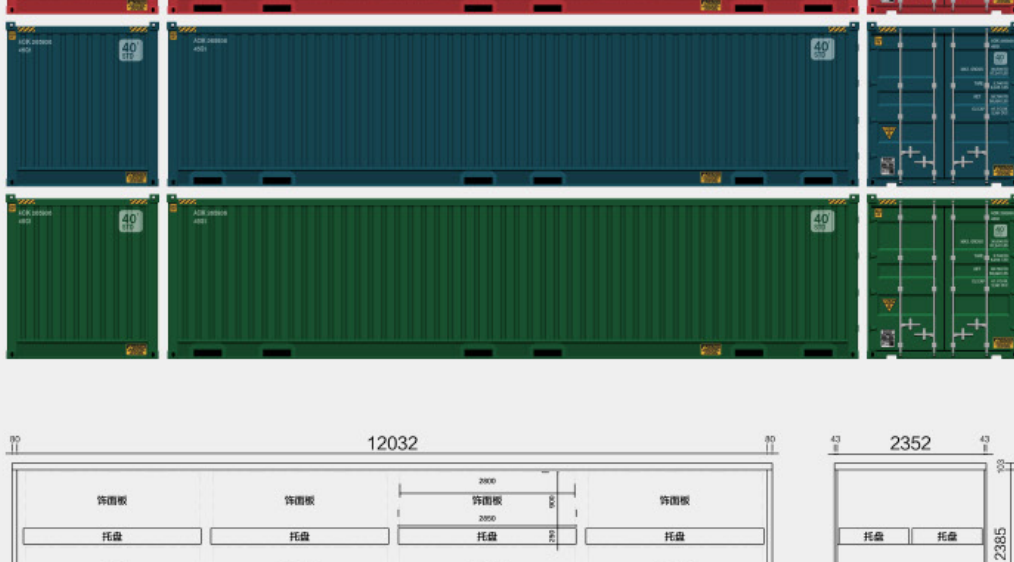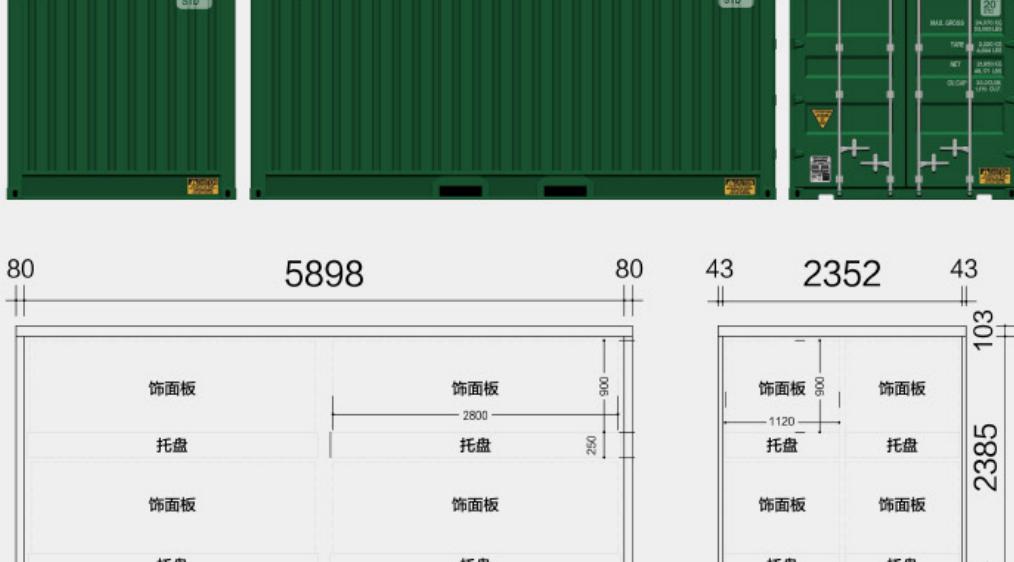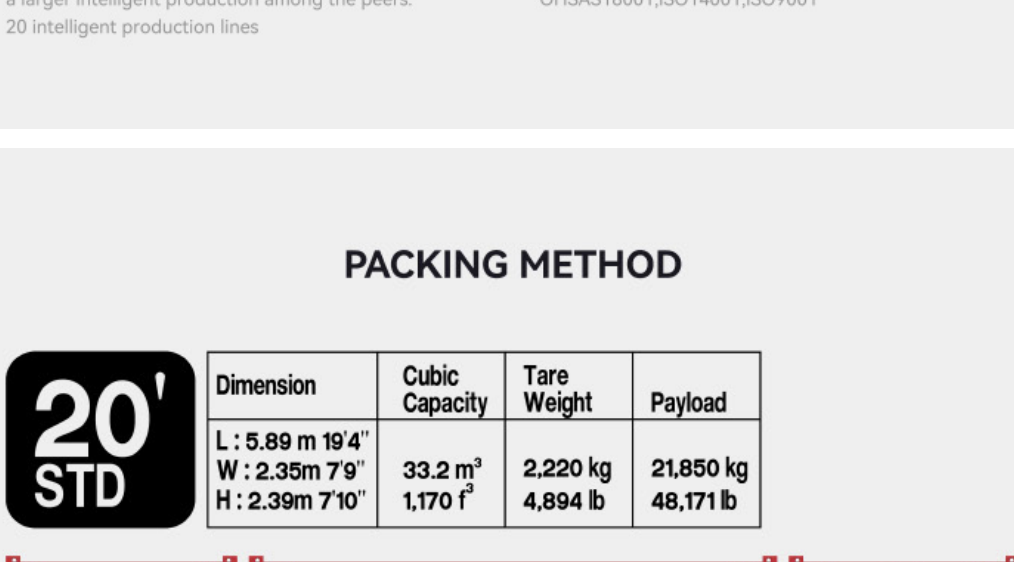

FACTORY STRENGTH

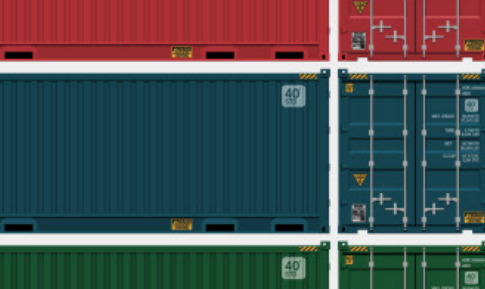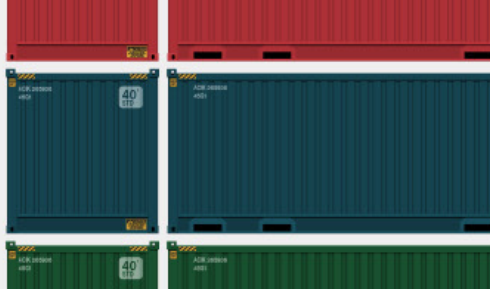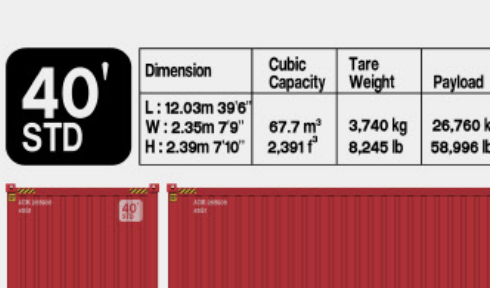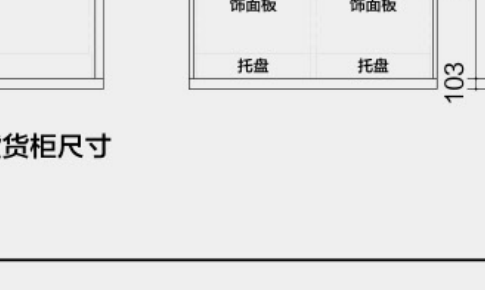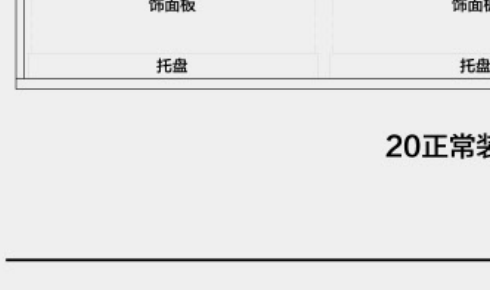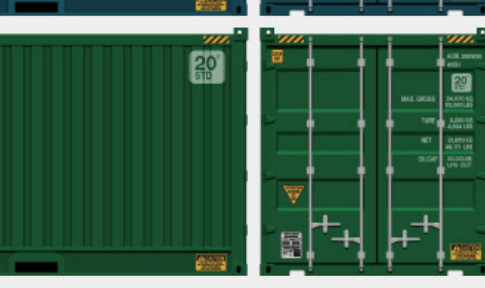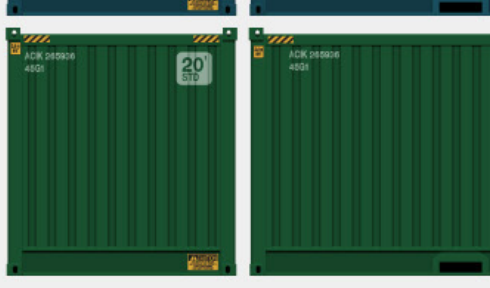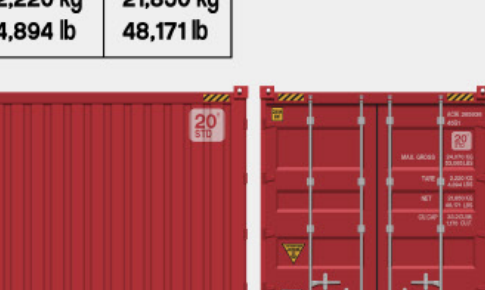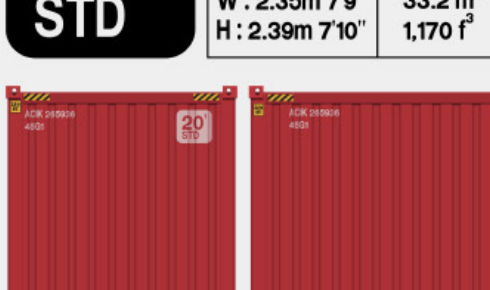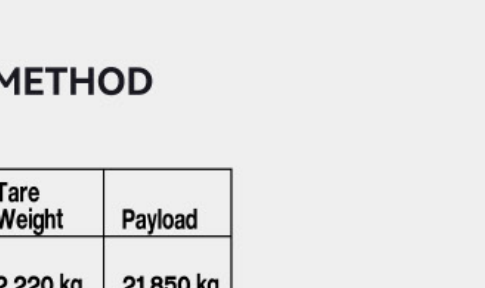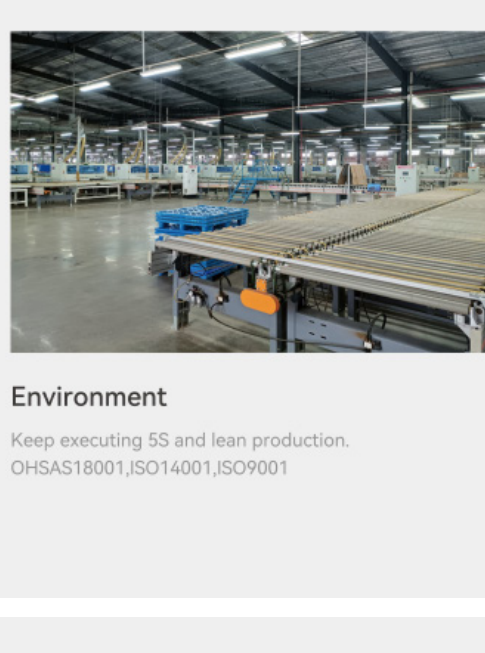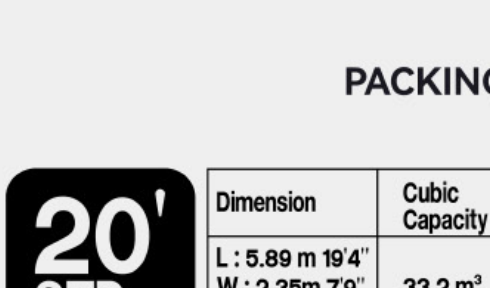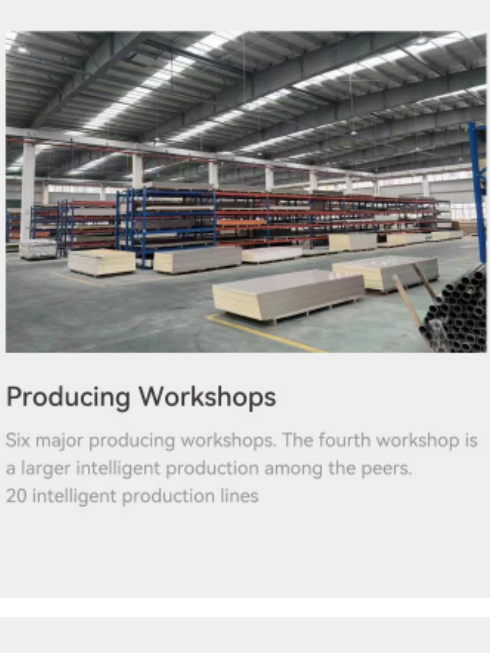

20正常装货货柜尺寸

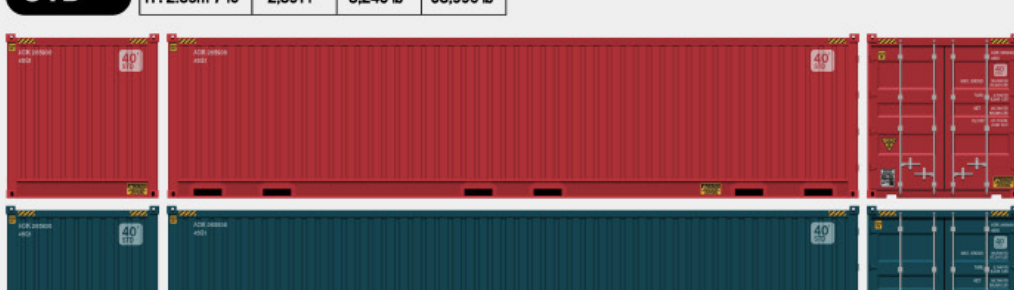

40正常装货货柜尺寸

