


- SOLID COLOR -

31011

COLOR NUMBER

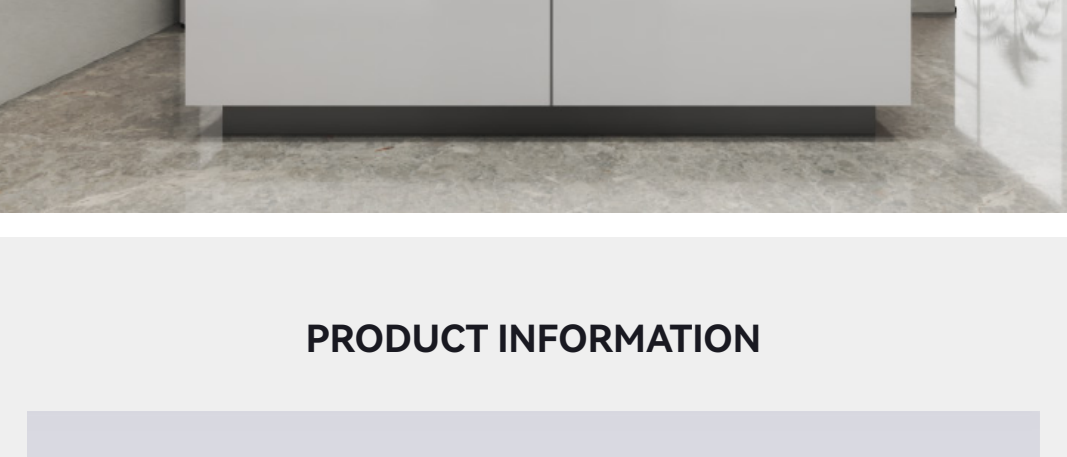


PRODUCT INFORMATION



Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

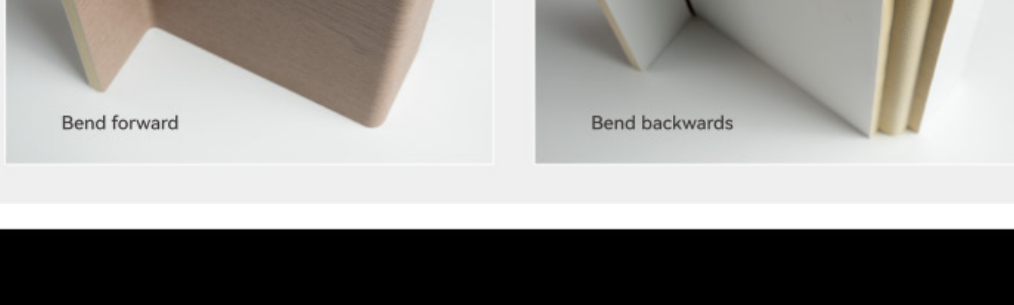


ENF


EP LEVEL

B1

FIRE RATING






WATERPROOF





BENDABLE

MORE SOLID COLORS

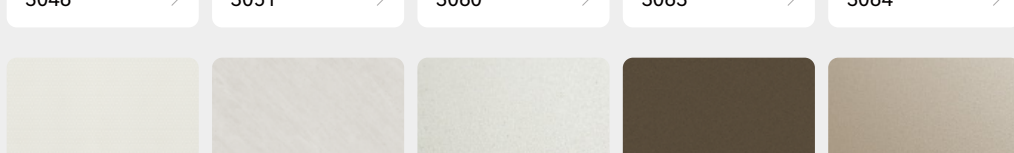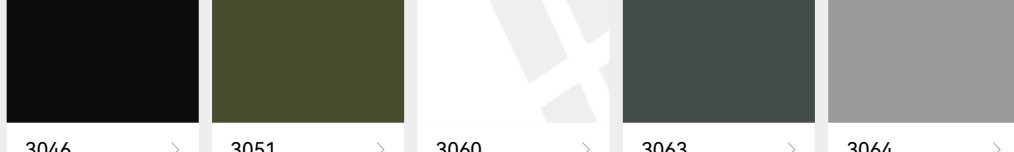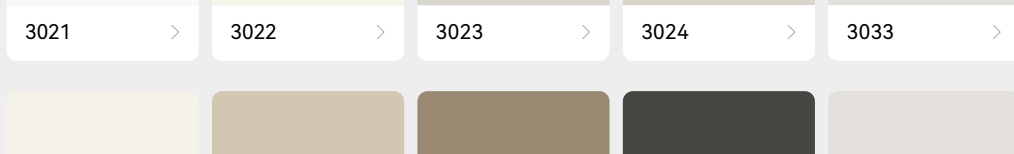

INTERNATIONAL CERTIFICATION

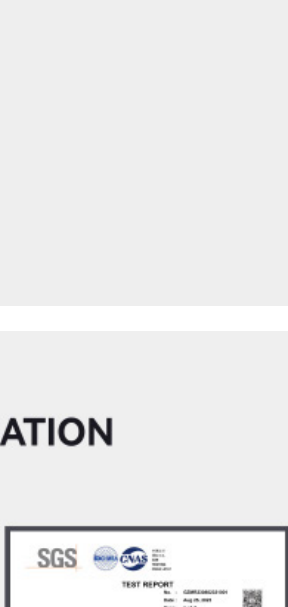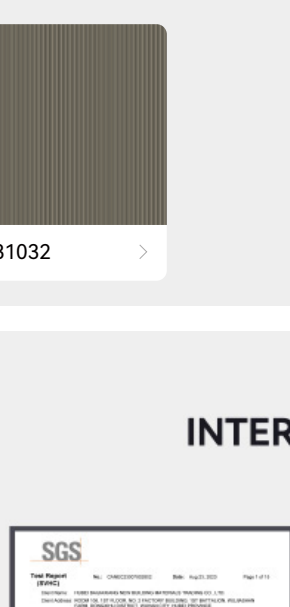


Environmental Test Report



EU Highly Concerned Substance Report



Flame Retardant Test Report



Formaldehyde Test Report



Eu Safety Certification

FACTORY STRENGTH




Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis



Equipment Operation


1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

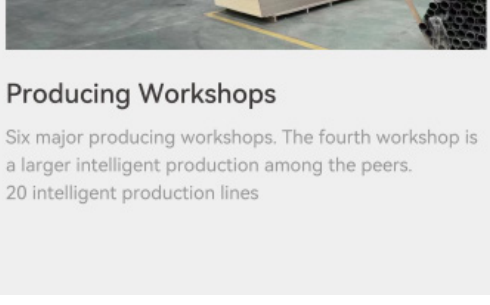

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

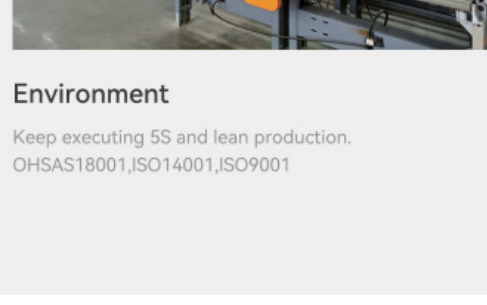

Environment

Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001

PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89 m 19'4"			
	W : 2.35 m 7'9"	33.2 m³	2,220 kg	21,850 kg
	H : 2.39 m 7'10"	1,170 f³	4,894 lb	48,171 lb



20正常装货货柜尺寸

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 12.03 m 39'6"			
	W : 2.35 m 7'9"	67.7 m³	3,740 kg	26,760 kg
	H : 2.39 m 7'10"	2,391 f³	8,245 lb	58,996 lb



40正常装货货柜尺寸