

- CLOTH GRAIN -

**6081**  
COLOR NUMBER

WPC WALL PANEL  
6081

WPC WALL PANEL  
6081

WPC WALL PANEL  
6081

WPC WALL PANEL  
6081

## PRODUCT INFORMATION

- 1 Excimer stain resistant layer
- 2 Excimer printing middle layer
- 3 Excimer printing bottom layer
- 4 Imported no granular PUR layer
- 5 High strength crystal coextruded layer 1mm
- 6 Bamboo charcoal fiber layer 3mm/6mm
- 7 High strength crystal coextruded layer 1mm

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

Waterproof test

Bend forward

Bend backwards

**ENF**

EP LEVEL

**B1**

FIRE RATING

**WATERPROOF**

WATERPROOF

**BENDABLE**

BENDABLE

## MORE CLOTH GRAIN COLORS

FT 25601 > FT 25602 > FT 25603 > FT 25604 > FT 25605 >

FT 25606 > FT 25607 > 6001 > 6003 > 6004 >

6005 > 6009 > 6015 > 6016 > 6019 >

6021 > 6027 > 6035 > 6065 > 6066 >


6070 > 6071 > 6072 > 6073 > 6076 >

6079 > 6080 > 6081 >

## INTERNATIONAL CERTIFICATION



**Environmental Test Report**

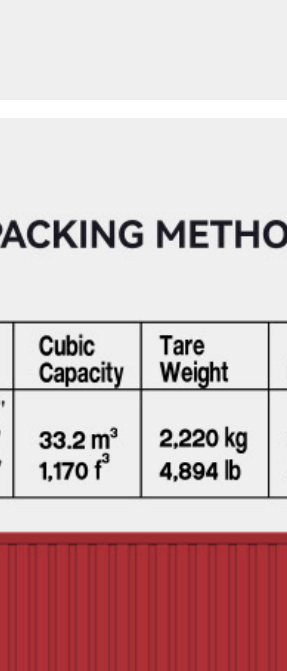


**EU Highly Concerned Substance Report**



**Flame Retardant Test Report**




**Formaldehyde Test Report**

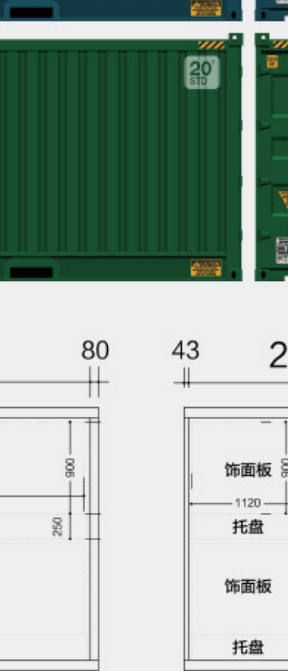


**Eu Safety Certification**

## FACTORY STRENGTH

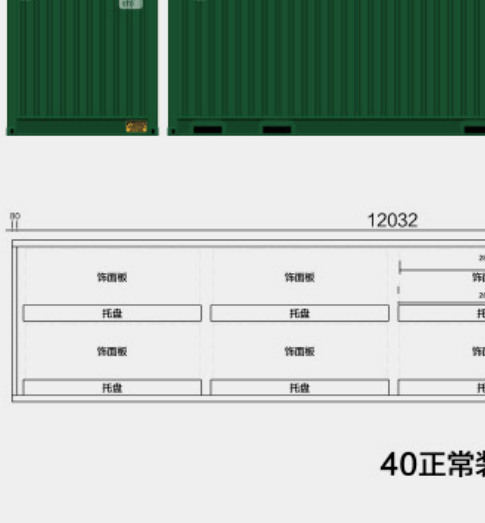

**Mature Technology**

- 1.Standardized technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis

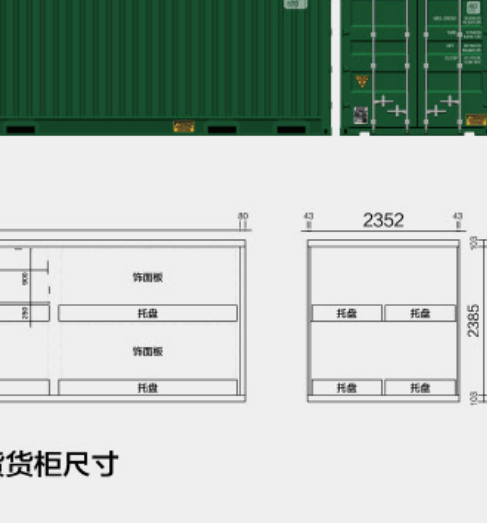

**Equipment Operation**

- 1.Famous brands,operational maintenance
- 2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring



**Producing Workshops**

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines



**Environment**

Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

## PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89 m 19'4"			
	W : 2.35m 7'9"	33.2 m³	2,220 kg	21,850 kg
	H : 2.39m 7'10"	1,170 f³	4,894 lb	48,171 lb



20正常装货货柜尺寸



20正常装货货柜尺寸



40正常装货货柜尺寸