

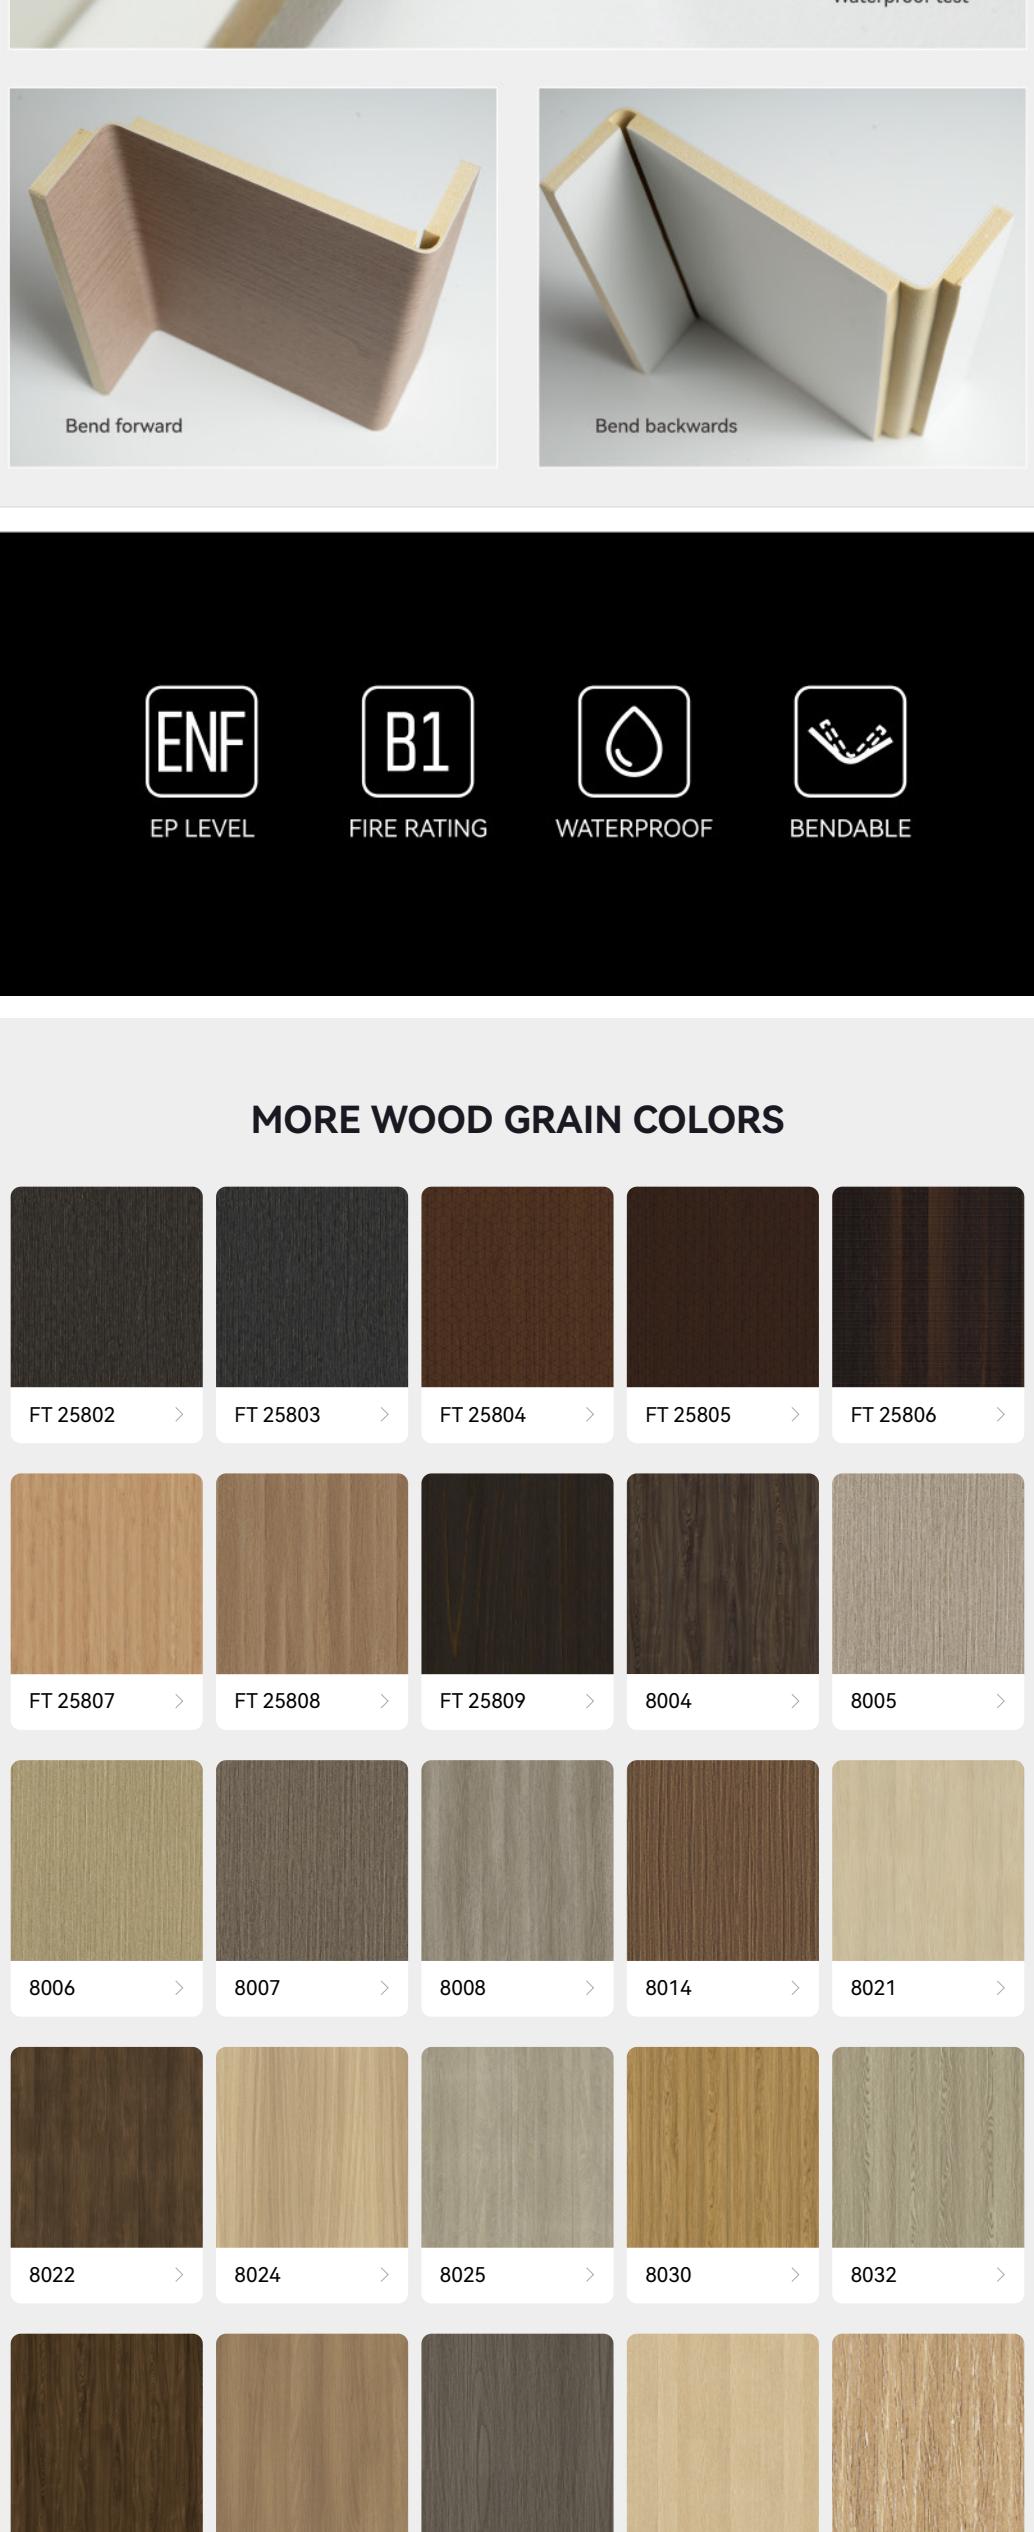


- WOOD GRAIN -

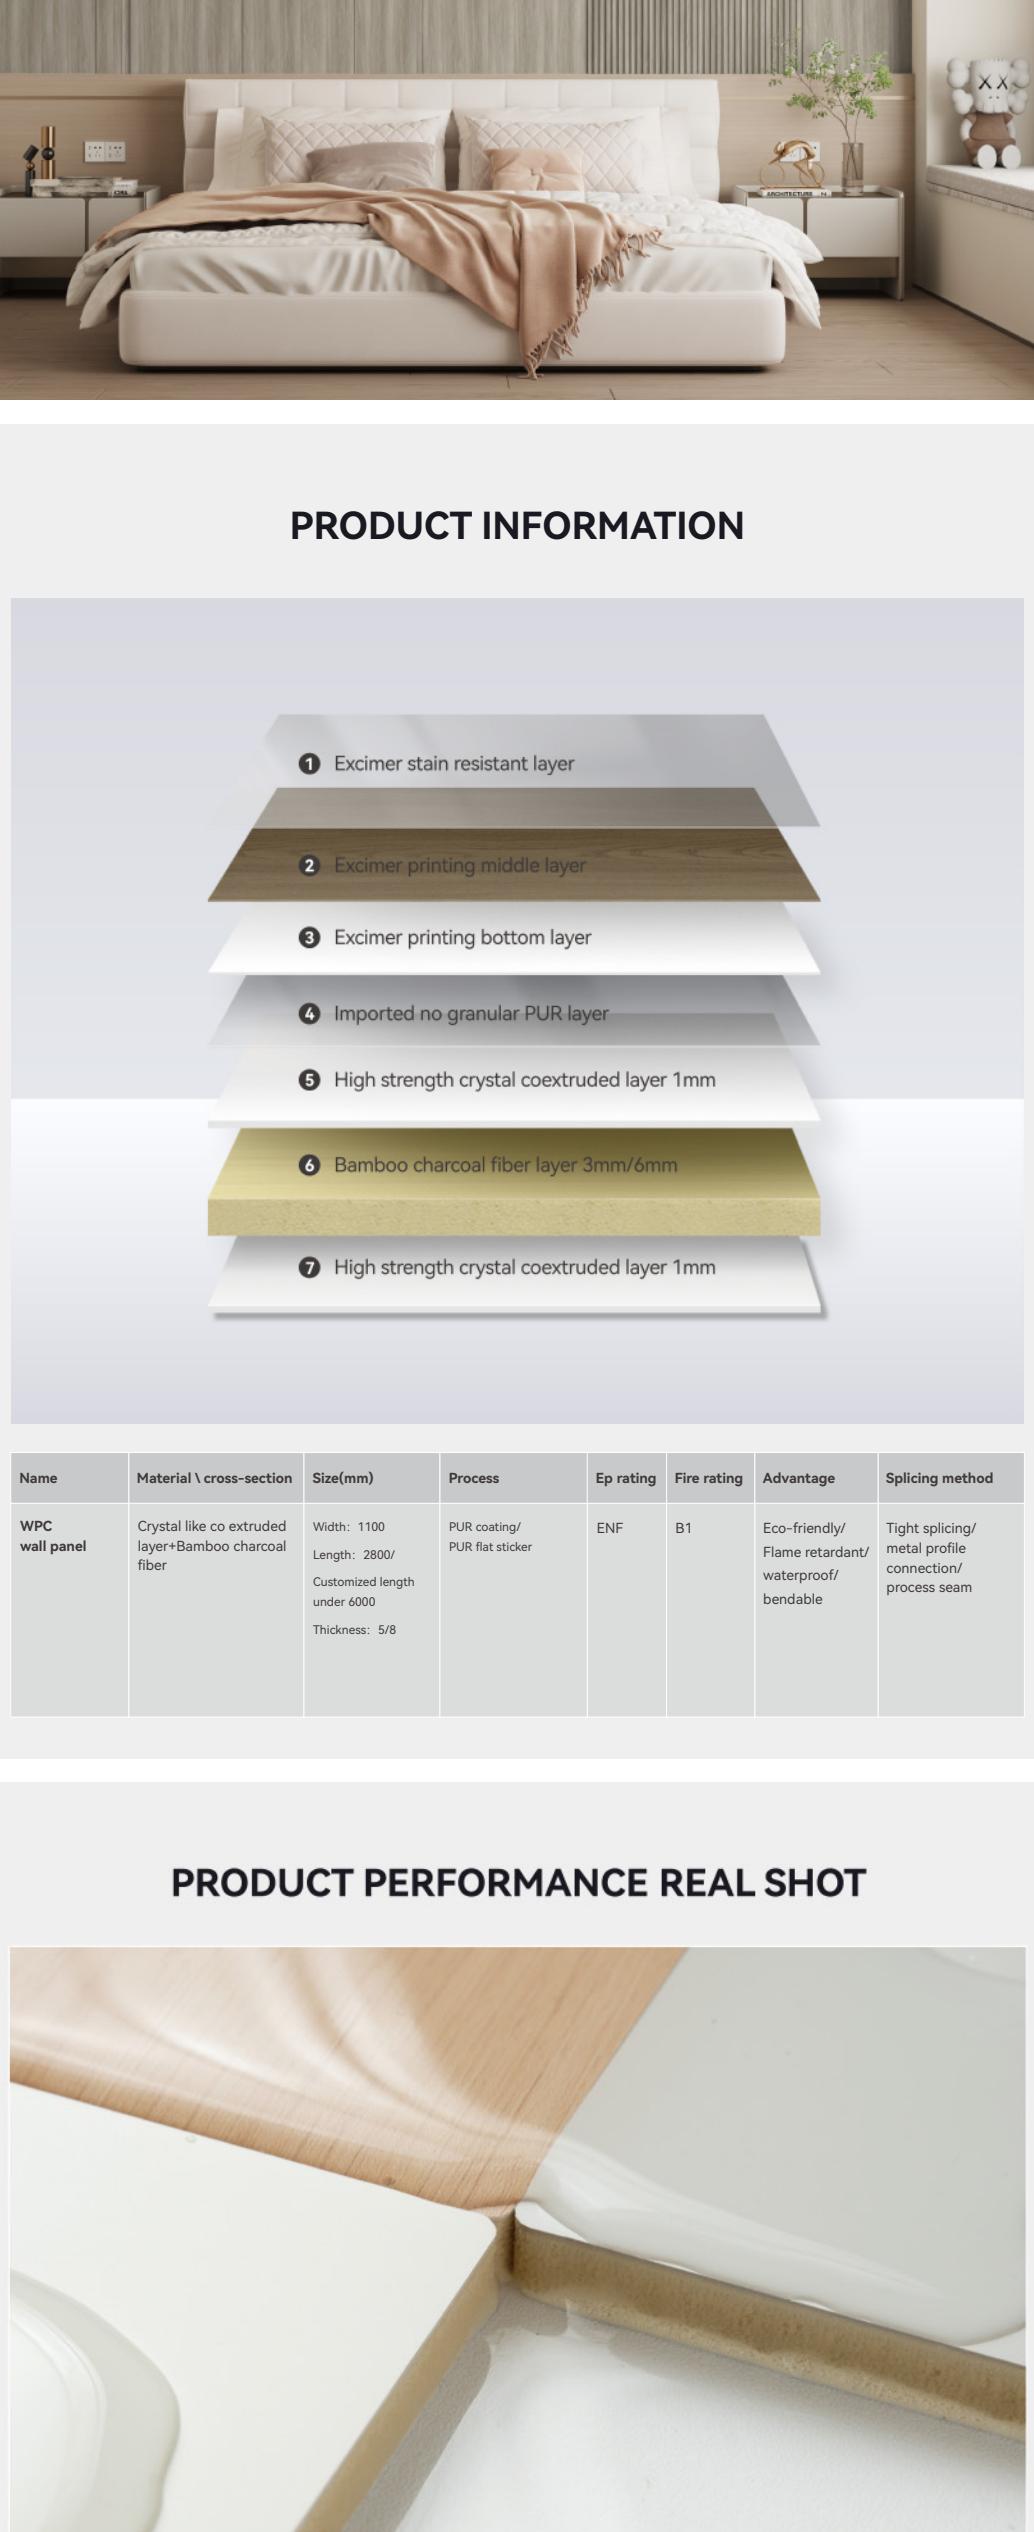




Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

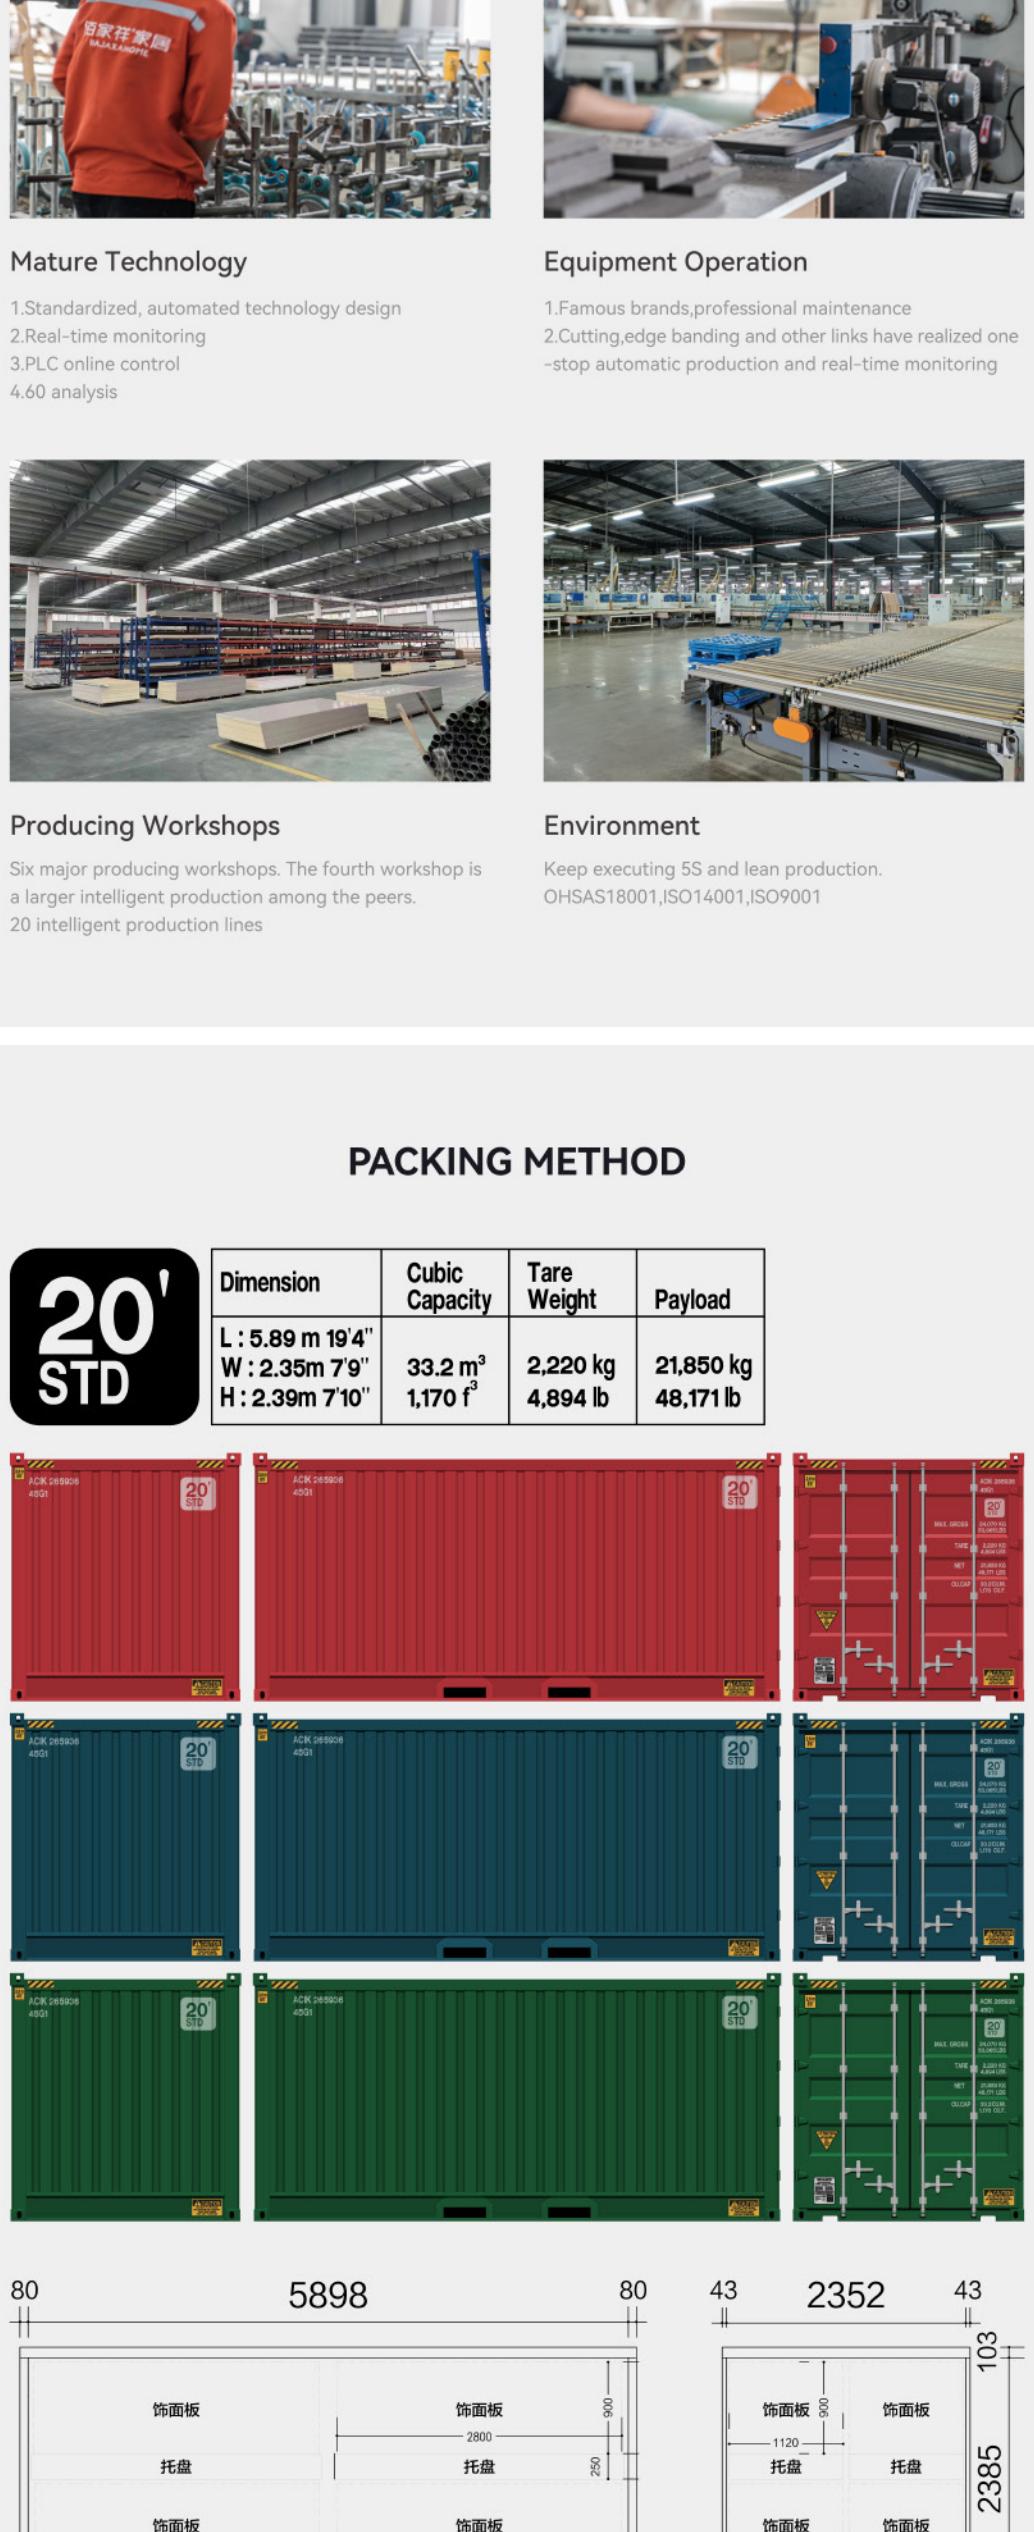

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89 m 19'4" W: 2.35m 79' H: 2.39m 710"	33.2 m <sup>3</sup> 1,170 f <sup>3</sup>	2,220 kg 4,894 lb	21,850 kg 48,171 lb



## MORE WOOD GRAIN COLORS

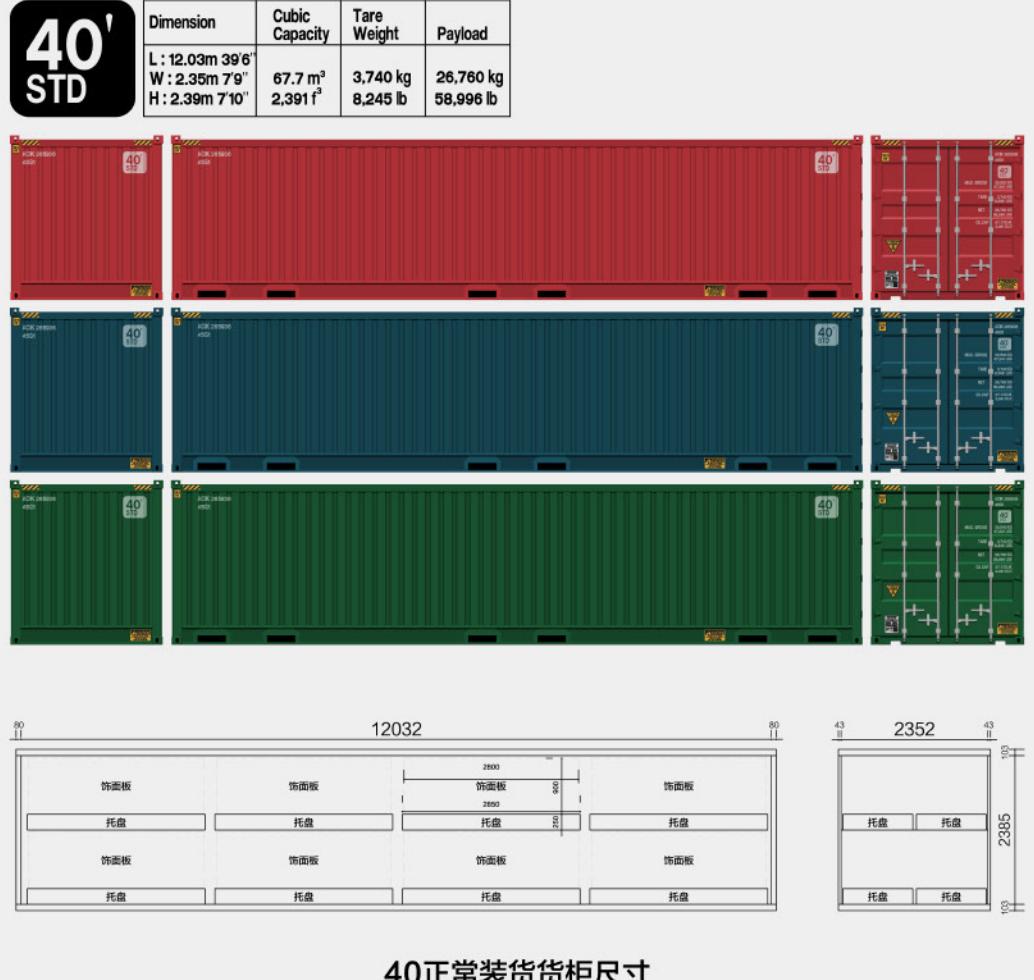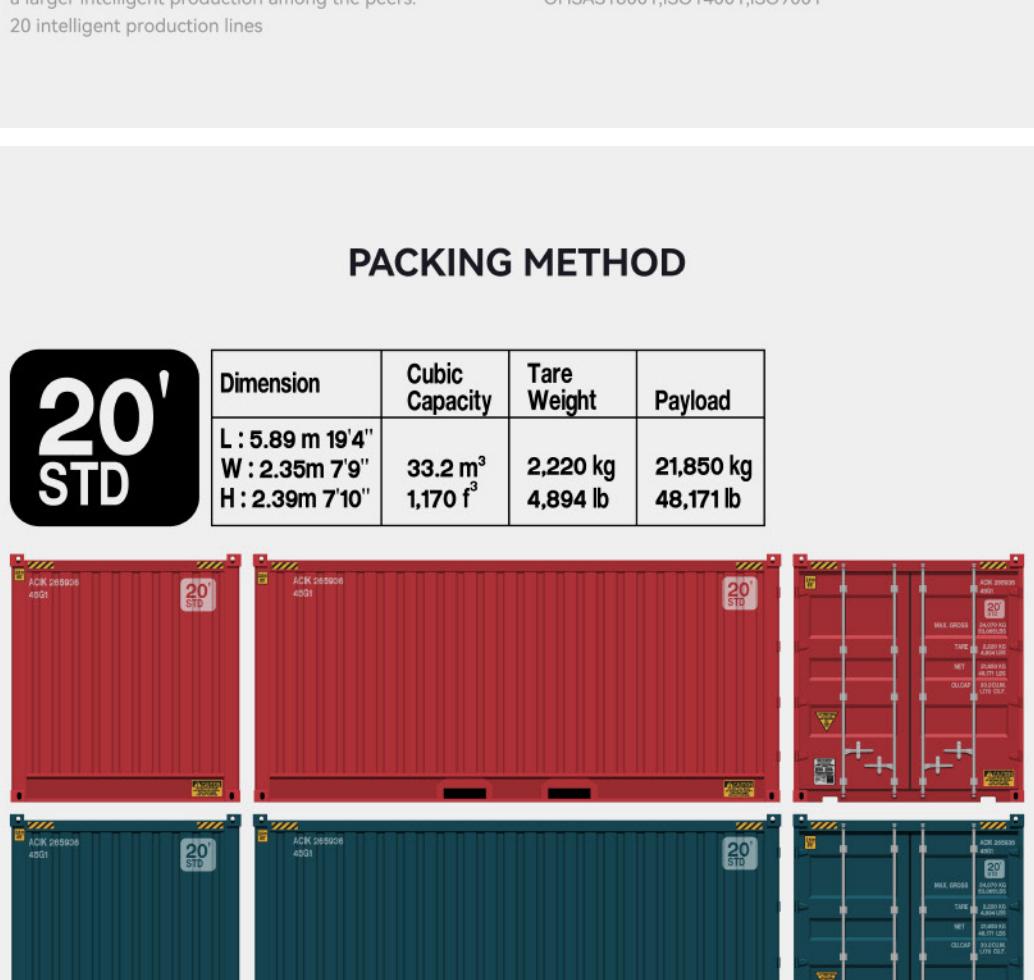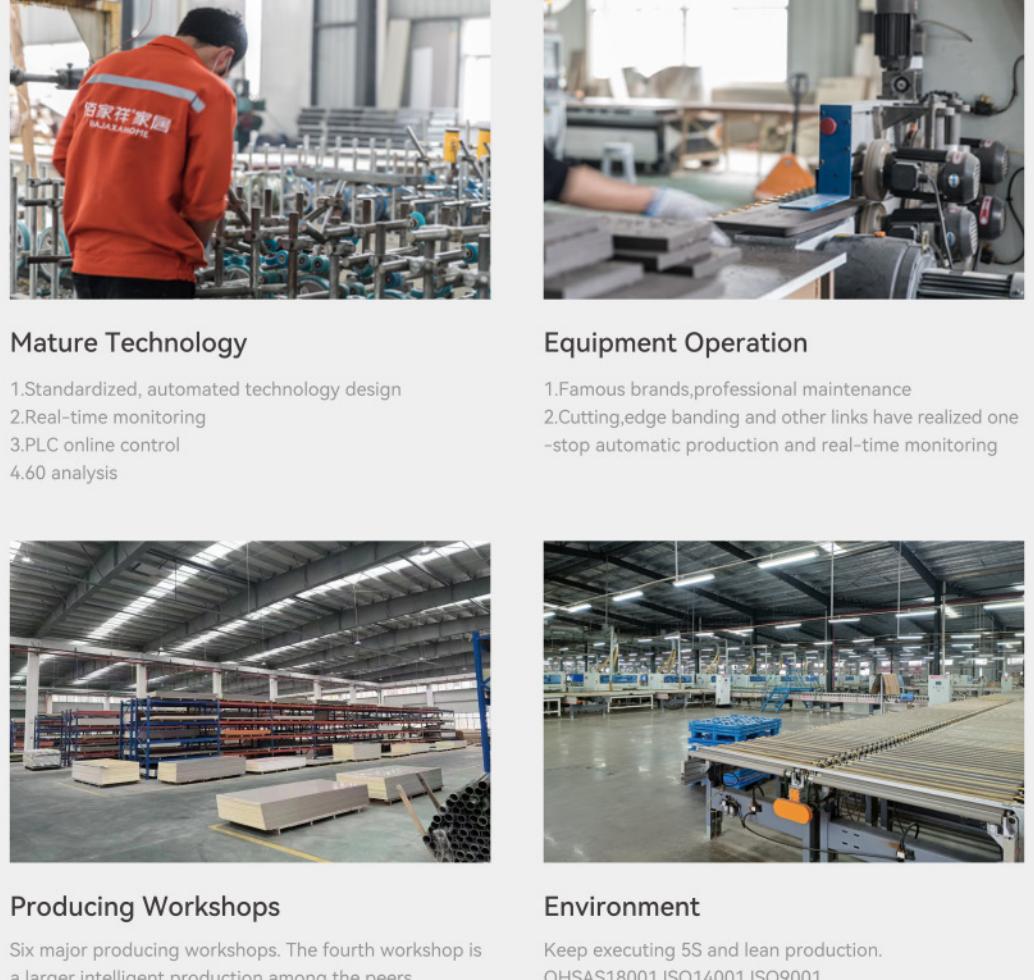

## FACTORY STRENGTH

