










PRODUCT INFORMATION










Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer/Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam






PRODUCT PERFORMANCE REAL SHOT

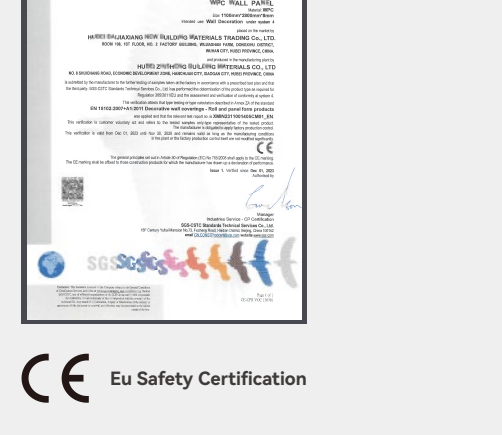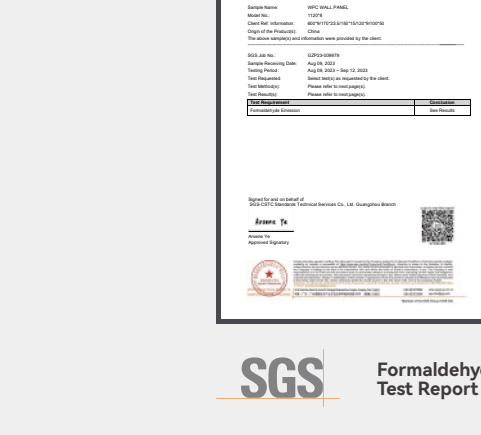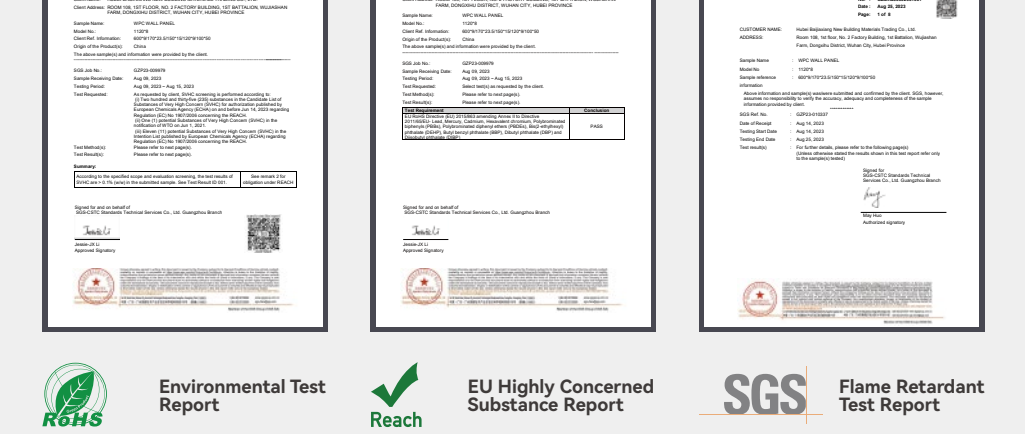







INTERNATIONAL CERTIFICATION

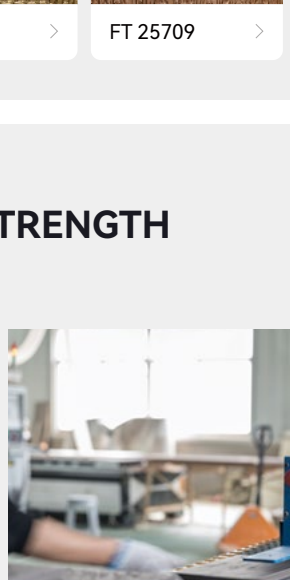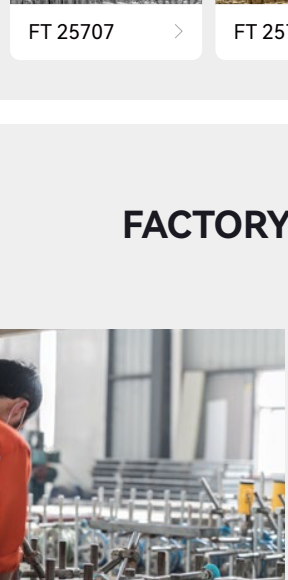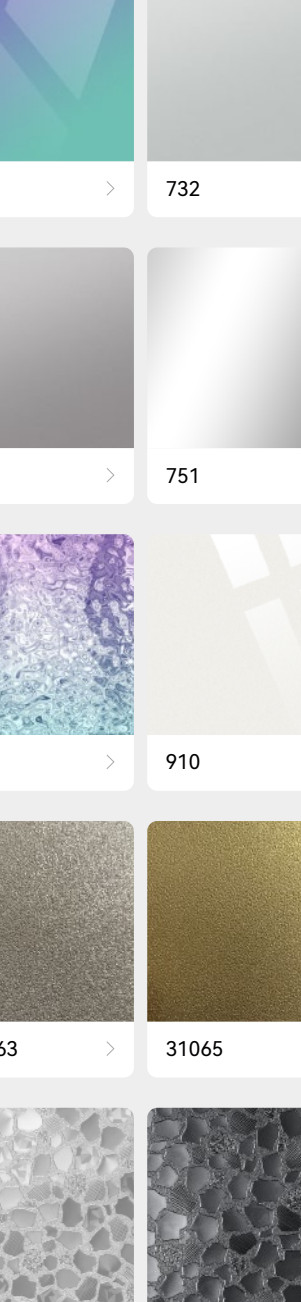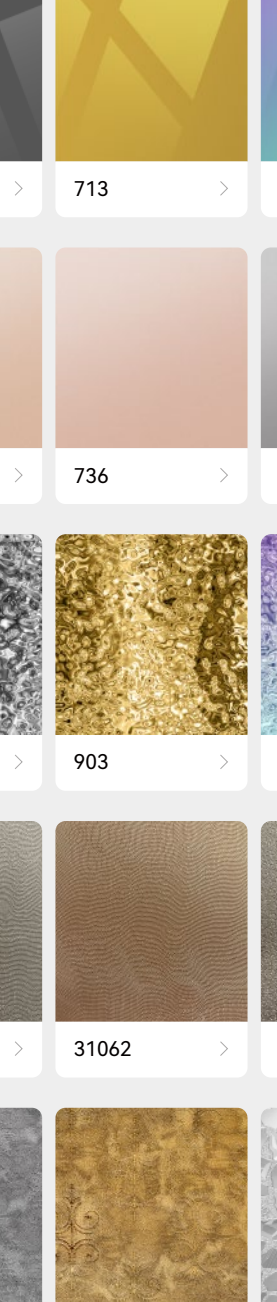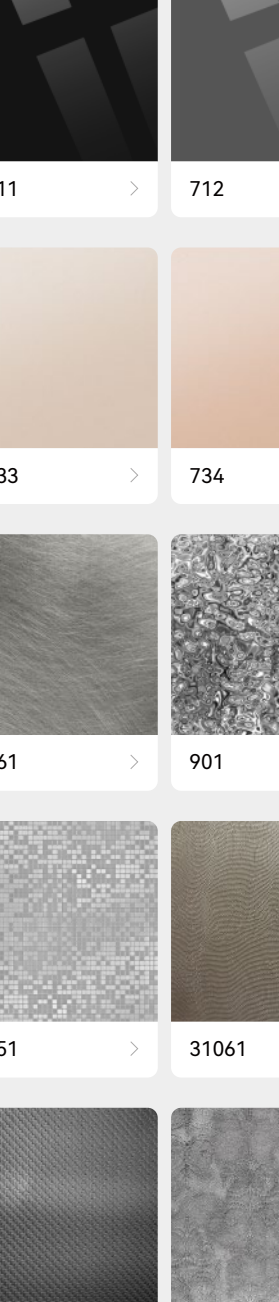


MORE METAL SERIES COLORS

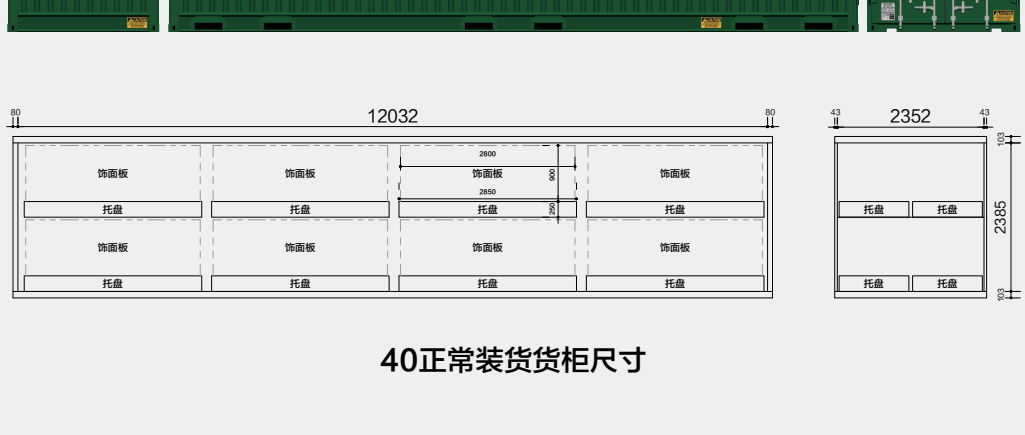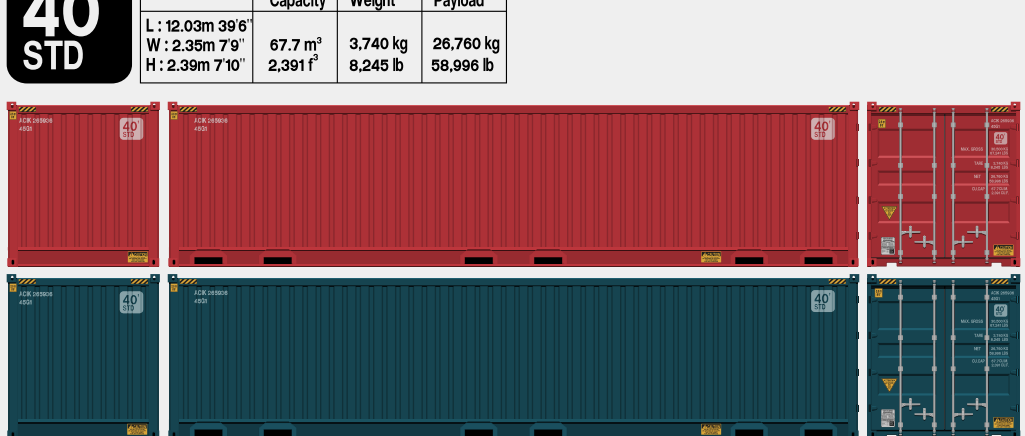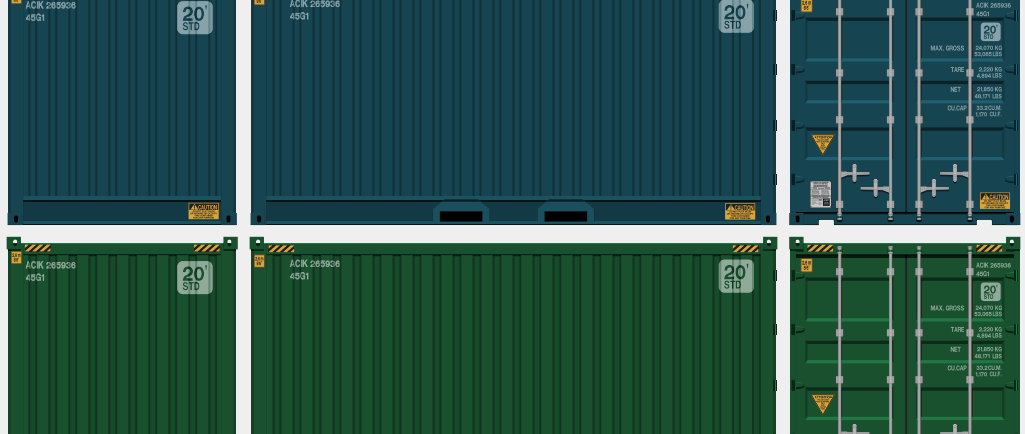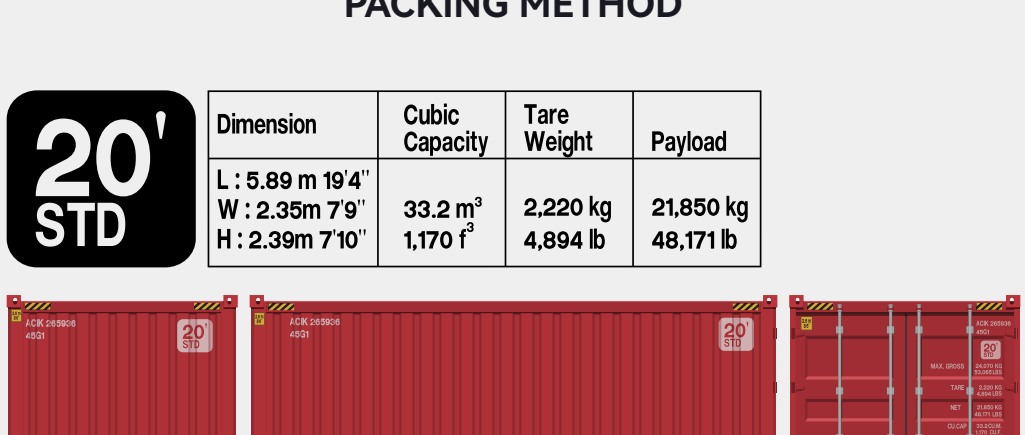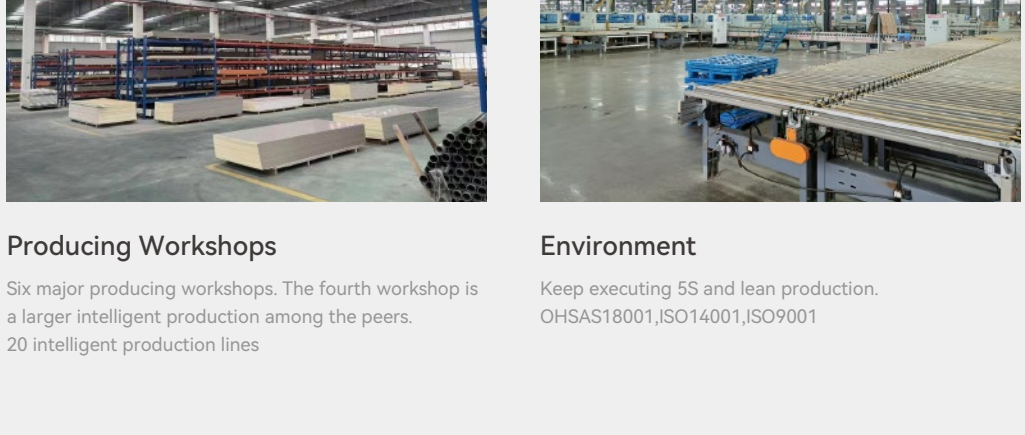

FACTORY STRENGTH

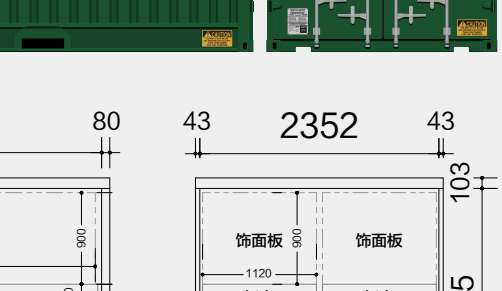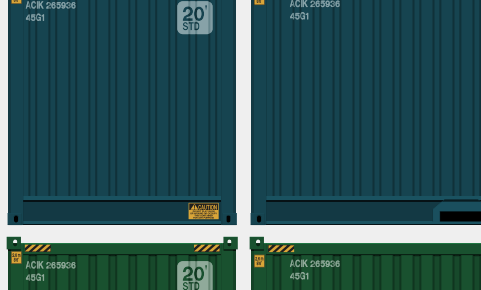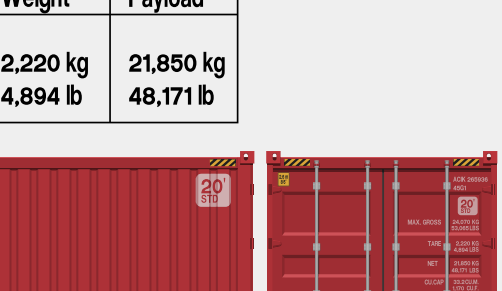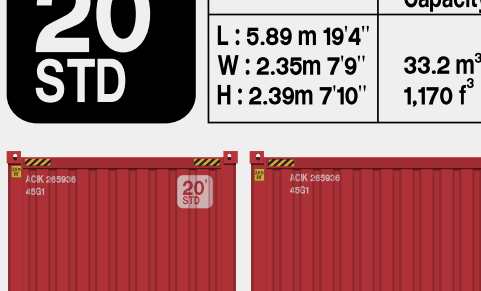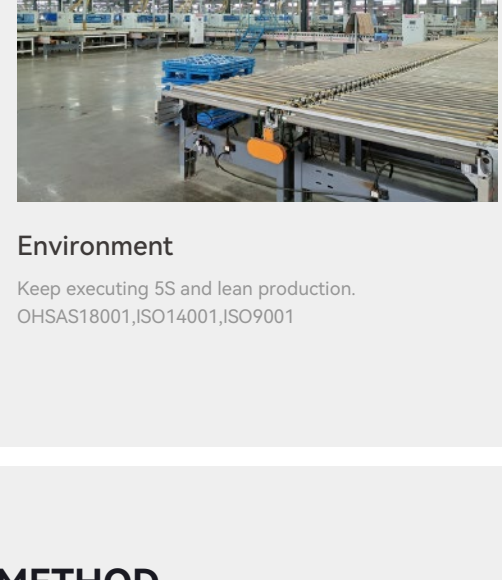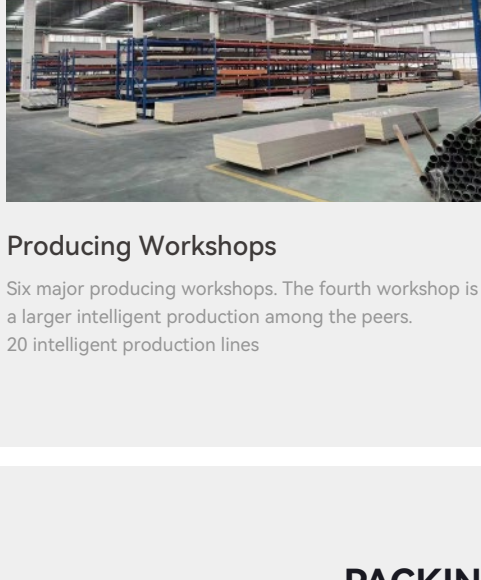

PACKING METHOD

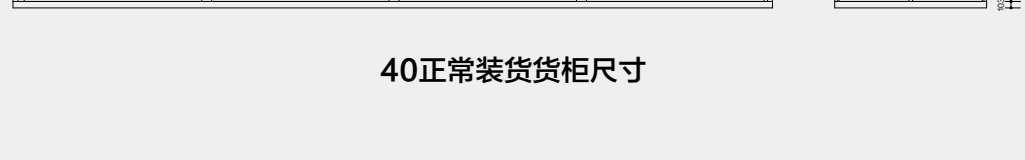

20正常装货货柜尺寸

40正常装货货柜尺寸

