

- SOLID COLOR -

31032  
COLOR NUMBER

WPC WALL PANEL  
31032

WPC WALL PANEL  
31032

WPC WALL PANEL  
31032

WPC WALL PANEL  
31032

## PRODUCT INFORMATION

- 1 Excimer stain resistant layer
- 2 Excimer printing middle layer
- 3 Excimer printing bottom layer
- 4 Imported no-granular PUR layer
- 5 High strength crystal coextruded layer 1mm
- 6 Bamboo charcoal fiber layer 3mm/6mm
- 7 High strength crystal coextruded layer 1mm

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

Waterproof test

Bend forward

Bend backwards

ENF

EP LEVEL

B1

FIRE RATING

Waterproof

WATERPROOF


Bendable

BENDABLE


## MORE SOLID COLORS




## INTERNATIONAL CERTIFICATION





Environmental Test Report



EU Highly Concerned Substance Report



Flame Retardant Test Report

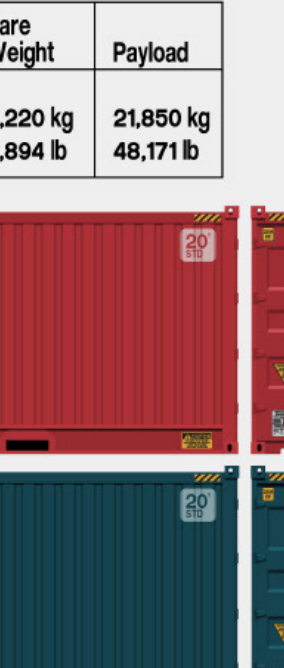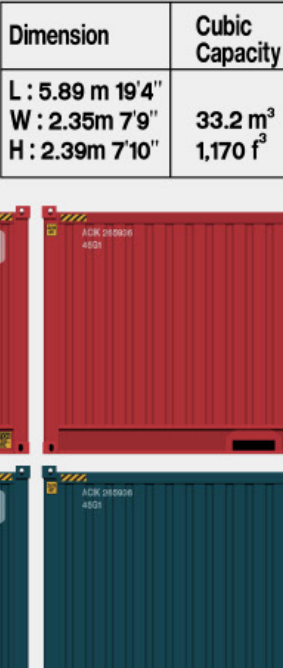


Formaldehyde Test Report




Eu Safety Certification

## FACTORY STRENGTH

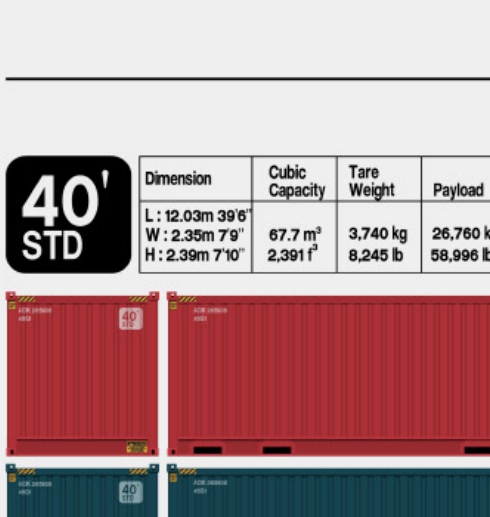


### Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

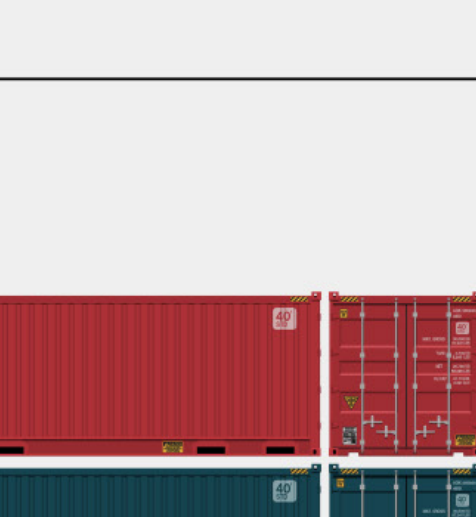


### Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring



### Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.  
20 intelligent production lines





### Environment

Keep executing 5S and lean production.  
OHSAS18001, ISO14001, ISO9001

## PACKING METHOD

20' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

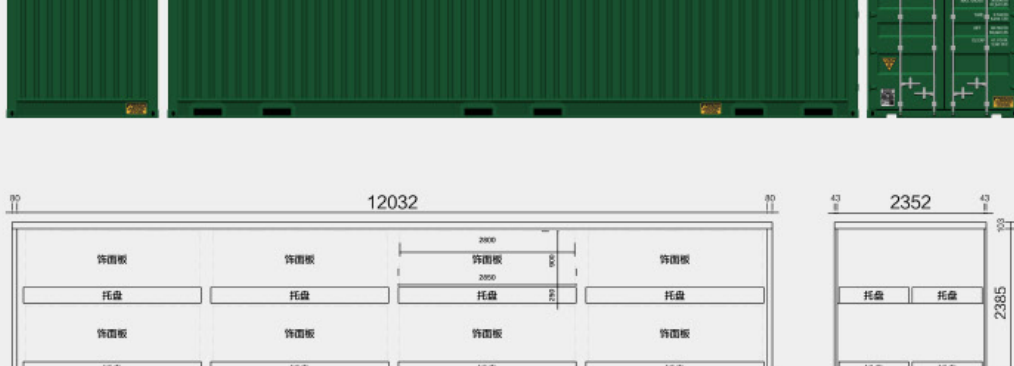

20正常装货货柜尺寸

40' STD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6" W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m³ 2,391 f³	3,740 kg 8,245 lb	26,760 kg 58,996 lb



40正常装货货柜尺寸