
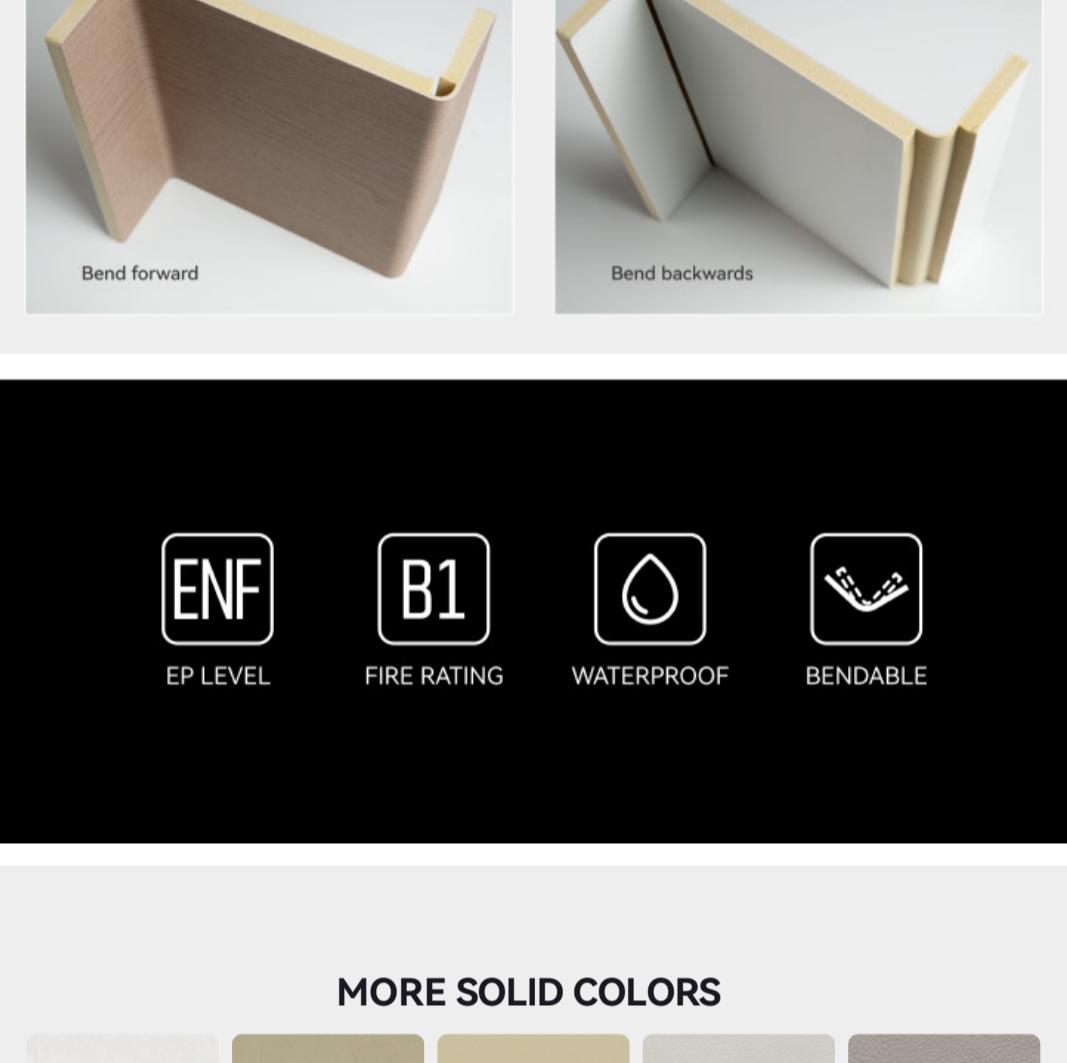


- SOLID COLOR -

3064

COLOR NUMBER

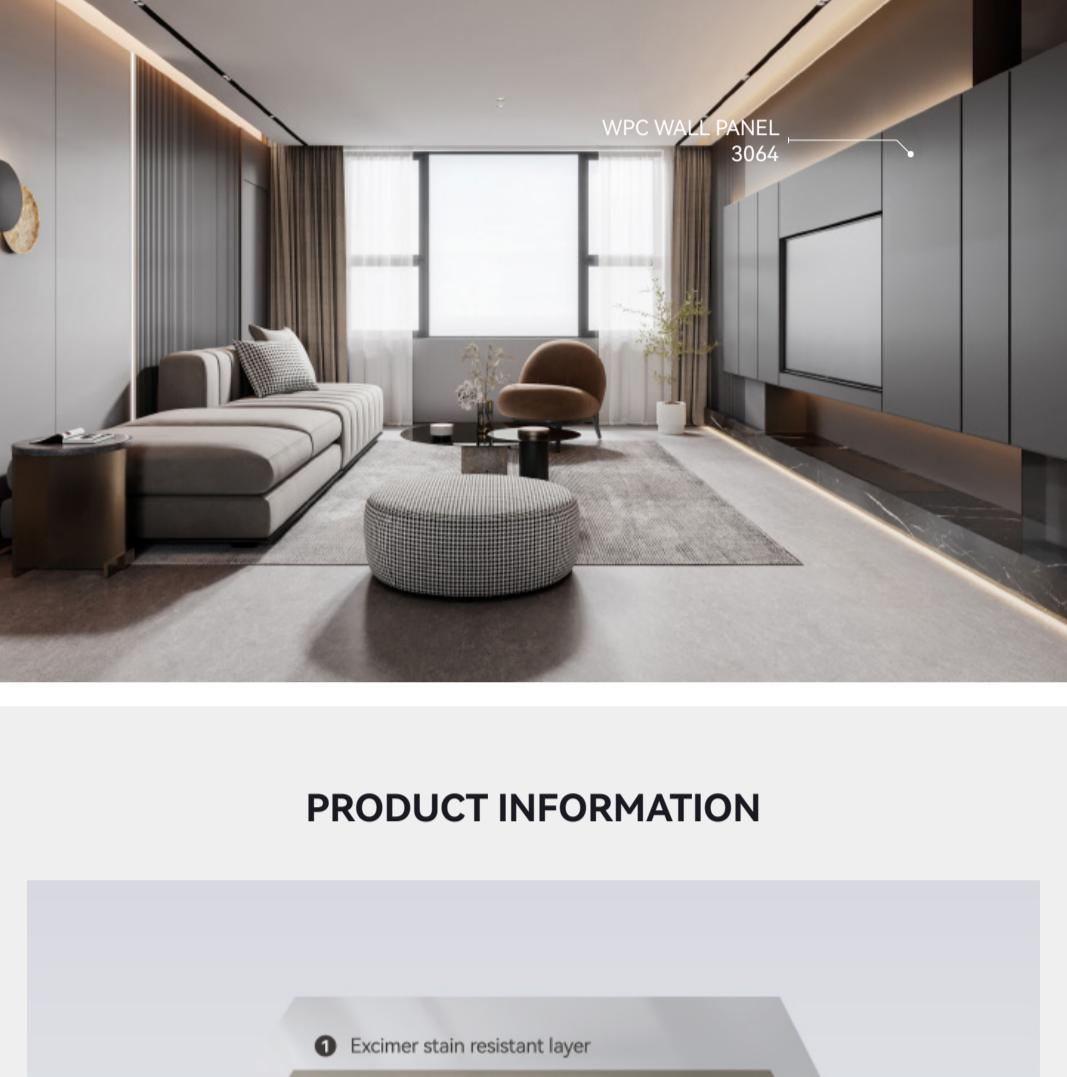

PRODUCT INFORMATION

① Excimer stain resistant layer

② Excimer printing middle layer

③ Excimer printing bottom layer

④ Imported no granular PUR layer



⑤ High strength crystal coextruded layer 1mm

⑥ Bamboo charcoal fiber layer 3mm/6mm

⑦ High strength crystal coextruded layer 1mm

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 L: 12.03m 39' W: 2.35m 7' H: 2.39m 7 10"	PUR coating/ PUR flat sticker Customized length under 6000 Thickness: 5/8	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

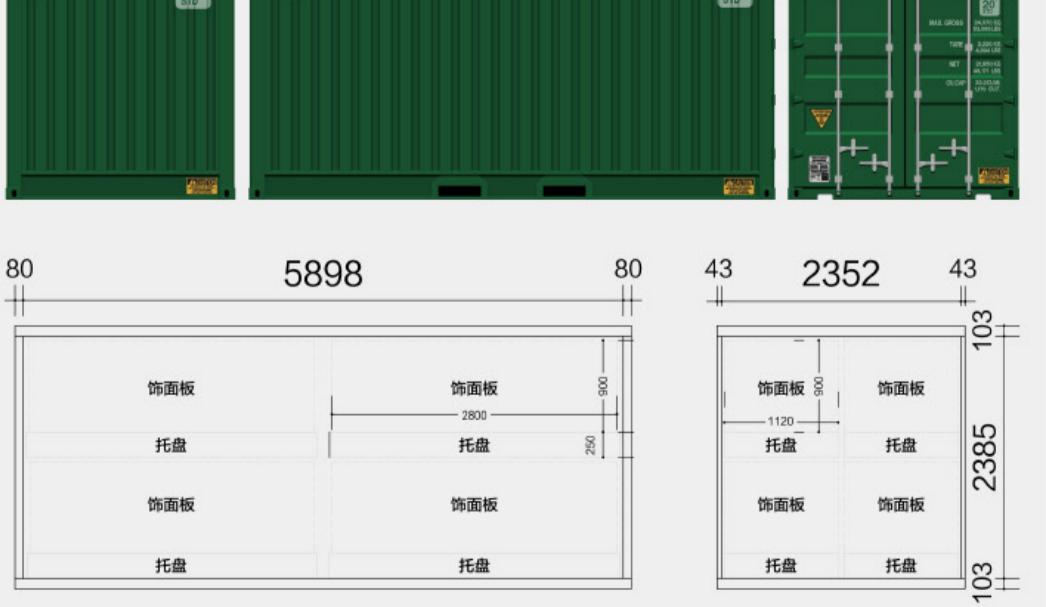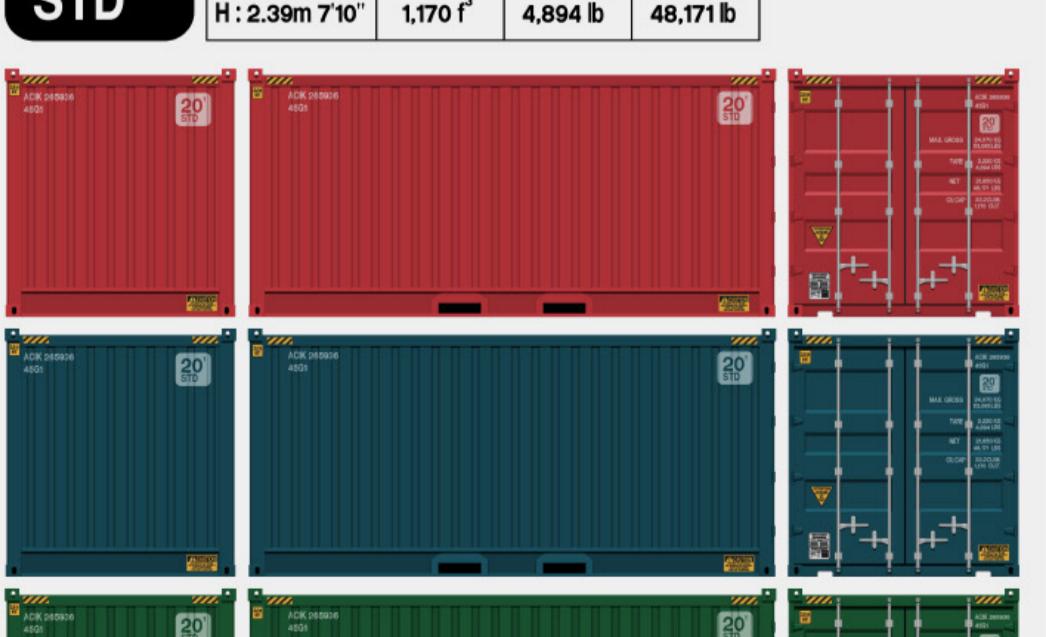

ENF

EP LEVEL

B1

FIRE RATING

Waterproof

SGS

BENDABLE

MORE SOLID COLORS

