





FT 25702

PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm


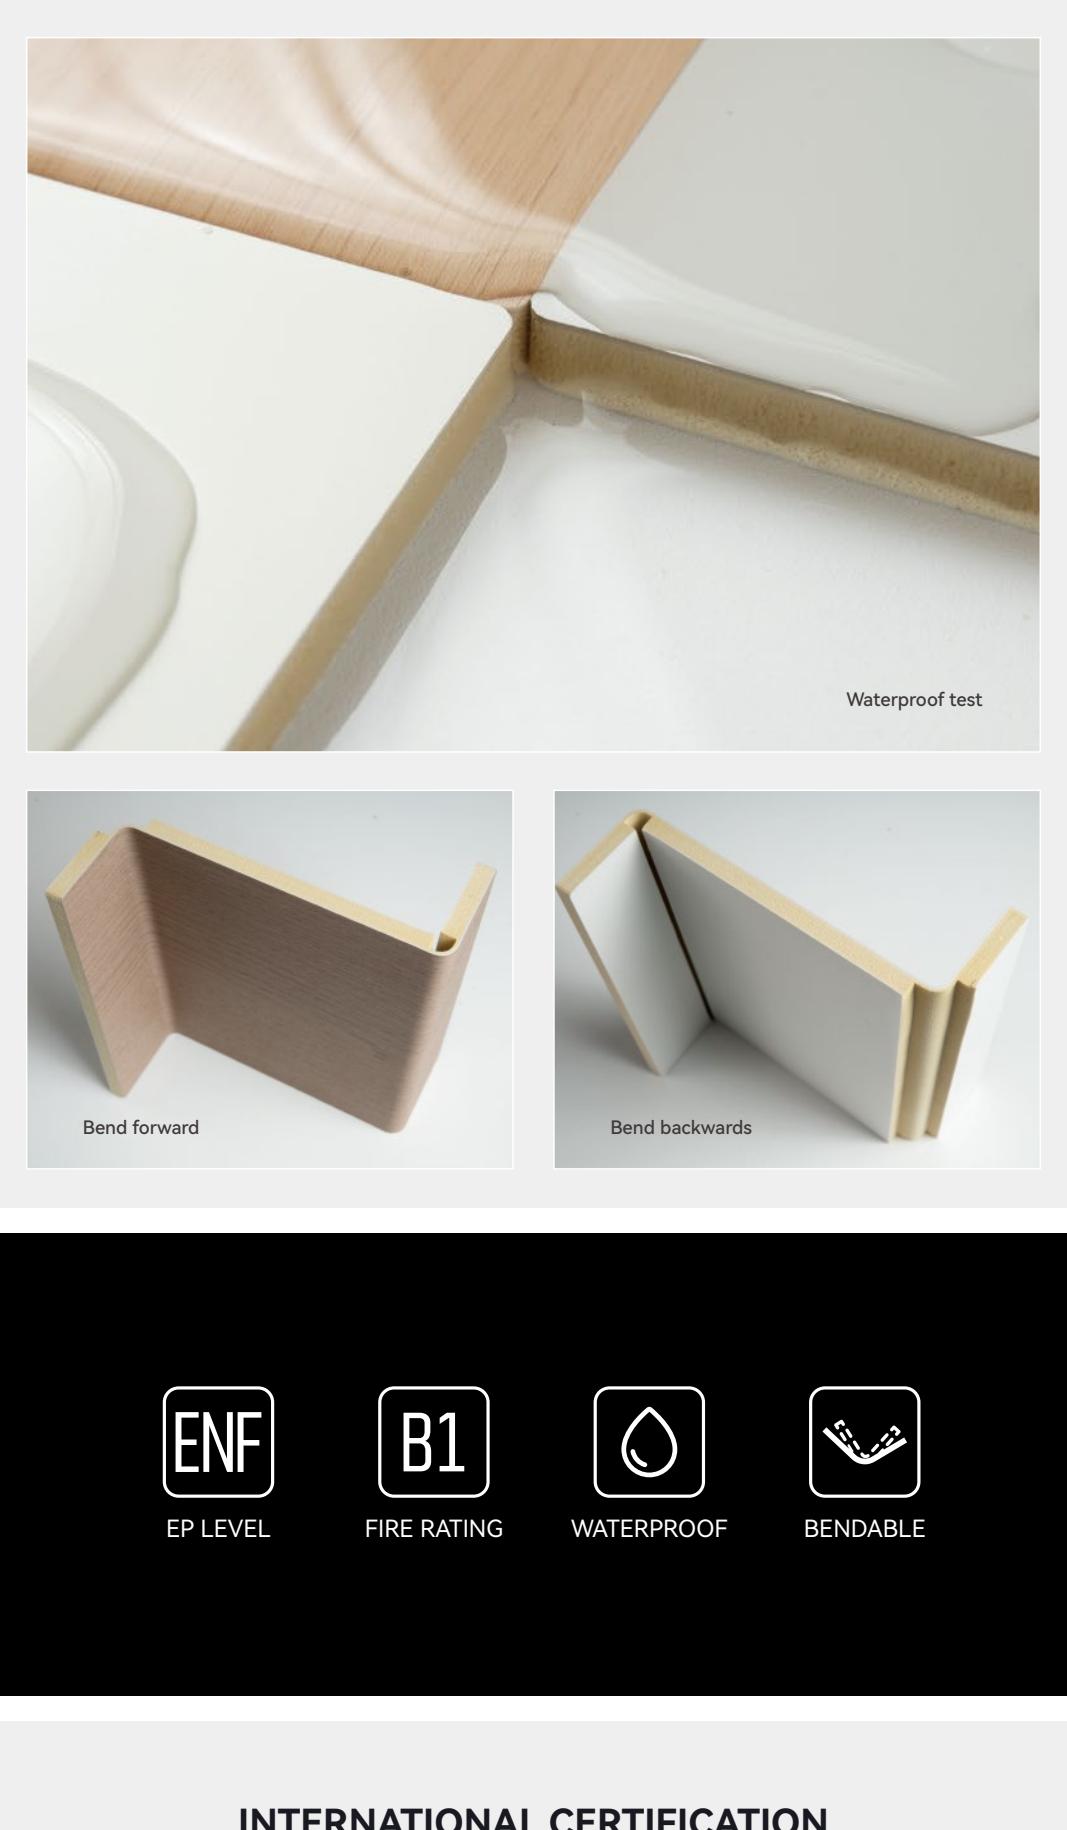


PRODUCT INFORMATION

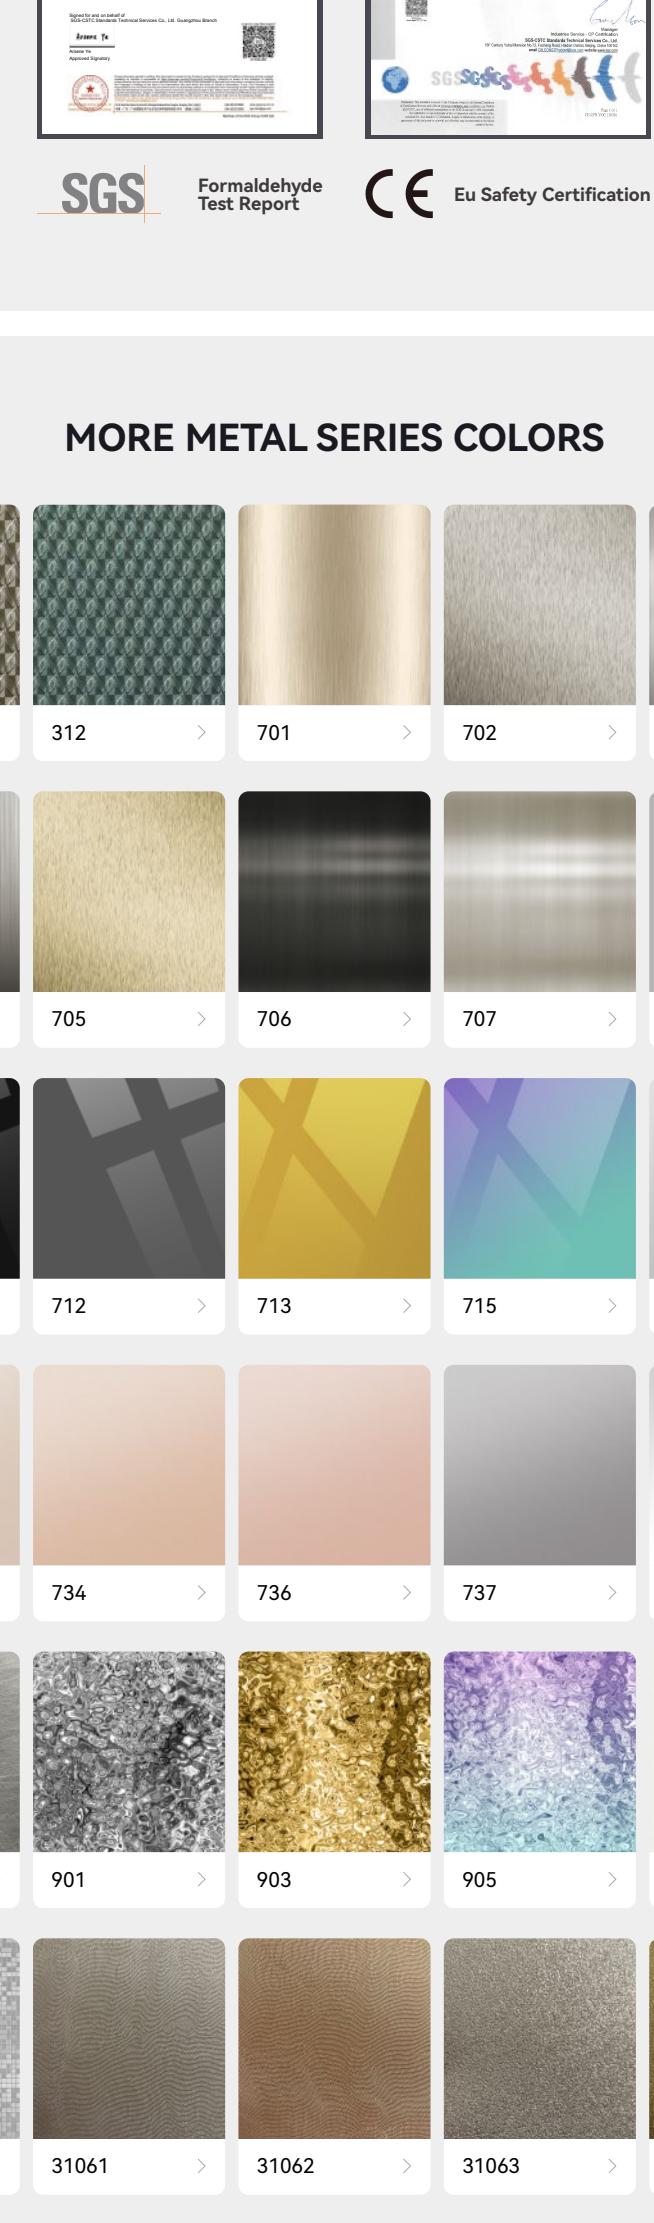

Name	Material\ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+ Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

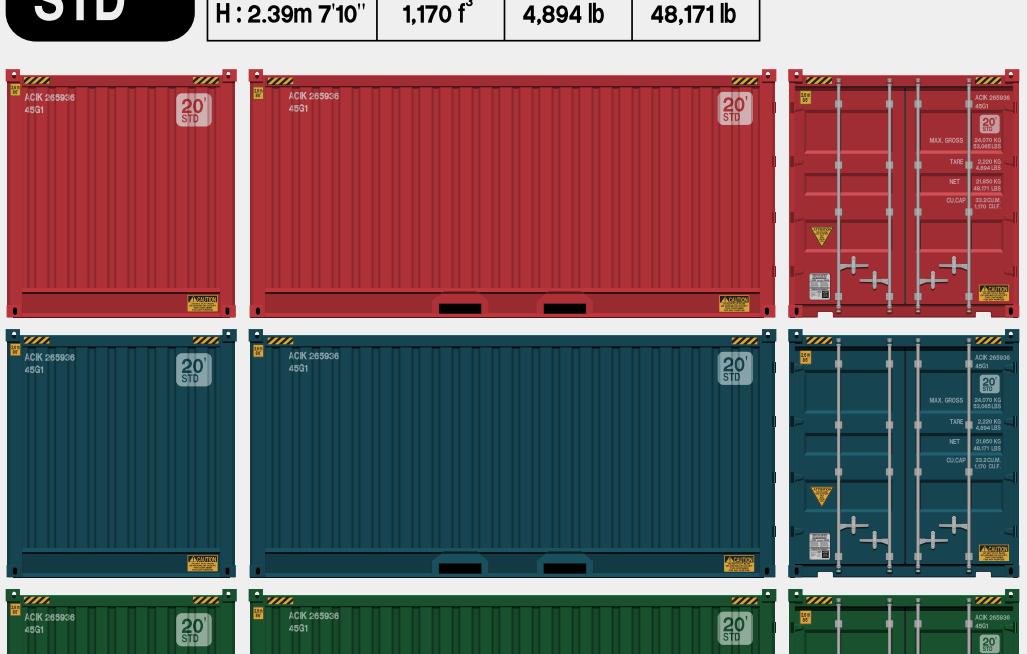
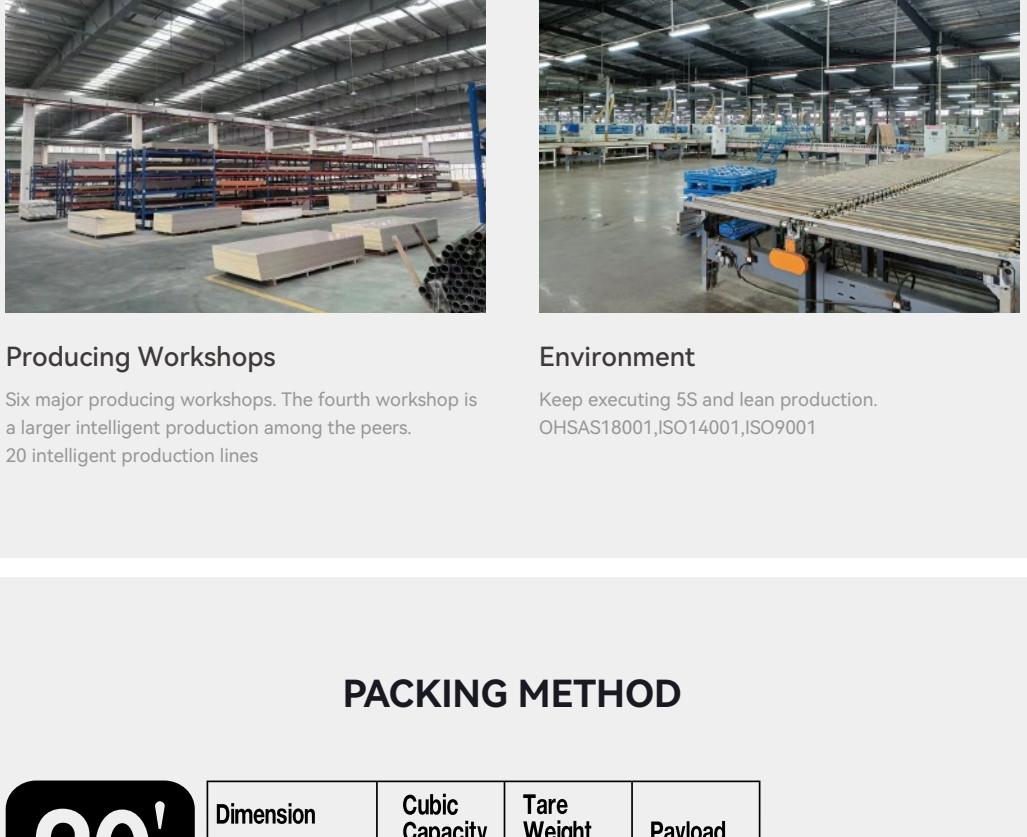


ENF
EP LEVEL

B1
FIRE RATING

Waterproof
WATERPROOF

Flame Retardant
BENDABLE

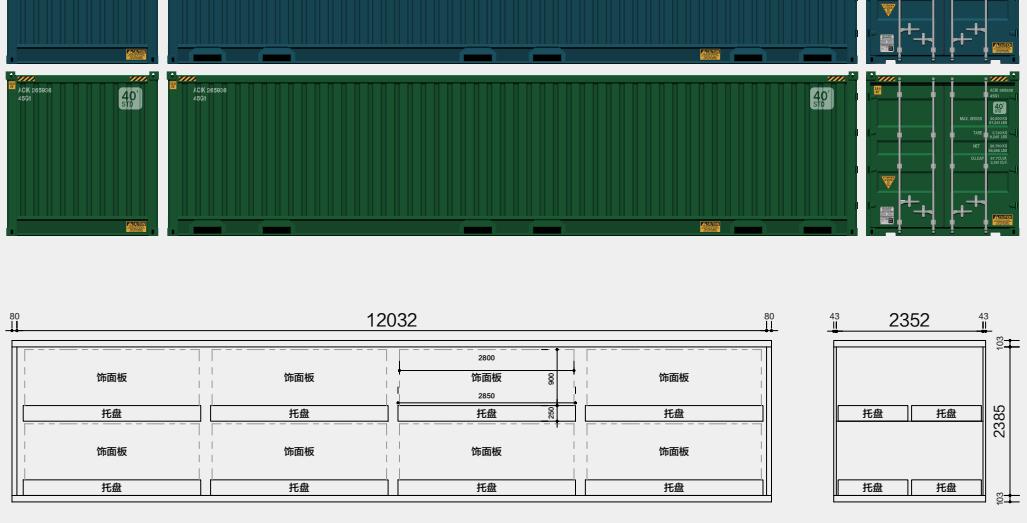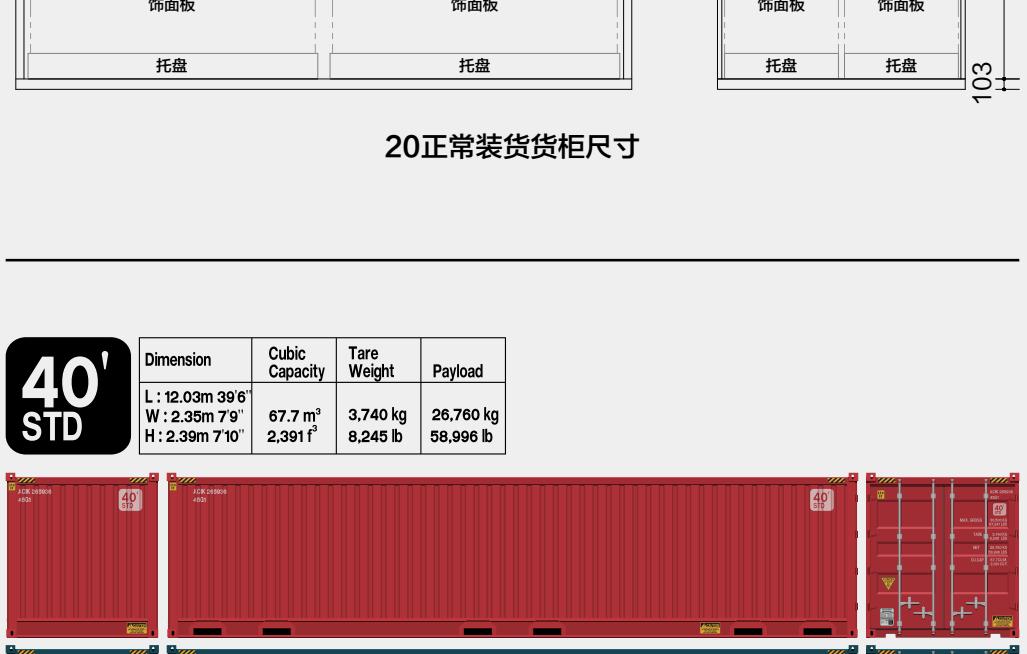

MORE METAL SERIES COLORS

FACTORY STRENGTH

Mature Technology

- Standardized, automated technology design
- Real-time monitoring
- PLC online control
- 4.60 analysis

Equipment Operation

- Famous brands, professional maintenance
- Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001

PACKING METHOD

20 STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 5.89 m 19'4" W: 2.35m 7'9" H: 2.30m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

40 STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.03m 39'6" W: 2.35m 7'9" H: 2.30m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

