

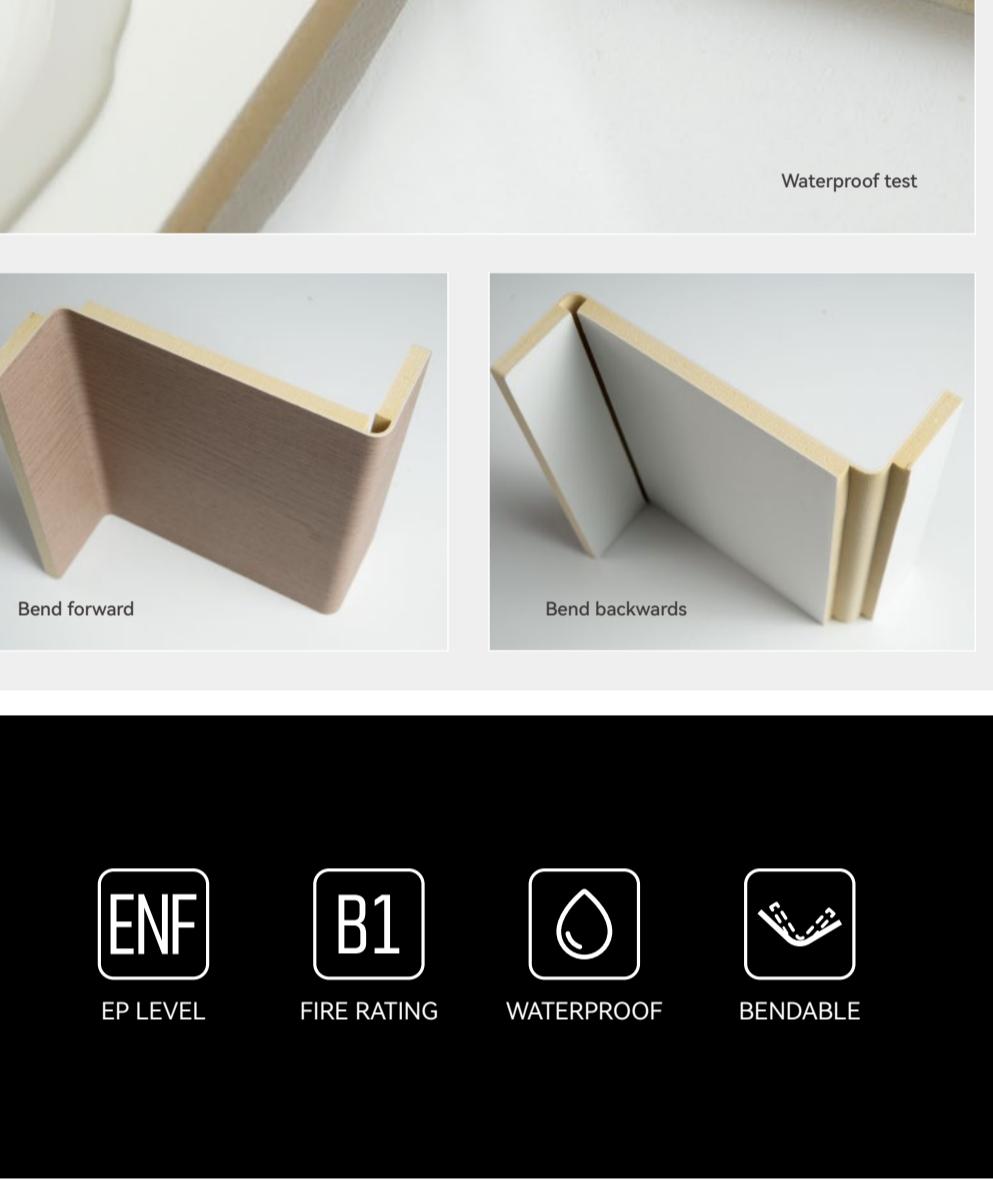


5003

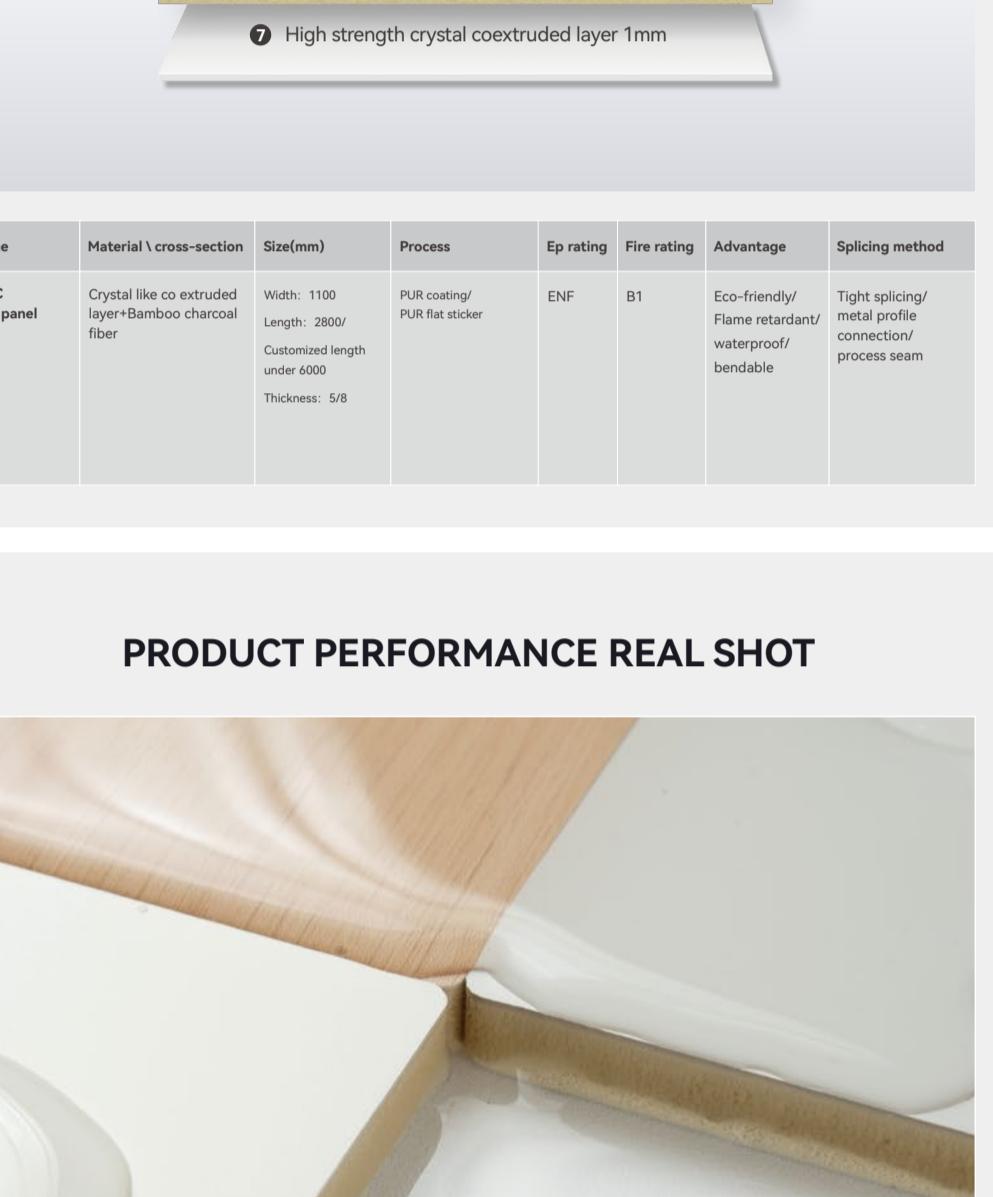


PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm


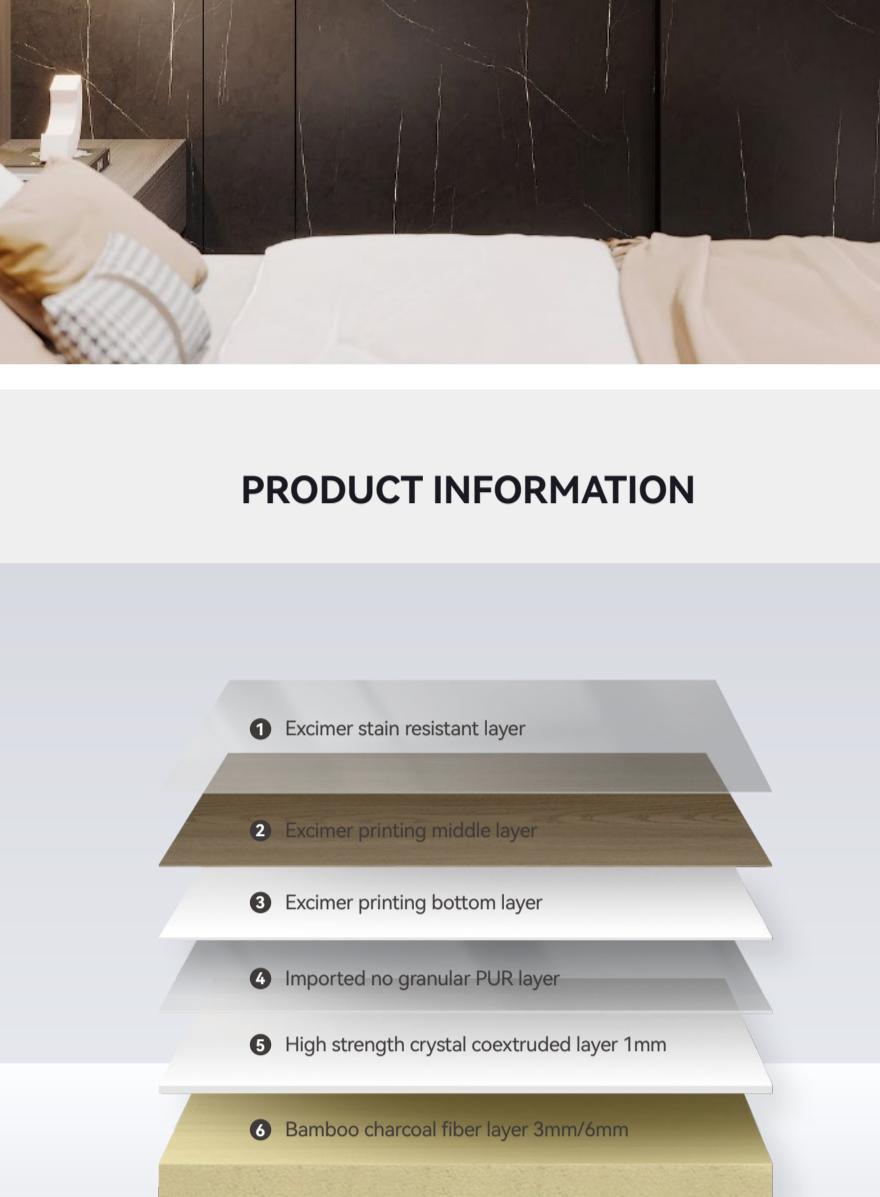


PRODUCT INFORMATION

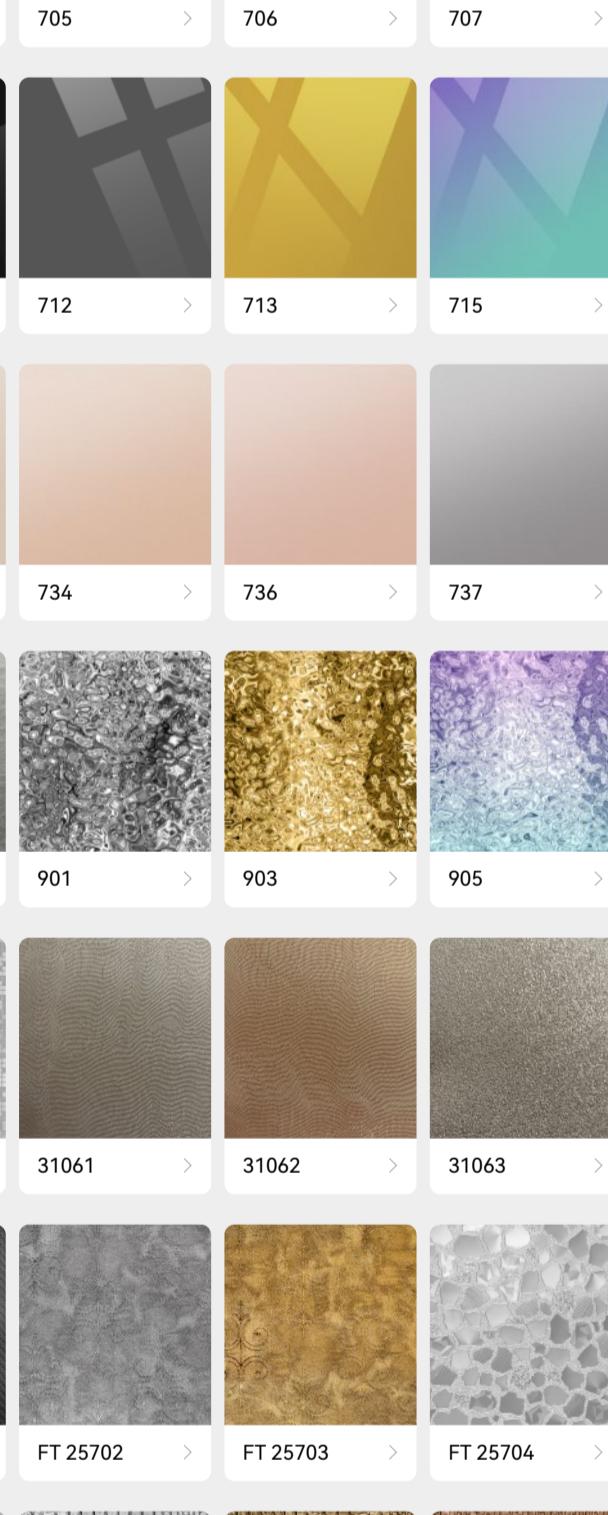

Name	Material \ cross-section	Size(mm)	Process	EP rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

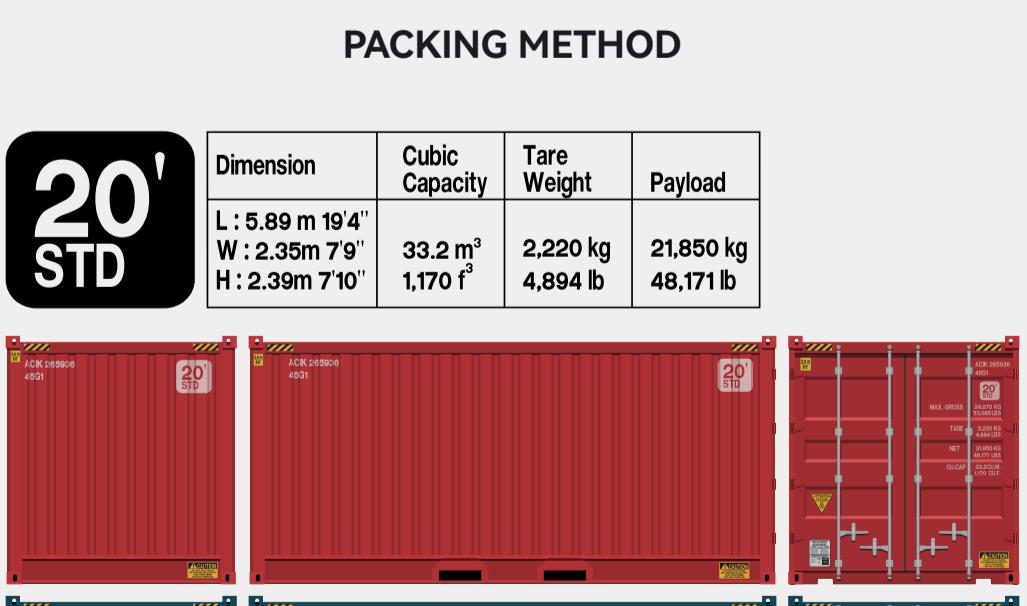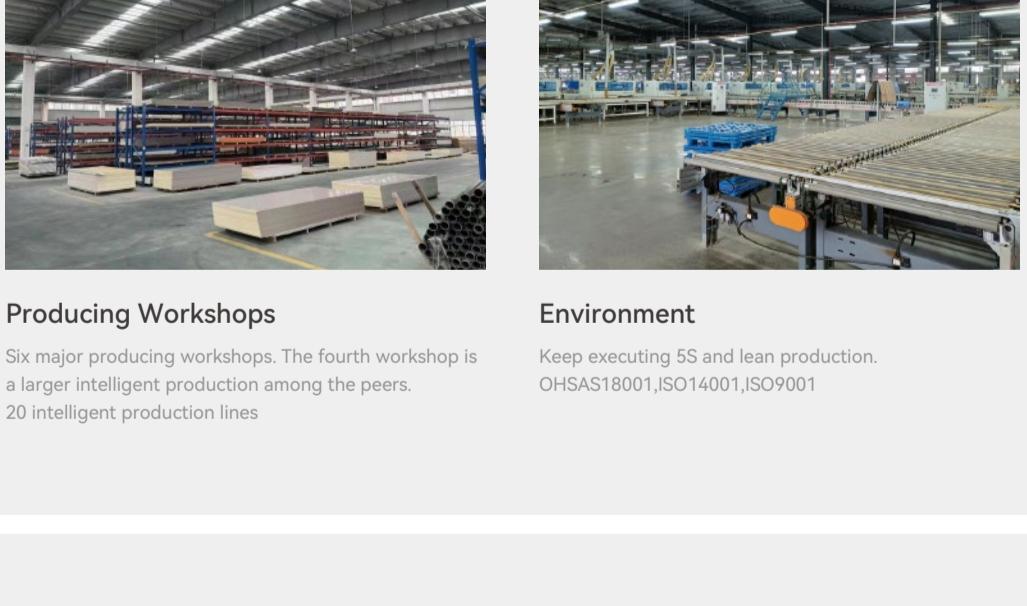

EP LEVEL



FIRE RATING




WATERPROOF



Flame Retardant Test Report











Formaldehyde Test Report



Eu Safety Certification


MORE METAL SERIES COLORS

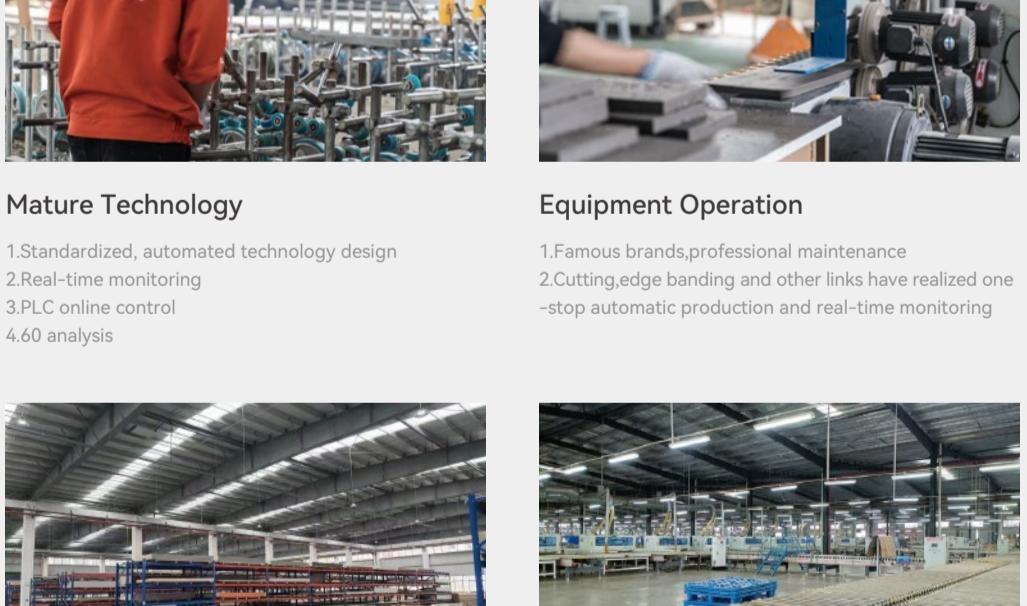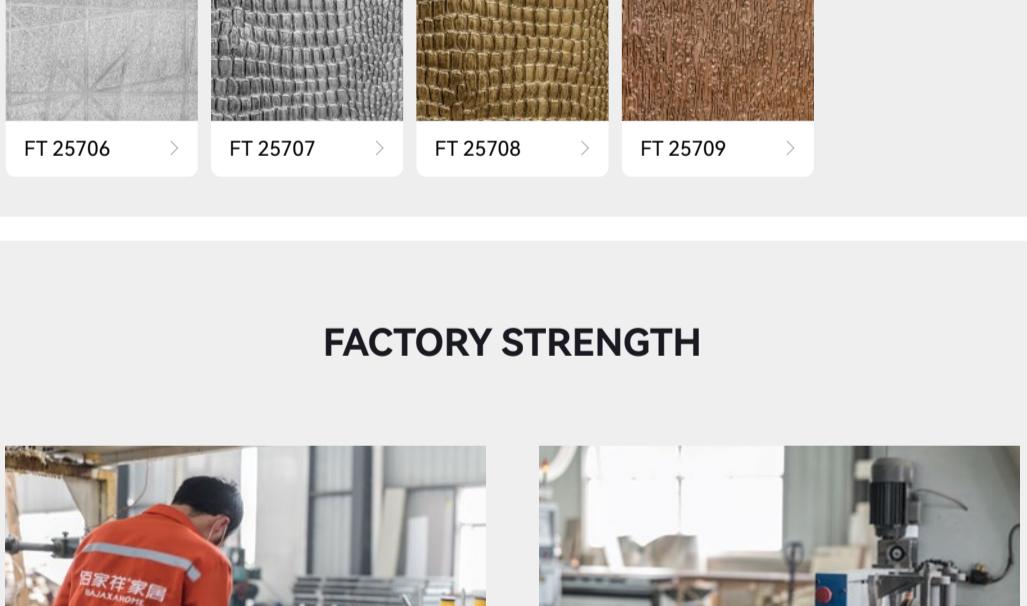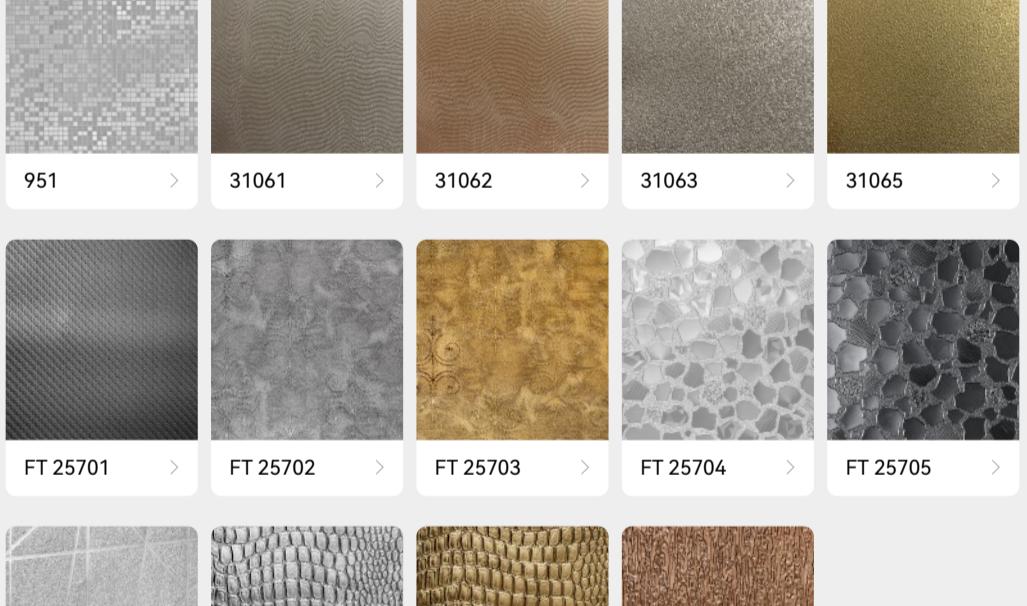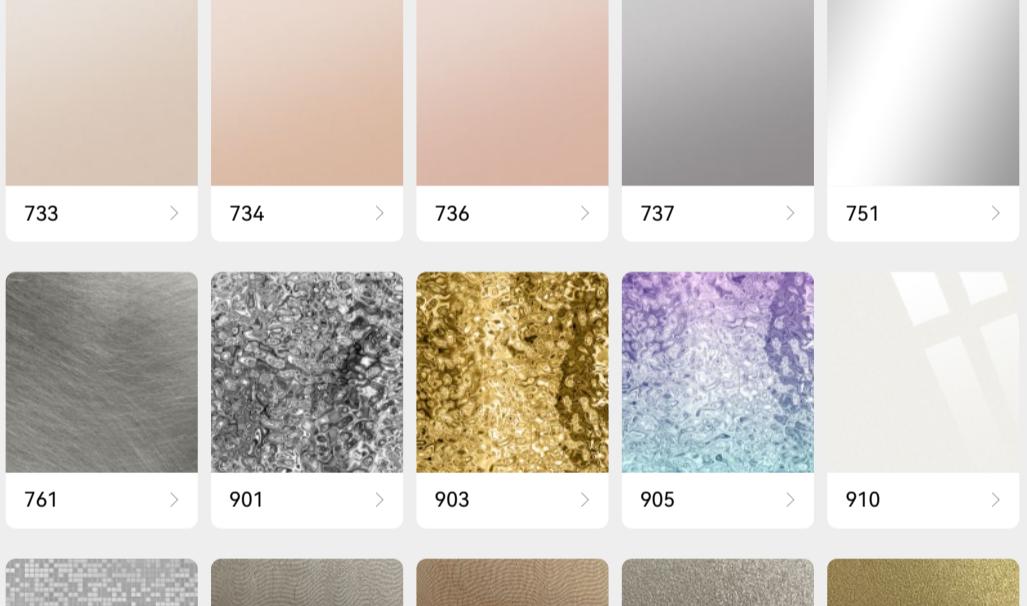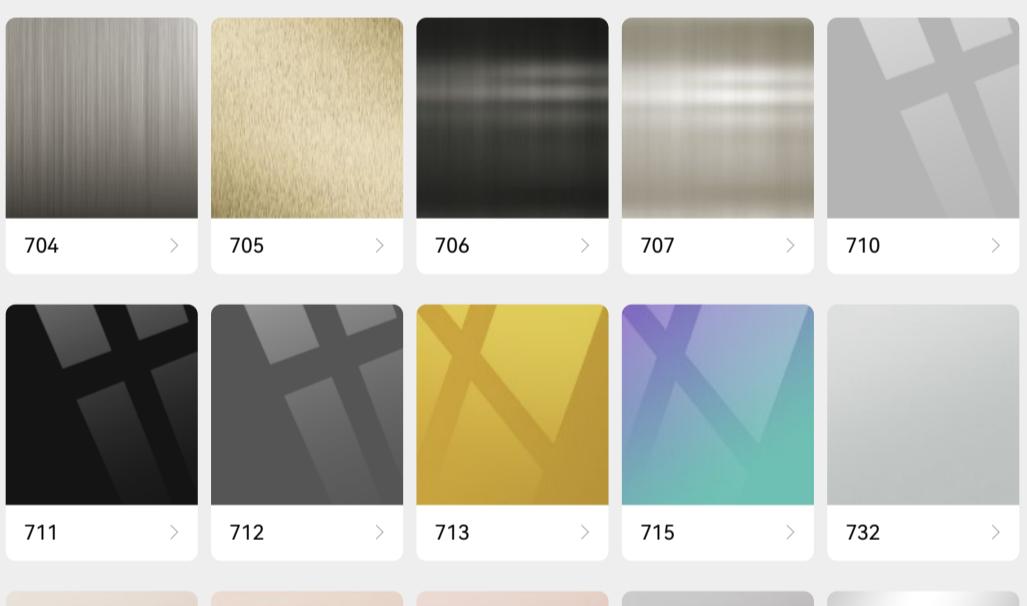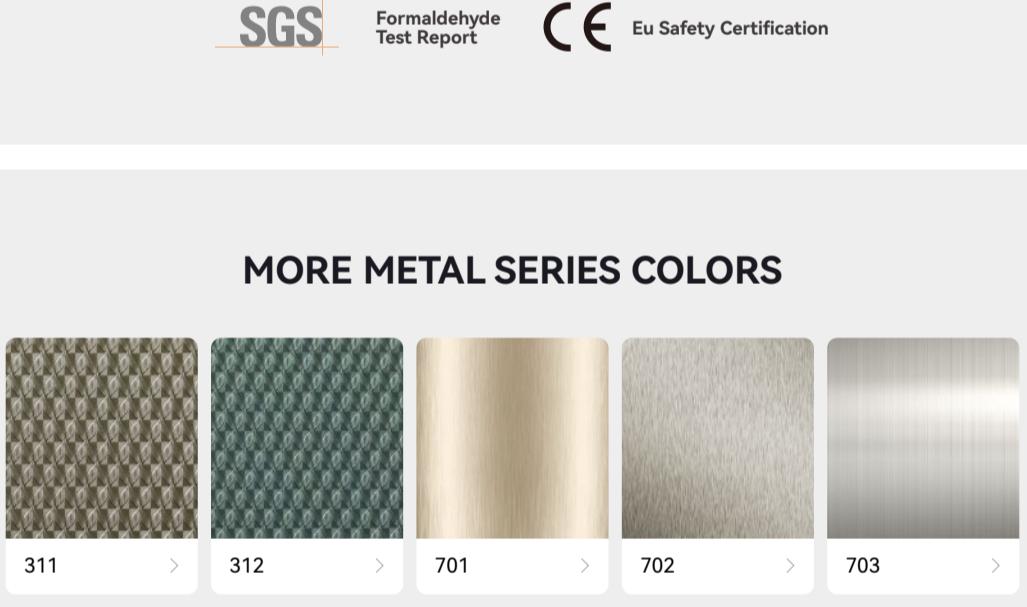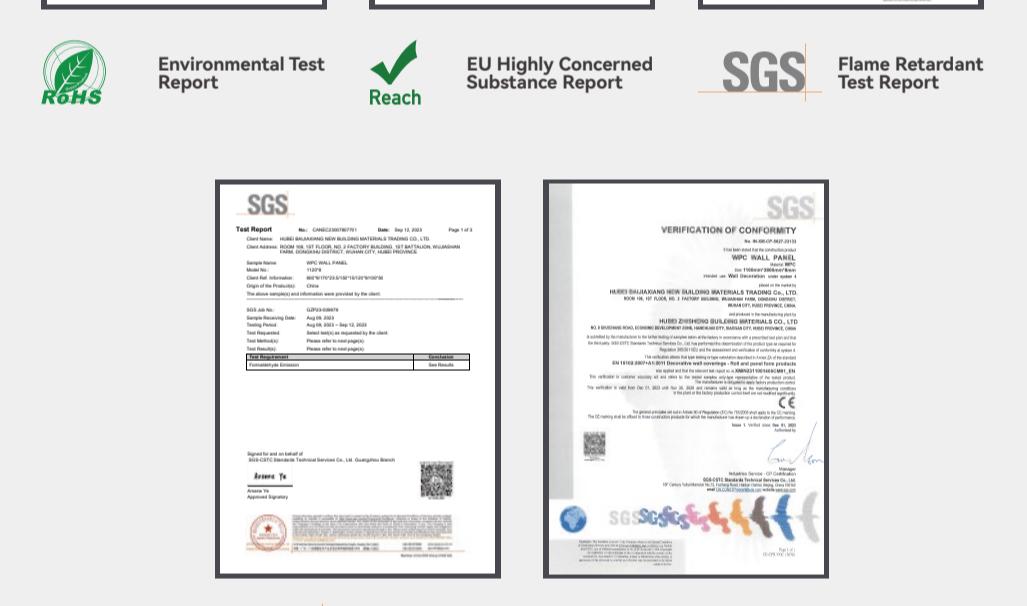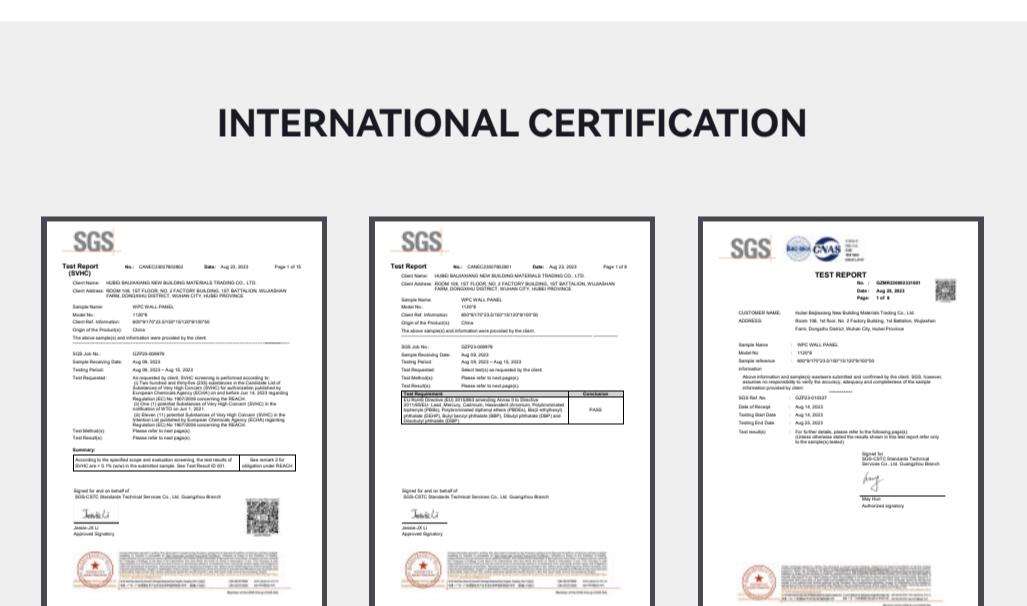

FACTORY STRENGTH



- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis

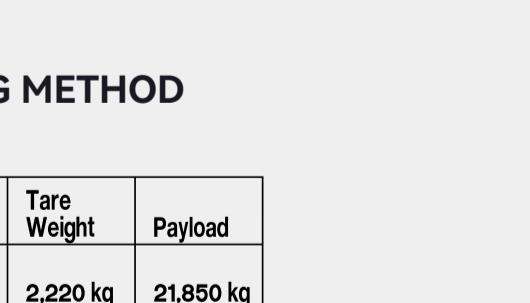

- 1.Famous brands, professional maintenance
- 2.Cutting, edge banding and other lines have realized one-stop automatic production and real-time monitoring



Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines



Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001

Dimension	Cubic Capacity	Tare Weight	Payload
L: 5.89 m 19'6" W: 2.35m 7'9" H: 2.39m 7'10"	33.2 m ³ 1,170 f ³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

20正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L: 12.03m 39'6" W: 2.35m 7'9" H: 2.39m 7'10"	67.7 m ³ 2,391 f ³	3,740 kg 8,245 lb	26,760 kg 59,996 lb

40正常装货货柜尺寸