

CLOTH GRAIN

FT 25607

COLOR NUMBER

WPC WALL PANEL
FT 25607

WPC WALL PANEL
FT 25607

WPC WALL PANEL
FT 25607

WPC WALL PANEL
FT 25607

PRODUCT INFORMATION




Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer-Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam


PRODUCT PERFORMANCE REAL SHOT




Waterproof test




Bend forward




Bend backwards




EP LEVEL



FIRE RATING



WATERPROOF



BENDABLE

MORE CLOTH GRAIN COLORS

FT 25601 > FT 25602 > FT 25603 > FT 25604 > FT 25605 >

FT 25606 > FT 25607 > 6001 > 6003 > 6004 >



6005 > 6009 > 6015 > 6016 > 6019 >

6021 > 6027 > 6035 > 6065 > 6066 >

6070 > 6071 > 6072 > 6073 > 6076 >

6079 > 6080 > 6081 >

INTERNATIONAL CERTIFICATION

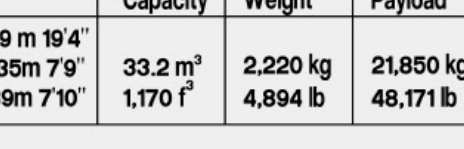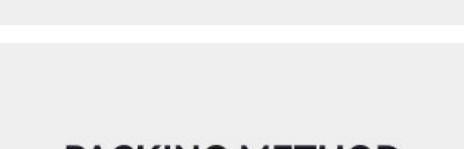


FACTORY STRENGTH



Mature Technology
1.Standardized, automated technology design
2.Real-time monitoring
3.PLC online control
4.6D analysis

Equipment Operation
1.Famous brands,operational maintenance
2.Cutting,edge banding and other links have realized one-stop automatic production and real-time monitoring

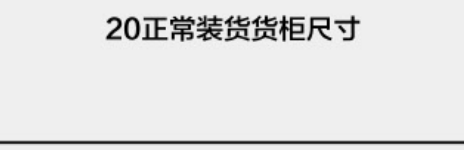


Producing Workshops
Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines



Environment
Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001

PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4"	33.2 m³	2,220 kg	21,850 kg
W : 2.35m 7'9"	1,170 f³	4,894 lb	48,171 lb
H : 2.39m 7'10"			

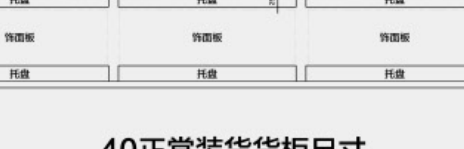

20正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6"	67.7 m³	3,740 kg	26,760 kg
W : 2.35m 7'9"	2,391 f³	8,245 lb	58,996 lb
H : 2.39m 7'10"			

40正常装货货柜尺寸