

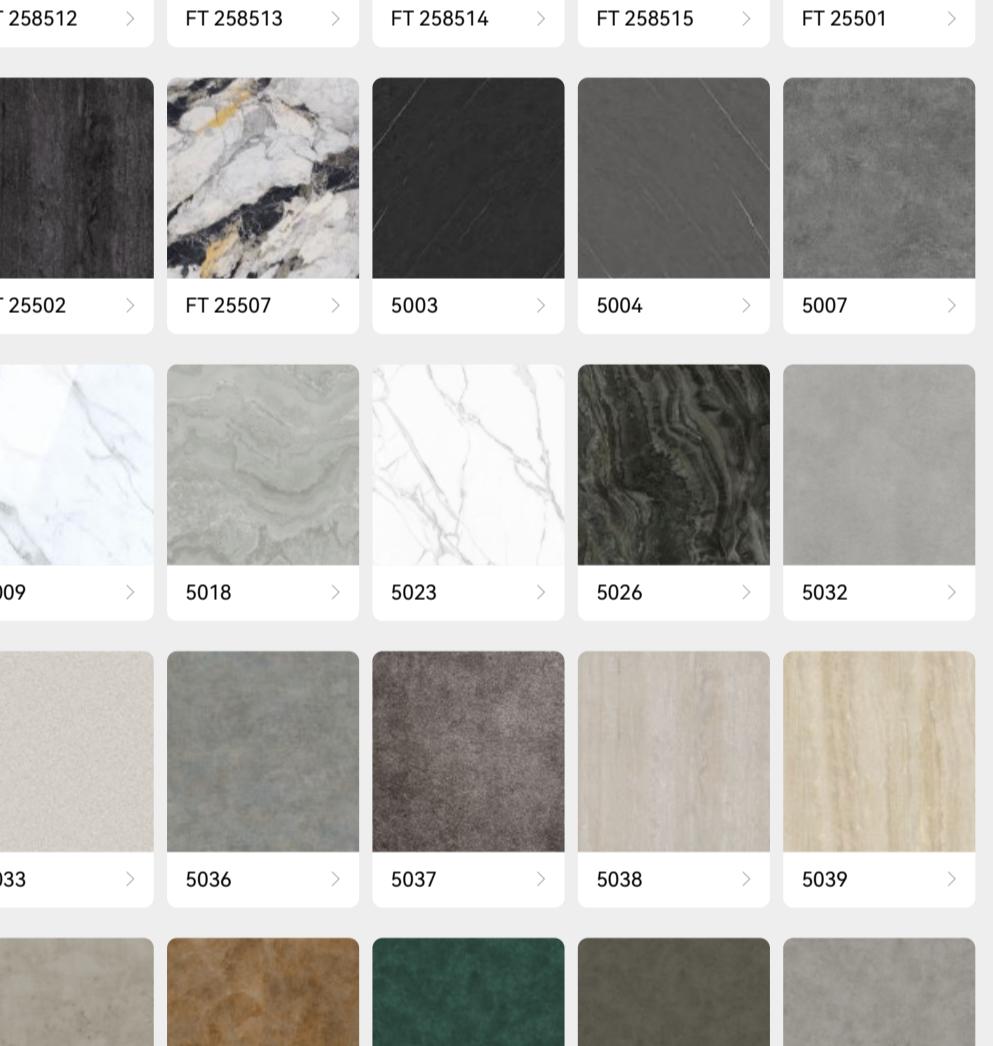


## FT 258514

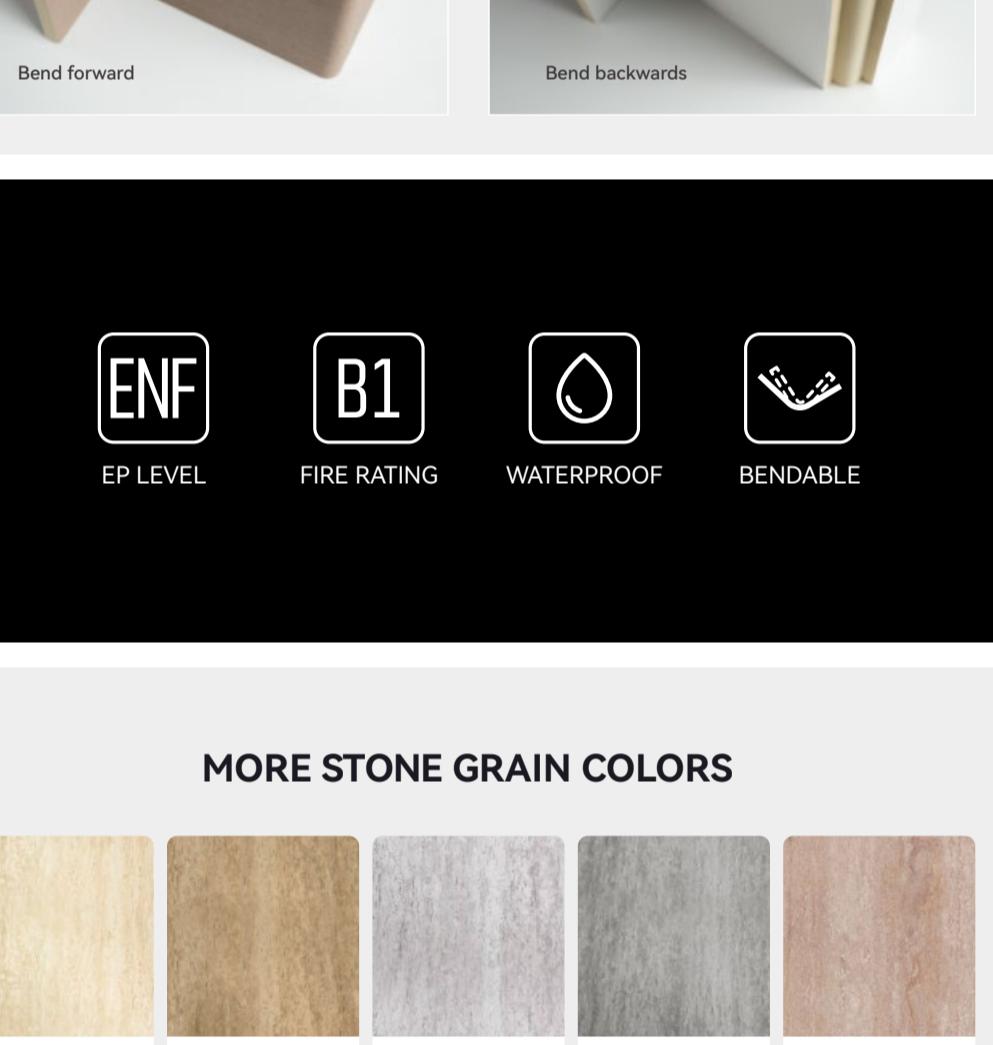


### PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm



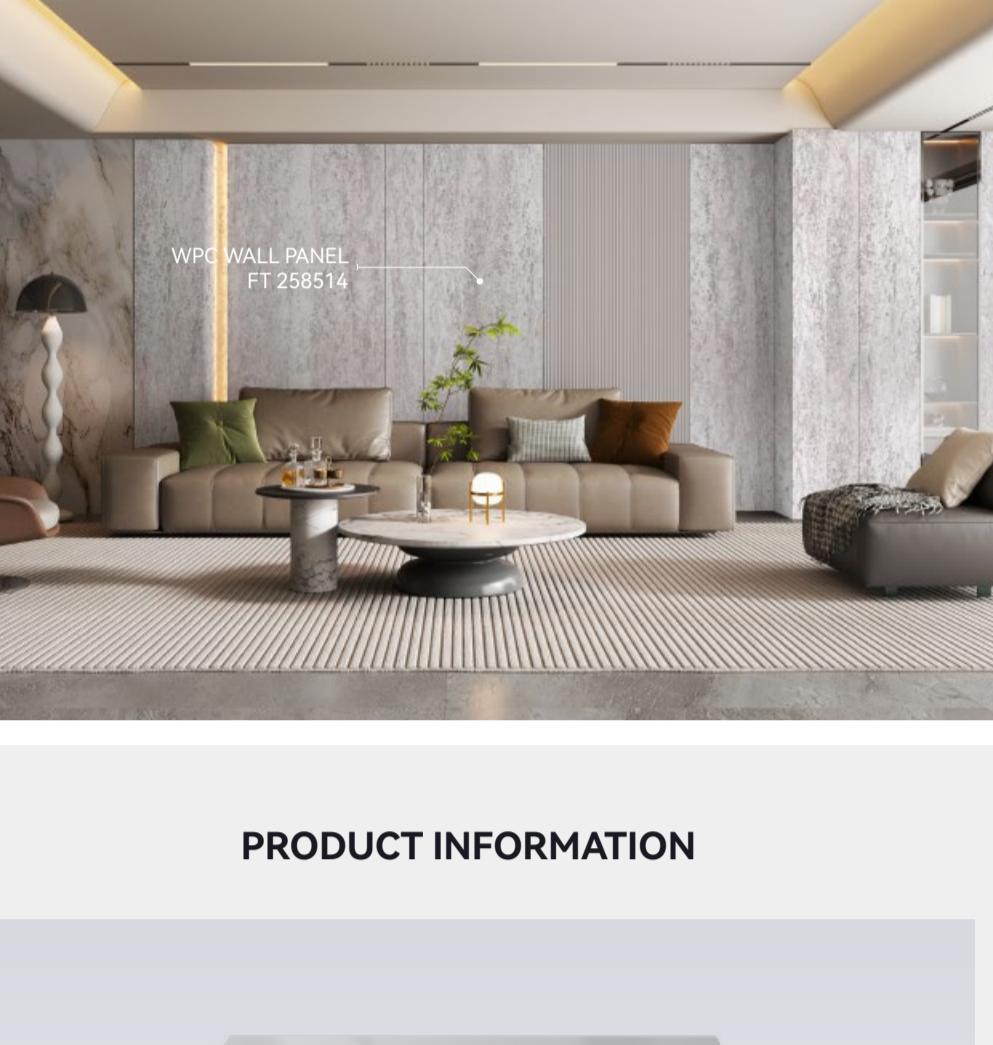


## PRODUCT INFORMATION

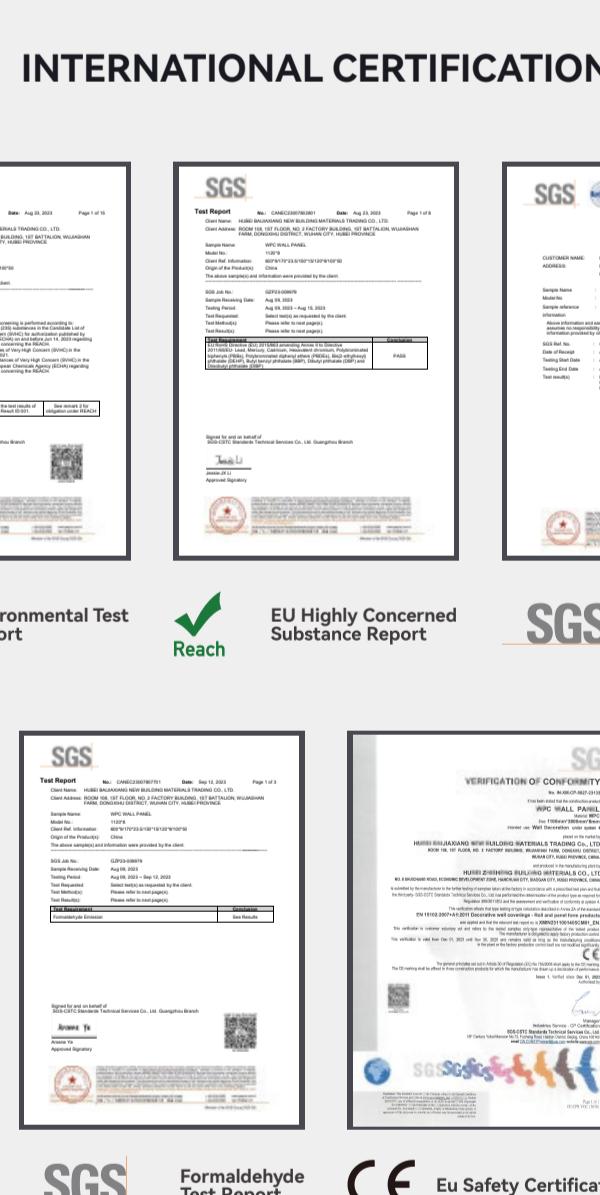

Name	Material\cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 L: 12.09m 39' W: 2.39m 79' H: 2.39m 710'	PUR coating/ PUR flat sticker Customized length under 6000 Thickness: 5/8	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ connection/ seam

## PRODUCT PERFORMANCE REAL SHOT

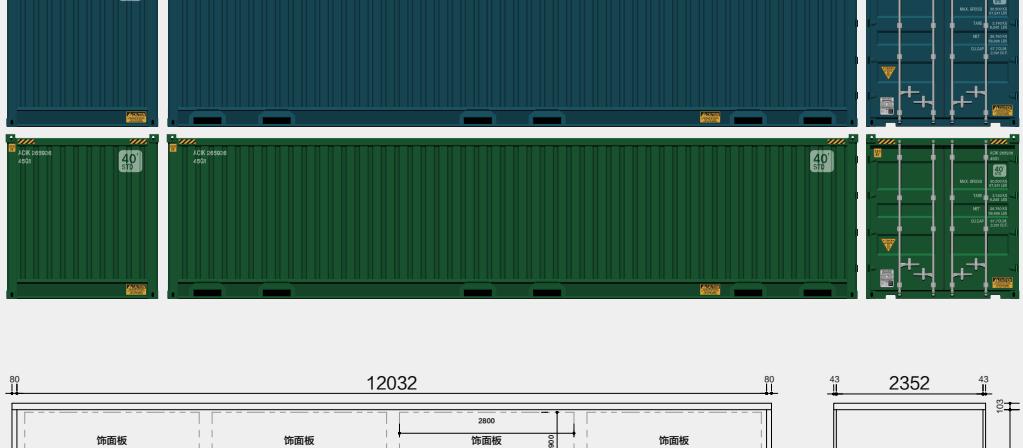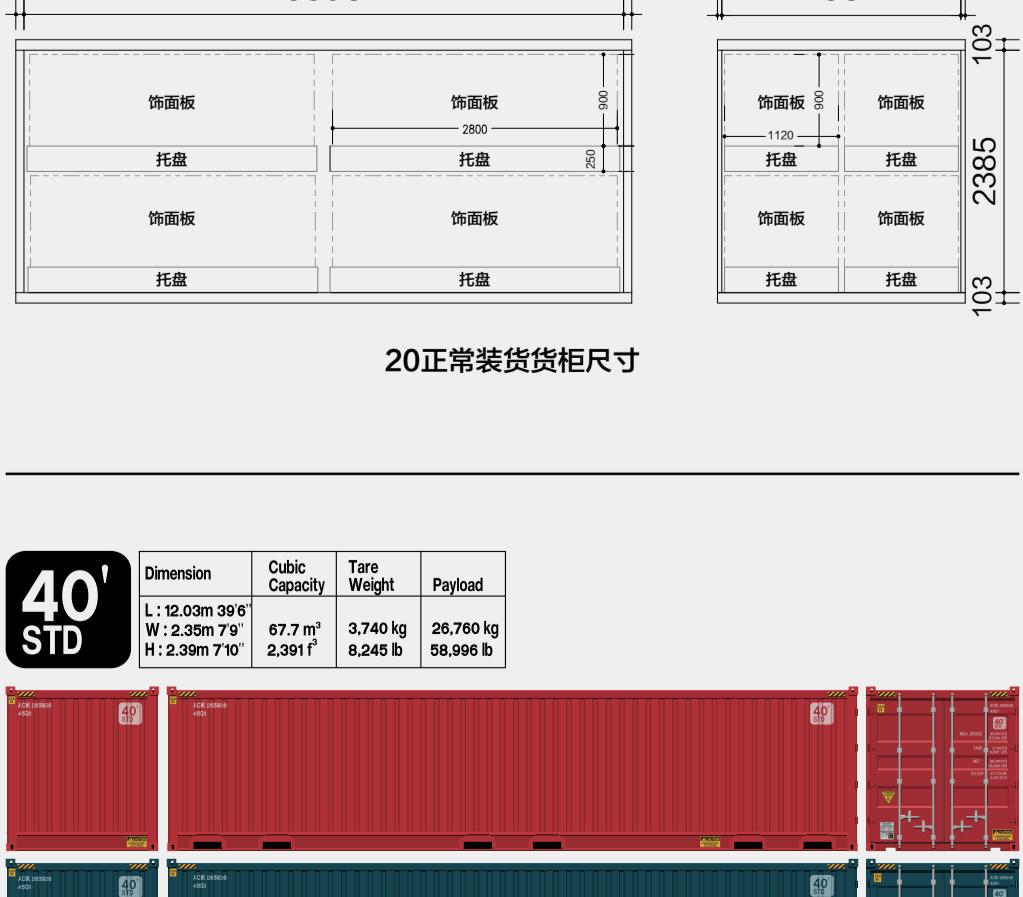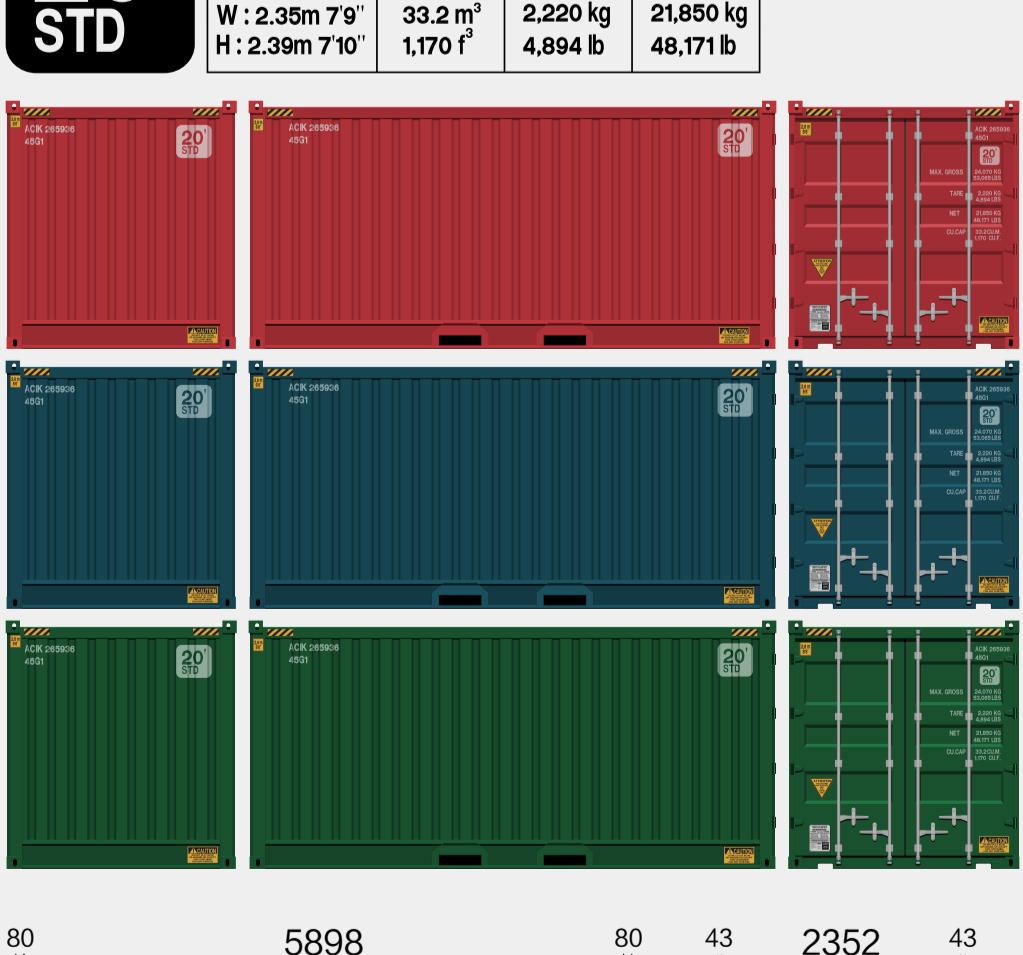

## FACTORY STRENGTH

Mature Technology	Equipment Operation
1.Standardized, automated technology design 2.Real-time monitoring 3.PLC online control 4.60 analysis	1.Famous brands, professional maintenance 2.Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

Producing Workshops	Environment
Six major producing workshops. The fourth workshop is a larger intelligent production among the peers. 20 intelligent production lines	Keep executing 5S and lean production. OHSAS18001, ISO14001, ISO9001

Packing Method
----------------

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 5.89 m 19'4" W: 2.35m 79" H: 2.39m 710"	33.2 m <sup>3</sup> 1,170 f <sup>3</sup>	2,220 kg 4,894 lb	21,850 kg 48,171 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.09m 39' W: 2.39m 79" H: 2.39m 710"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.09m 39' W: 2.39m 79" H: 2.39m 710"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.09m 39' W: 2.39m 79" H: 2.39m 710"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.09m 39' W: 2.39m 79" H: 2.39m 710"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L: 12.09m 39' W: 2.39m 79" H: 2.39m 710"	67.7 m <sup>3</sup> 2,391 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb