

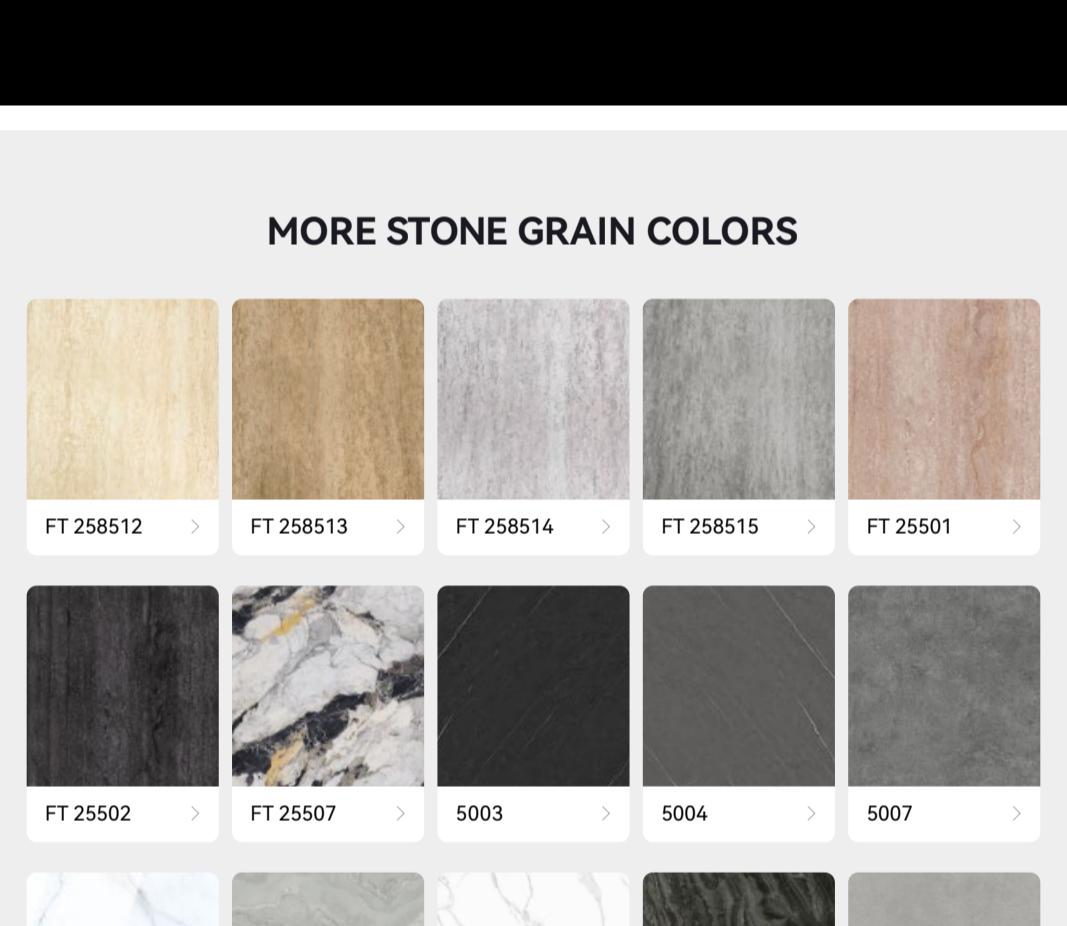
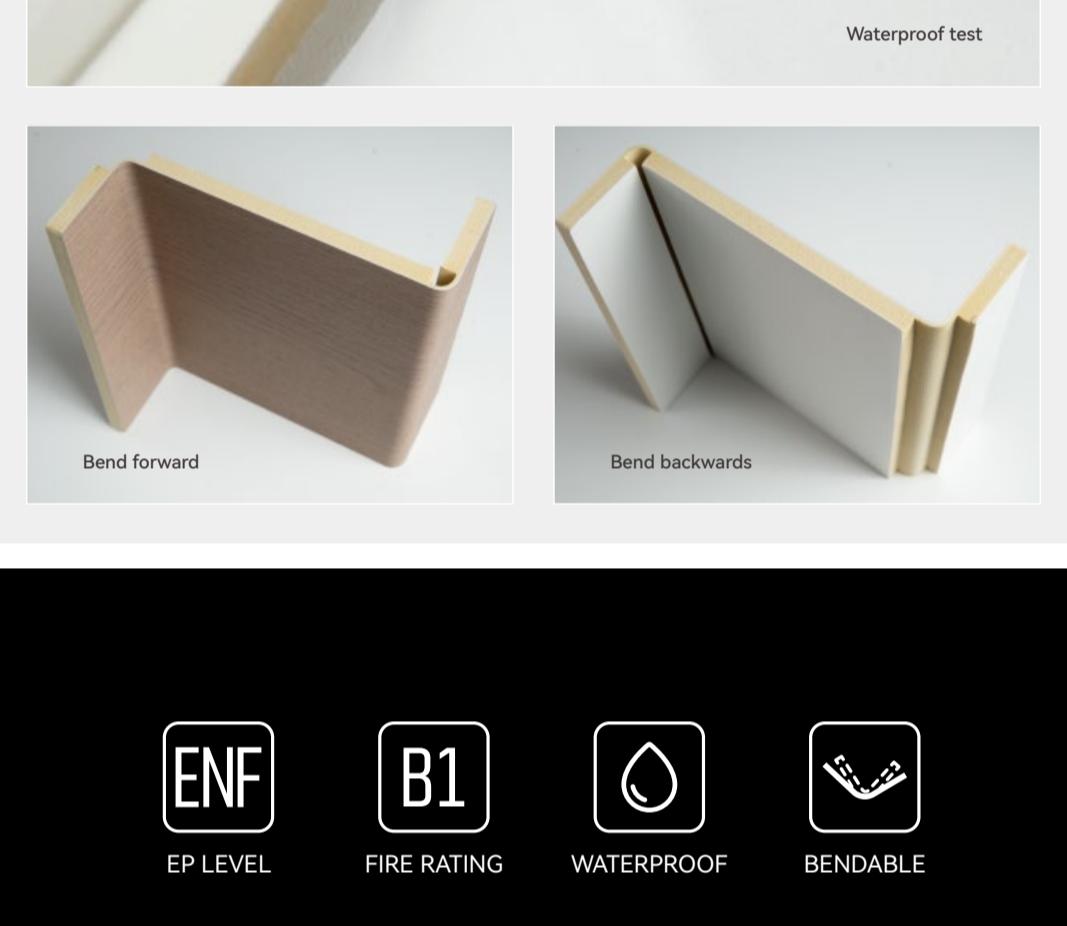
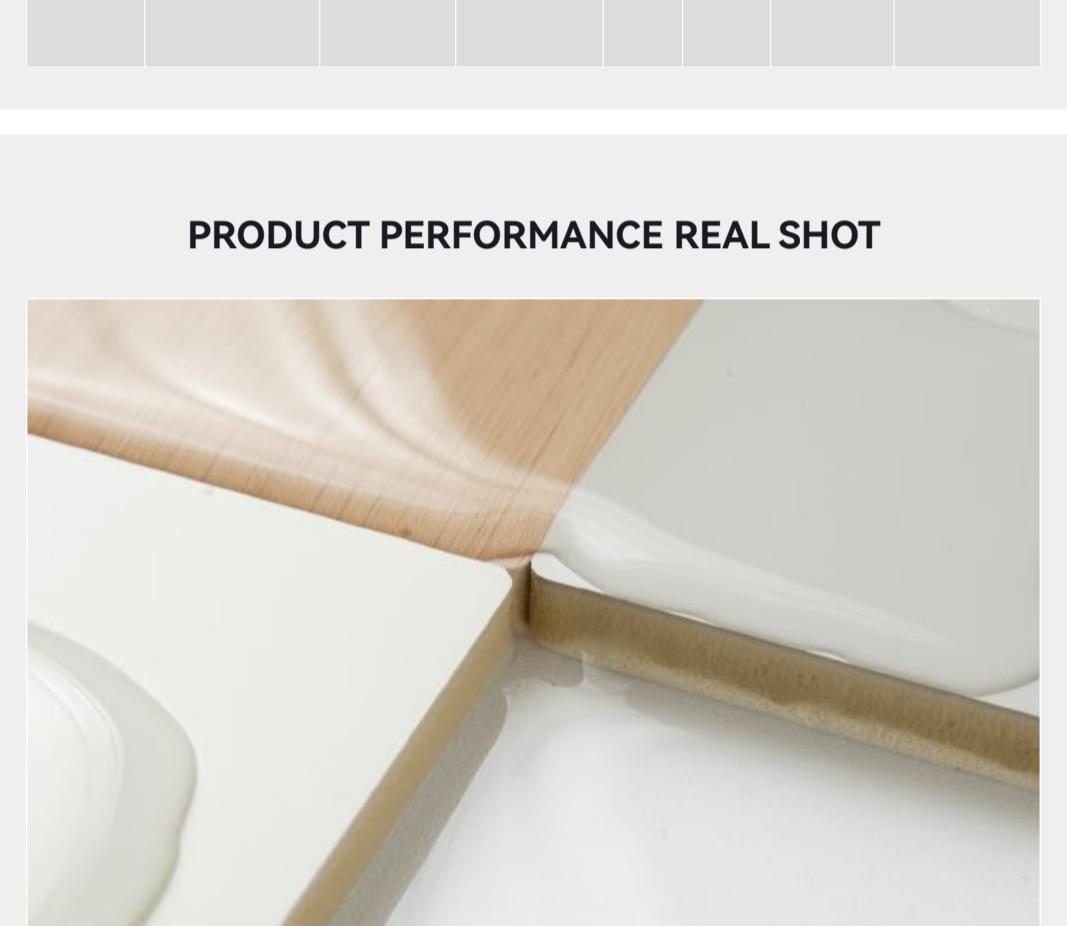


## FT 258512

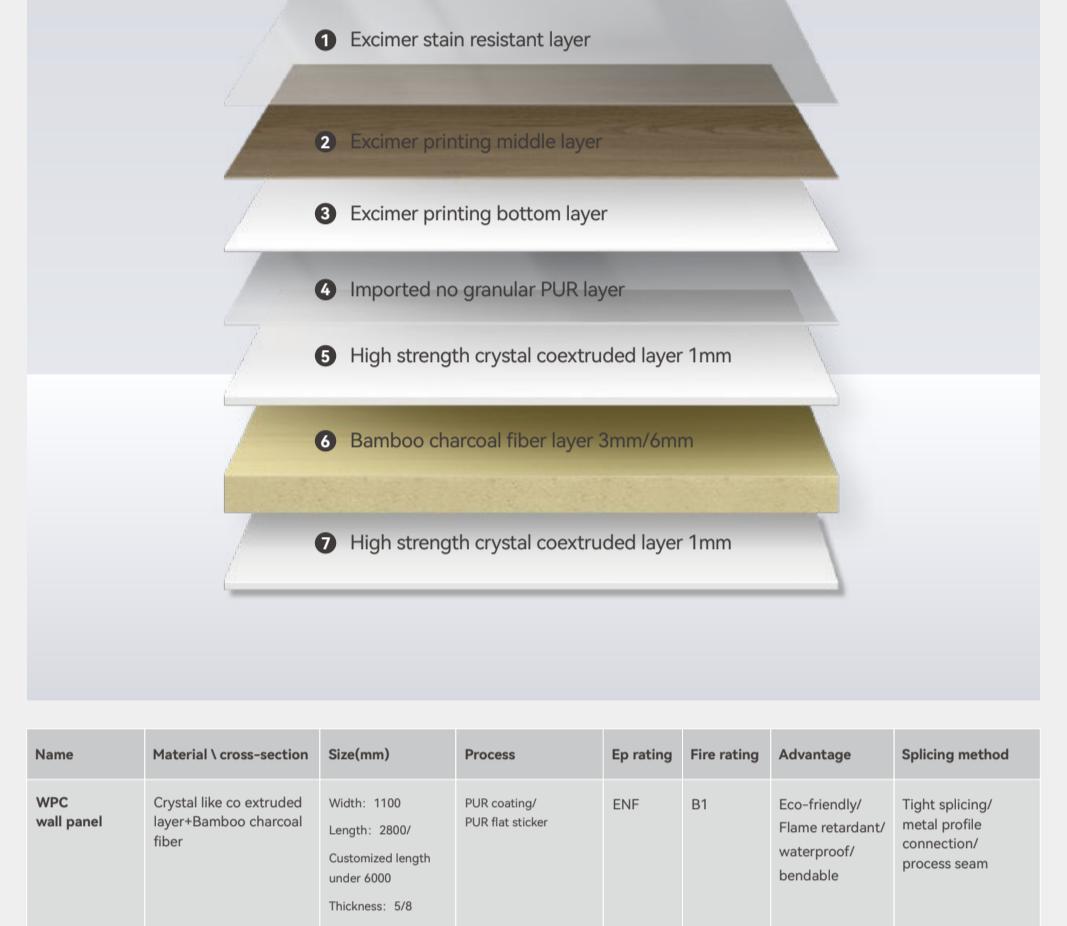

### PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

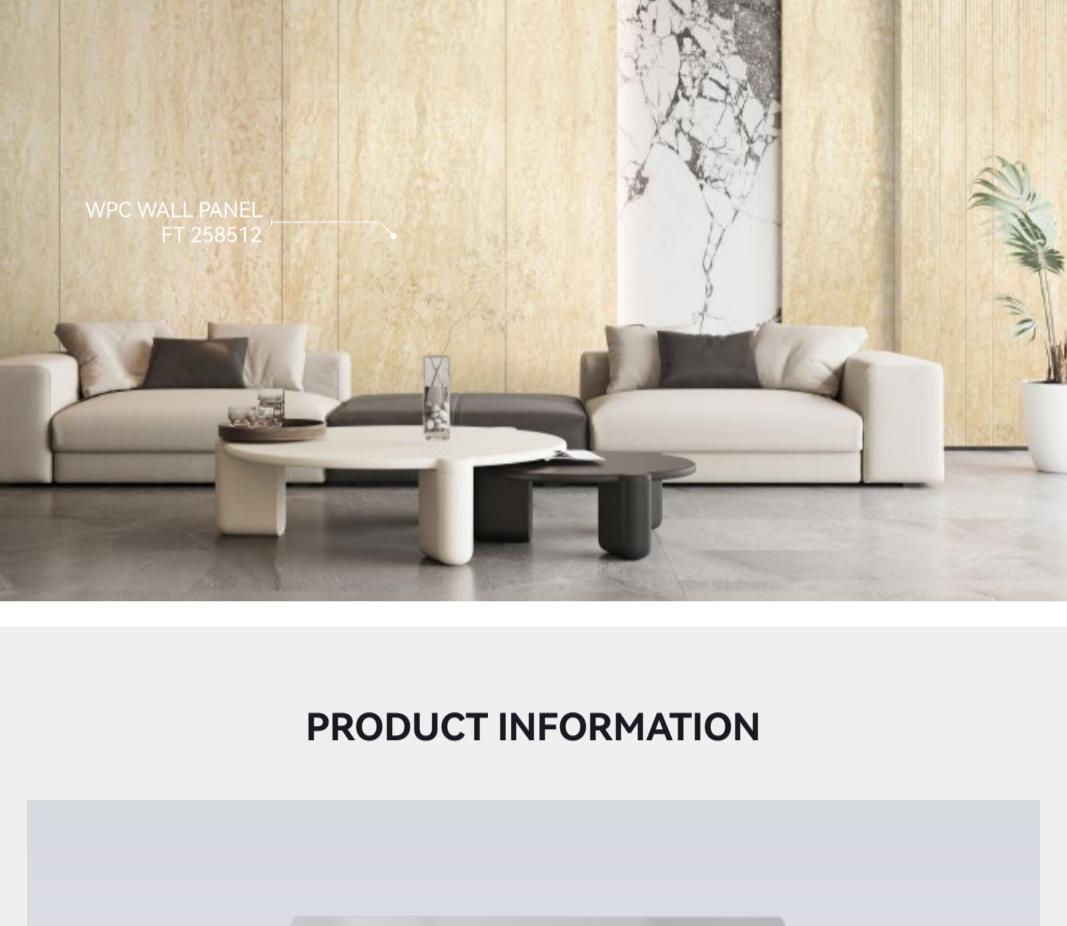

## PRODUCT INFORMATION



EP LEVEL



FIRE RATING



WATERPROOF



BENDABLE

### WPC WALL PANEL FT 258512

Crystal like co extruded layer+ Bamboo charcoal fiber

Width: 1100mm

Length: 2800mm

Customized length under 6000mm

Thickness: 5/8/12mm

PUR coating/ flat sticker

ENF

B1

Waterproof

High strength crystal coextruded layer 1mm

Bamboo charcoal fiber layer 3mm/6mm

High strength crystal coextruded layer 1mm

SGS

Environmental Test Report

EU Highly Concerned Substance Report

SGS

Formaldehyde Test Report

SGS

Flame Retardant Test Report

SGS


Verification of Conformity

SGS

CE

Eu Safety Certification

## FACTORY STRENGTH

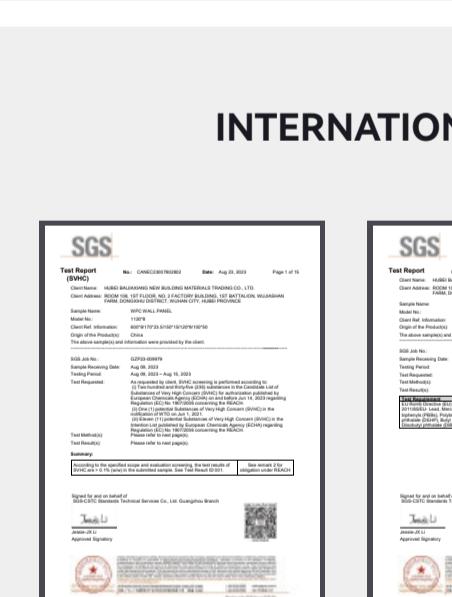

1.Standardized, automated technology design  
2.Real-time monitoring  
3.PLC online control  
4.60 analysis



1.Famous brands, professional maintenance  
2.Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring



Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines




Keep executing 5S and lean production.  
OHSAS18001, ISO14001, ISO9001



Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m <sup>3</sup> 1,170 f <sup>3</sup>	2,220 kg 4,894 lb	21,850 kg 48,171 lb



Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.09m 39'8" W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m <sup>3</sup> 2,311 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb

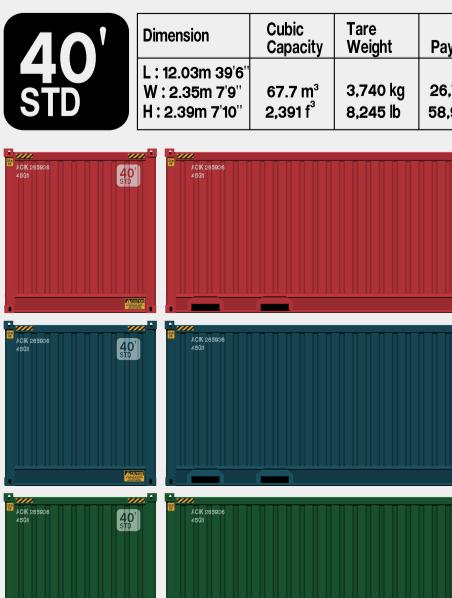

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'8" W : 2.35m 7'9" H : 2.39m 7'10"	2800 mm 8.245 f <sup>3</sup>	2,800 kg 6,225 lb	25,960 kg 57,475 lb