


## 8024

COLOR NUMBER




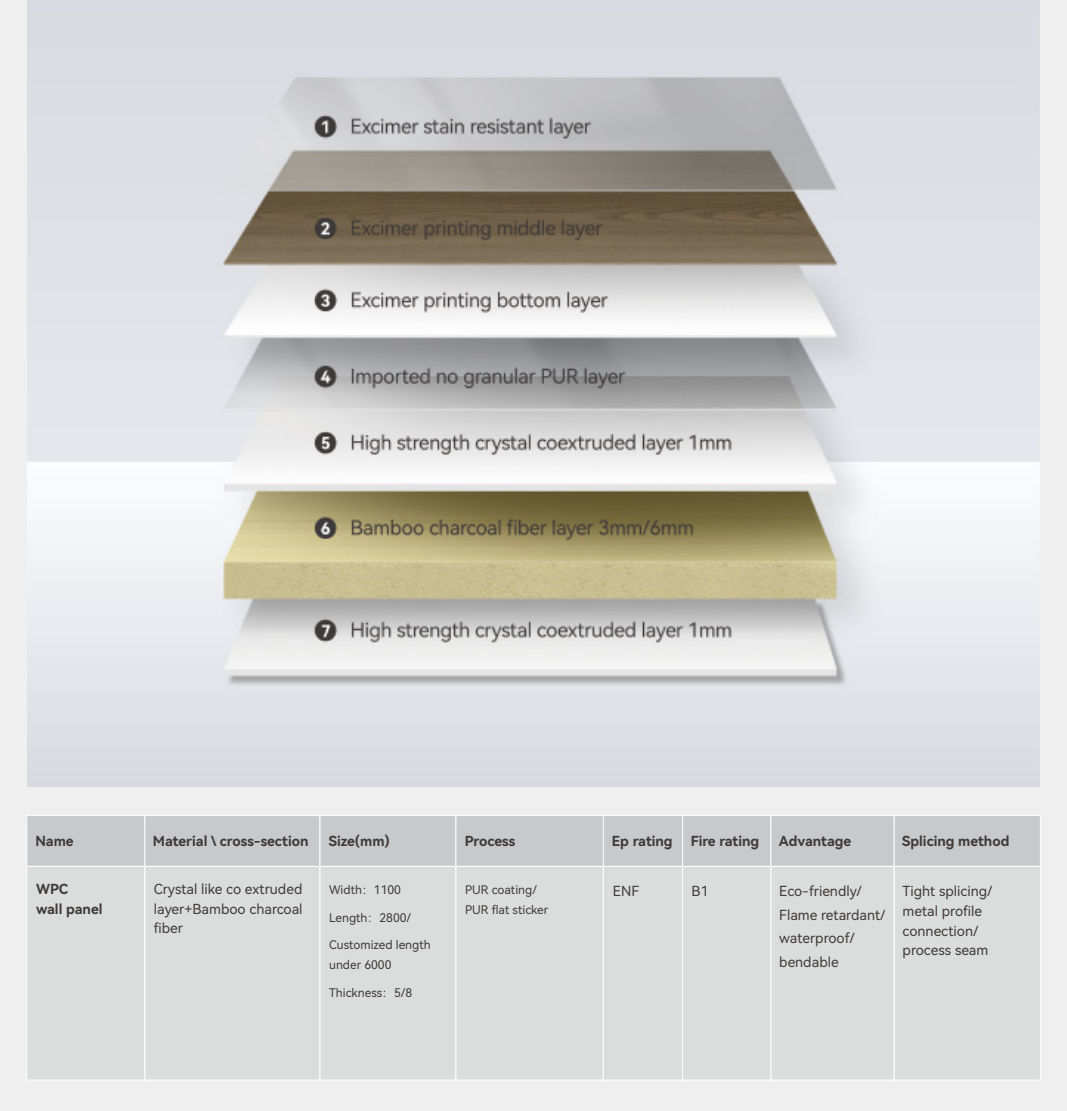


## PRODUCT INFORMATION

- 1 Excimer stain resistant layer
- 2 Excimer printing middle layer
- 3 Excimer printing bottom layer
- 4 Imported no granular PUR layer
- 5 High strength crystal coextruded layer 1mm
- 6 Bamboo charcoal fiber layer 3mm/6mm
- 7 High strength crystal coextruded layer 1mm

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

## PRODUCT PERFORMANCE REAL SHOT

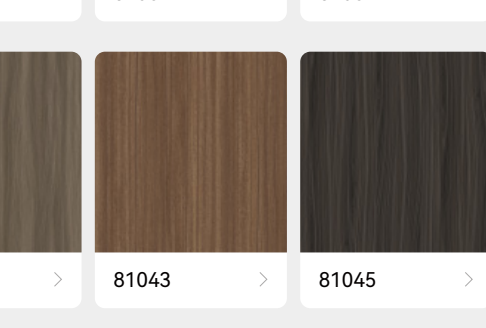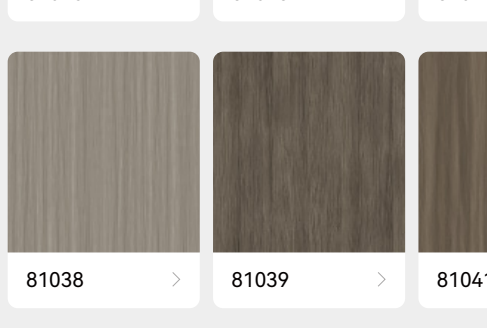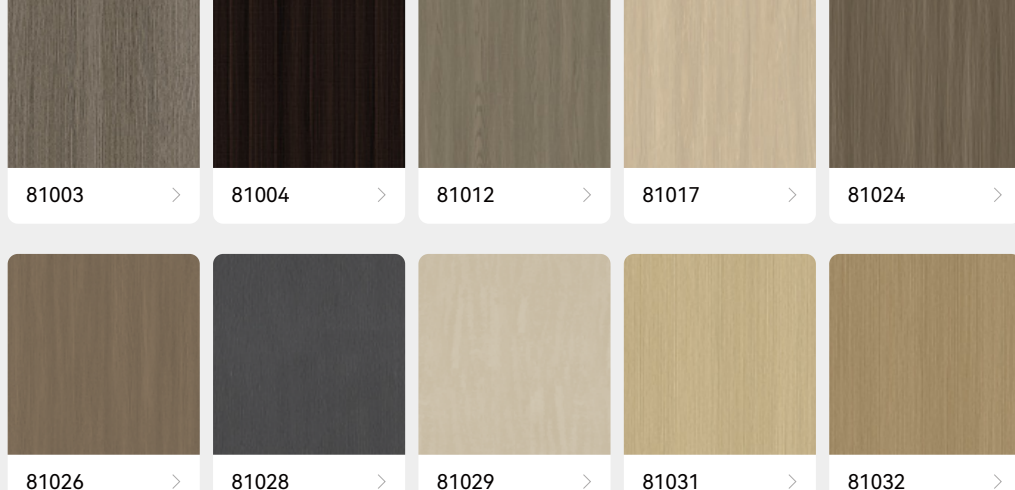

EP LEVEL



FIRE RATING



WATERPROOF




BENDABLE


## MORE WOOD GRAIN COLORS



## INTERNATIONAL CERTIFICATION

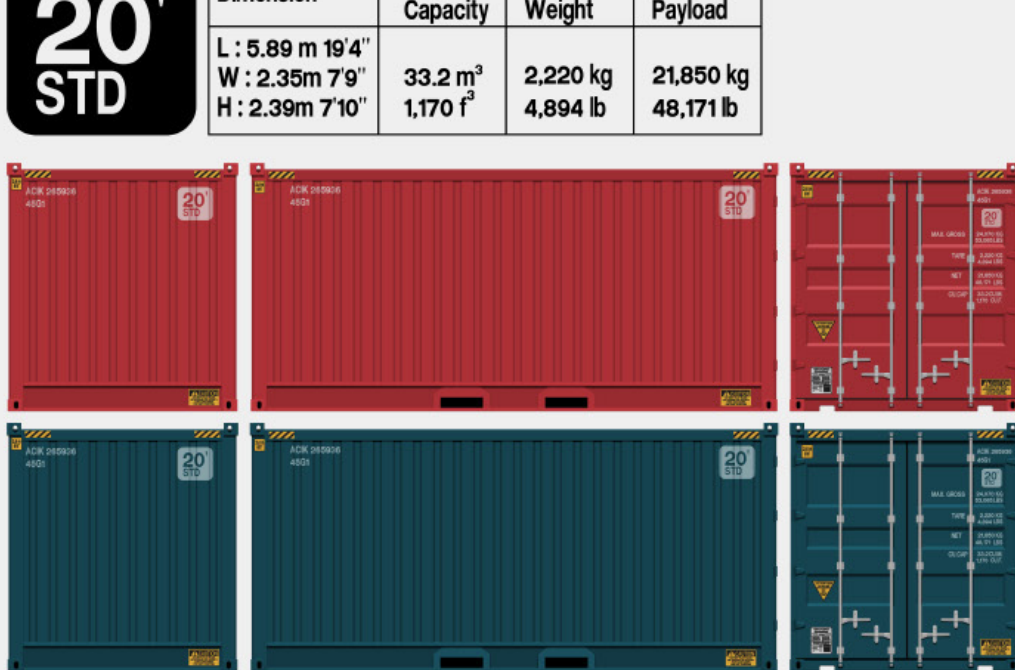

## FACTORY STRENGTH

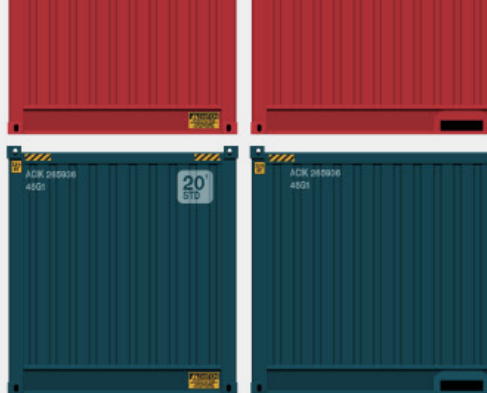


**Mature Technology**

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

**Equipment Operation**

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

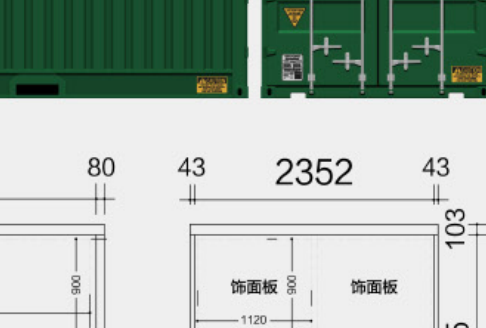

**Producing Workshops**

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.


20 intelligent production lines

**Environment**

Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001

## PACKING METHOD

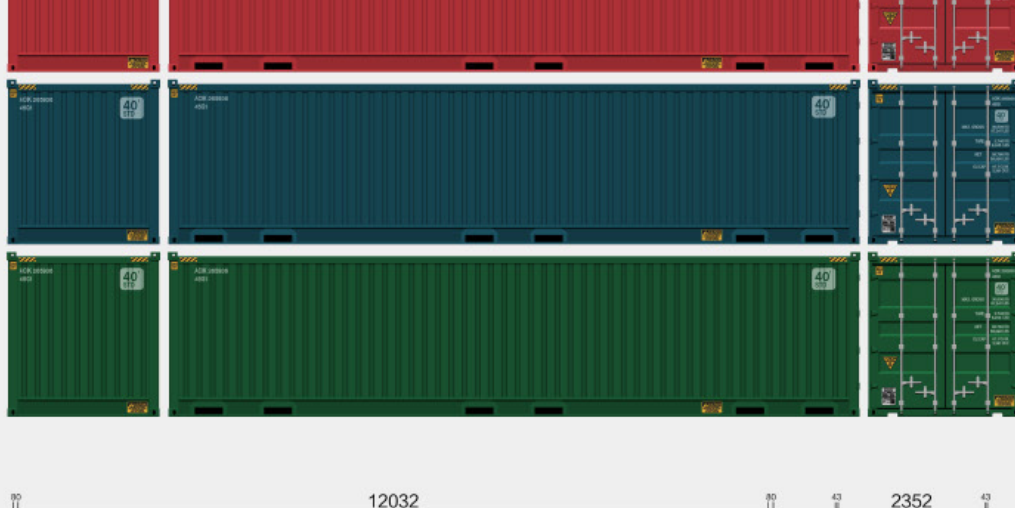

**20' 正常装货货柜尺寸**

**40' 正常装货货柜尺寸**