
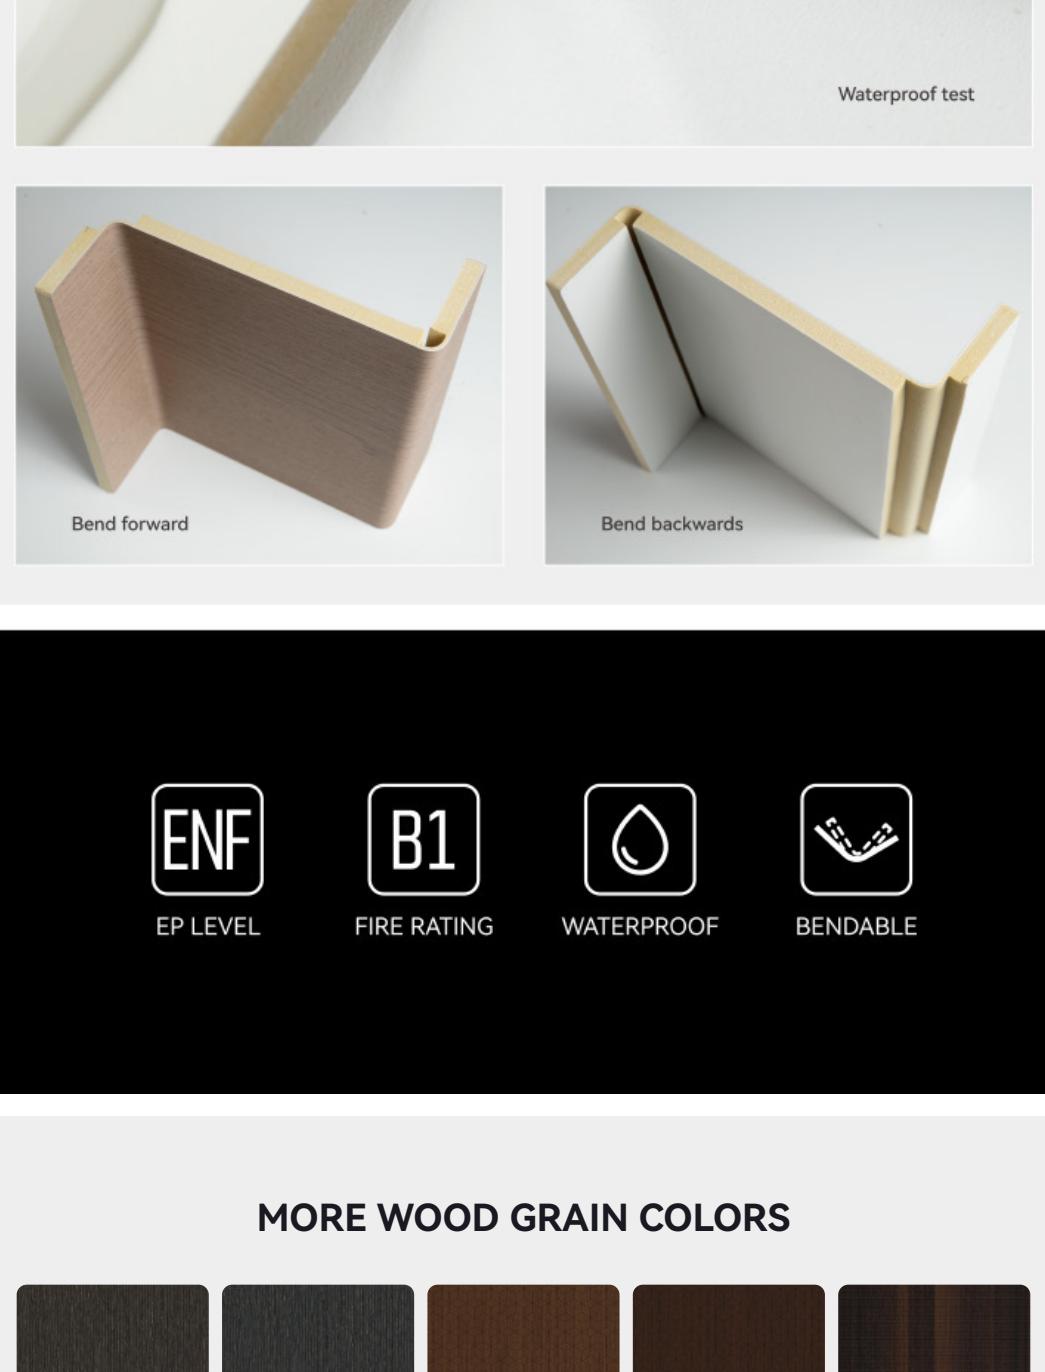
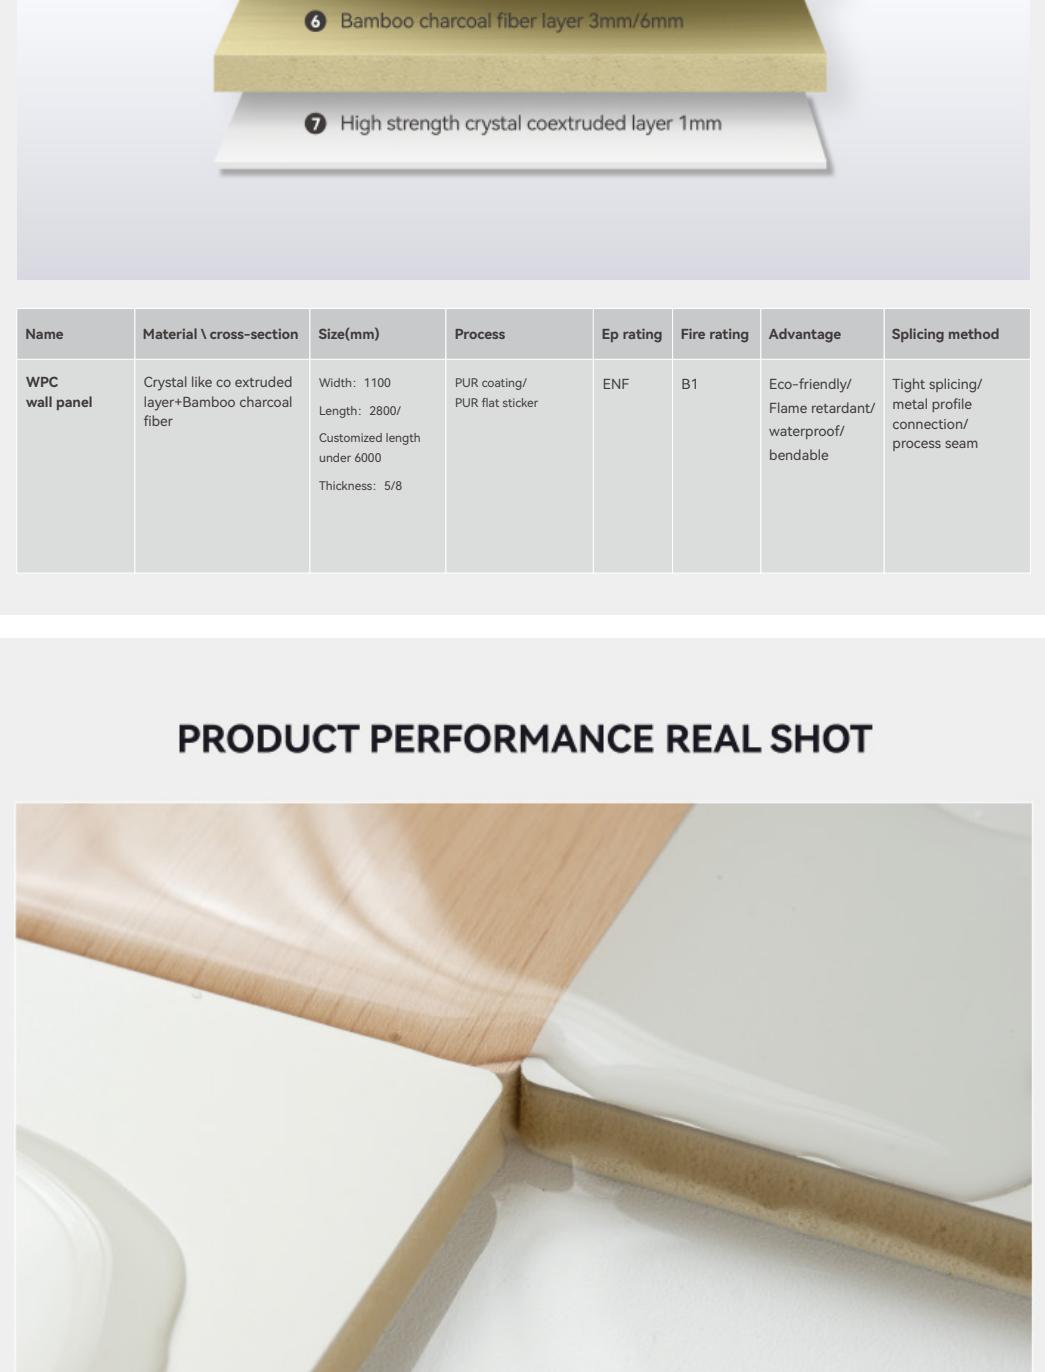
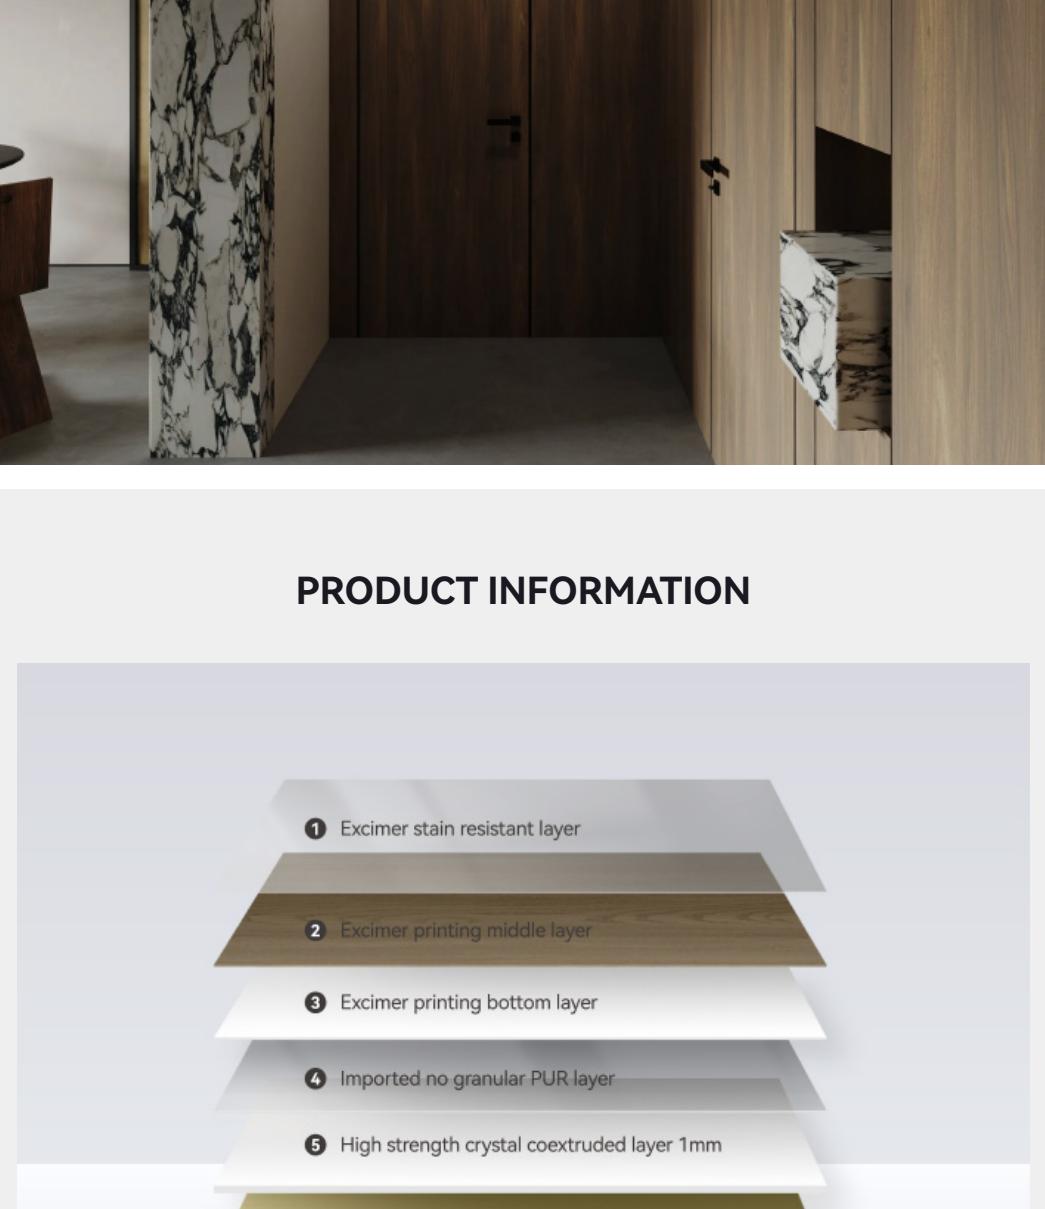



- WOOD GRAIN -

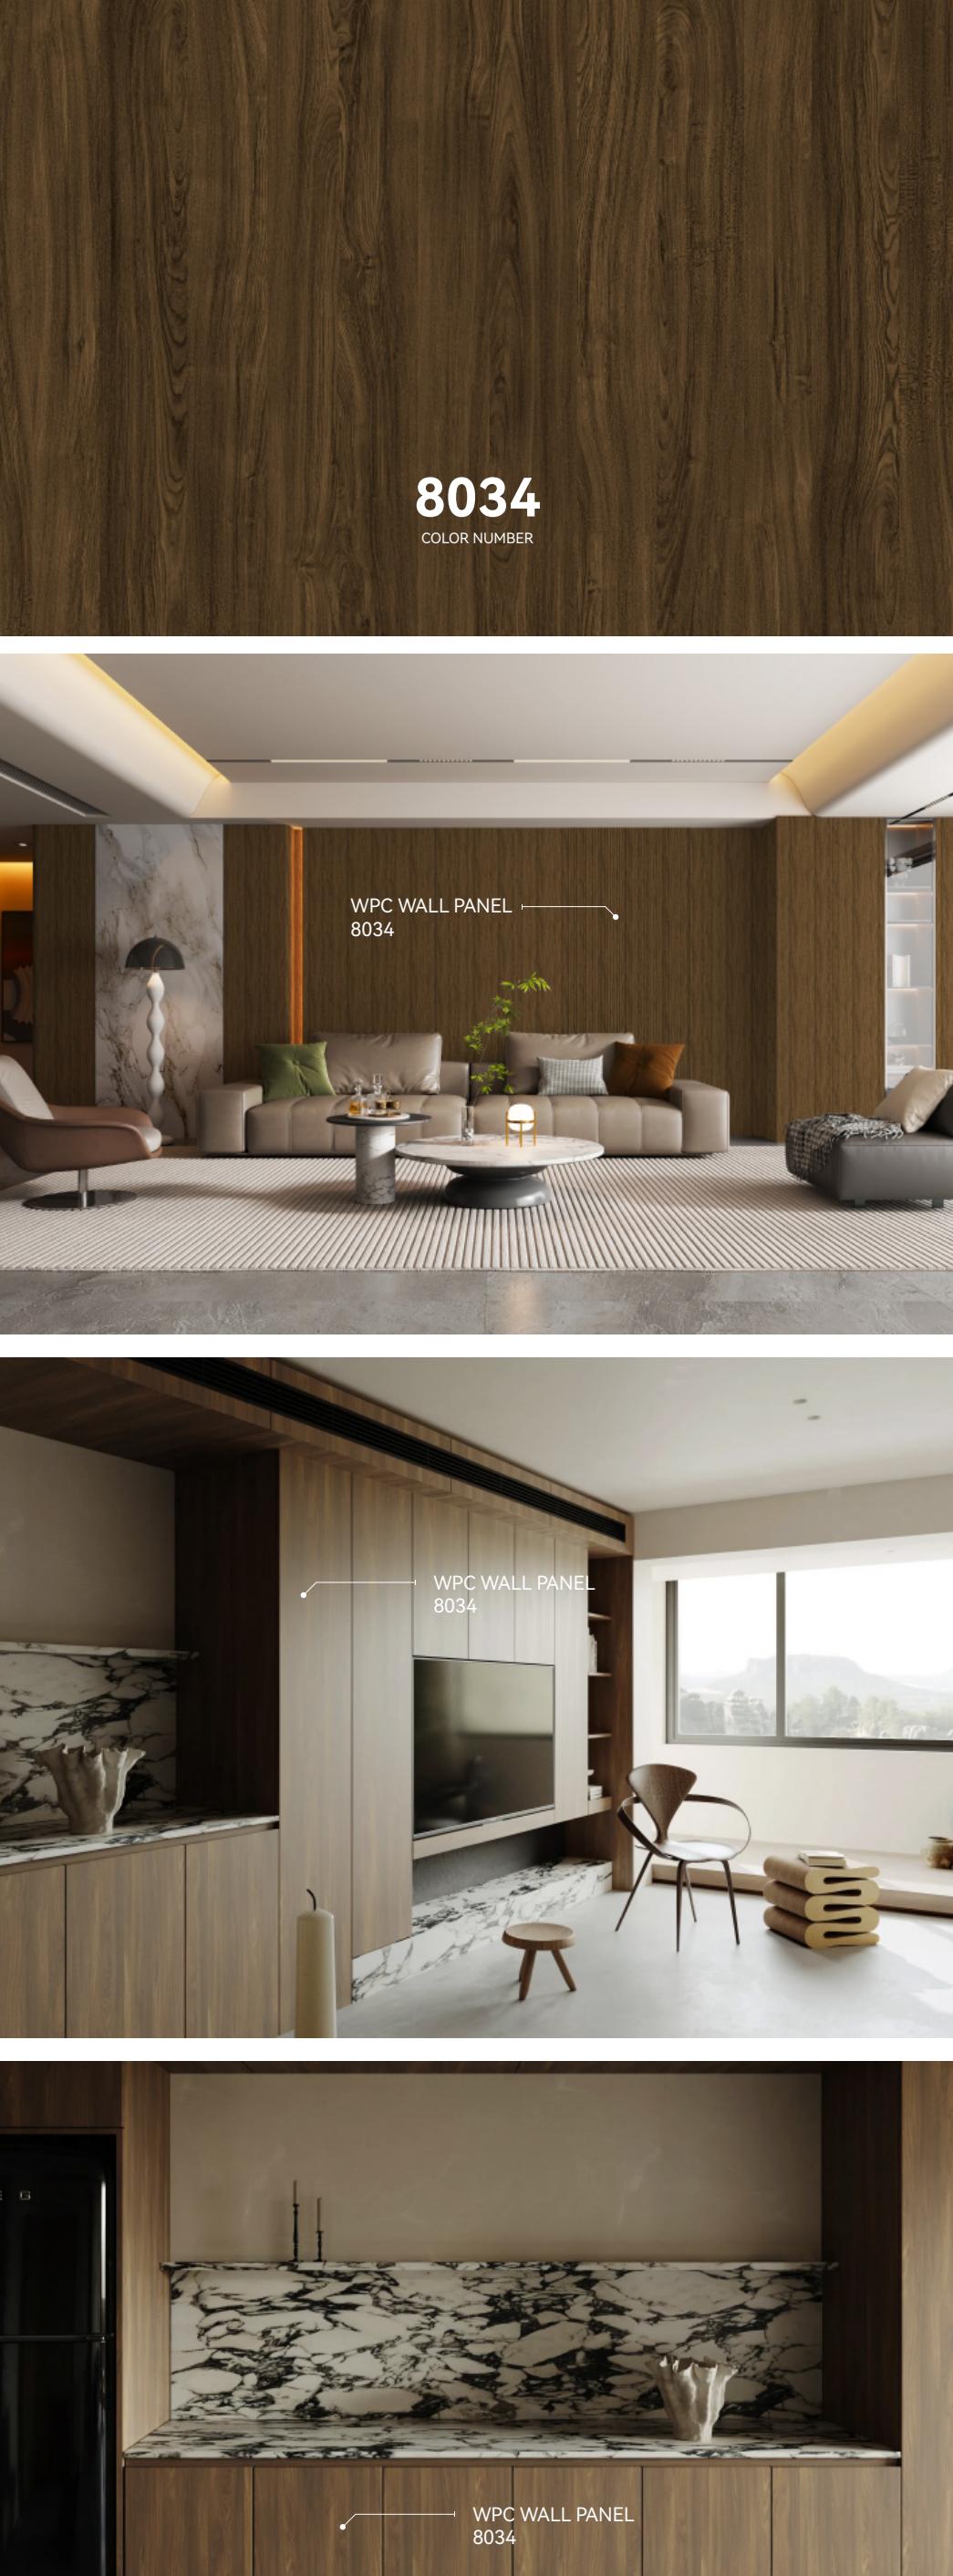

PRODUCT INFORMATION

Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile/ process seam

PRODUCT PERFORMANCE REAL SHOT

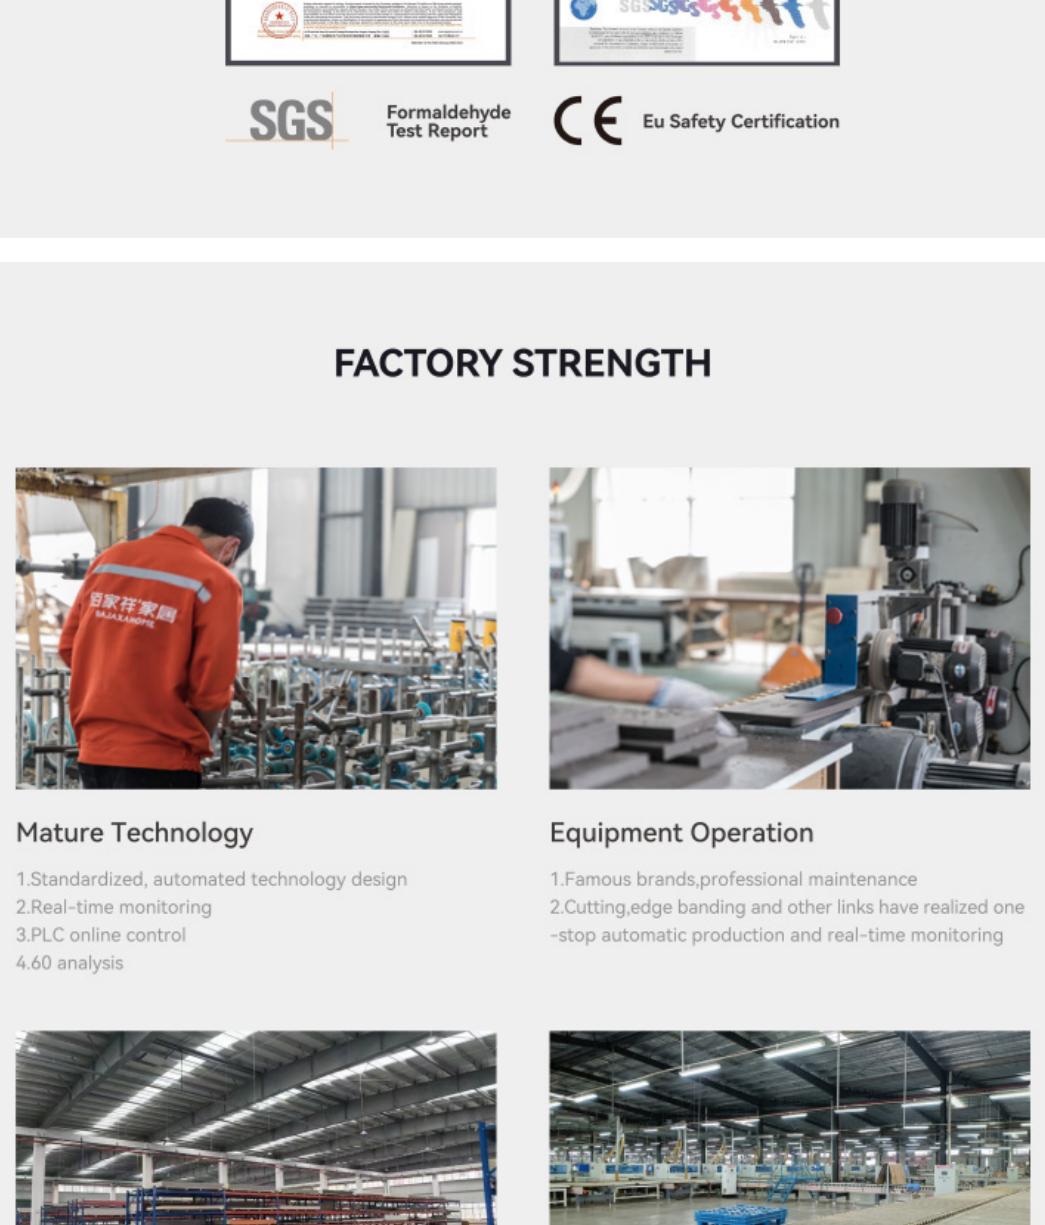

ENF

B1

WATERPROOF

BENDABLE

EP LEVEL

FIRE RATING



EU Highly Concerned Substance Report

SGS Flame Retardant Test Report






SGS Formaldehyde Test Report

SGS Eu Safety Certification


MORE WOOD GRAIN COLORS

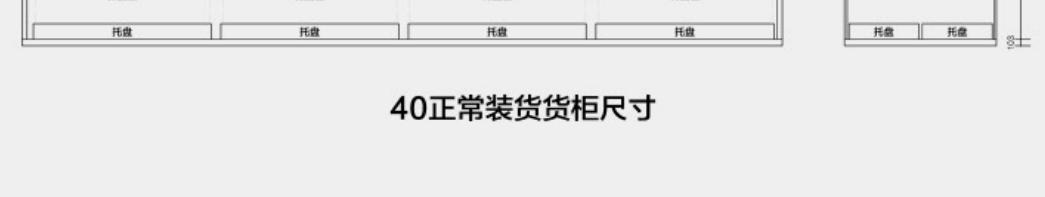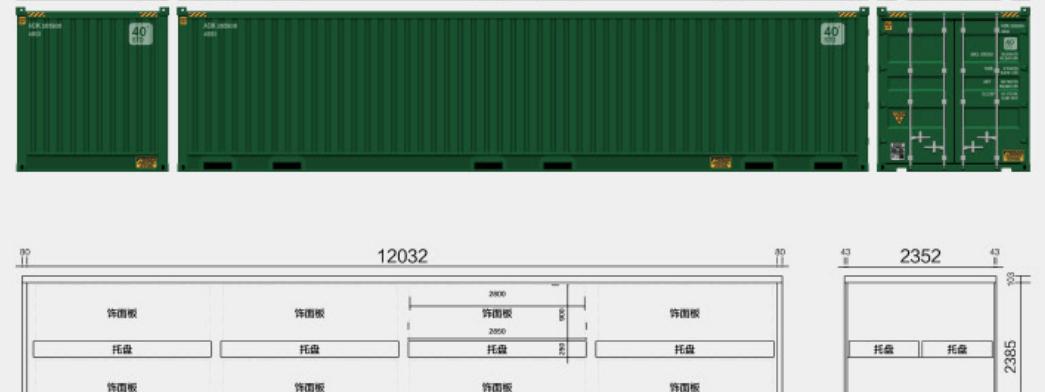

INTERNATIONAL CERTIFICATION

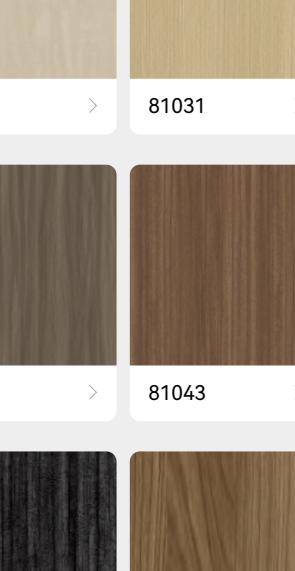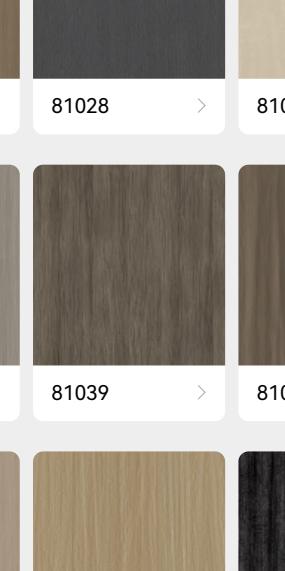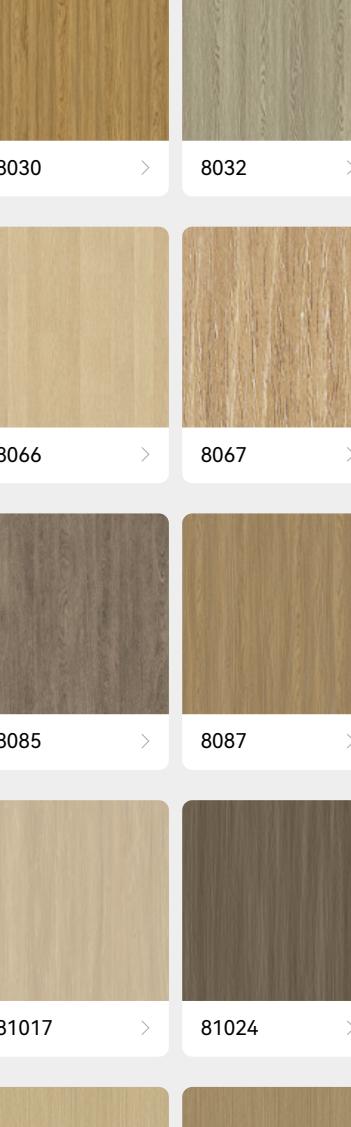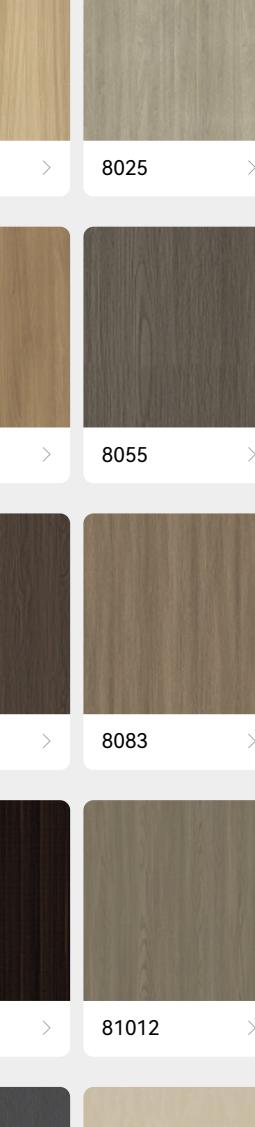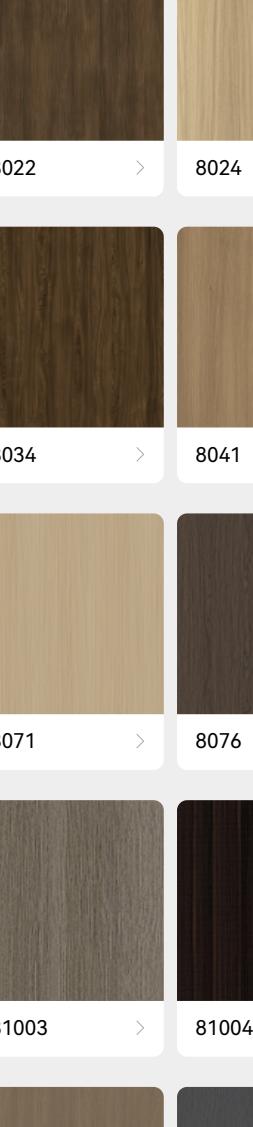

FACTORY STRENGTH

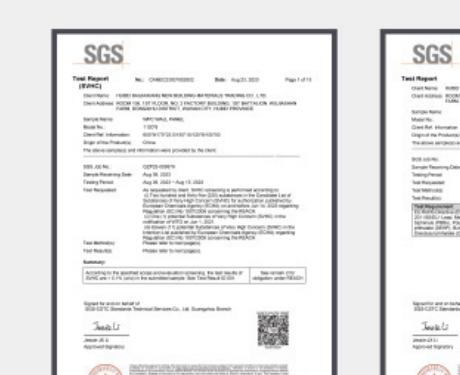

- 1.Standardized, automated technology design
- 2.Real-time monitoring
- 3.PLC online control
- 4.60 analysis




- 1.Famous brands.professional maintenance
- 2.Cutting edge banding and other links have realized one-stop automatic production and real-time monitoring



Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines

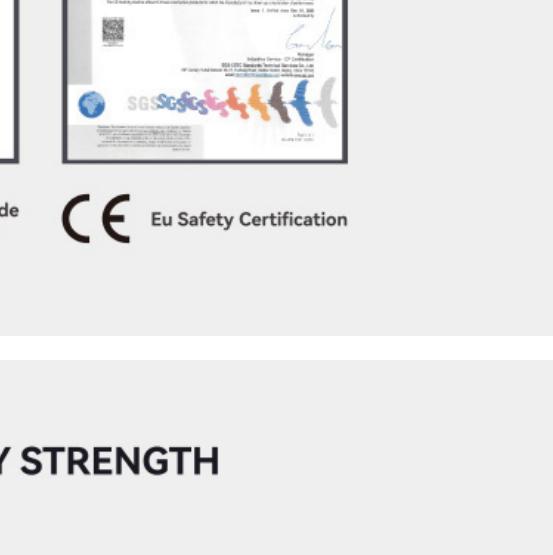

Keep executing 5S and lean production.

OHAS18001,ISO14001,ISO9001

