



**705**



#### PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm

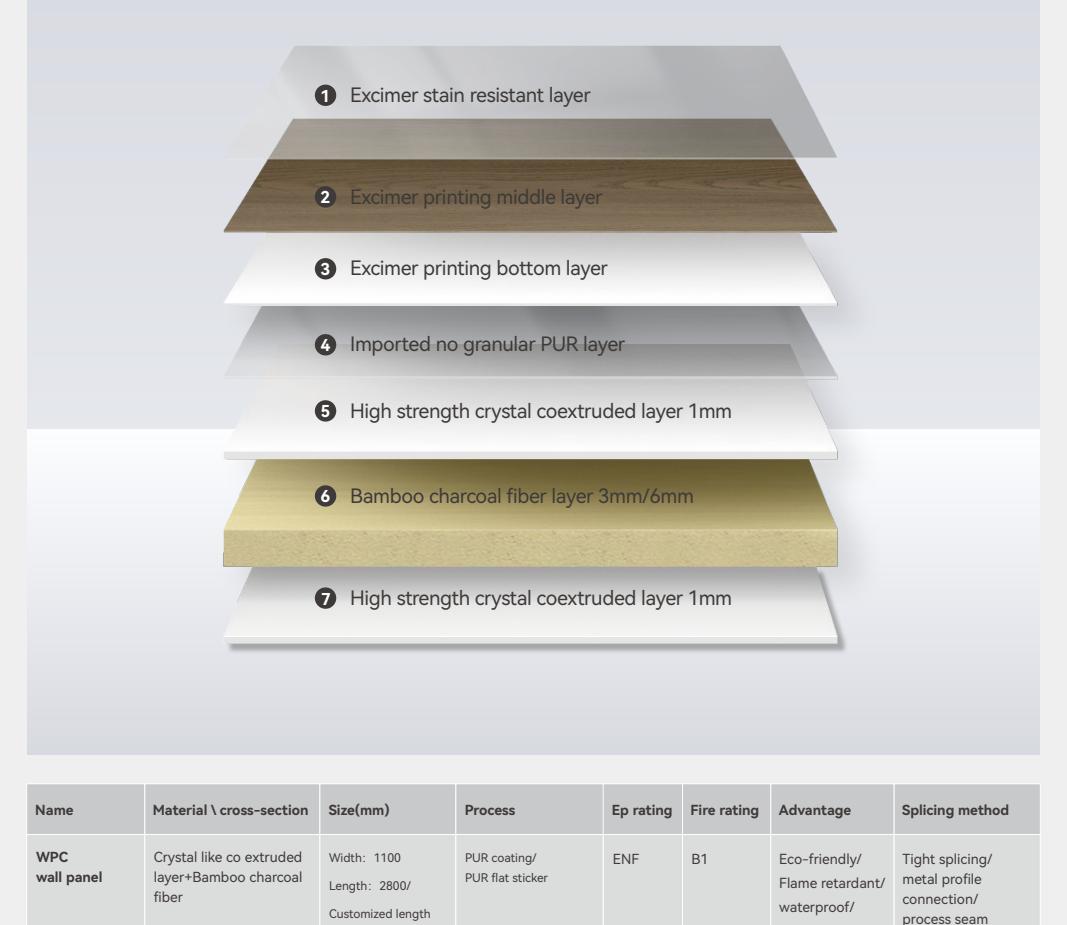

#### PRODUCT INFORMATION

① Excimer stain resistant layer

② Excimer printing middle layer

③ Excimer printing bottom layer

④ Imported no granular PUR layer


⑤ High strength crystal coextruded layer 1mm

⑥ Bamboo charcoal fiber layer 3mm/6mm

⑦ High strength crystal coextruded layer 1mm

Name	Material\ cross-section	Size(mm)	Process	EP rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

#### PRODUCT PERFORMANCE REAL SHOT

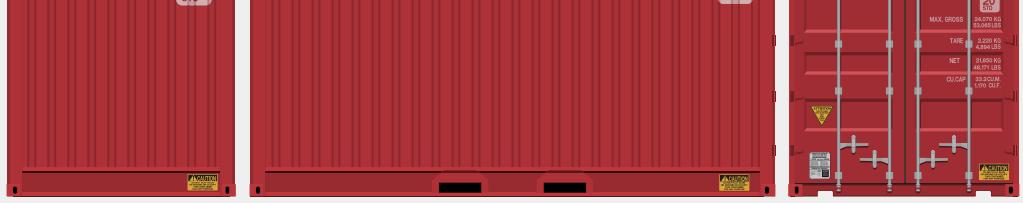


Waterproof test



Bend forward


Bend backwards



EP LEVEL



FIRE RATING




WATERPROOF



BENDABLE

#### INTERNATIONAL CERTIFICATION



Formaldehyde Test Report

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89 m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m <sup>3</sup> 1,170 f <sup>3</sup>	2,220 kg 4,894 lb	21,850 kg 48,171 lb

5.898

2352

饰面板	托盘	饰面板	托盘	饰面板
托盘	托盘	托盘	托盘	托盘

饰面板	托盘	饰面板	托盘	饰面板
托盘	托盘	托盘	托盘	托盘

5.898

2352

20正常装货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39' W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m <sup>3</sup> 2,311 f <sup>3</sup>	3,740 kg 8,245 lb	26,760 kg 58,996 lb

12.032

2352

饰面板	托盘	饰面板	托盘	饰面板
托盘	托盘	托盘	托盘	托盘

饰面板	托盘	饰面板	托盘	饰面板
托盘	托盘	托盘	托盘	托盘

12.032

2352

40正常装货柜尺寸