





FT 25502



PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm


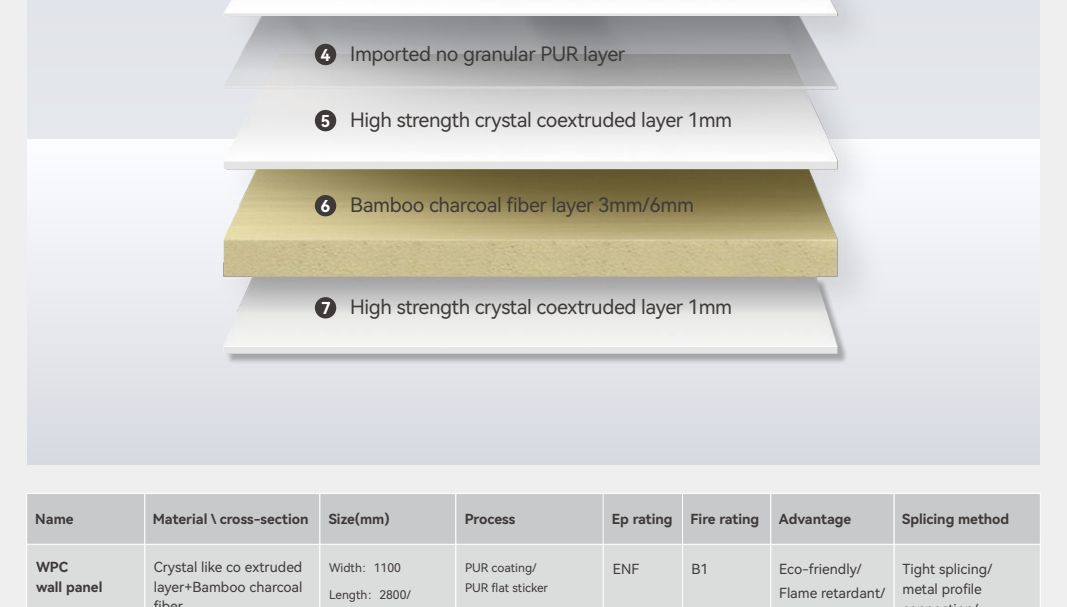
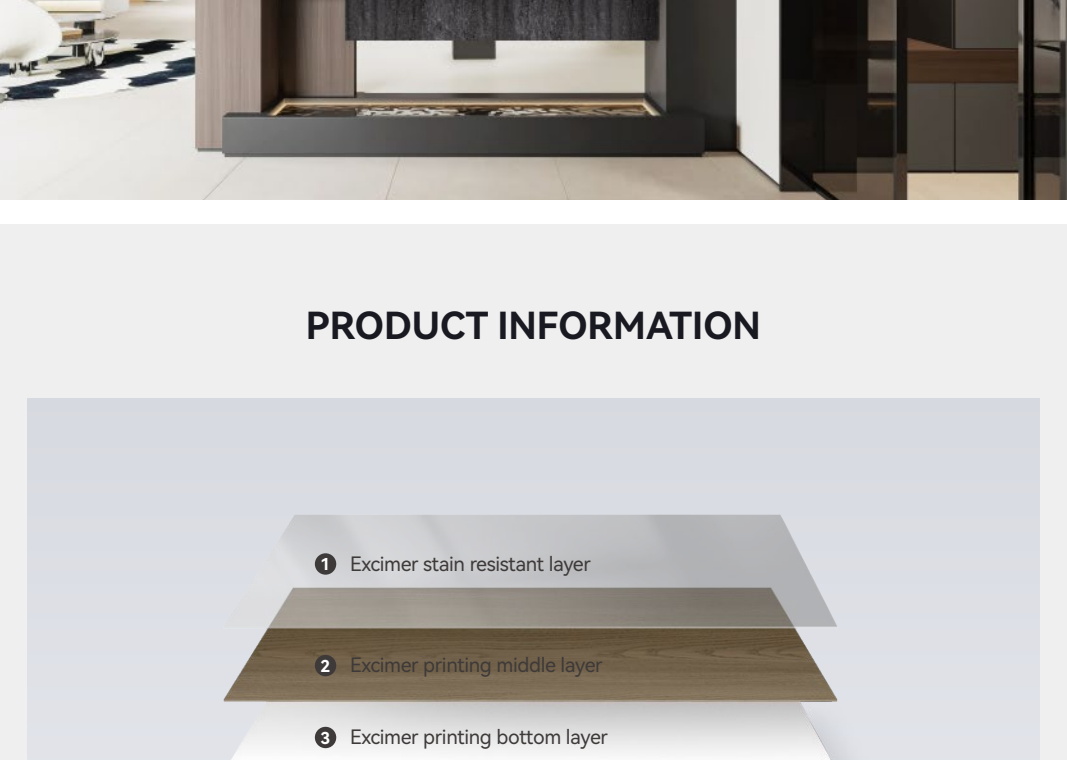


PRODUCT INFORMATION



Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

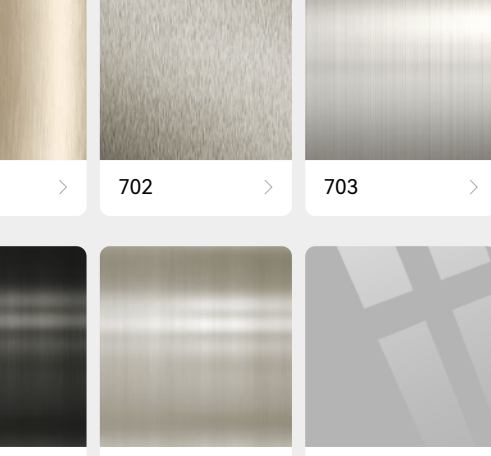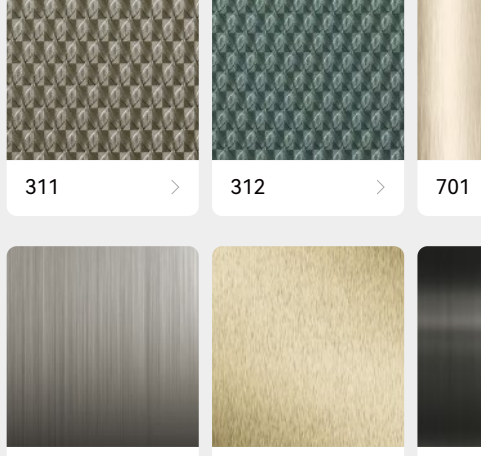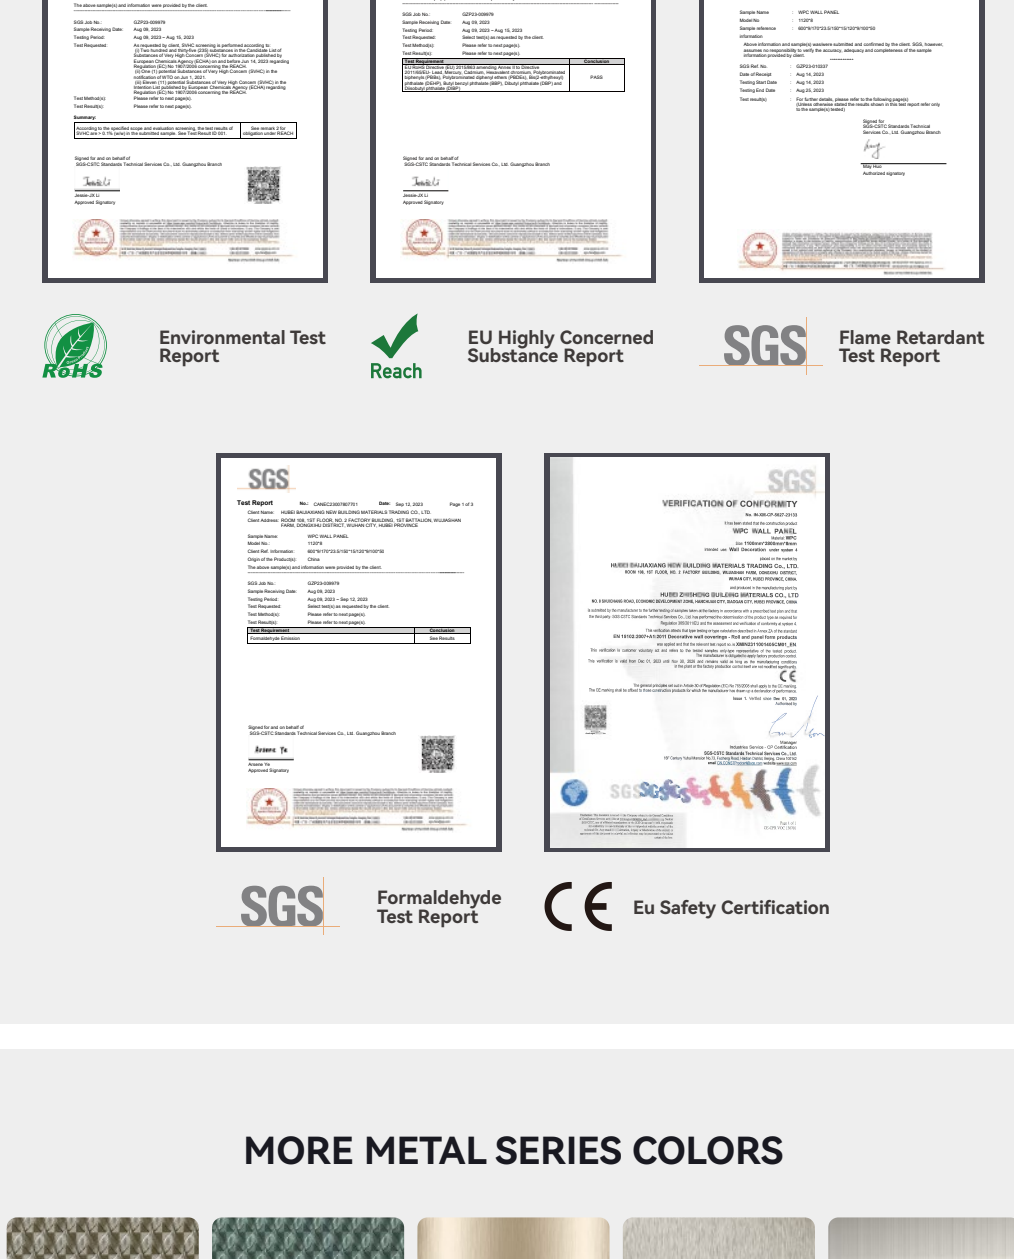

Bend forward

Bend backwards

ENF

EP LEVEL




B1

FIRE RATING

WATERPROOF

BENDABLE

INTERNATIONAL CERTIFICATION

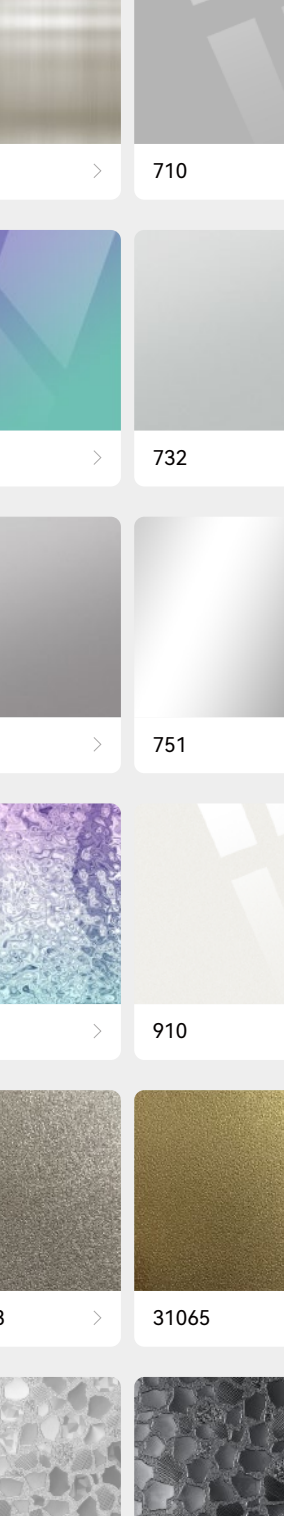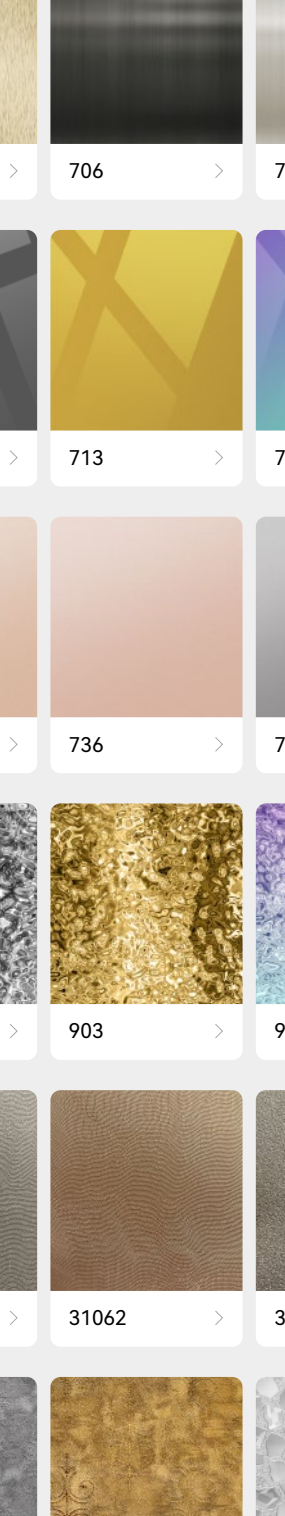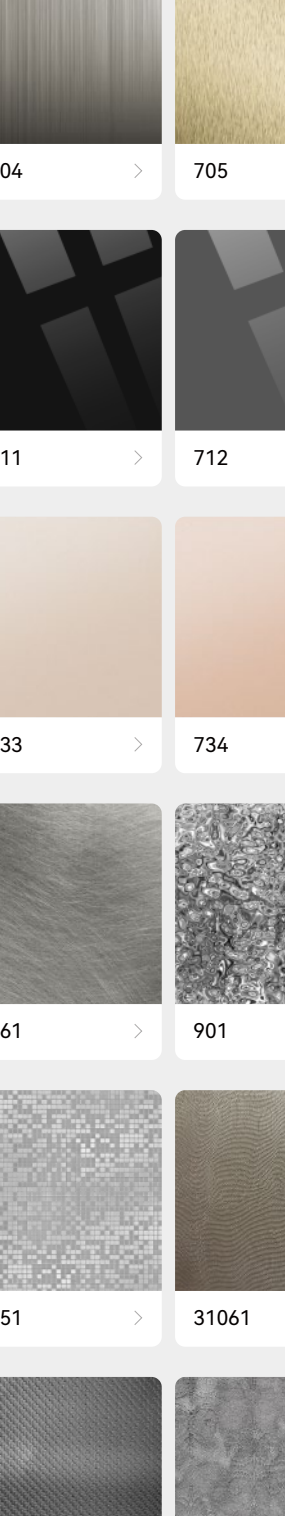

Environmental Test Report


EU Highly Concerned Substance Report

SGS Flame Retardant Test Report



Formaldehyde Test Report

Eu Safety Certification

MORE METAL SERIES COLORS

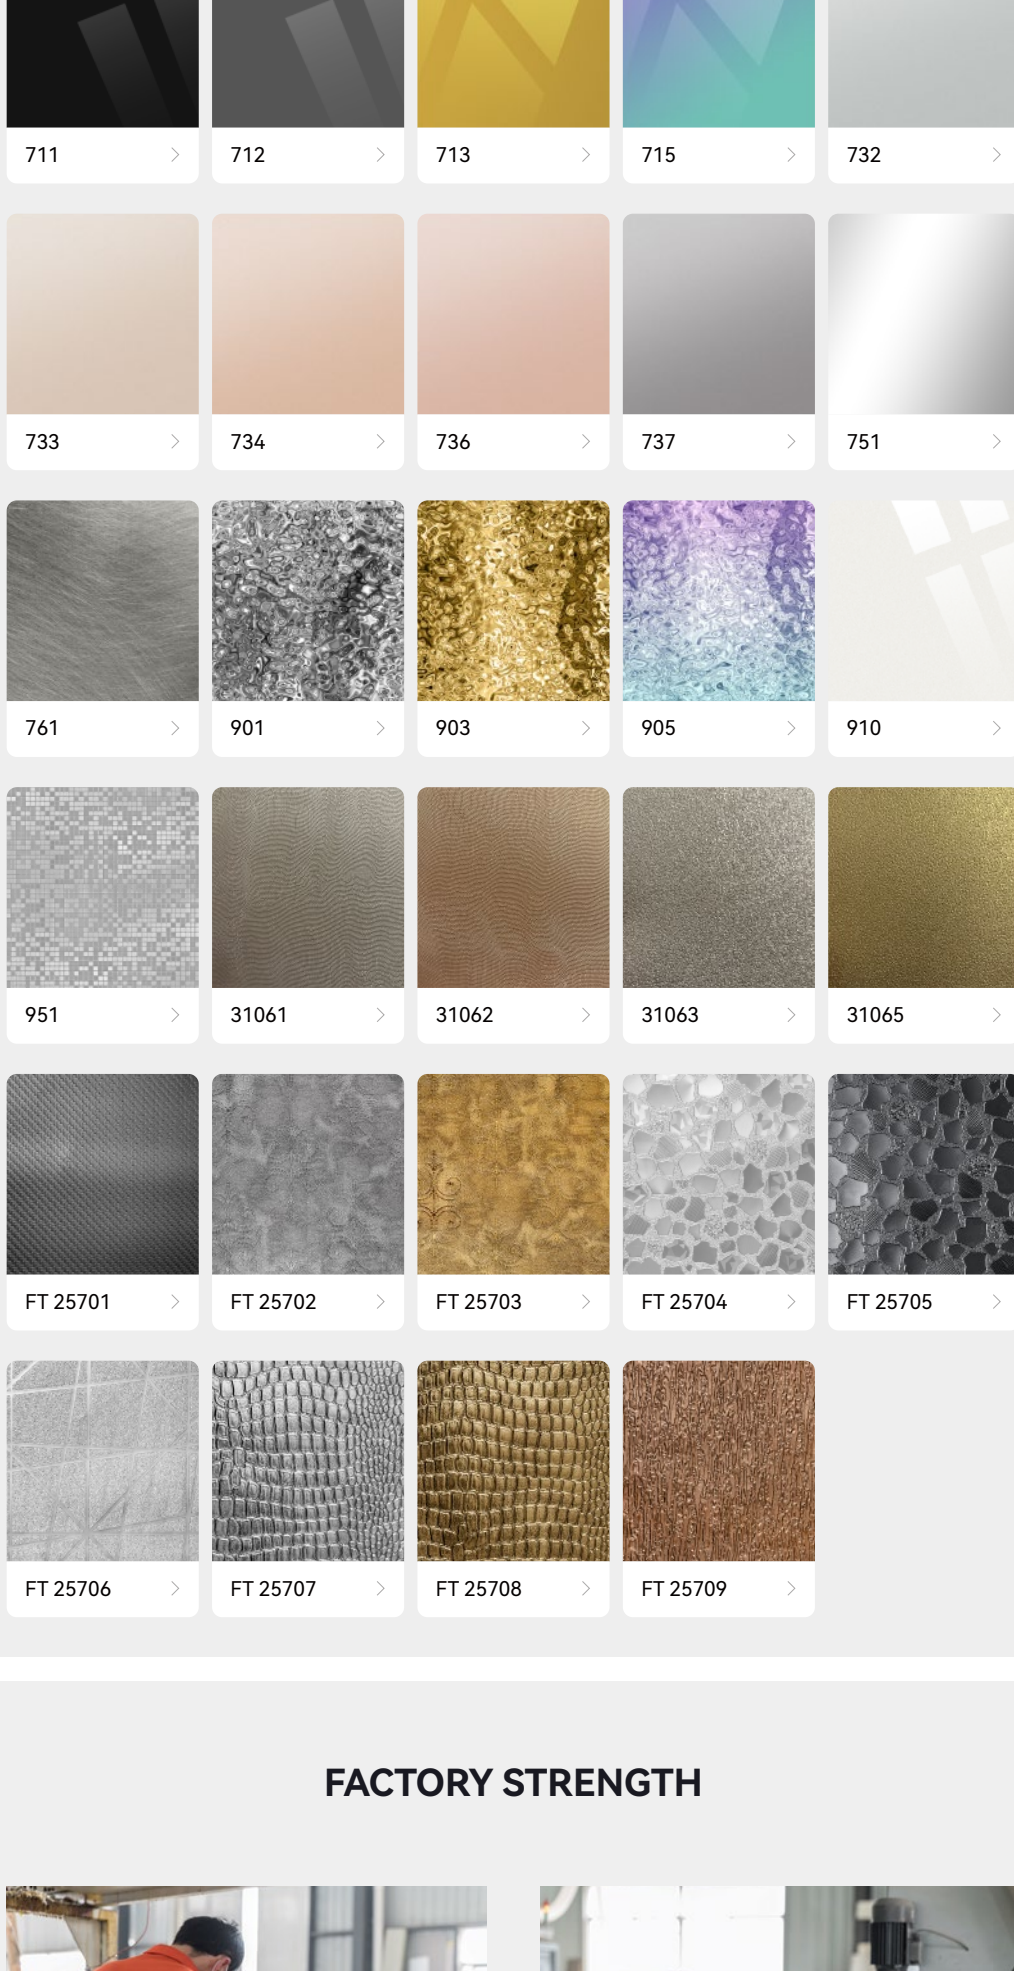

FACTORY STRENGTH

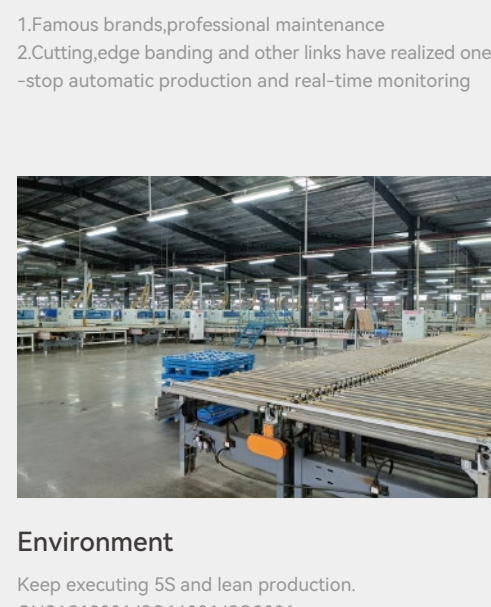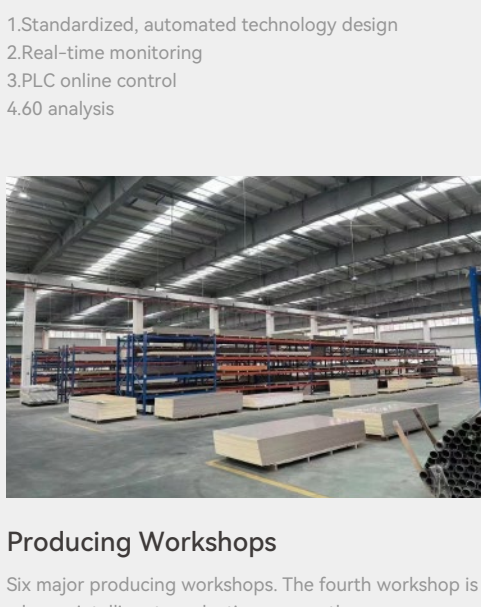

Mature Technology

1.Standardized, automated technology design

2.Real-time monitoring

3.PLC online control

4.60 analysis

Equipment Operation

1.Famous brands,professional maintenance

2.Cutting,edge banding and other links have realized one

-stop automatic production and real-time monitoring

Producing Workshops

Six major producing workshops. The fourth workshop is

a larger intelligent production among the peers.


20 intelligent production lines

Environment


Keep executing 5S and lean production.

OHSAS18001,ISO14001,ISO9001

PACKING METHOD

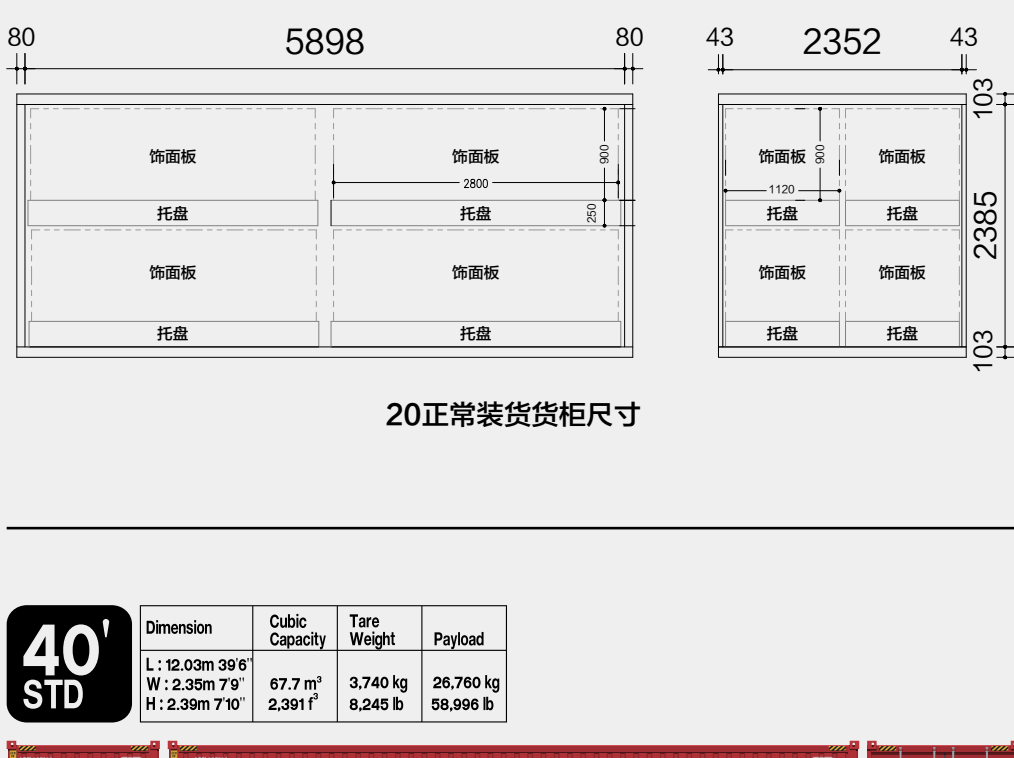

20正常装货货柜尺寸

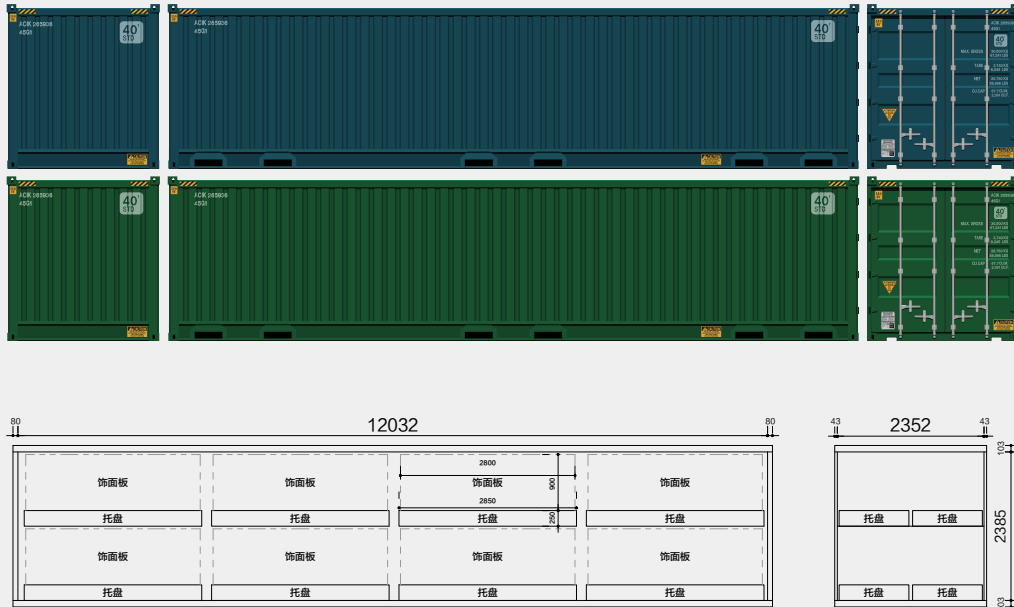

40正常装货货柜尺寸