

KA 57503



PRODUCT SIZE

Width	1100mm
Length	2600/2800/3000mm
Thickness	5mm/8mm/12mm




WPC WALL PANEL
KA 57503




WPC WALL PANEL
KA 57503

WPC WALL PANEL
KA 57503

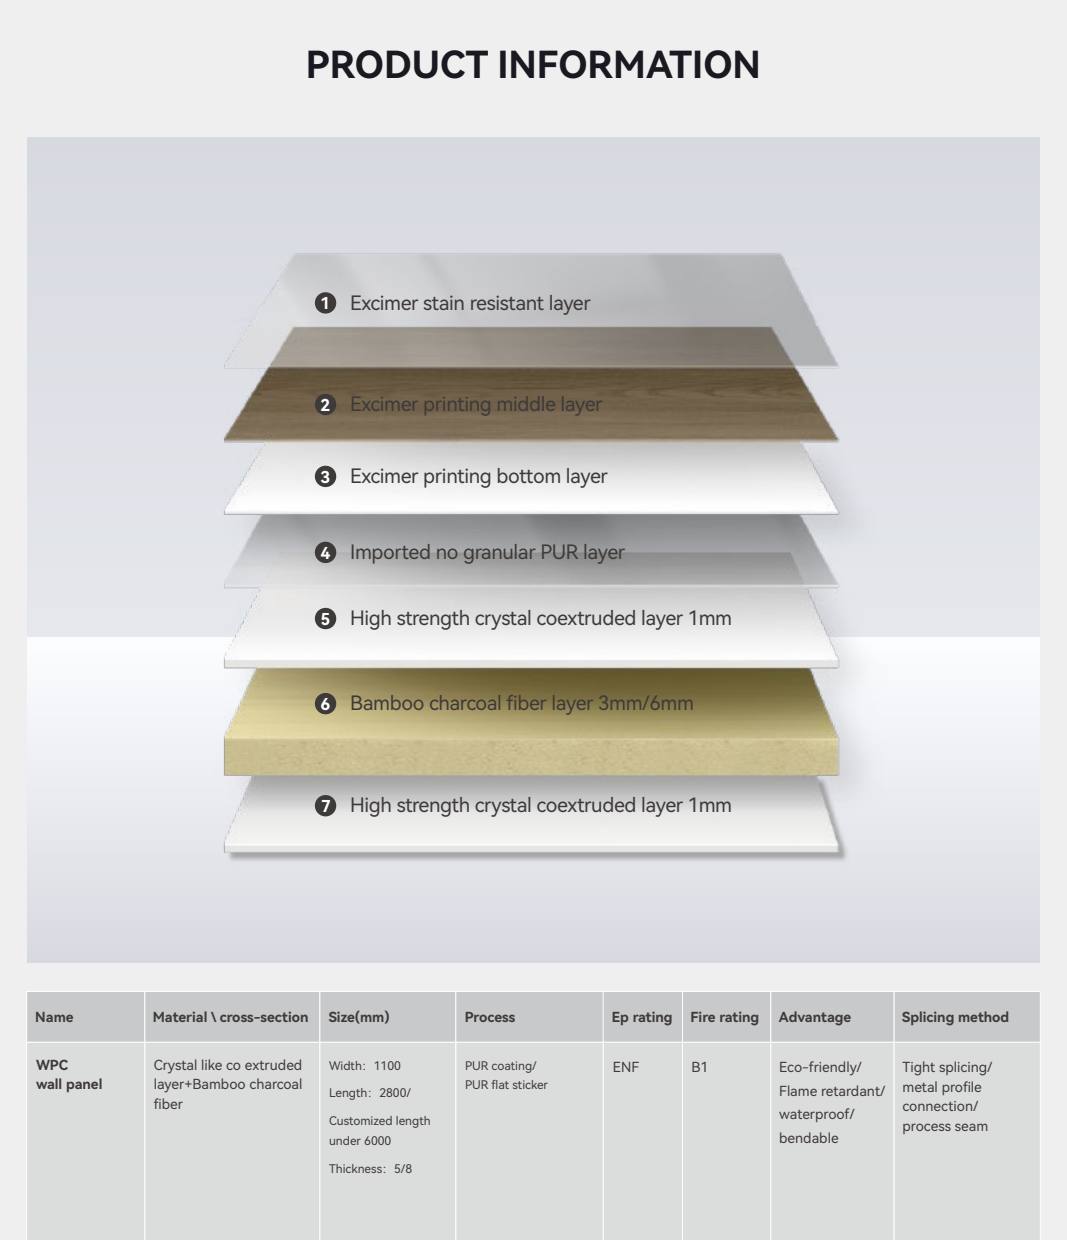


WPC WALL PANEL
KA 57503

PRODUCT INFORMATION

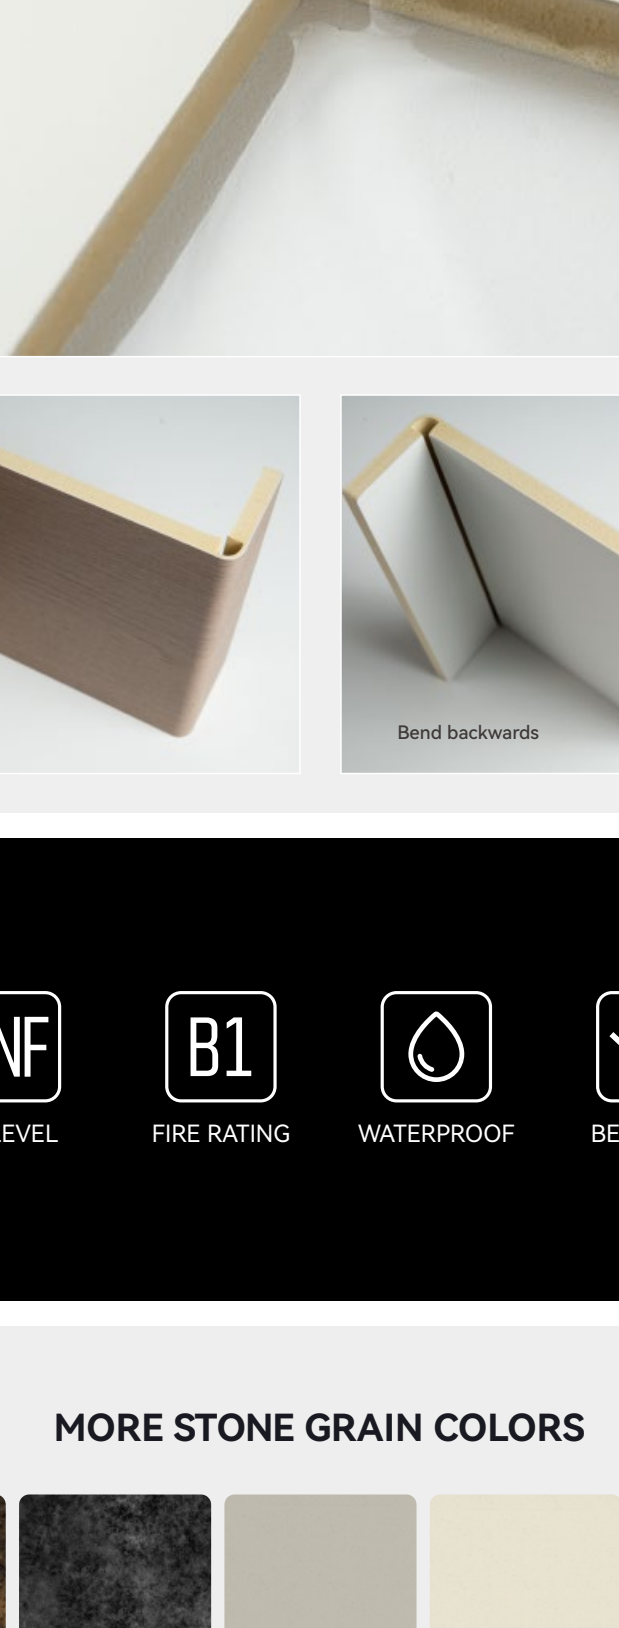


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam

PRODUCT PERFORMANCE REAL SHOT

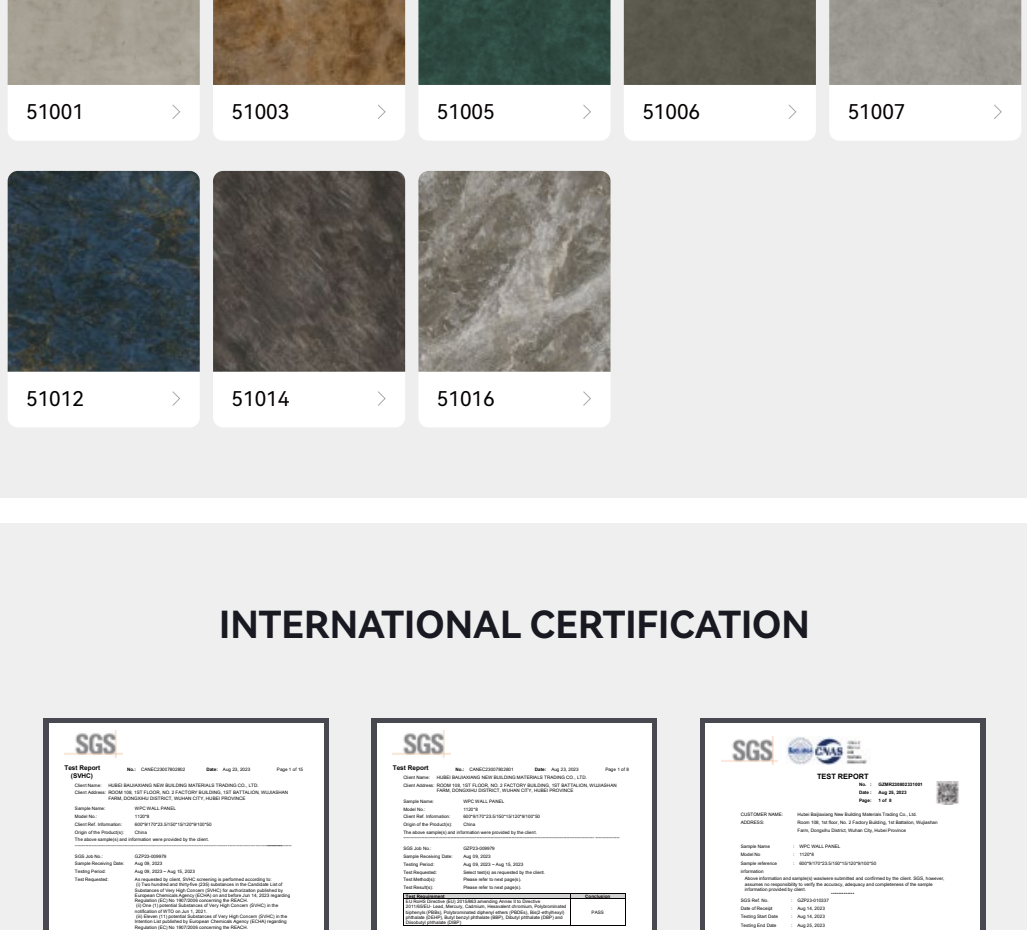


Waterproof test

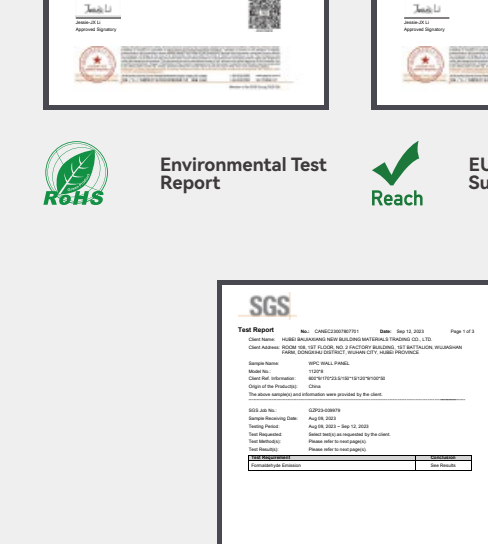

Bend forward



Bend backwards




EP LEVEL



FIRE RATING












WATERPROOF



BENDABLE


MORE STONE GRAIN COLORS

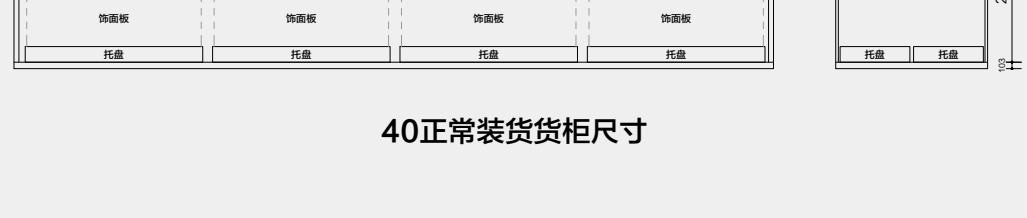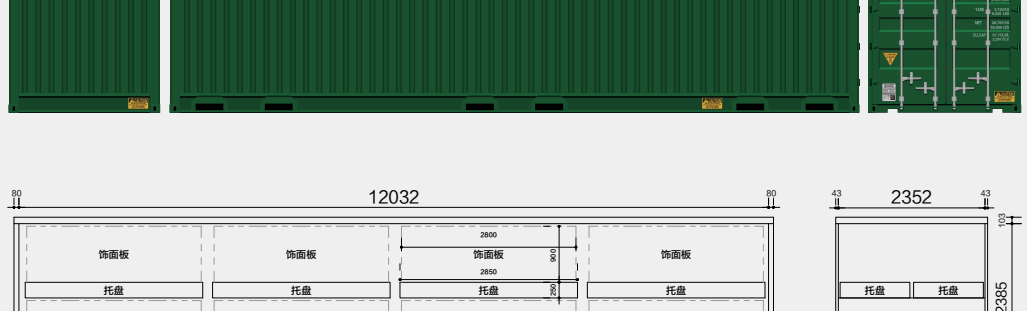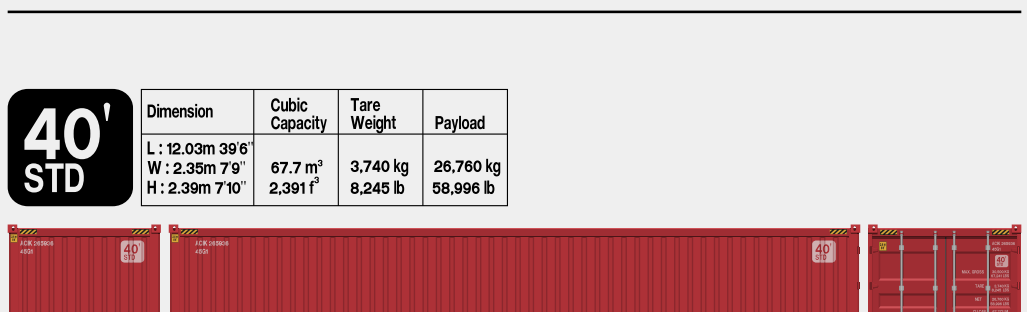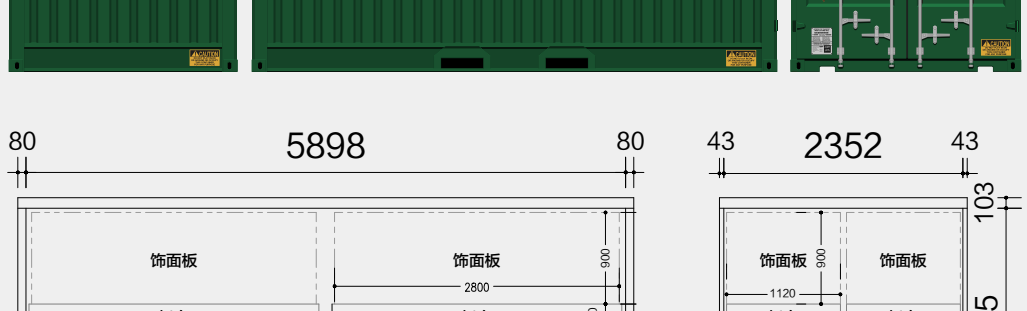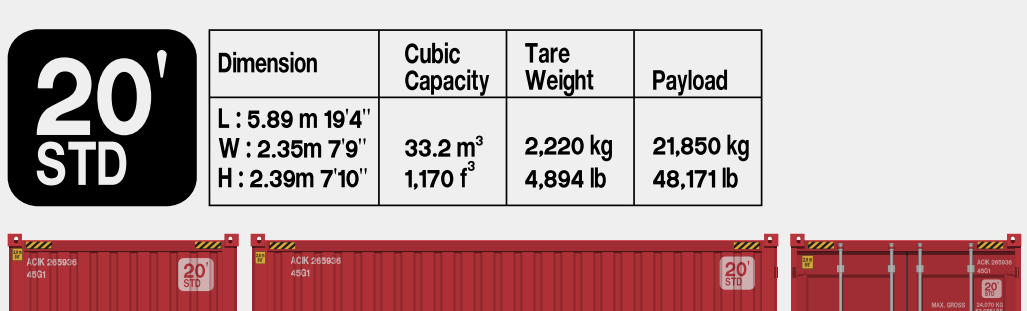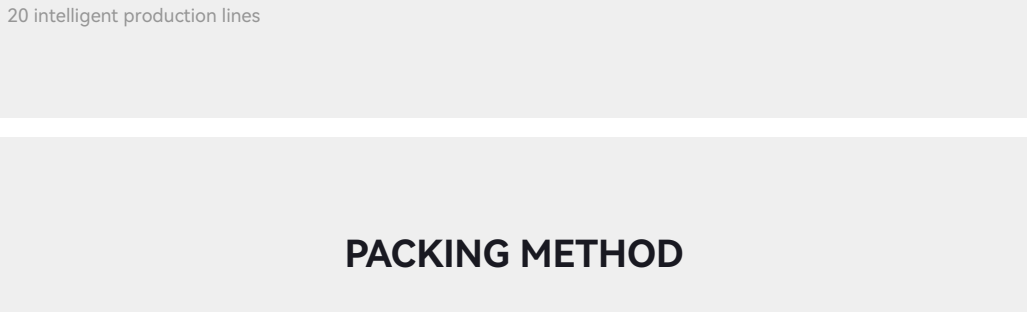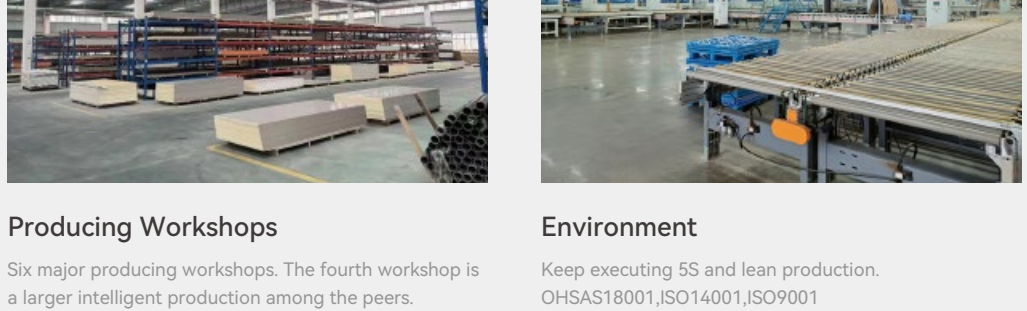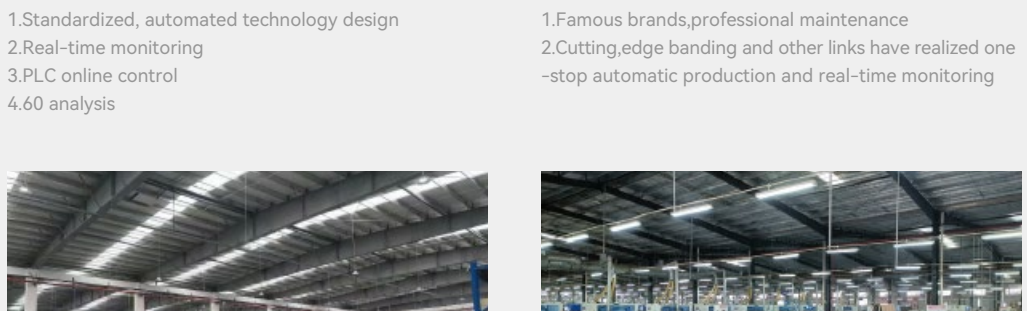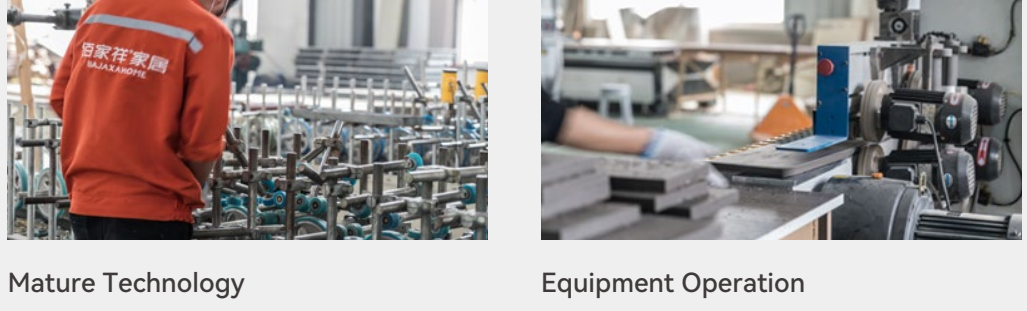

INTERNATIONAL CERTIFICATION



FACTORY STRENGTH

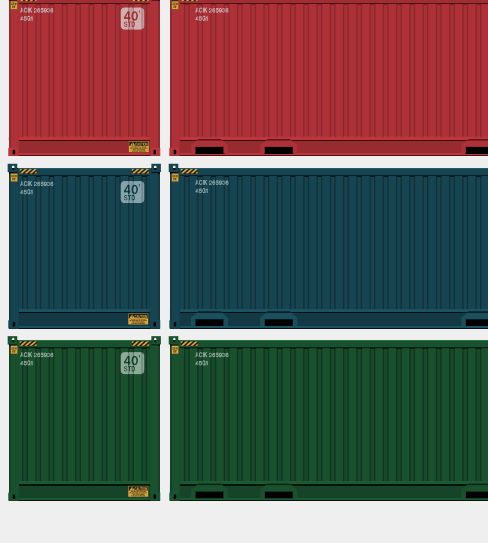

Mature Technology

- 1. Standardized, automated technology design
- 2. Real-time monitoring
- 3. PLC online control
- 4. 60 analysis



Equipment Operation

- 1. Famous brands, professional maintenance
- 2. Cutting-edge banding and other links have realized one-stop automatic production and real-time monitoring



Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.
20 intelligent production lines



Environment

Keep executing 5S and lean production.
OHSAS18001,ISO14001,ISO9001

PACKING METHOD

Dimension	Cubic Capacity	Tare Weight	Payload
L : 5.89m 19'4" W : 2.35m 7'9" H : 2.39m 7'10"	33.2 m³ 1,170 f³	2,220 kg 4,894 lb	21,850 kg 48,171 lb

20正常装货货柜尺寸

Dimension	Cubic Capacity	Tare Weight	Payload
L : 12.03m 39'6" W : 2.35m 7'9" H : 2.39m 7'10"	67.7 m³ 2,391 f³	3,740 kg 8,245 lb	26,760 kg 58,996 lb

40正常装货货柜尺寸