


3040

COLOR NUMBER










PRODUCT INFORMATION

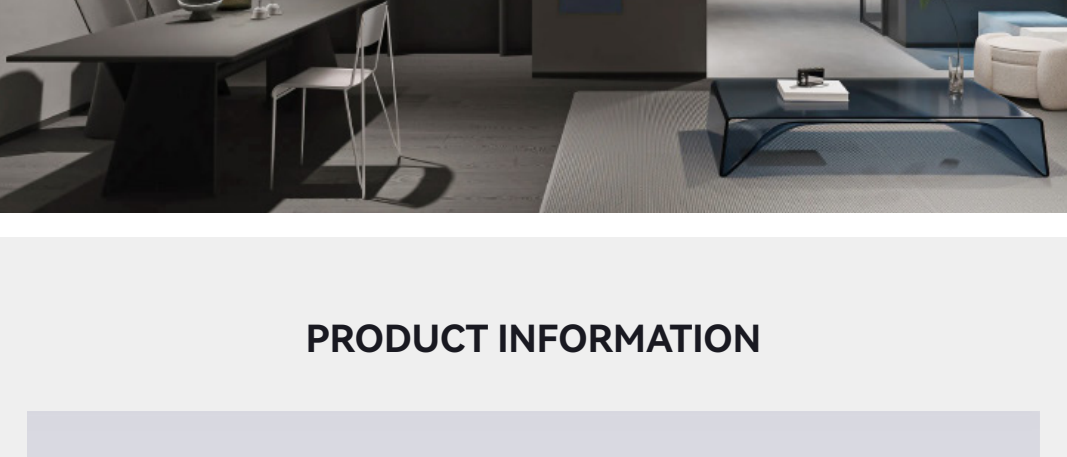


Name	Material \ cross-section	Size(mm)	Process	Ep rating	Fire rating	Advantage	Splicing method
WPC wall panel	Crystal like co extruded layer+Bamboo charcoal fiber	Width: 1100 Length: 2800/ Customized length under 6000 Thickness: 5/8	PUR coating/ PUR flat sticker	ENF	B1	Eco-friendly/ Flame retardant/ waterproof/ bendable	Tight splicing/ metal profile connection/ process seam



PRODUCT PERFORMANCE REAL SHOT

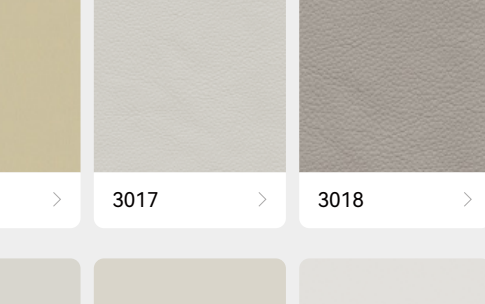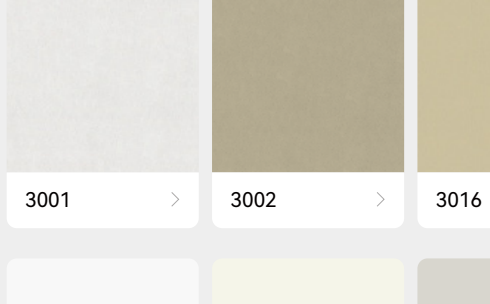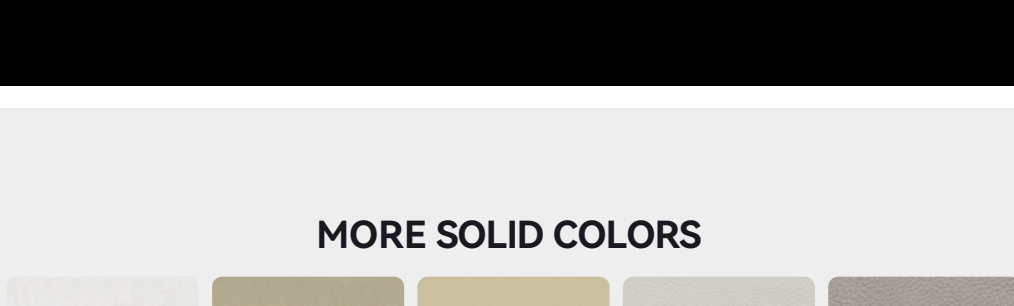



MORE SOLID COLORS

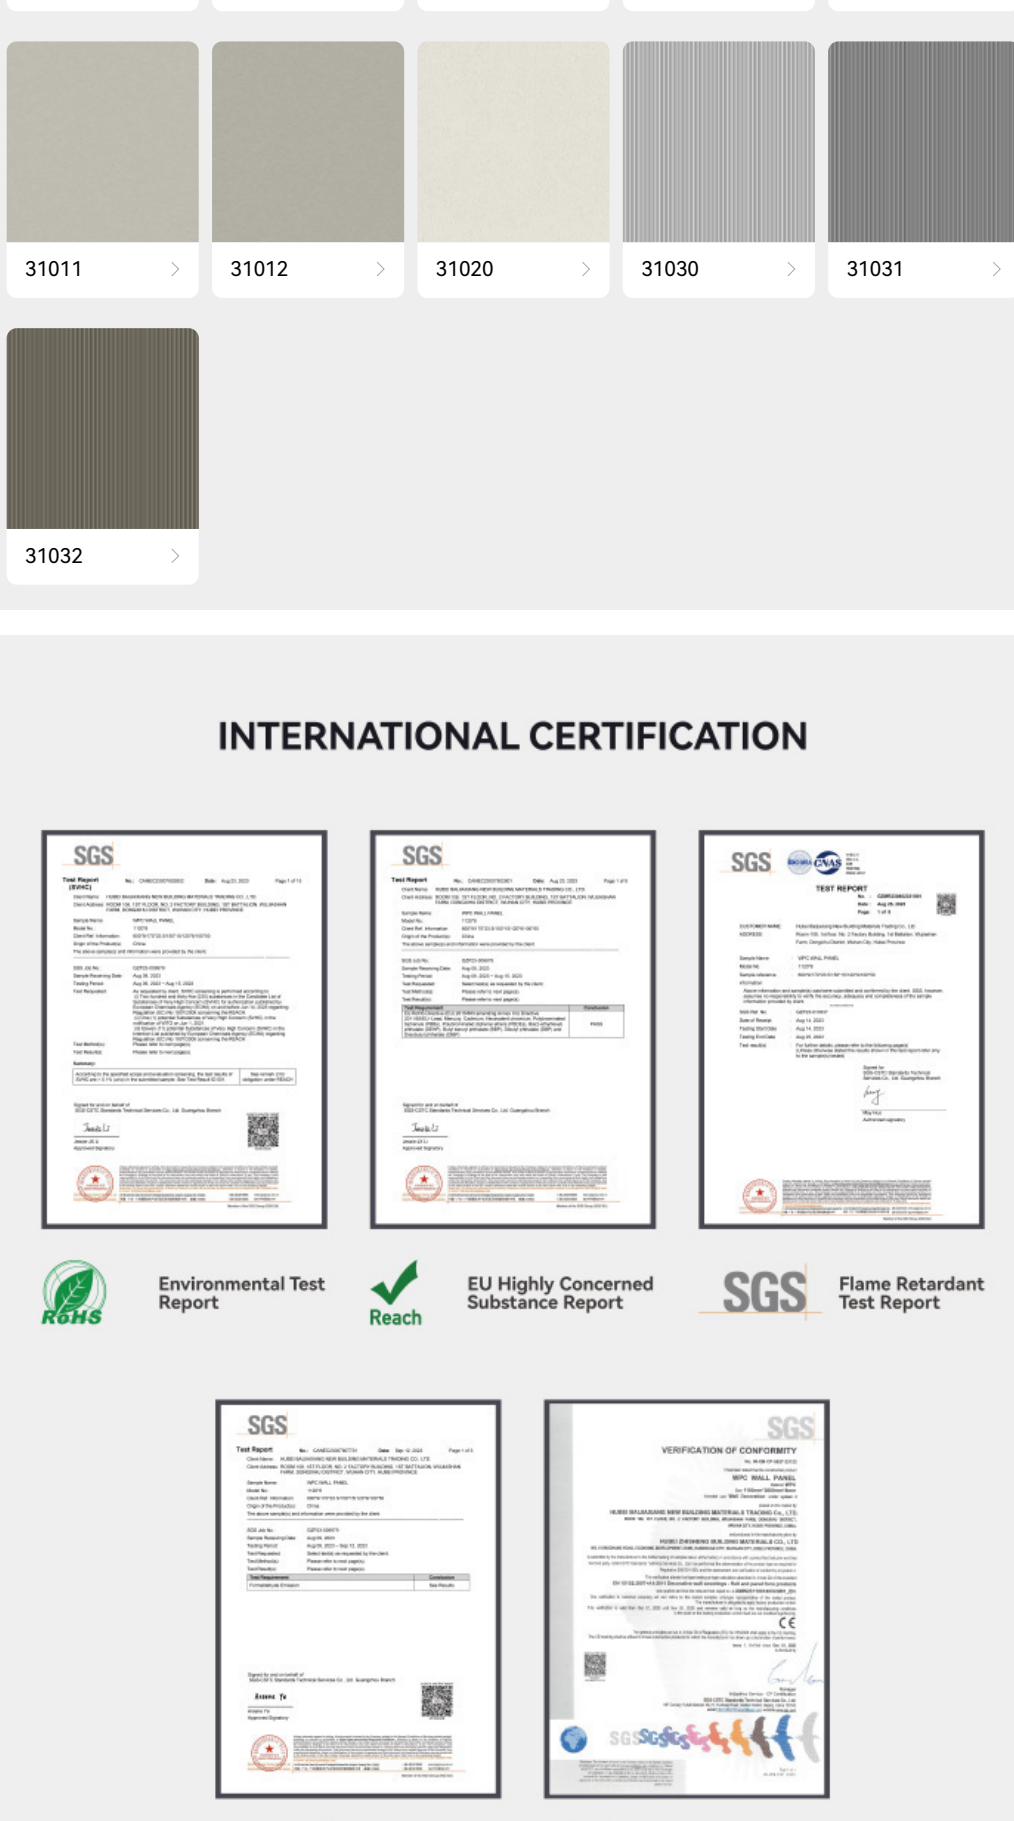

INTERNATIONAL CERTIFICATION

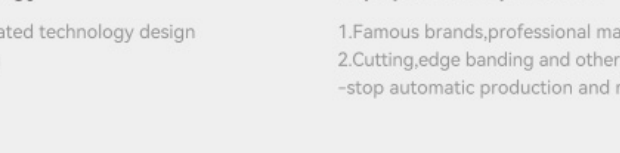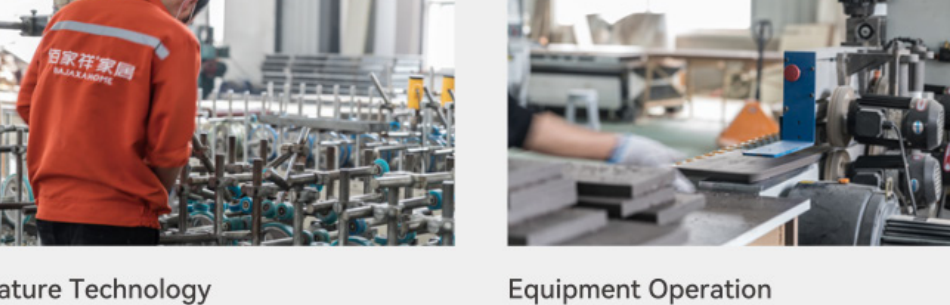

FACTORY STRENGTH

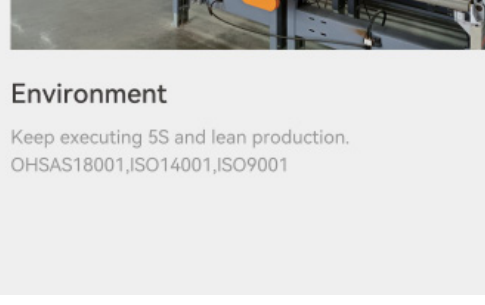
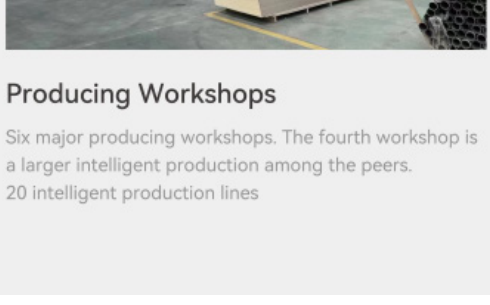


Mature Technology

1. Standardized, automated technology design
2. Real-time monitoring
3. PLC online control
4. 60 analysis

Equipment Operation

1. Famous brands, professional maintenance
2. Cutting, edge banding and other links have realized one-stop automatic production and real-time monitoring

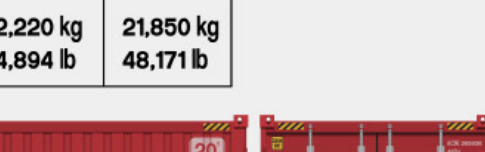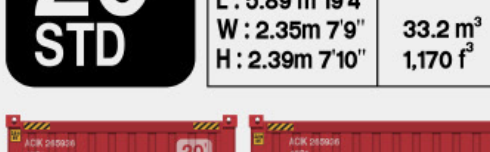

Producing Workshops

Six major producing workshops. The fourth workshop is a larger intelligent production among the peers.

20 intelligent production lines



Environment

Keep executing 5S and lean production.

OHSAS18001, ISO14001, ISO9001

PACKING METHOD

20' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 5.89m 19'4"			
	W : 2.35m 7'9"	33.2 m³	2,220 kg	21,850 kg
	H : 2.39m 7'10"	1,170 f³	4,894 lb	48,171 lb

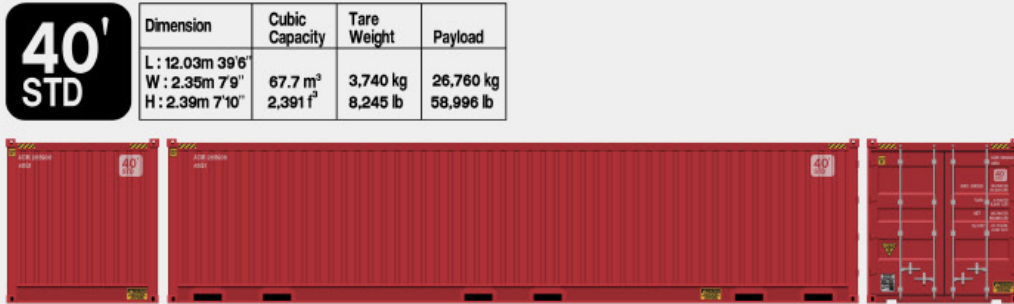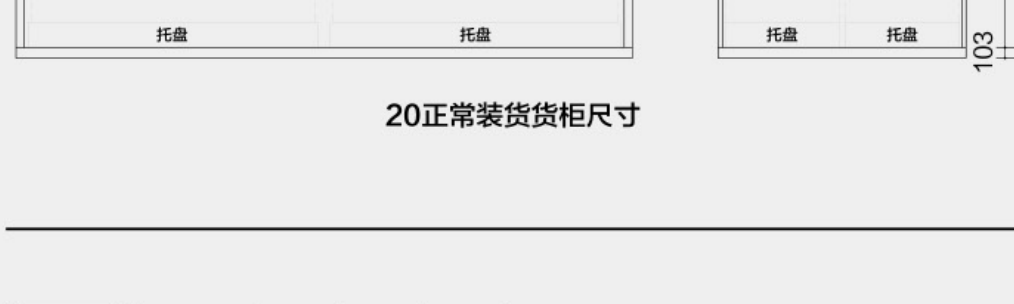

20正常装货货柜尺寸

40' STD	Dimension	Cubic Capacity	Tare Weight	Payload
	L : 12.03m 39'6"			
	W : 2.35m 7'9"	67.7 m³	3,740 kg	26,760 kg
	H : 2.39m 7'10"	2,391 f³	8,245 lb	58,996 lb



40正常装货货柜尺寸